



Data visualization with ggplot2 :: CHEATSHEET

Basics

ggplot2 is based on the **grammar of graphics**, the idea that you can build every graph from the same components: a **data** set, a **coordinate system**, and **geoms**—visual marks that represent data points.



To display values, map variables in the data to visual properties of the geom (**aesthetics**) like **size**, **color**, and **x** and **y** locations.

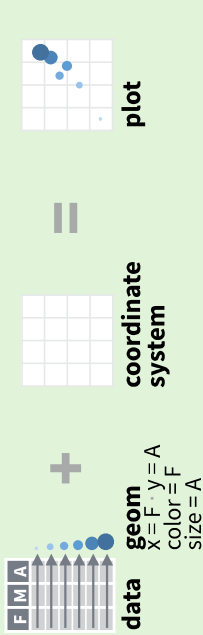

Complete the template below to build a graph.

ggplot (data = <DATA>) +
<GEOM_FUNCTION> (mapping = aes (<MAPPINGS> ,
stat = <STAT> , position = <POSITION>) +
<COORDINATE_FUNCTION> +
<FACET_FUNCTION> +
<SCALE_FUNCTION> +
<THEME_FUNCTION>

required
Not required, sensible defaults supplied

ggplot(data = mpg, **aes**(x = cty, y = hwy)) Begins a plot that you finish by adding layers to. Add one geom function per layer.

last_plot() Returns the last plot.

ggsave("plot.png", width = 5, height = 5) Saves last plot as 5' x 5' file named "plot.png" in working directory.
Matches file type to file extension.

Aes

Common aesthetic values.

color and **fill** - string ("red", "#RRGGBB")

linetype - integer or string (0 = "blank", 1 = "solid", 2 = "dashed", 3 = "dotted", 4 = "dotted", 5 = "longdash", 6 = "twodash")

size - integer (in mm for size of points and text)

linewidth - integer (in mm for widths of lines)

shape - integer/shape name or a single character ("a")



Geoms

Use a geom function to represent data points, use the geom's aesthetic properties to represent variables.

Each function returns a layer.

GRAPHICAL PRIMITIVES

a <- ggplot(economics, aes(date, unemploy))
b <- ggplot(seals, aes(x = long, y = lat))



a + geom_blank() and **a + expand_limits()**
Ensure limits include values across all plots.



b + geom_curve(aes(yend = lat + 1, xend = long + 1), curvature = 1) - x, xend, y, yend, alpha, angle, color, curvature, linetype, size



a + geom_path(lineend = "butt", linejoin = "round", linemitre = 1) x, y, alpha, color, group, linetype, size



a + geom_polygon(aes(alpha = 50)) - x, y, alpha, color, fill, group, subgroup, linetype, size



b + geom_rect(aes(xmin = long, ymin = lat, xmax = long + 1, ymax = lat + 1)) - xmax, xmin, ymax, ymin, alpha, color, fill, linetype, size



a + geom_ribbon(aes(ymin = unemploy - 900, ymax = unemploy + 900)) - x, ymax, ymin, alpha, color, fill, group, linetype, size

LINE SEGMENTS

common aesthetics: x, y, alpha, color, linetype, size



b + geom_abline(aes(intercept = 0, slope = 1))
b + geom_hline(aes(yintercept = lat))
b + geom_vline(aes(xintercept = long))



b + geom_segment(aes(yend = lat + 1, xend = long + 1))
b + geom_spoke(aes(angle = 1:1155, radius = 1))

ONE VARIABLE continuous

c <- ggplot(mpg, aes(hwy)); **c2** <- ggplot(mpg)



c + geom_area(stat = "bin") x, y, alpha, color, fill, linetype, size



c + geom_density(kernel = "gaussian") x, y, alpha, color, fill, group, linetype, size, weight



c + geom_dotplot() x, y, alpha, color, fill



c + geom_freqpoly() x, y, alpha, color, group, linetype, size



c + geom_histogram(binwidth = 5) x, y, alpha, color, fill, linetype, size, weight



c2 + geom_qq(aes(sample = hwy)) x, y, alpha, color, fill, linetype, size, weight

discrete

d <- ggplot(mpg, aes(fill))



d + geom_bar() x, alpha, color, fill, linetype, size, weight

TWO VARIABLES

both continuous

e <- ggplot(mpg, aes(cty, hwy))



e + geom_label(aes(label = cty), nudge_x = 1, nudge_y = 1) - x, y, label, alpha, angle, color, family, fontface, hjust, lineheight, size, vjust



e + geom_point() x, y, alpha, color, fill, shape, size, stroke



e + geom_quantile() x, y, alpha, color, group, linetype, size, weight



e + geom_rug(sides = "b1") x, y, alpha, color, linetype, size



e + geom_smooth(method = lm) x, y, alpha, color, fill, group, linetype, size, weight



e + geom_text(aes(label = cty), nudge_x = 1, nudge_y = 1) - x, y, label, alpha, angle, color, family, fontface, hjust, lineheight, size, vjust

continuous bivariate distribution

h <- ggplot(diamonds, aes(carat, price))



h + geom_bin2d(binwidth = c(0.25, 500)) x, y, alpha, color, fill, linetype, size, weight



h + geom_density_2d() x, y, alpha, color, group, linetype, size



h + geom_hex() x, y, alpha, color, fill, size

continuous function

i <- ggplot(economics, aes(date, unemploy))



i + geom_area() x, y, alpha, color, fill, linetype, size



i + geom_line() x, y, alpha, color, group, linetype, size



i + geom_step(direction = "hv") x, y, alpha, color, group, linetype, size

visualizing error

df <- data.frame(grp = c("A", "B"), fit = 4.5, se = 1.2)
j <- ggplot(df, aes(grp, fit, ymin = fit - se, ymax = fit + se))



j + geom_crossbar(fatten = 2) - x, y, ymax, ymin, alpha, color, group, fill, group, linetype, size



j + geom_errorbar() - x, ymax, ymin, alpha, color, group, linetype, size, width
Also **geom_errorbarh**()



j + geom_linerange() x, ymin, ymax, alpha, color, group, linetype, size



j + geom_pointrange() - x, y, ymin, ymax, alpha, color, fill, group, linetype, shape, size

both discrete

g <- ggplot(diamonds, aes(cut, color))



g + geom_count() x, y, alpha, color, fill, shape, size, stroke



e + geom_jitter(height = 2, width = 2) x, y, alpha, color, fill, shape, size

THREE VARIABLES

seals\$z <- with(seals, sqrt(delta_long^2 + delta_lat^2)); **l** <- ggplot(seals, aes(long, lat))



l + geom_contour(aes(z = z)) x, y, z, alpha, color, group, linetype, size, weight




l + geom_contour_filled(aes(fill = z)) x, y, alpha, color, fill, group, linetype, size, subgroup

Stats

An alternative way to build a layer.

A stat builds new variables to plot (e.g., count, prop).

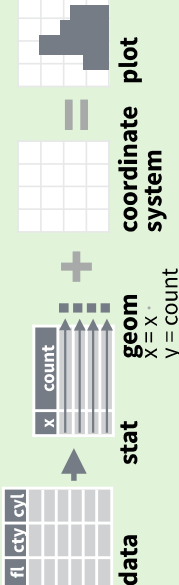

Visualize a stat by changing the default stat of a geom function, **geom_bar(stat="count")** or by using a stat function, **stat_count(geom="bar")**, which calls a default geom to make a layer (equivalent to a geom function).
Use **after_stat(name)** syntax to map the stat variable **name** to an aesthetic.

**geom to use**

i + stat_density_2d(aes(fill = after_stat(level)), geom = "polygon")

stat function

geomappings

variable created by stat

- c + stat_bin**(binwidth = 1, boundary = 10)
x, y | count, ncount, density, ndensity
- c + stat_count**(width = 1) **x, y** | count, prop
- c + stat_density**(adjust = 1, kernel = "gaussian")
x, y | count, density, scaled
- e + stat_bin_2d**(bins = 30, drop = T)
x, y, fill | count, density
- e + stat_bin_hex**(bins = 30) **x, y, fill** | count, density
- e + stat_density_2d**(contour = TRUE, n = 100)
x, y, color, size | level
- e + stat_ellipse**(level = 0.95, segments = 51, type = "t")

- l + stat_contour**(aes(z = z)) **x, y, z, order** | level
- l + stat_summary_hex**(aes(z = z), bins = 30, fun = max)
x, y, z, fill | value
- l + stat_summary_2d**(aes(z = z), bins = 30, fun = mean)
x, y, z, fill | value

- f + stat_boxplot**(coef = 1.5)
x, y | lower, middle, upper, width, ymin, ymax
- f + stat_ydensity**(kernel = "gaussian", scale = "area") **x, y** | density, scaled, count, n, violinwidth, width

- e + stat_ecdf**(n = 40) **x, y** | x, y
- e + stat_quantile**(quantiles = c(0.1, 0.9), formula = y ~ log(x), method = "rq") **x, y** | quantile
- e + stat_smooth**(method = "lm", formula = y ~ x, se = T, level = 0.95) **x, y** | se, x, y, ymin, ymax

- ggplot()** + **xlim**(-5, 5) + **stat_function**(fun = dnorm, n = 20, geom = "point") **x** | x, y
- ggplot()** + **stat_qq**(aes(sample = 1:100))
x, y, sample | sample, theoretical
- e + stat_sum**() **x, y, size** | n, prop
- e + stat_summary**(fun.data = "mean_cl_boot")
- h + stat_summary_bin**(fun = "mean", geom = "bar")
- e + stat_identity**()
- e + stat_unique**()

Scales

Override defaults with **scales** package.

Scales map data values to the visual values of an aesthetic. To change a mapping, add a new scale.

**n <- d + geom_bar(aes(fill = fl))**

**scale_ aesthetic to adjust scale to use scale-specific arguments**

**n + scale_fill_manual(values = c("skyblue", "royalblue", "blue", "navy"), limits = c("d", "e", "p", "r"), breaks = c("d", "e", "p", "r"), name = "fuel", labels = c("D", "E", "P", "R"))**

**range of values to include in title to use in legend/axis labels to use in legend/axis breaks to use in legend/axis**

GENERAL PURPOSE SCALES

Use with most aesthetics

- scale_*_continuous**() - Map cont' values to visual ones.
- scale_*_discrete**() - Map discrete values to visual ones.
- scale_*_binned**() - Map continuous values to discrete bins.
- scale_*_identity**() - Use data values as visual ones.
- scale_*_manual**(values = c()) - Map discrete values to manually chosen visual ones.
- scale_*_date**(date_labels = "%m/%d"),
date_breaks = "2 weeks") - Treat data values as dates.
- scale_*_datetime**() - Treat data values as date times.
Same as scale_*_date(). See ?strptime for label formats.

X & Y LOCATION SCALES

Use with x or y aesthetics (x shown here)

- scale_x_log10**() - Plot x on log10 scale.
- scale_x_reverse**() - Reverse the direction of the x axis.
- scale_x_sqrt**() - Plot x on square root scale.

COLOR AND FILL SCALES (DISCRETE)

- n + scale_fill_brewer**(palette = "Blues")
For palette choices:
RColorBrewer::display.brewer.all()
- n + scale_fill_grey**(start = 0.2, end = 0.8, na.value = "red")

COLOR AND FILL SCALES (CONTINUOUS)

- o <- c + geom_dotplot**(aes(fill = x))
- o + scale_fill_distiller**(palette = "Blues")
- o + scale_fill_gradient**(low="red", high="yellow")
- o + scale_fill_gradient2**(low = "red", high = "blue", mid = "white", midpoint = 25)
- o + scale_fill_gradientn**(colors = topo.colors(6))
Also: rainbow(), heat.colors(), terrain.colors(), cm.colors(), RColorBrewer::brewer.pal()

SHAPE AND SIZE SCALES

- p <- e + geom_point**(aes(shape = fl, size = cyl))
- p + scale_shape()** + **scale_size()**
- p + scale_shape_manual**(values = c(3:7))
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
□○△+×▽◇✱◆⊕⊗⊙⊠⊡⊢⊣⊤⊥⊦⊧⊨⊩⊪⊫⊬⊭⊮⊯⊰⊱⊲⊳⊴⊵⊶⊷⊸⊹⊺⊻⊼⊽⊾⊿⋈⋉⋊⋋⋌⋍⋎⋏⋐⋑⋒⋓⋔⋕⋖⋗⋘⋙⋚⋛⋜⋝⋞⋟⋠⋡⋢⋣⋤⋥⋦⋧⋨⋩⋪⋫⋬⋭⋮⋯⋰⋱⋲⋳⋴⋵⋶⋷⋸⋹⋺⋻⋼⋽⋾⋿⣀⣁⣂⣃⣄⣅⣆⣇⣈⣉⣊⣋⣌⣍⣎⣏⣐⣑⣒⣓⣔⣕⣖⣗⣘⣙⣚⣛⣜⣝⣞⣟⣠⣡⣢⣣⣤⣥⣦⣧⣨⣩⣪⣫⣬⣭⣮⣯⣰⣱⣲⣳⣴⣵⣶⣷⣸⣹⣺⣻⣼⣽⣾⣿⤀⤁⤂⤃⤄⤅⤆⤇⤈⤉⤊⤋⤌⤍⤎⤏⤐⤑⤒⤓⤔⤕⤖⤗⤘⤙⤚⤛⤜⤝⤞⤟⤠⤡⤢⤣⤤⤥⤦⤧⤨⤩⤪⤫⤬⤭⤮⤯⤰⤱⤲⤳⤴⤵⤶⤷⤸⤹⤺⤻⤼⤽⤿⥀⥁⥂⥃⥄⥅⥆⥇⥈⥉⥊⥋⥌⥍⥎⥏⥐⥑⥒⥓⥔⥕⥖⥗⥘⥙⥚⥛⥜⥝⥞⥟⥠⥡⥢⥣⥤⥥⥦⥧⥨⥩⥪⥫⥬⥭⥮⥯⥰⥱⥲⥳⥴⥵⥶⥷⥸⥹⥺⥻⥼⥽⥾⥿⦀⦁⦂⦃⦄⦅⦆⦇⦈⦉⦊⦋⦌⦍⦎⦏⦐⦑⦒⦓⦔⦕⦖⦗⦘⦙⦚⦛⦜⦝⦞⦟⦠⦡⦢⦣⦤⦥⦦⦧⦨⦩⦪⦫⦬⦭⦮⦯⦰⦱⦲⦳⦴⦵⦶⦷⦸⦹⦺⦻⦼⦽⦾⦿⧀⧁⧂⧃⧄⧅⧆⧇⧈⧉⧊⧋⧌⧍⧎⧏⧐⧑⧒⧓⧔⧕⧖⧗⧘⧙⧚⧛⧜⧝⧞⧟⧠⧡⧢⧣⧤⧥⧦⧧⧨⧩⧪⧫⧬⧭⧮⧯⧰⧱⧲⧳⧴⧵⧶⧷⧸⧹⧺⧻⧼⧽⧾⧿⨀⨁⨂⨃⨄⨅⨆⨇⨈⨉⨊⨋⨌⨍⨎⨏⨐⨑⨒⨓⨔⨕⨖⨗⨘⨙⨚⨛⨜⨝⨞⨟⨠⨡⨢⨣⨤⨥⨦⨧⨨⨩⨪⨫⨬⨭⨮⨯⨰⨱⨲⨳⨴⨵⨶⨷⨸⨹⨺⨻⨼⨽⨾⨿⩀⩁⩂⩃⩄⩅⩆⩇⩈⩉⩊⩋⩌⩍⩎⩏⩐⩑⩒⩓⩔⩕⩖⩗⩘⩙⩚⩛⩜⩝⩞⩟⩠⩡⩢⩣⩤⩥⩦⩧⩨⩩⩪⩫⩬⩭⩮⩯⩰⩱⩲⩳⩴⩵⩶⩷⩸⩹⩺⩻⩼⩽⩾⩿⪀⪁⪂⪃⪄⪅⪆⪇⪈⪉⪊⪋⪌⪍⪎⪏⪐⪑⪒⪓⪔⪕⪖⪗⪘⪙⪚⪛⪜⪝⪞⪟⪠⪡⪢⪣⪤⪥⪦⪧⪨⪩⪪⪫⪬⪭⪮⪯⪰⪱⪲⪳⪴⪵⪶⪷⪸⪹⪺⪻⪼⪽⪾⪿⫀⫁⫂⫃⫄⫅⫆⫇⫈⫉⫊⫋⫌⫍⫎⫏⫐⫑⫒⫓⫔⫕⫖⫗⫘⫙⫚⫛⫝̸⫝⫞⫟⫠⫡⫢⫣⫤⫥⫦⫧⫨⫩⫪⫫⫬⫭⫮⫯⫰⫱⫲⫳⫴⫵⫶⫷⫸⫹⫺⫻⫼⫽⫾⫿⬀⬁⬂⬃⬄⬅⬆⬇⬈⬉⬊⬋⬌⬍⬎⬏⬐⬑⬒⬓⬔⬕⬖⬗⬘⬙⬚⬛⬜⬝⬞⬟⬠⬡⬢⬣⬤⬥⬦⬧⬨⬩⬪⬫⬬⬭⬮⬯⬰⬱⬲⬳⬴⬵⬶⬷⬸⬹⬺⬻⬼⬽⬾⬿⭀⭁⭂⭃⭄⭅⭆⭇⭈⭉⭊⭋⭌⭍⭎⭏⭐⭑⭒⭓⭔⭕⭖⭗⭘⭙⭚⭛⭜⭝⭞⭟⭠⭡⭢⭣⭤⭥⭦⭧⭨⭩⭪⭫⭬⭭⭮⭯⭰⭱⭲⭳⭴⭵⭶⭷⭸⭹⭺⭻⭼⭽⭾⭿⮀⮁⮂⮃⮄⮅⮆⮇⮈⮉⮊⮋⮌⮍⮎⮏⮐⮑⮒⮓⮔⮕⮖⮗⮘⮙⮚⮛⮜⮝⮞⮟⮠⮡⮢⮣⮤⮥⮦⮧⮨⮩⮪⮫⮬⮭⮮⮯⮰⮱⮲⮳⮴⮵⮶⮷⮸⮹⮺⮻⮼⮽⮾⮿⯀⯁⯂⯃⯄⯅⯆⯇⯈⯉⯊⯋⯌⯍⯎⯏⯐⯑⯒⯓⯔⯕⯖⯗⯘⯙⯚⯛⯜⯝⯞⯟⯠⯡⯢⯣⯤⯥⯦⯧⯨⯩⯪⯫⯬⯭⯮⯯⯰⯱⯲⯳⯴⯵⯶⯷⯸⯹⯺⯻⯼⯽⯾⯿ⰀⰁⰂⰃⰄⰅⰆⰇⰈⰉⰊⰋⰌⰍⰎⰏⰐⰑⰒⰓⰔⰕⰖⰗⰘⰙⰚⰛⰜⰝⰞⰟⰠⰡⰢⰣⰤⰥⰦⰧⰨⰩⰪⰫⰬⰭⰮⰯⰰⰱⰲⰳⰴⰵⰶⰷⰸⰹⰺⰻⰼⰽⰾⰿⱀⱁⱂⱃⱄⱅⱆⱇⱈⱉⱊⱋⱌⱍⱎⱏⱐⱑⱒⱓⱔⱕⱖⱗⱘⱙⱚⱛⱜⱝⱞⱟⱠⱡⱢⱣⱤⱥⱦⱧⱨⱩⱪⱫⱬⱭⱮⱯⱰⱱⱲⱳⱴⱵⱶⱷⱸⱹⱺⱻⱼⱽⱾⱿⲀⲁⲂⲃⲄⲅⲆⲇⲈⲉⲊⲋⲌⲍⲎⲏⲐⲑⲒⲓⲔⲕⲖⲗⲘⲙⲚⲛⲜⲝⲞⲟⲠⲡⲢⲣⲤⲥⲦⲧⲨⲩⲪⲫⲬⲭⲮⲯⲰⲱⲲⲳⲴⲵⲶⲷⲸⲹⲺⲻⲼⲽⲾⲿⳀⳁⳂⳃⳄⳅⳆⳇⳈⳉⳊⳋⳌⳍⳎⳏⳐⳑⳒⳓⳔⳕⳖⳗⳘⳙⳚⳛⳜⳝⳞⳟⳠⳡⳢⳣⳤ⳥⳦⳧⳨⳩⳪ⳫⳬⳭⳮ⳯⳰⳱Ⳳⳳ⳴⳵⳶⳷⳸⳹⳺⳻⳼⳽⳾⳿ⴀⴁⴂⴃⴄⴅⴆⴇⴈⴉⴊⴋⴌⴍⴎⴏⴐⴑⴒⴓⴔⴕⴖⴗⴘⴙⴚⴛⴜⴝⴞⴟⴠⴡⴢⴣⴤⴥ⴦ⴧ⴨⴩⴪⴫⴬ⴭ⴮⴯ⴰⴱⴲⴳⴴⴵⴶⴷⴸⴹⴺⴻⴼⴽⴾⴿⵀⵁⵂⵃⵄⵅⵆⵇⵈⵉⵊⵋⵌⵍⵎⵏⵐⵑⵒⵓⵔⵕⵖⵗⵘⵙⵚⵛⵜⵝⵞⵟⵠⵡⵢⵣⵤⵥⵦⵧ⵨⵩⵪⵫⵬⵭⵮ⵯ⵰⵱⵲⵳⵴⵵⵶⵷⵸⵹⵺⵻⵼⵽⵾⵿ⶀⶁⶂⶃⶄⶅⶆⶇⶈⶉⶊⶋⶌⶍⶎⶏⶐⶑⶒⶓⶔⶕⶖ⶗⶘⶙⶚⶛⶜⶝⶞⶟ⶠⶡⶢⶣⶤⶥⶦ⶧ⶨⶩⶪⶫⶬⶭⶮ⶯ⶰⶱⶲⶳⶴⶵⶶ⶷ⶸⶹⶺⶻⶼⶽⶾ⶿ⷀⷁⷂⷃⷄⷅⷆ⷇ⷈⷉⷊⷋⷌⷍⷎ⷏ⷐⷑⷒⷓⷔⷕⷖ⷗ⷘⷙⷚⷛⷜⷝⷞ⷟ⷠⷡⷢⷣⷤⷥⷦⷧⷨⷩⷪⷫⷬⷭⷮⷯⷰⷱⷲⷳⷴⷵⷶⷷⷸⷹⷺⷻⷼⷽⷾⷿ⸀⸁⸂⸃⸄⸅⸆⸇⸈⸉⸊⸋⸌⸍⸎⸏⸐⸑⸒⸓⸔⸕⸖⸗⸘⸙⸚⸛⸜⸝⸞⸟⸠⸡⸢⸣⸤⸥⸦⸧⸨⸩⸪⸫⸬⸭⸮ⸯ⸰⸱⸲⸳⸴⸵⸶⸷⸸⸹⸺⸻⸼⸽⸾⸿⹀⹁⹂⹃⹄⹅⹆⹇⹈⹉⹊⹋⹌⹍⹎⹏⹐⹑⹒⹓⹔⹕⹖⹗⹘⹙⹚⹛⹜⹝⹞⹟⹠⹡⹢⹣⹤⹥⹦⹧⹨⹩⹪⹫⹬⹭⹮⹯⹰⹱⹲⹳⹴⹵⹶⹷⹸⹹⹺⹻⹼⹽⹾⹿⺀⺁⺂⺃⺄⺅⺆⺇⺈⺉⺊⺋⺌⺍⺎⺏⺐⺑⺒⺓⺔⺕⺖⺗⺘⺙⺚⺛⺜⺝⺞⺟⺠⺡⺢⺣⺤⺥⺦⺧⺨⺩⺪⺫⺬⺭⺮⺯⺰⺱⺲⺳⺴⺵⺶⺷⺸⺹⺺⺻⺼⺽⺾⺿⻀⻁⻂⻃⻄⻅⻆⻇⻈⻉⻊⻋⻌⻍⻎⻏⻐⻑⻒⻓⻔⻕⻖⻗⻘⻙⻚⻛⻜⻝⻞⻟⻠⻡⻢⻣⻤⻥⻦⻧⻨⻩⻪⻫⻬⻭⻮⻰⻱⻲⻳⻴⻵⻶⻷⻸⻹⻺⻻⻼⻽⻾⻿⼀⼁⼂⼃⼄⼅⼆⼇⼈⼉⼊⼋⼌⼍⼎⼏⼐⼑⼒⼓⼔⼕⼖⼗⼘⼙⼚⼛⼜⼝⼞⼟⼠⼡⼢⼣⼤⼥⼦⼧⼨⼩⼪⼫⼬⼭⼮⼯⼰⼱⼲⼳⼴⼵⼶⼷⼸⼹⼺⼻⼼⼽⼾⼿⽀⽁⽂⽃⽄⽅⽆⽇⽈⽉⽊⽋⽌⽍⽎⽏⽐⽑⽒⽓⽔⽕⽖⽗⽘⽙⽚⽛⽜⽝⽞⽟⽠⽡⽢⽣⽤⽥⽦⽧⽨⽩⽪⽫⽬⽭⽮⽯⽰⽱⽲⽳⽴⽵⽶⽷⽸⽹⽺⽻⽼⽽⽾⽿⿀⿁⿂⿃⿄⿅⿆⿇⿈⿉⿊⿋⿌⿍⿎⿏⿐⿑⿒⿓⿔⿕⿖⿗⿘⿙⿚⿛⿜⿝⿞⿟⿠⿡⿢⿣⿤⿥⿦⿧⿨⿩⿪⿫⿬⿭⿮⿯⿰⿱⿲⿳⿴⿵⿶⿷⿸⿹⿺⿻⿼⿽⿾⿿⠀⠁⠂⠃⠄⠅⠆⠇⠈⠉⠊⠋⠌⠍⠎⠏⠑⠒⠓⠔⠕⠖⠗⠘⠙⠚⠛⠜⠝⠞⠟⠠⠡⠢⠣⠤⠥⠦⠧⠨⠩⠪⠫⠬⠭⠮⠯⠰⠱⠲⠳⠴⠵⠶⠷⠸⠹⠺⠻⠼⠽⠾⠿⡀⡁⡂⡃⡄⡅⡆⡇⡈⡉⡊⡋⡌⡍⡎⡏⡐⡑⡒⡓⡔⡕⡖⡗⡘⡙⡚⡛⡜⡝⡞⡟⡠⡡⡢⡣⡤⡥⡦⡧⡨⡩⡪⡫⡬⡭⡮⡯⡰⡱⡲⡳⡴⡵⡶⡷⡸⡹⡺⡻⡼⡽⡾⡿⢀⢁⢂⢃⢄⢅⢆⢇⢈⢉⢊⢋⢌⢍⢎⢏⢐⢑⢒⢓⢔⢕⢖⢗⢘⢙⢚⢛⢜⢝⢞⢟⢠⢡⢢⢣⢤⢥⢦⢧⢨⢩⢪⢫⢬⢭⢮⢯⢰⢱⢲⢳⢴⢵⢶⢷⢸⢹⢺⢻⢼⢽⢾⢿⣀⣁⣂⣃⣄⣅⣆⣇⣈⣉⣊⣋⣌⣍⣎⣏⣐⣑⣒⣓⣔⣕⣖⣗⣘⣙⣚⣛⣜⣝⣞⣟⣠⣡⣢⣣⣤⣥⣦⣧⣨⣩⣪⣫⣬⣭⣮⣯⣰⣱⣲⣳⣴⣵⣶⣷⣸⣹⣺⣻⣼⣽⣾⣿⤀⤁⤂⤃⤄⤅⤆⤇⤈⤉⤊⤋⤌⤍⤎⤏⤐⤑⤒⤓⤔⤕⤖⤗⤘⤙⤚⤛⤜⤝⤞⤟⤠⤡⤢⤣⤤⤥⤦⤧⤨⤩⤪⤫⤬⤭⤮⤯⤰⤱⤲⤳⤴⤵⤶⤷⤸⤹⤺⤻⤼⤽⤿⥀⥁⥂⥃⥄⥅⥆⥇⥈⥉⥊⥋⥌⥍⥎⥏⥐⥑⥒⥓⥔⥕⥖⥗⥘⥙⥚⥛⥜⥝⥞⥟⥠⥡⥢⥣⥤⥥⥦⥧⥨⥩⥪⥫⥬⥭⥮⥯⥰⥱⥲⥳⥴⥵⥶⥷⥸⥹⥺⥻⥼⥽⥾⥿⦀⦁⦂⦃⦄⦅⦆⦇⦈⦉⦊⦋⦌⦍⦎⦏⦐⦑⦒⦓⦔⦕⦖⦗⦘⦙⦚⦛⦜⦝⦞⦟⦠⦡⦢⦣⦤⦥⦦⦧⦨⦩⦪⦫⦬⦭⦮⦯⦰⦱⦲⦳⦴⦵⦶⦷⦸⦹⦺⦻⦼⦽⦾⦿⧀⧁⧂⧃⧄⧅⧆⧇⧈⧉⧊⧋⧌⧍⧎⧏⧐⧑⧒⧓⧔⧕⧖⧗⧘⧙⧚⧛⧜⧝⧞⧟⧠⧡⧢⧣⧤⧥⧦⧧⧨⧩⧪⧫⧬⧭⧮⧯⧰⧱⧲⧳⧴⧵⧶⧷⧸⧹⧺⧻⧼⧽⧾⧿⨀⨁⨂⨃⨄⨅⨆⨇⨈⨉⨊⨋⨌⨍⨎⨏⨐⨑⨒⨓⨔⨕⨖⨗⨘⨙⨚⨛⨜⨝⨞⨟⨠⨡⨢⨣⨤⨥⨦⨧⨨⨩⨪⨫⨬⨭⨮⨯⨰⨱⨲⨳⨴⨵⨶⨷⨸⨹⨺⨻⨼⨽⨾⨿⩀⩁⩂⩃⩄⩅⩆⩇⩈⩉⩊⩋⩌⩍⩎⩏⩐⩑⩒⩓⩔⩕⩖⩗⩘⩙⩚⩛⩜⩝⩞⩟⩠⩡⩢⩣⩤⩥⩦⩧⩨⩩⩪⩫⩬⩭⩮⩯⩰⩱⩲⩳⩴⩵⩶⩷⩸⩹⩺⩻⩼⩽⩾⩿⪀⪁⪂⪃⪄⪅⪆⪇⪈⪉⪊⪋⪌⪍⪎⪏⪐⪑⪒⪓⪔⪕⪖⪗⪘⪙⪚⪛⪜⪝⪞⪟⪠⪡⪢⪣⪤⪥⪦⪧⪨⪩⪪⪫⪬⪭⪮⪯⪰⪱⪲⪳⪴⪵⪶⪷⪸⪹⪺⪻⪼⪽⪾⪿⫀⫁⫂⫃⫄⫅⫆⫇⫈⫉⫊⫋⫌⫍⫎⫏⫐⫑⫒⫓⫔⫕⫖⫗⫘⫙⫚⫛⫝̸⫝⫞⫟⫠⫡⫢⫣⫤⫥⫦⫧⫨⫩⫪⫫⫬⫭⫮⫯⫰⫱⫲⫳⫴⫵⫶⫷⫸⫹⫺⫻⫼⫽⫾⫿⬀⬁⬂⬃⬄⬅⬆⬇⬈⬉⬊⬋⬌⬍⬎⬏⬐⬑⬒⬓⬔⬕⬖⬗⬘⬙⬚⬛⬜⬝⬞⬟⬠⬡⬢⬣⬤⬥⬦⬧⬨⬩⬪⬫⬬⬭⬮⬯⬰⬱⬲⬳⬴⬵⬶⬷⬸⬹⬺⬻⬼⬽⬾⬿⭀⭁⭂⭃⭄⭅⭆⭇⭈⭉⭊⭋⭌⭍⭎⭏⭐⭑⭒⭓⭔⭕⭖⭗⭘⭙⭚⭛⭜⭝⭞⭟⭠⭡⭢⭣⭤⭥⭦⭧⭨⭩⭪⭫⭬⭭⭮⭯⭰⭱⭲⭳⭴⭵⭶⭷⭸⭹⭺⭻⭼⭽⭾⭿⮀⮁⮂⮃⮄⮅⮆⮇⮈⮉⮊⮋⮌⮍⮎⮏⮐⮑⮒⮓⮔⮕⮖⮗⮘⮙⮚⮛⮜⮝⮞⮟⮠⮡⮢⮣⮤⮥⮦⮧⮨⮩⮪⮫⮬⮭⮮⮯⮰⮱⮲⮳⮴⮵⮶⮷⮸⮹⮺⮻⮼⮽⮾⮿⯀⯁⯂⯃⯄⯅⯆⯇⯈⯉⯊⯋⯌⯍⯎⯏⯐⯑⯒⯓⯔⯕⯖⯗⯘⯙⯚⯛⯜⯝⯞⯟⯠⯡⯢⯣⯤⯥⯦⯧⯨⯩⯪⯫⯬⯭⯮⯯⯰⯱⯲⯳⯴⯵⯶⯷⯸⯹⯺⯻⯼⯽⯾⯿ⰀⰁⰂⰃⰄⰅⰆⰇⰈⰉⰊⰋⰌⰍⰎⰏⰐⰑⰒⰓⰔⰕⰖⰗⰘⰙⰚⰛⰜⰝⰞⰟⰠⰡⰢⰣⰤⰥⰦⰧⰨⰩⰪⰫⰬⰭⰮⰯⰰⰱⰲⰳⰴⰵⰶⰷⰸⰹⰺⰻⰼⰽⰾⰿⱀⱁⱂⱃⱄⱅⱆⱇⱈⱉⱊⱋⱌⱍⱎⱏⱐⱑⱒⱓⱔⱕⱖⱗⱘⱙⱚⱛⱜⱝⱞⱟⱠⱡⱢⱣⱤⱥⱦⱧⱨⱩⱪⱫⱬⱭⱮⱯⱰⱱⱲⱳⱴⱵⱶⱷⱸⱹⱺⱻⱼⱽⱾⱿⲀⲁⲂⲃⲄⲅⲆⲇⲈⲉⲊⲋⲌⲍⲎⲏⲐⲑⲒⲓⲔⲕⲖⲗⲘⲙⲚⲛⲜⲝⲞⲟⲠⲡⲢⲣⲤⲥⲦⲧⲨⲩⲪⲫⲬⲭⲮⲯⲰⲱⲲⲳⲴⲵⲶⲷⲸⲹⲺⲻⲼⲽⲾⲿⳀⳁⳂⳃⳄⳅⳆⳇⳈⳉ