

Component

Angular Components :-

- Components are building blocks for Angular Application.
- Application is built by using components. –

A component comprises of

- a) Presentation
- b) Styles
- c) Functionality

- Presentation is defined by using HTML.
- Styles are defined by using CSS.
- Functionality is defined by using TypeScript.
- Components can be added into project by using
 - a) Manual Approach
 - b) CLI Commands

To create application in Angular:

goto command prompt :

```
d:\> mkdir Angular
```

```
d:\> cd Angular
```

```
D:\Angular>ng new WebApp2
```

Which stylesheet format would you like to use? CSS [<https://developer.mozilla.org/docs/Web/CSS>]

√ Do you want to enable Server-Side Rendering (SSR) and Static Site Generation (SSG/Prerendering)? Yes

Do you want to create a 'zoneless' application without zone.js? Yes

goto visual studio code

file -> open folder -> d:\Angular

select - WebApp2

index.html is the startup page. It works with root component called - App, by using selector

- <app-root> </app-root>

for App root component 4 files are created.

- 1) app.css
- 2) app.html
- 3) app.spec.ts
- 4) app.ts

component has :

presentation (html file)

styles (css file)

functionality (typescript file)

app.ts

```
import { Component } from '@angular/core';
```

```
@Component({  
  selector: 'app-root',  
  templateUrl: ' ./app.html',  
  styleUrls: [ ' ./app.css']  
})  
export class App {  
  title = 'WebApp1';  
}
```

index.html

```
<app-root> </app-root>
```

file -> save all

click on - terminal -> new terminal

```
d:\Angular> cd WebApp2
```

```
d:\Angular\WebApp2>
```

To run the application :

```
d:\Angular\WebApp2>ng serve
```

In browser : <http://localhost:4200>

Note:

To stop the server, In terminal, press ctrl+c

localhost means browser communicates with web server in the same system.

localhost ip address is 127.0.0.1

4200 is the port no. It is the memory location where browser and web server will communicate and data is transferred between them.


Enable Bootstrap for Angular Project :-


D:\folder_name\application_name> npm install bootstrap


Go to "src/styles.css"

@import '../node_modules/bootstrap/dist/css/bootstrap.css';

Bootstrap example 1

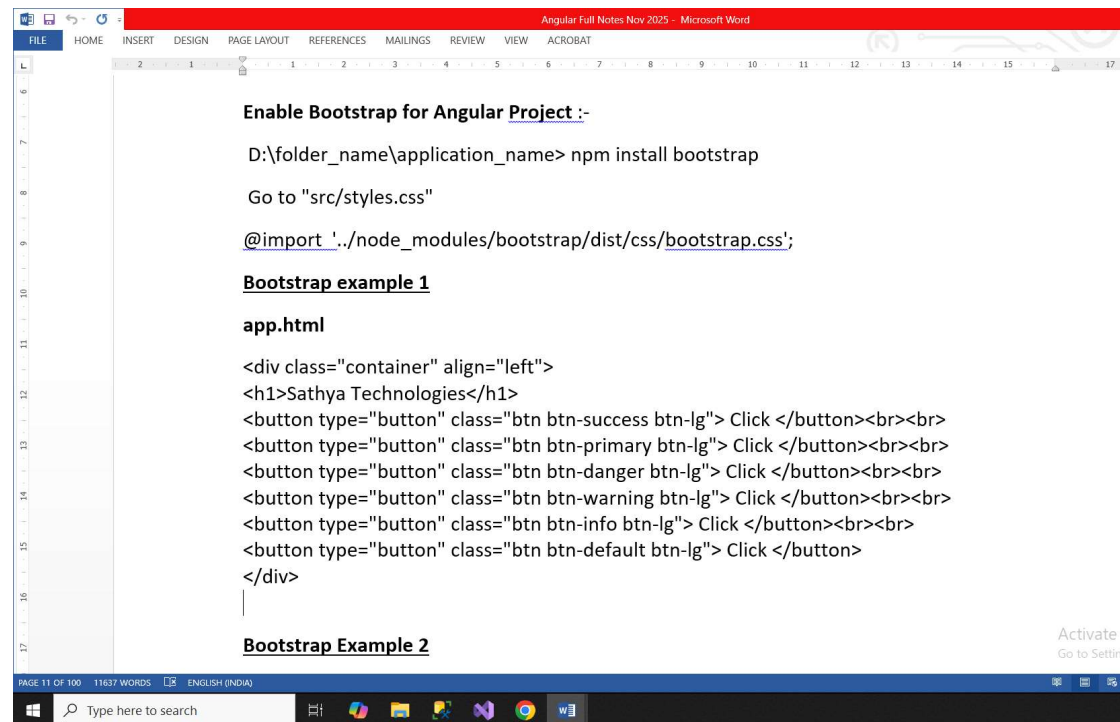

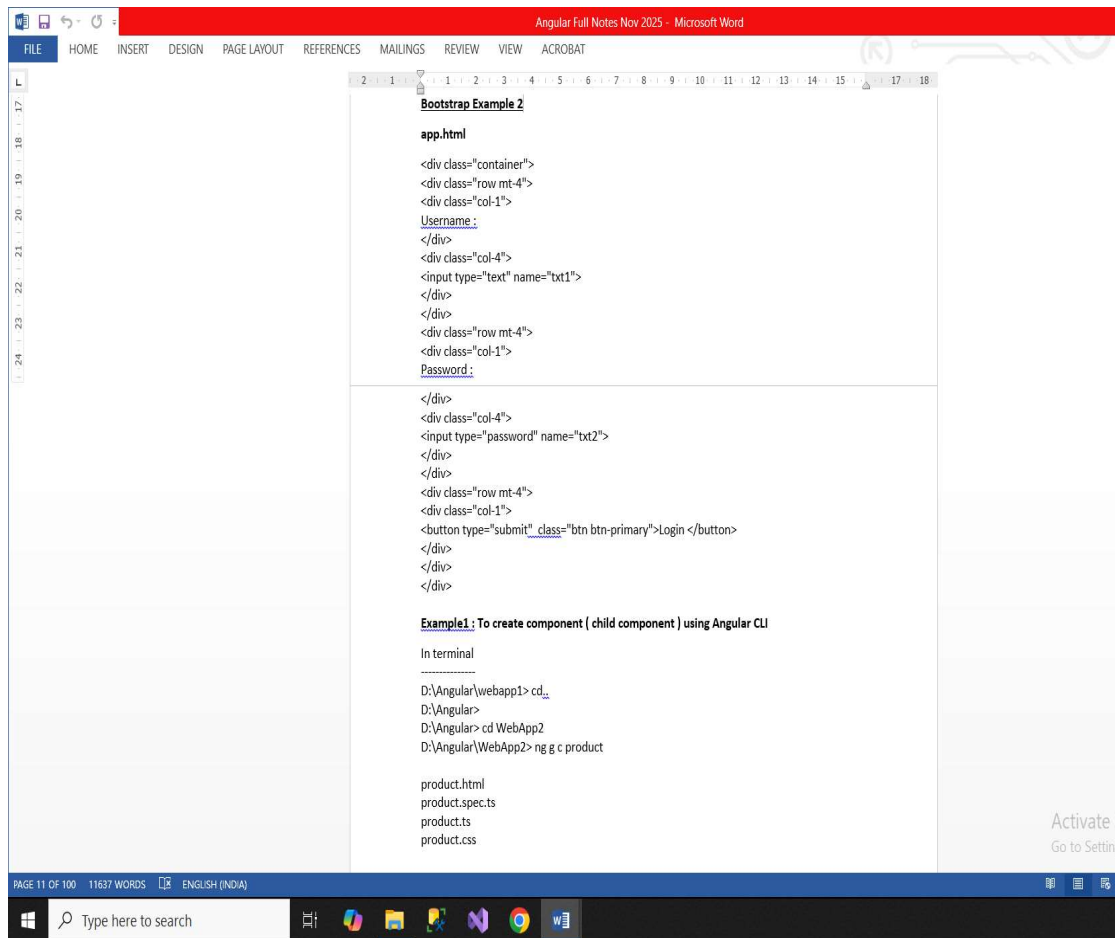


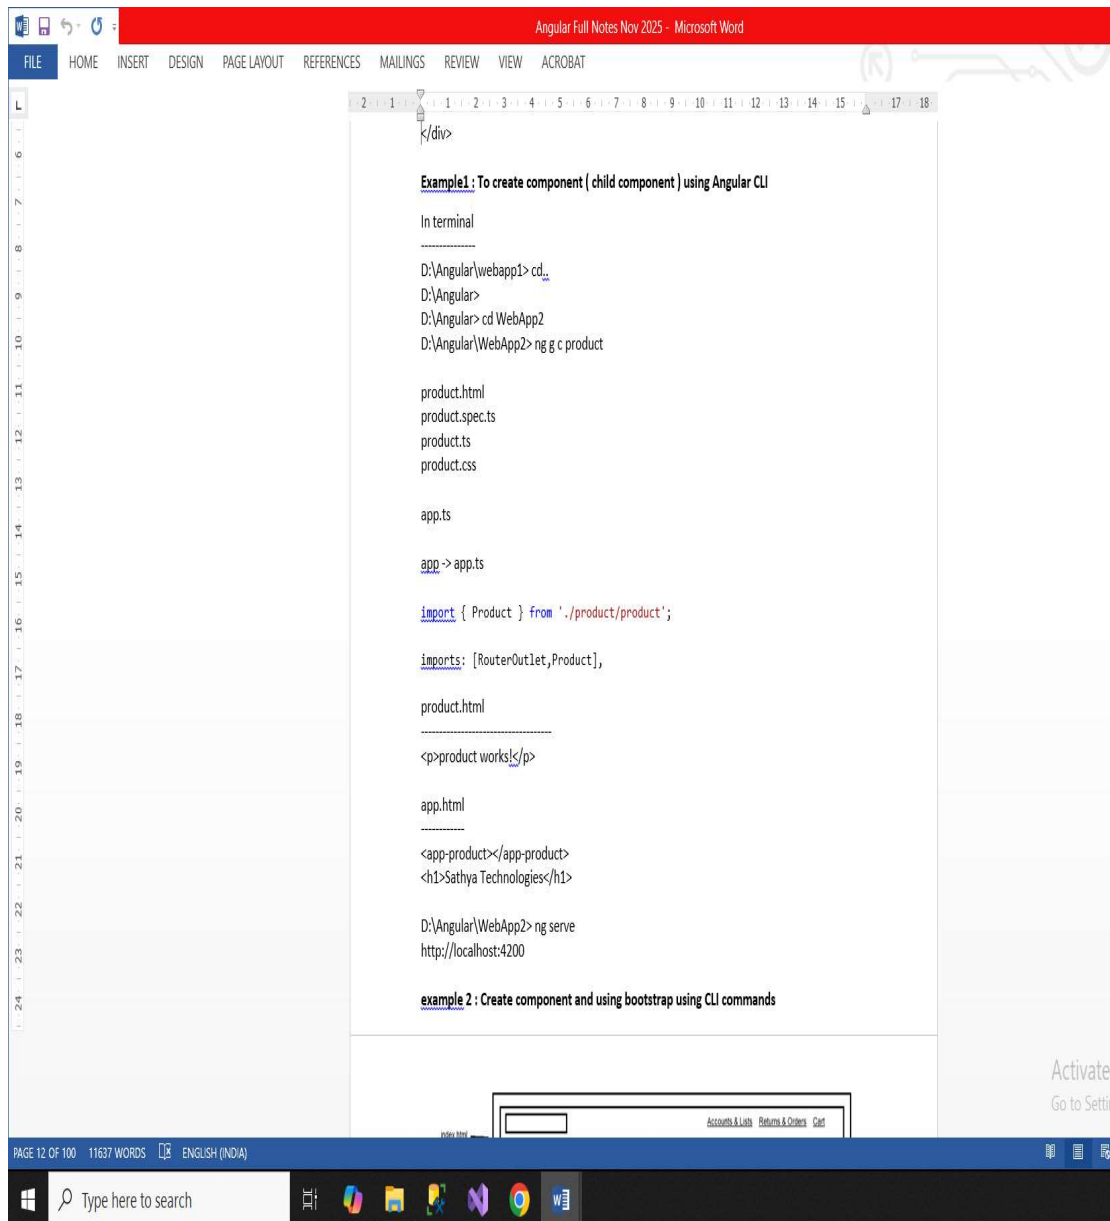

Angular Full Notes Nov 2025 - Microsoft Word

FILE HOME INSERT DESIGN PAGE LAYOUT REFERENCES MAILINGS REVIEW VIEW ACROBAT

example 2 : Create component and using bootstrap using CLI commands

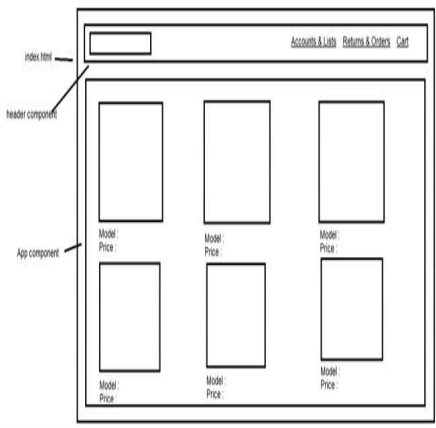

index.html

header component

App component

Model: Price:

Model: Price:

Model: Price:

Model: Price:

Model: Price:

Model: Price:

Accounts & Lists Returns & Orders Cart

in vs code, click on terminal -> new terminal

```
D:\> ng new WebApp01
D:\> cd webapp01
file -> open folder -> d:\webapp01
D:\webapp01> npm install bootstrap
```

src/styles.css

```
@import './node_modules/bootstrap/dist/css/bootstrap.css';
```

D:\WebApp01> ng g c header

```
src/app/header/header.html
" /header.spec.ts
" /header.ts
" /header.css
```

app -> app.ts


```
import { Header } from './header/header';


imports: [RouterOutlet, header],
```


PAGE 12 OF 100 11637 WORDS ENGLISH (INDIA)

Type here to search

Activate Go to Setting

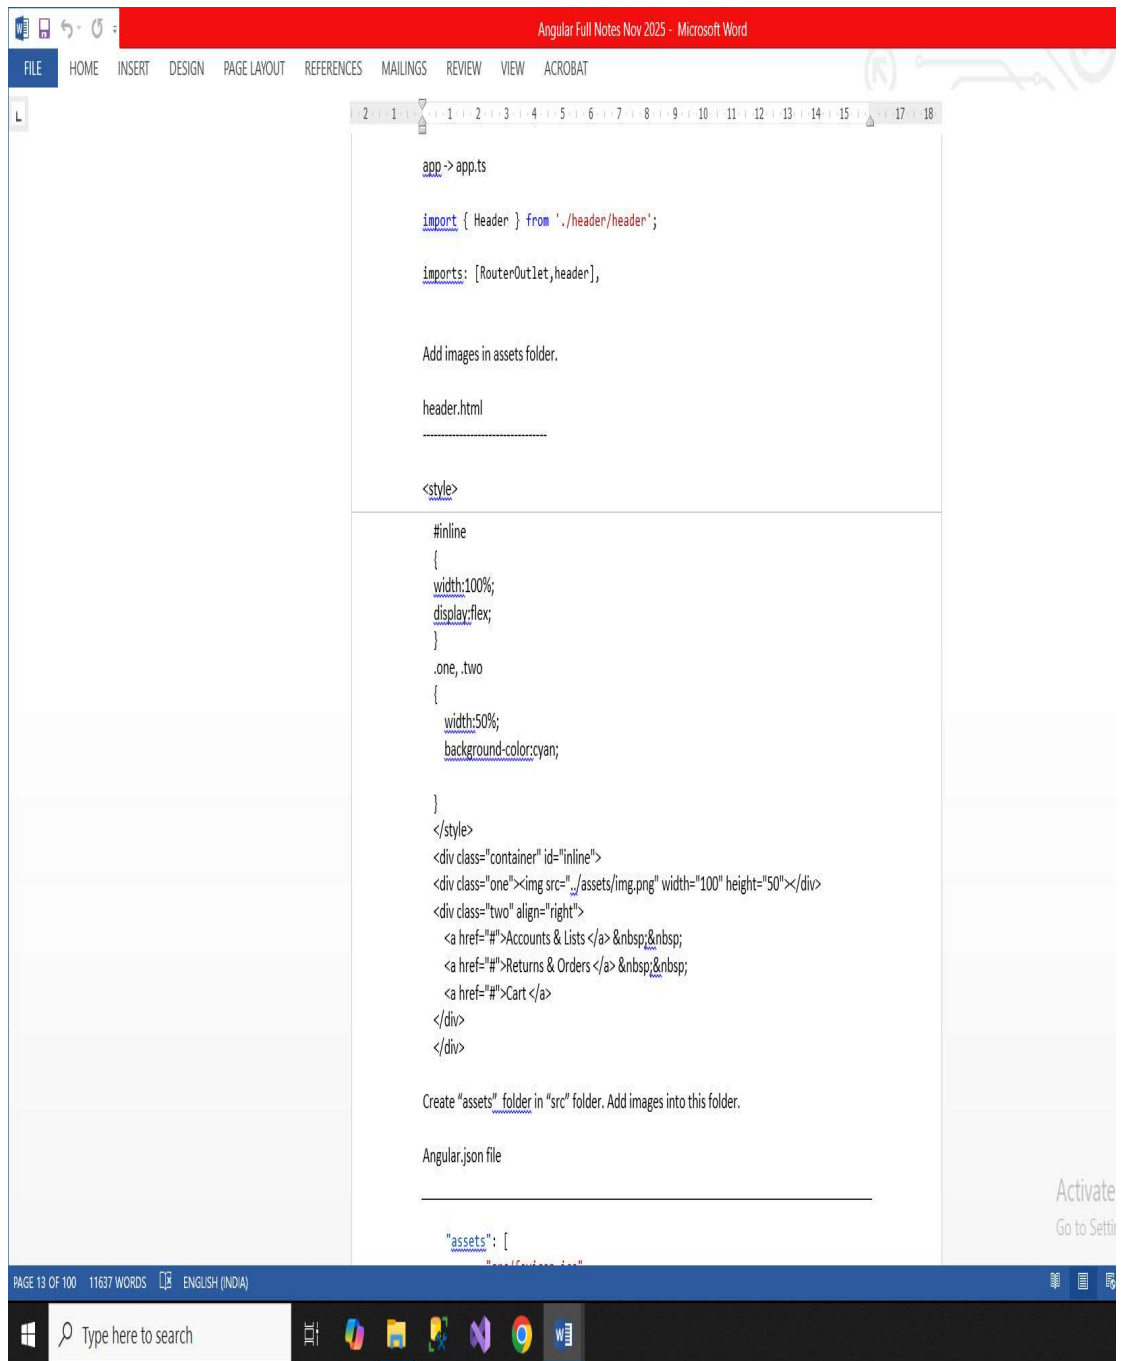

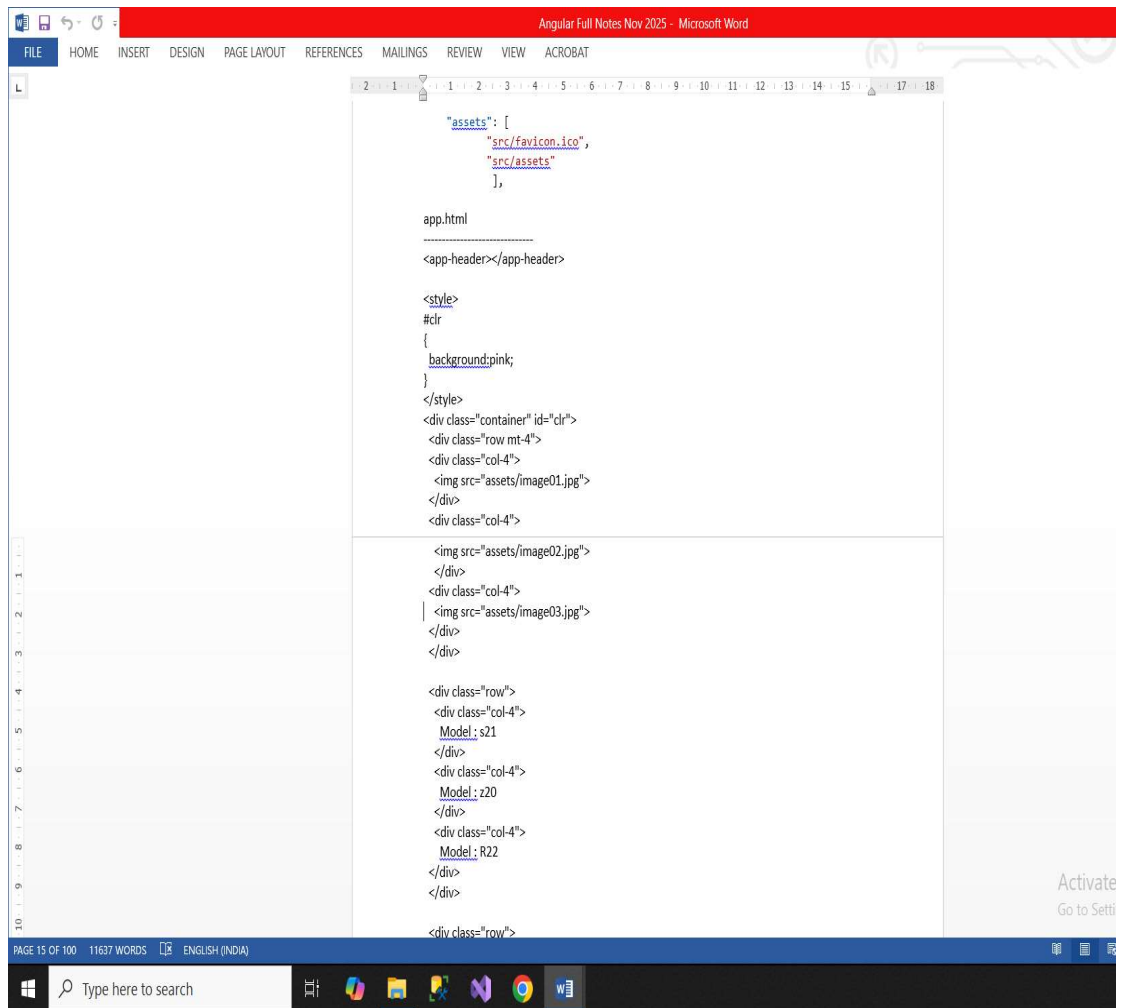

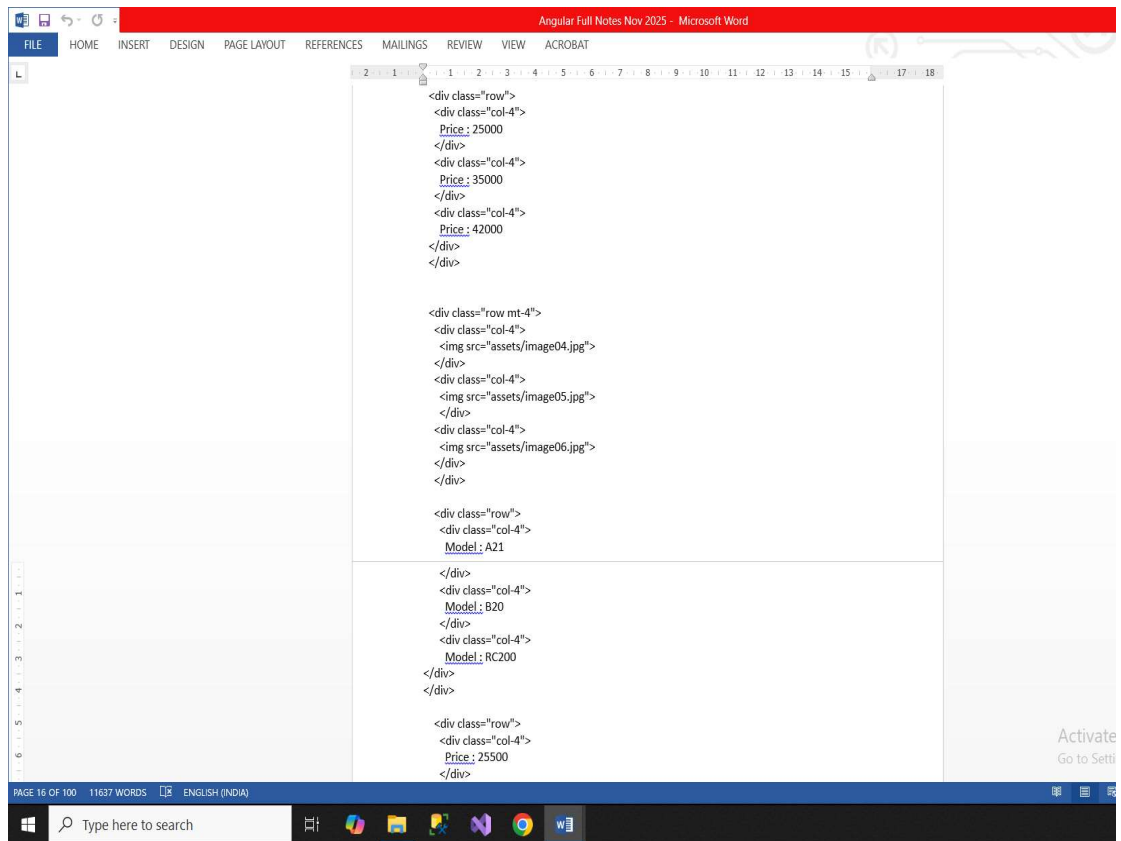

Angular Full Notes Nov 2025 - Microsoft Word

FILE HOME INSERT DESIGN PAGE LAYOUT REFERENCES MAILINGS REVIEW VIEW ACROBAT

2 1 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 17 18

```
<div class="col-4">
  Model: B20
</div>
<div class="col-4">
  Model: RC200
</div>
</div>

<div class="row">
  <div class="col-4">
    Price: 25500
  </div>
  <div class="col-4">
    Price: 35600
  </div>
  <div class="col-4">
    Price: 42700
  </div>
</div>
</div>
```

File -> save all
in terminal:

d:\folder_name\WebApp1> ng serve

Note:

display: flex means which allows you to create flexible layouts with elements that you can align and distribute vertically or horizontally.

FAQ: What is Transpile?

Ans: Transpilation (transpile) : It is the process of converting source code from one high-level programming language to another high level language. (type script to javascript)

TypeScript

TypeScript is a strongly typed programming language that builds on JavaScript. TypeScript uses compile time type checking. JavaScript is generated from TypeScript. As a result, TS can

Activat
Go to Set

PAGE 16 OF 100 11637 WORDS ENGLISH (INDIA)

Type here to search