

OpenShift Local (CRC) Technical Guide

Prerequisites & Login

OpenShift CodeReady Containers (CRC) is intended for local development and is not production-ready.

1. Environment Setup

To use `oc` commands within your CRC environment, run the following command to set up the environment variables:

```
Shell  
eval $(crc oc-env)
```

2. Retrieve Console URL

Use this command to view the URL required to log in to the OpenShift host:

```
Shell  
crc console --url
```

3. Authentication

Log in to the cluster using one of the following methods:

- **Case 1: Login without password in command**

```
Shell  
oc login -u developer https://api.lab.example.com:6443
```

- **Case 2: Login with password in command**

```
Shell  
oc login -u developer -p developer https://api.lab.example.com:6443
```

4. Verify Identity


To verify your current login and see the console URL:

```
Shell  
oc whoami --show-console
```

Managing Projects

To create a new project using the Web Console UI:


1. Log in to the Web Console.
2. Go to the **Home** section and click on **Projects**.
3. Click on **Create Project**.

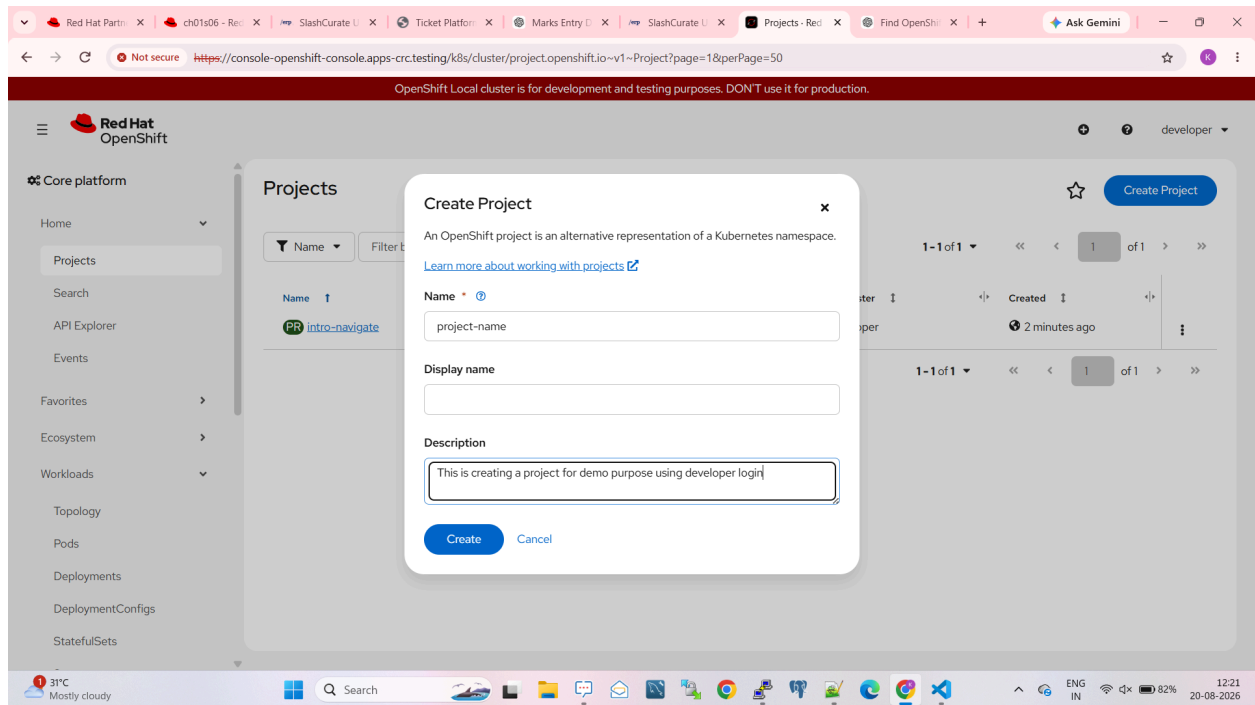

Deploying Applications

Applications can be deployed by importing code directly from a Git repository:

1. In the left-hand navigation menu, go to **Workloads > Topology**.
2. Click the **+** (Add) button.
3. Select the **Import from Git** option.

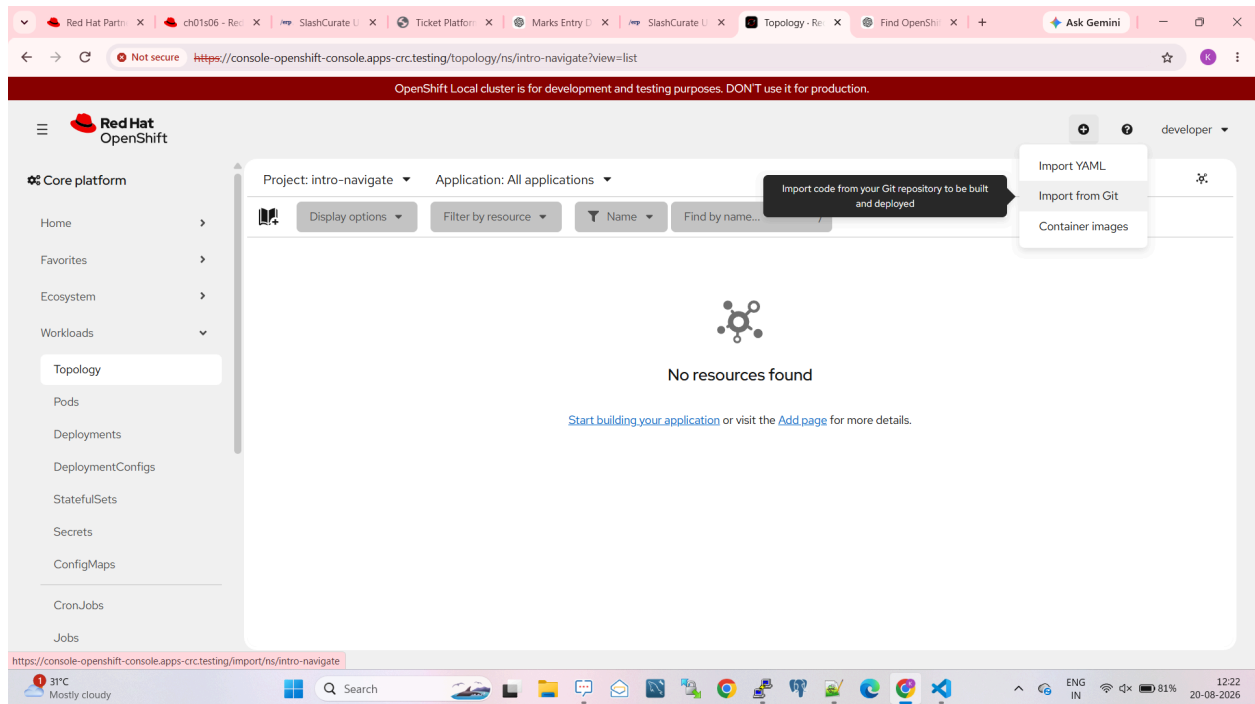

Troubleshooting

If an import is completed but the application remains in a *Pending* state, investigate potential causes:

Storage Availability: Check if there is sufficient storage available for the deployment.