

6-INDUSTRY/HIGHER LEARNING INSTITUTE INTERACTION



Select Coursecode



Select Coursecode

10215CS147-IoT Design Sprint for Smart and Sustainable Systems

10215CS148-Edge Computing Concepts and Applications

10215CS149-Cloud Computing Essentials for infrastructure Deployment

10215CS163-Intelligent Sustainable Design

10215CS164-AI-Driven Cyber Defense

10215CS165-AI-Powered Security Operations Center

registered the maximum credit

Clear

Description Accepted

53. Maximum Subarray

Medium

Topics

Companies

Given an integer array `nums`, find the **subarray** with the largest sum, and return *its sum*.

Example 1:

Input: `nums = [-2,1,-3,4,-1,2,1,-5,4]`

Output: 6

Explanation: The subarray `[4,-1,2]` has the largest sum 6.

Example 2:

Input: `nums = [1]`

Output: 1

Explanation: The subarray `[1]` has the largest sum 1.

Example 3:

Input: `nums = [5,4,-1,7,8]`

Output: 23

Explanation: The subarray `[5,4,-1,7,8]` has the largest sum 23.

38.3K 580

Code

Python Auto

```
1 class Solution(object):
2     def maxSubArray(self, nums):
3         s=max_sum=nums[0]
4         for num in nums[1:]:
5             s=max(num,s+num)
6             max_sum=max(max_sum,s)
7         return max_sum
8
9
```

Saved

Ln 7, Col 9

Test Result Testcase

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

`nums =`
`[-2,1,-3,4,-1,2,1,-5,4]`

Output

6

Expected

Problem

Submissions

Leaderboard

Discussions

Editorial

Two children, Lily and Ron, want to share a chocolate bar. Each of the squares has an integer on it.

Lily decides to share a contiguous segment of the bar selected such that:

- The length of the segment matches Ron's birth month, and,
- The sum of the integers on the squares is equal to his birth day.

Determine how many ways she can divide the chocolate.

Example

$s = [2, 2, 1, 3, 2]$

$d = 4$

$m = 2$

Lily wants to find segments summing to Ron's birth day, $d = 4$ with a length equalling his birth month, $m = 2$. In this case, there are two segments meeting her criteria: $[2, 2]$ and $[1, 3]$.

Function Description

Complete the birthday function in the editor below.

birthday has the following parameter(s):

- int $s[n]$: the numbers on each of the squares of chocolate
- int d : Ron's birth day
- int m : Ron's birth month

Returns

- int: the number of ways the bar can be divided

Input Format

The first line contains an integer n , the number of squares in the chocolate bar.

The second line contains n space-separated integers $s[i]$, the numbers on the chocolate squares where $0 \leq i < n$.

The third line contains two space-separated integers, d and m , Ron's birth day and his birth month.

Constraints

- $1 \leq n \leq 100$
- $1 \leq s[i] \leq 5$, where $(0 \leq i < n)$
- $1 \leq d \leq 31$
- $1 \leq m \leq 12$

Sample Input 0

```
76     int d = Integer.parseInt(firstMultipleInput[0]);
77
78     int m = Integer.parseInt(firstMultipleInput[1]);
79
80     int result = Result.birthday(s, d, m);
81
82     bufferedWriter.write(String.valueOf(result));
83     bufferedWriter.newLine();
84
85     bufferedReader.close();
86     bufferedWriter.close();
87 }
88
89
```

Line: 89 Col: 1

Upload Code as File

Test against custom input

Run Code

Submit Code

You have earned 10.00 points!
You are now 75 points away from the 3rd star for your problem solving badge.

25%

125/200

Congratulations

You solved this challenge. Would you like to challenge your friends?  

Next Challenge

Test case 0

Test case 1

Test case 2

Compiler Message

Success

Input (stdin)

Download

Problem

We define subsequence as any subset of an array. We define a subarray as a contiguous subsequence in an array.

Given an array, find the maximum possible sum among:

1. all nonempty subarrays.
2. all nonempty subsequences.

Print the two values as space-separated integers on one line.

Note that empty subarrays/subsequences should not be considered.

Example

`arr = [-1, 2, 3, -4, 5, 10]`

The maximum subarray sum is comprised of elements at indices `[1 - 5]`. Their sum is `2 + 3 + -4 + 5 + 10 = 16`. The maximum subsequence sum is comprised of elements at indices `[1, 2, 4, 5]` and their sum is `2 + 3 + 5 + 10 = 20`.

Function Description

Complete the `maxSubarray` function in the editor below.

`maxSubarray` has the following parameter(s):

- `int arr[n]`: an array of integers

Returns

- `int[2]`: the maximum subarray and subsequence sums

Input Format

The first line of input contains a single integer `t`, the number of test cases.

The first line of each test case contains a single integer `n`.

The second line contains `n` space-separated integers `arr[i]` where $0 \leq i < n$.

Constraints

- $1 \leq t \leq 10$
- $1 \leq n \leq 10^4$
- $-10^4 \leq arr[i] \leq 10^4$

The subarray and subsequences you consider should have at least one element.

Sample Input 0

```
2
4
```

Submissions

Leaderboard

Discussions

Editorial

```
13 class Result {
59
60
61
62 public class Solution {
63     public static void main(String[] args) throws IOException {
64         BufferedReader bufferedReader = new BufferedReader(new InputStreamReader(System.in));
65         BufferedWriter bufferedWriter = new BufferedWriter(new FileWriter(System.getenv("OUTPUT_PATH")));
66
67         int t = Integer.parseInt(bufferedReader.readLine().trim());
68
69         IntStream.range(0, t).forEach(tItr -> {
70             try {
71                 int n = Integer.parseInt(bufferedReader.readLine().trim());
72
73                 List<Integer> arr = Stream.of(bufferedReader.readLine().replaceAll("\\s+$", "").split(" "))
74                     .map(Integer::parseInt)
75                     .collect(toList());
76
77                 List<Integer> result = Result.maxSubarray(arr);
78
79                 bufferedWriter.write(
80                     result.stream()
81                         .map(Object::toString)
82                         .collect(joining(" "))
83                     + "\n"
84                 );
85             } catch (IOException ex) {
86                 throw new RuntimeException(ex);
87             }
88         });
89
90         bufferedReader.close();
91         bufferedWriter.close();
92     }
93 }
94
```

Line: 94 Col: 1

Upload Code as File

Test against custom input

Run Code

Submit Code

Code

Python Auto

```

1 class Solution:
2     def maxSubarraySumCircular(self, nums):
3         total_sum = 0
4
5         curr_max = 0
6         max_sum = nums[0]
7
8         curr_min = 0
9         min_sum = nums[0]
10
11         for num in nums:

```

Ln 2, Col 42

Accepted Runtime: 0 ms

Input

 $[1, -2, 3, -2]$

3

Expected

- `n == nums.length`
- `1 <= n <= 3 * 104`
- `-3 * 104 <= nums[i] <= 3 * 104`



🏠 Problem List < > 🔍

🔥 ⏮️ Submit 📄 ✨

🔧 ⚙️ 🔥 0 ⏮️ 01:39:27 ⏲️ 👤 S Premium

📖 Description | 🟢 Accepted × 📖 Editorial

← All Submissions

Accepted 1096 / 1096 testcases passed
🟢 SRI kiran R... submitted at Aug 22, 2026 09:18


👑 ₹583.25/mo Save over 56%
👑 Unlock the Full LeetCode...
Company problems, Ask Leet, and...

🕒 Runtime

3 ms | Beats 61.18% 🌱

@ Memory

12.22 MB | Beats 92.25% 🌱

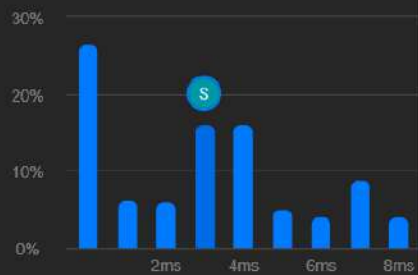

</> Code

Python ▾ 🔒 Auto

```
1 class Solution:
2     def myAtoi(self, s):
3         if not s:
4             return 0
5
6         i = 0
7         n = len(s)
8
9         while i < n and s[i] == ' ':
10             i += 1
11
```

Saved

Ln 2, Col 23

> Test Result | 🟢 Testcase

S =
"42"

Output

42

Expected

42

♥️ Contribute a testcase

3 29°C
Sunny



🔍 Search



ENG
IN



9:19 AM
8/22/2026

You are given a string containing characters *A* and *B* only. Your task is to change it into a string such that there are no matching adjacent characters. To do this, you are allowed to delete zero or more characters in the string.

Your task is to find the minimum number of required deletions.

Example

s = *AABAAB*

Remove an *A* at positions 0 and 3 to make *s* = *ABAB* in 2 deletions.

Function Description

Complete the `alternatingCharacters` function in the editor below.

`alternatingCharacters` has the following parameter(s):

- string *s*: a string

Returns

- int: the minimum number of deletions required

Input Format

The first line contains an integer *q*, the number of queries.

The next *q* lines each contain a string *s* to analyze.

Constraints

- $1 \leq q \leq 10$
- $1 \leq \text{length of } s \leq 10^5$
- Each string *s* will consist only of characters *A* and *B*.

Sample Input

```
5
AAAA
BBBBB
ABABABAB
BABABA
AAABBB
```

Sample Output

```
3
```

```
String s = bufferedReader.readLine();
48
49     int result = Result.alternatingCharacters(s);
50
51     bufferedWriter.write(String.valueOf(result));
52     bufferedWriter.newLine();
53 } catch (IOException ex) {
54     throw new RuntimeException(ex);
55 }
56 });
57
58 bufferedReader.close();
59 bufferedWriter.close();
60
61 }
62 }
```

Line: 62 Col: 1

Upload Code as File

Test against custom input

Run Code

Submit Code



You have earned 20.00 points!

You are now 5 points away from the 3rd star for your problem solving badge.

95%

195/200

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

Next Challenge

Test case 0

Test case 1

```
2 AAAA
3 BBBBB
4 ABABABAB
5 BABABA
```

Medium Topics Companies Hint

Example 1:

Output: 3

Example 2:

Output: 1

Example 3:

45.6K 932

Python Auto

Ln 2, Col 41

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3

Input

"abcabcbb"

Output

3

Expected

890. Find and Replace Pattern

Medium Topics Companies

Given a list of strings `words` and a string `pattern`, return a list of `words[i]` that match `pattern`. You may return the answer in **any order**.

A word matches the pattern if there exists a permutation of letters `p` so that after replacing every letter `x` in `pattern` with `p(x)`, we get the desired word.

Recall that a permutation of letters is a bijection from letters to letters: every letter maps to another letter, and no two letters map to the same letter.

Example 1:

Input: `words = ["abc","deq","mee","aqq","dkd","ccc"]`
`pattern = "abb"`
Output: `["mee","aqq"]`
Explanation: "mee" matches the pattern because there is a permutation {a -> e, b -> m, c -> e}.

4K 28

Code

Python Auto

```
1 class Solution:
2     def findAndReplacePattern(self, words, pattern):
3         p_len = len(set(pattern))
4         return [w for w in words if len(set(w)) == p_len == len(set(zip(w, pattern)))]
5
```

Saved

Ln 2, Col 42

Test Result

Testcase

Accepted Runtime: 0 ms

Case 1 Case 2

Input

`words = ["abc","deq","mee","aqq","dkd","ccc"]`

`pattern = "abb"`

Output

Description Accepted Editorial

1408. String Matching in an Array

Easy Topics Companies Hint

Given an array of string `words`, return all strings `words` that are a **substring** of another word. You return the answer in **any order**.

Example 1:

Input: `words = ["mass", "as", "hero", "superhero"]`
Output: `["as", "hero"]`
Explanation: "as" is substring of "mass" and "hero" is substring of "superhero".
 ["hero", "as"] is also a valid answer.

Example 2:

Input: `words = ["leetcode", "et", "code"]`
Output: `["et", "code"]`
Explanation: "et", "code" are substrings of "leetcode".

1.5K 173

Code

Python Auto

```
1 class Solution:
2     def stringMatching(self, words):
3         joined = " ".join(words)
4         return [w for w in words if joined.count(w) >= 2]
5
```

Saved

Ln 2, Col 35

Test Result Testcase

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3

Input

`words = ["mass", "as", "hero", "superhero"]`

Output

`["as", "hero"]`

Expected