

```

32     int i = 0; // index for text
33     int j = 0; // index for pattern
34
35     while (i < text.length()) {
36         if (text.charAt(i) == pattern.charAt(j)) {
37             i++;
38             j++;
39         }
40
41         if (j == pattern.length()) {
42             System.out.print((i - j) + " "); // print space
43             j = lps[j - 1];
44         } else if (i < text.length() && text.charAt(i) != pattern.charAt(j)) {
45             if (j != 0) {
46                 j = lps[j - 1];
47             } else {
48                 i++;
49             }
50         }
51     }

```

[Edit this code](#)

→ line that just executed
→ next line to execute

<< First < Prev Next > Last >>

User input processed so far:

```

AABAACAADAABAABAAAAA
AABAACAADAABAABAAAAA

```

Frames

Objects


```

main:62
  SC
  text "AABAACAADAABAABAAAAA"
  pattern "AABAACAADAABAABAAAAA "

```

java.util.Scanner instance

Ads keep this site free for everyone. Donate to support an ad-free and faster AI. (Teachers get free access.)

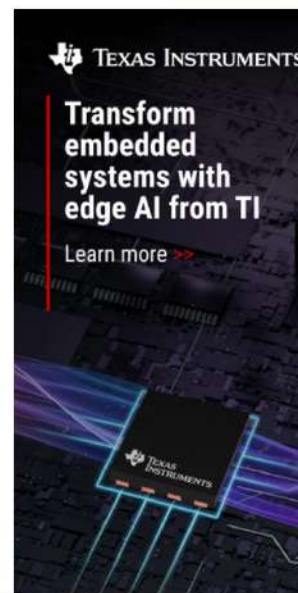


```
Java
known limitations
9      int n = sc.nextInt();
10     int[] arr = new int[n];
11
12     for (int i = 0; i < n; i++) {
13         arr[i] = sc.nextInt();
14     }
15
16     int currentSum = arr[0];
17     int maxSum = arr[0];
18
19     for (int i = 1; i < n; i++) {
20         currentSum = Math.max(arr[i], currentSum);
21         maxSum = Math.max(maxSum, currentSum);
22     }
23
24     System.out.println(maxSum);
25
26     sc.close();
27 }
28 }
```

User input processed so far:

```
8
-2
4
-1
-2
1
5
-3
-3
```

Print output (drag lower right corner to resize)

7

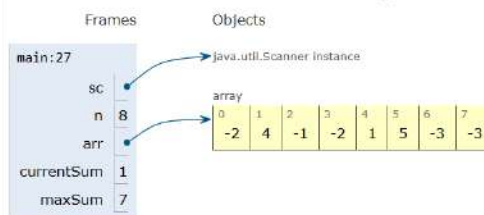

Ads keep this site free for everyone. Donate to get ad-free and faster AI. (Teachers get free access)

TEXAS INSTRUMENTS

Transform embedded systems with edge AI from TI

Learn more >>


```
33 }
34
35 // Filter readings > 50 and compute average per sensor
36 Map<String, Double> averageMap = readings.stream()
37     .filter(r -> r.getTemperature() > 50)
38     .collect(Collectors.groupingBy(
39         SensorReading::getSensorId,
40         Collectors.averagingDouble(SensorReading::getTemperature)
41     ));
42
43 // Sort by average temperature descending and print
44 averageMap.entrySet().stream()
45     .sorted(Map.Entry.<String, Double>comparing(
46         Map.Entry.getValue(),
47         Collections.reverseOrder()
48     ))
49     .forEach(entry -> System.out.println(
50         entry.getKey() + " " + String.format("%.1f", entry.getValue())
51     ));
52 }
```

User input processed so far:

```
6
s1 60
s2 40
s3 70
s1 90
s2 70
s3 30
```

Print output (drag lower right corner to resize)

```
s1 75.0
s3 70.0
s2 70.0
```

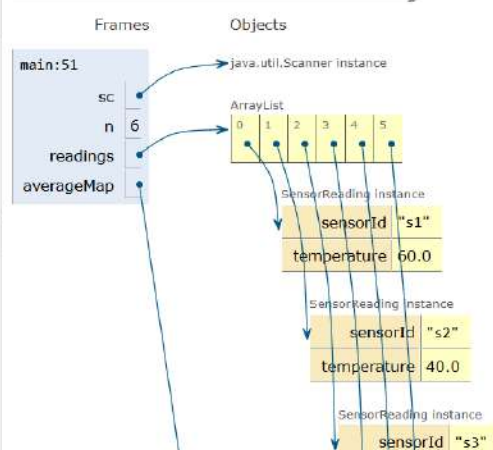

Ads keep this site free for everyone. Don't remove ads. (Teachers get free ad-free and faster AI. (Teachers get free

TEXAS INSTRUMENTS

Transform embedded systems with edge AI from TI


Learn more >>

```
Java
known limitations
10 List<Integer> salaries = new ArrayList<>();
11
12 // Read salaries
13 for (int i = 0; i < n; i++) {
14     salaries.add(sc.nextInt());
15 }
16
17 // Increase salary by 10%
18 List<Integer> updatedSalaries = salaries.stream()
19     .map(salary -> (int) (salary * 1.10))
20     .collect(Collectors.toList());
21
22 // Print updated salaries
23 for (int salary : updatedSalaries) {
24     System.out.print(salary + " ");
25 }
26
27 sc.close();
28 }
29 }
```

line that just executed

next line to execute

<< First < Prev Next > Last >>

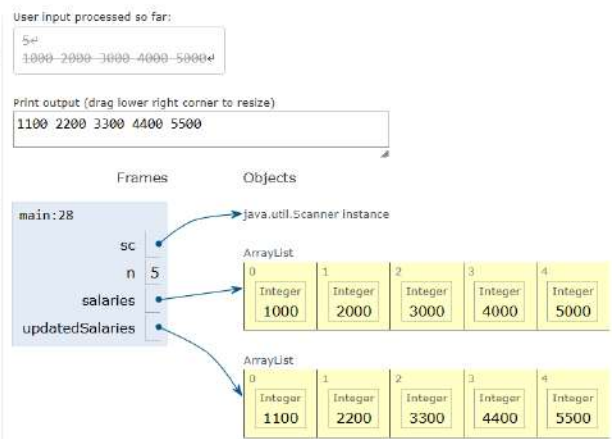

Ads keep this site free for ever
ad-free and faster AI. (Teache

TEXAS INST

Transform
embedded
systems wi
edge AI fro

Learn more >>

TEXAS INSTRUMENTS