

# Hands-on Lab: Backup and Restore using PostgreSQL

**Estimated time needed:** 30 minutes

In this lab, you will learn how to use the PostgreSQL Command Line Interface (CLI) to restore a full database from a backup. Then using a combination of the CLI and pgAdmin, which is a Graphical User Interface (GUI) for PostgreSQL, you will make some changes to this database and perform a full backup. Finally, you will then delete this database to practice a full restoration in the scenario of an accidental deletion.


## Software used in this Lab

In this lab, you will be using PostgreSQL. It is a popular open-source object Relational Database Management System (RDBMS) capable of performing a wealth of database administration tasks, such as storing, manipulating, retrieving, and archiving data.

To complete this lab, you will be accessing the PostgreSQL service through the IBM Skills Network (SN) Cloud IDE, which is a virtual development environment you will utilize throughout this course.

## Database used in this Lab

In this lab, you will use a database from <https://postgrespro.com/education/demodb> distributed under the [PostgreSQL licence](#). It stores a month of data about airline flights in Russia and is organized according to the following schema:

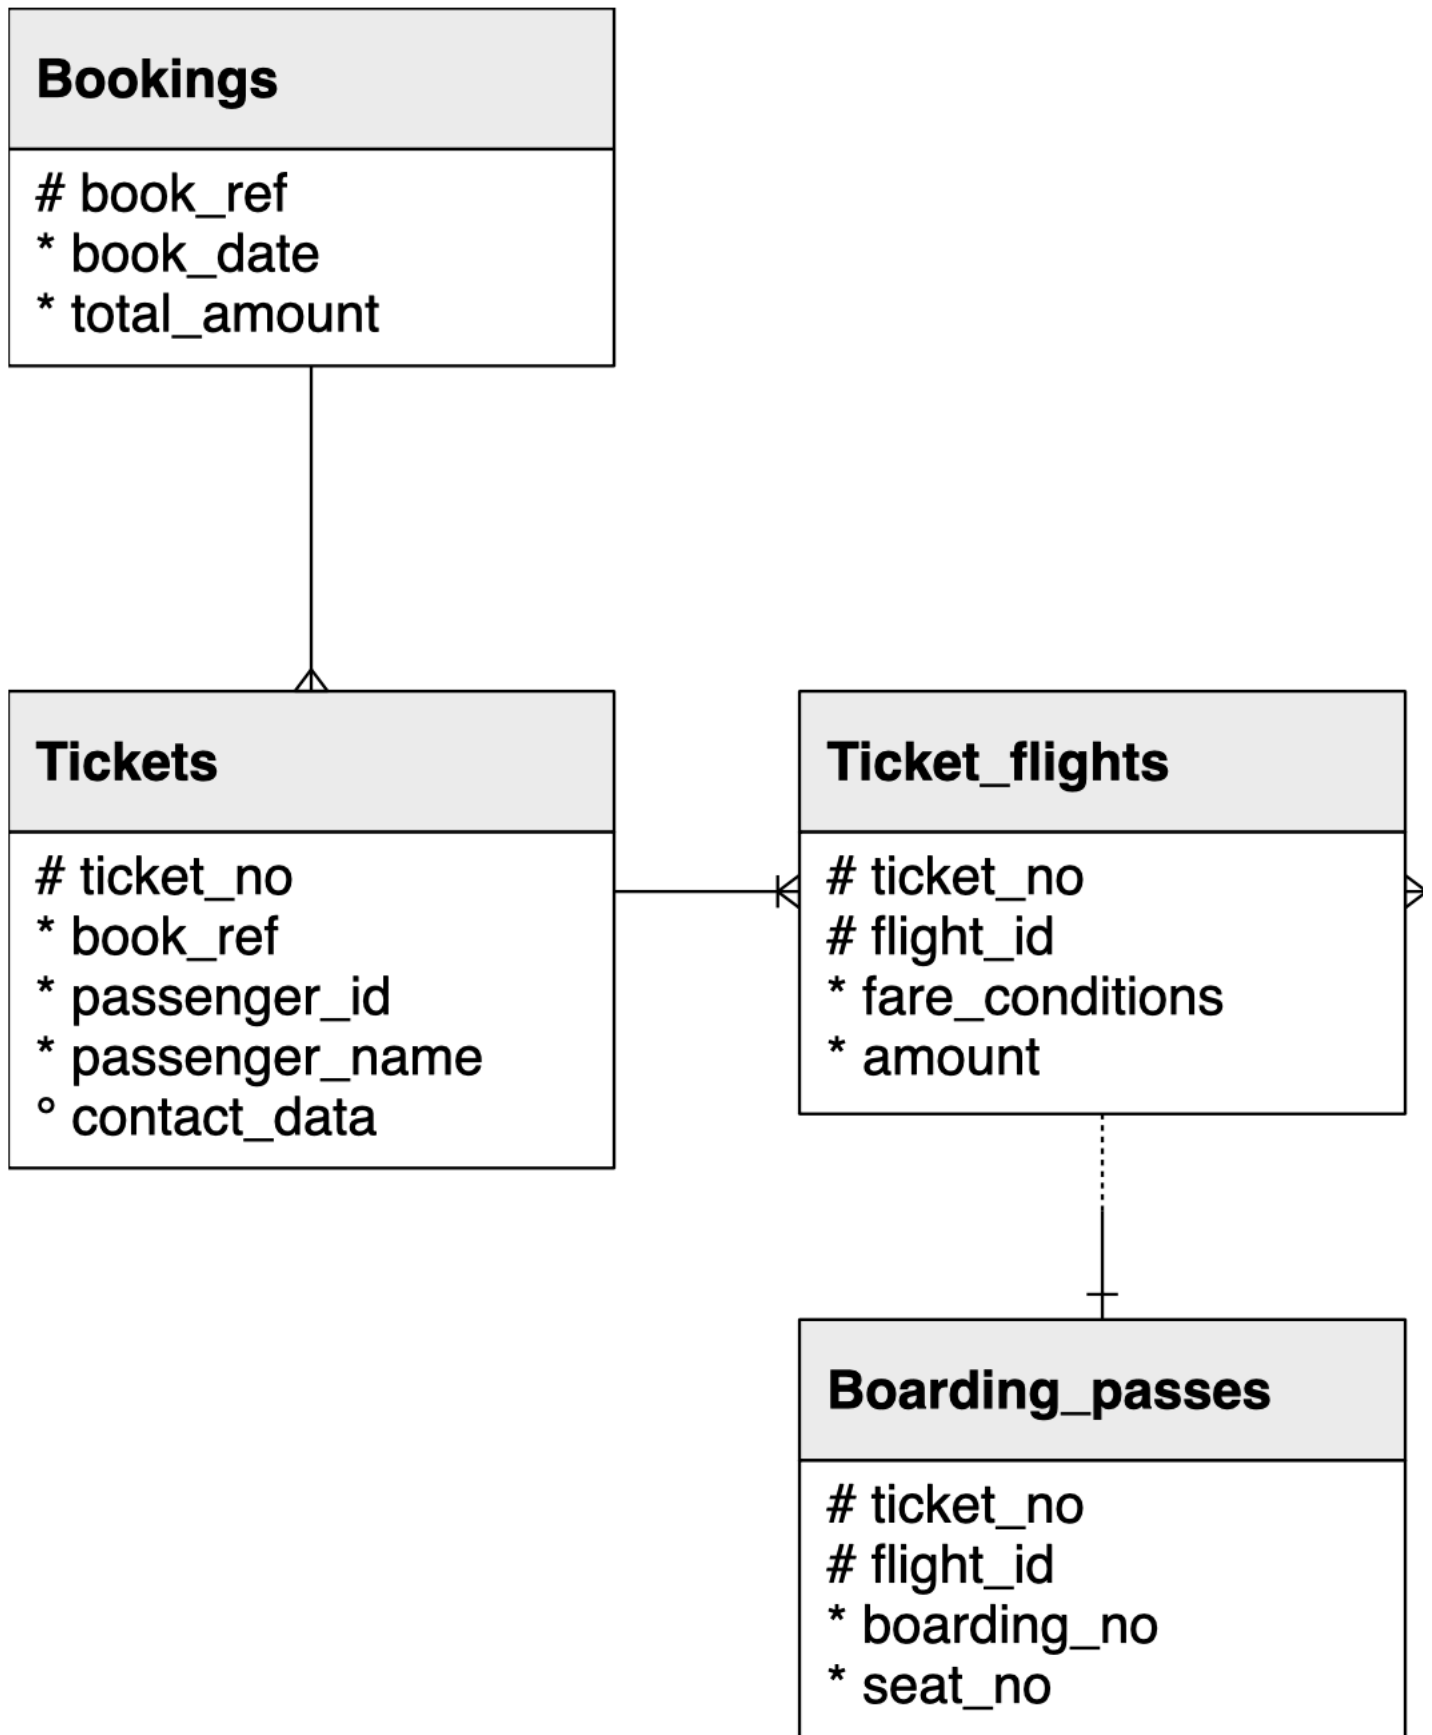

## Objectives

After completing this lab, you will be able to use the PostgreSQL CLI and pgAdmin to:

- Restore a full database from a backup
- Update a database and perform a full backup
- Drop a database and then restore it

## Launching PostgreSQL in Cloud IDE

To get started with this lab, launch PostgreSQL using the Cloud IDE. You can do this by following these steps:

1. Click on the Skills Network extension button on the left side of the window.
2. Open the “DATABASES” drop down menu and click on “PostgreSQL”.
3. Click on the “Start” button. PostgreSQL may take a few moments to start.

The screenshot shows the IBM Skills Network interface for launching a PostgreSQL application. The interface is dark-themed with a sidebar on the left and a main content area on the right.

**Callout 1:** Points to the PostgreSQL icon in the sidebar under the 'DATABASES' section.

**Callout 2:** Points to the PostgreSQL button in the 'DATABASES' list.

**Callout 3:** Points to the 'Start' button in the PostgreSQL details panel.

The main content area displays the PostgreSQL details, including the version (v13.2) and a status indicator (INACTIVE). Below the details, there are tabs for 'Summary', 'Connection Information', and 'Details'. The 'Summary' tab is selected, showing the text: 'Get started with Postgres in a faster, easier way. To launch y'.

# Exercise 1: Restore a Full Database from a Backup

First, we will need to download the database.

1. Open a new terminal by clicking on the “New Terminal” button near the bottom of the interface.

Lab IBMCloud Launch Application

File Edit Selection View Go Run Terminal Help

SKILLS NETWO... PostgreSQL ×

▼ DATABASES

- MySQL
- PostgreSQL
- MongoDB
- Cassandra

> CLOUD

> BIG DATA

> OTHER

# PostgreSQL

ACTIVE

v13.2 | v5.0 | v13.2

Connect to PostgreSQL and pgAdmin directly in your Skills

Start

Summary Connection Information Details

Your database and pgAdmin server are now ready to use and you can connect using the provided credentials. For more details on how to navigate PostgreSQL, please refer to the documentation.

Username:

Password:

You can manage Postgres via:

pgAdmin [↗](#)

Or to interact with the database in the terminal, select one of the following options:

Postgres CLI **New Terminal**

0 0

2. Run the following command in the terminal.

```
1. 1
```

```
1. wget https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/example-guided-project/flights_RUSSIA_small.sql
```

Copied!

The file which you downloaded is a full database backup of a month of flight data in Russia. Now, you can perform a full restoration of the dataset by first opening the PostgreSQL CLI.

3. Near the bottom of the window, click on the “PostgreSQL CLI” button to launch the Command Line Interface.

Lab

IBMCLOUD

Launch Application

FileEditSelectionViewGoRunTerminalHelp

SKILLS NETWORK

PostgreSQL x

DATABASES

MySQL

PostgreSQL

MongoDB

Cassandra

CLOUD

BIG DATA

OTHER

PostgreSQL

ACTIVE

v13.2

v5.0

v13.2

Connect to PostgreSQL and pgAdmin directly in your Skills

Start

Summary

Connection Information

Details

Your database and pgAdmin server are now ready to use and  
credentials. For more details on how to navigate Postgres, p

Username:

Password:

You can manage Postgres via:

pgAdmin

Or to interact with the database in the terminal, select one of

Postgres CLI

New Terminal

0

0



4. In the PostgreSQL CLI, type in the command `\i <file_name>`. In your case, the filename will be the name of the file you downloaded, `flights_RUSSIA_small.sql`. This will restore the data into a new database called `demo`.

```
1. 1
1. \i flights_RUSSIA_small.sql
```

Copied!

The restorations may take a few moments to complete.

5. After the restoration completes, one way you can check that the database has been restored is with the following command, which lists all the tables in the current database schema.

```
1. 1
1. \dt
```

Copied!

You should see the following output:

```
theia@theiadocker-davidpastern: /home/project theia@theiadocker-davidpastern: /home/project

demo=# \dt

          List of relations
Schema | Name          | Type  | Owner
-----+-----+-----+-----
bookings | aircrafts_data | table | postgres
bookings | airports_data  | table | postgres
bookings | boarding_passes | table | postgres
bookings | bookings       | table | postgres
bookings | flights        | table | postgres
bookings | seats          | table | postgres
bookings | ticket_flights | table | postgres
bookings | tickets        | table | postgres
(8 rows)

demo=#
```

## Exercise 2: Modify the Database and Perform a Full Backup

### Task A: Modify the Database with the CLI

1. One of the tables in the database schema is `aircrafts_data`. You can take a look at the contents of that table by executing the following command in the PostgreSQL CLI:

```
1. 1
1. SELECT * FROM aircrafts_data;
```

Copied!

This will show you the aircraft models in the database, their code, and their range in kilometers.

```
demo=# SELECT * FROM aircrafts_data;
 aircraft_code |          model          | range
-----+-----+-----
 773           | {"en": "Boeing 777-300"} | 11100
 763           | {"en": "Boeing 767-300"} | 7900
 SU9           | {"en": "Sukhoi Superjet-100"} | 3000
 320           | {"en": "Airbus A320-200"} | 5700
 321           | {"en": "Airbus A321-200"} | 5600
 319           | {"en": "Airbus A319-100"} | 6700
 733           | {"en": "Boeing 737-300"} | 4200
 CN1           | {"en": "Cessna 208 Caravan"} | 1200
 CR2           | {"en": "Bombardier CRJ-200"} | 2700
(9 rows)
```

2. Suppose a new model of aircraft is being added to the fleet, and you, as the database administrator, are responsible for updating the database to reflect this addition. The aircraft they wish to add is the [Airbus A380](#), which has a range of 15,700 km and aircraft code "380". You can do this by executing the following command in the PostgreSQL CLI:

```
1. 1
1. INSERT INTO aircrafts_data(aircraft_code, model, range) VALUES (380, '{"en": "Airbus A380-800"}', 15700);
```

Copied!

3. To confirm that the information was entered into the database correctly, you can read out the aircrafts\_data table again using:

```
1. 1
1. SELECT * FROM aircrafts_data;
```

Copied!

The output will look like this:

```
-----+-----+-----
 773           | {"en": "Boeing 777-300"} | 11100
 763           | {"en": "Boeing 767-300"} | 7900
 SU9           | {"en": "Sukhoi Superjet-100"} | 3000
 320           | {"en": "Airbus A320-200"} | 5700
 321           | {"en": "Airbus A321-200"} | 5600
 319           | {"en": "Airbus A319-100"} | 6700
 733           | {"en": "Boeing 737-300"} | 4200
 CN1           | {"en": "Cessna 208 Caravan"} | 1200
 CR2           | {"en": "Bombardier CRJ-200"} | 2700
 380           | {"en": "Airbus A380-800"} | 15700
(10 rows)
```

demo=# █

As you can see, there is a new entry in the table corresponding to the new aircraft added to the fleet.

## Task B: Backup your Database using pgAdmin

Now that you modified the database (minor modification for demonstration - in reality there would likely be far more additions) it is good practice to backup your database in case of accidental deletion.

1. To back up the demo database, first exit the PostgreSQL CLI by either entering:

```
1. 1
1. \q
```

Copied!

2. Next, open the pgAdmin Graphical User Interface by clicking the "pgAdmin" button in the Cloud IDE interface.

PostgreSQL x

Stop

Summary Connection Information Details

Your database and pgAdmin server are now ready to use and available with the on how to navigate PostgreSQL, please check out the Details section.

Username:

Password:


You can manage PostgreSQL via:

**pgAdmin**

Or to interact with the database in the terminal, select one of these options:

PostgreSQL CLI New Terminal

3. Once the pgAdmin GUI opens, click on the Servers tab on the left side of the page. You will be prompted to enter a password.

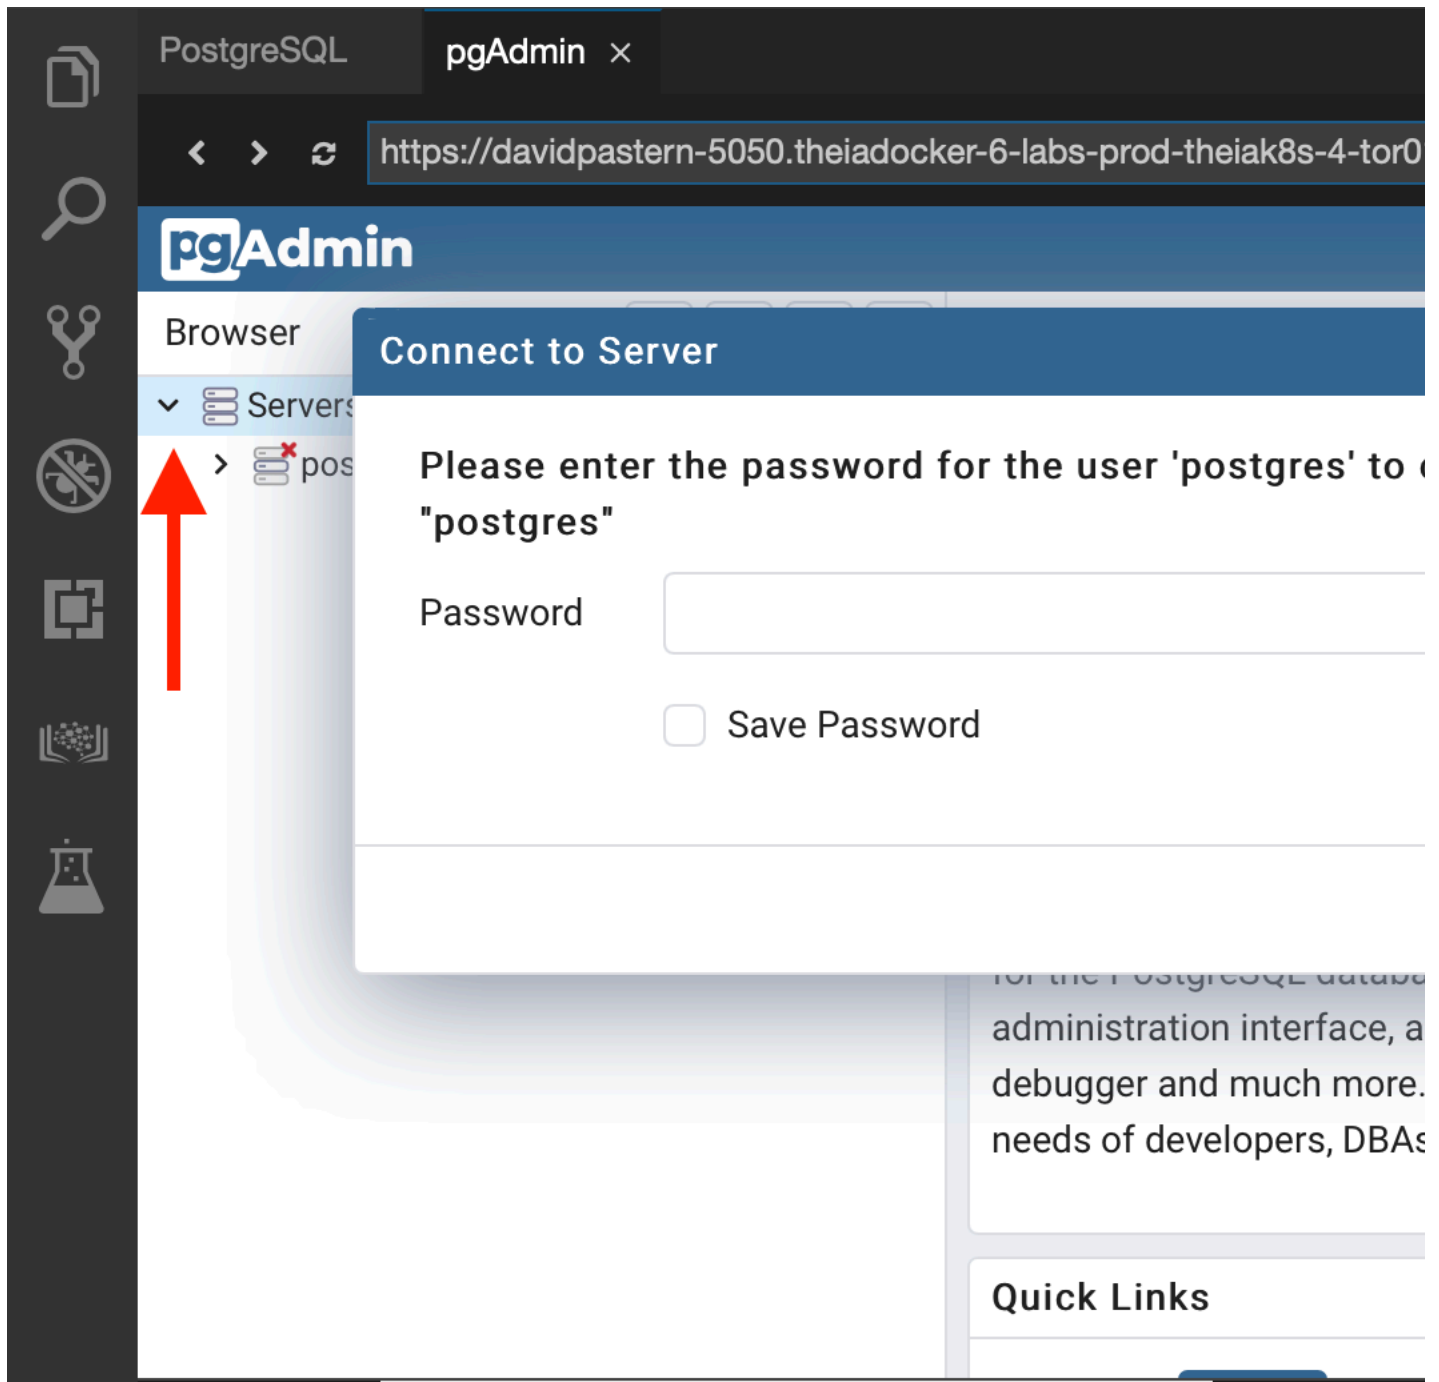

4. To retrieve your password, click on the “PostgreSQL” tab near the top of the interface.
5. Click on the Copy icon to the left of your password to copy the session password onto your clipboard.

PostgreSQL x pgAdmin

# PostgreSQL

ACTIVE

v13.2 | v5.0 | v13.2

Connect to PostgreSQL and pgAdmin directly in your Skills Network Labs environment

Stop

Summary Connection Information Details

Your database and pgAdmin server are now ready to use and available with the following information. For more information on how to navigate PostgreSQL, please check out the Details section.

Username:

Password:

You can manage PostgreSQL via:

pgAdmin


Or to interact with the database in the terminal, select one of these options:

PostgreSQL CLI New Terminal


6. Navigate back to the “pgAdmin” tab and paste in your password, then click OK.

7. Click on Postgres > Databases.

8. Right click on demo and click the Backup button.

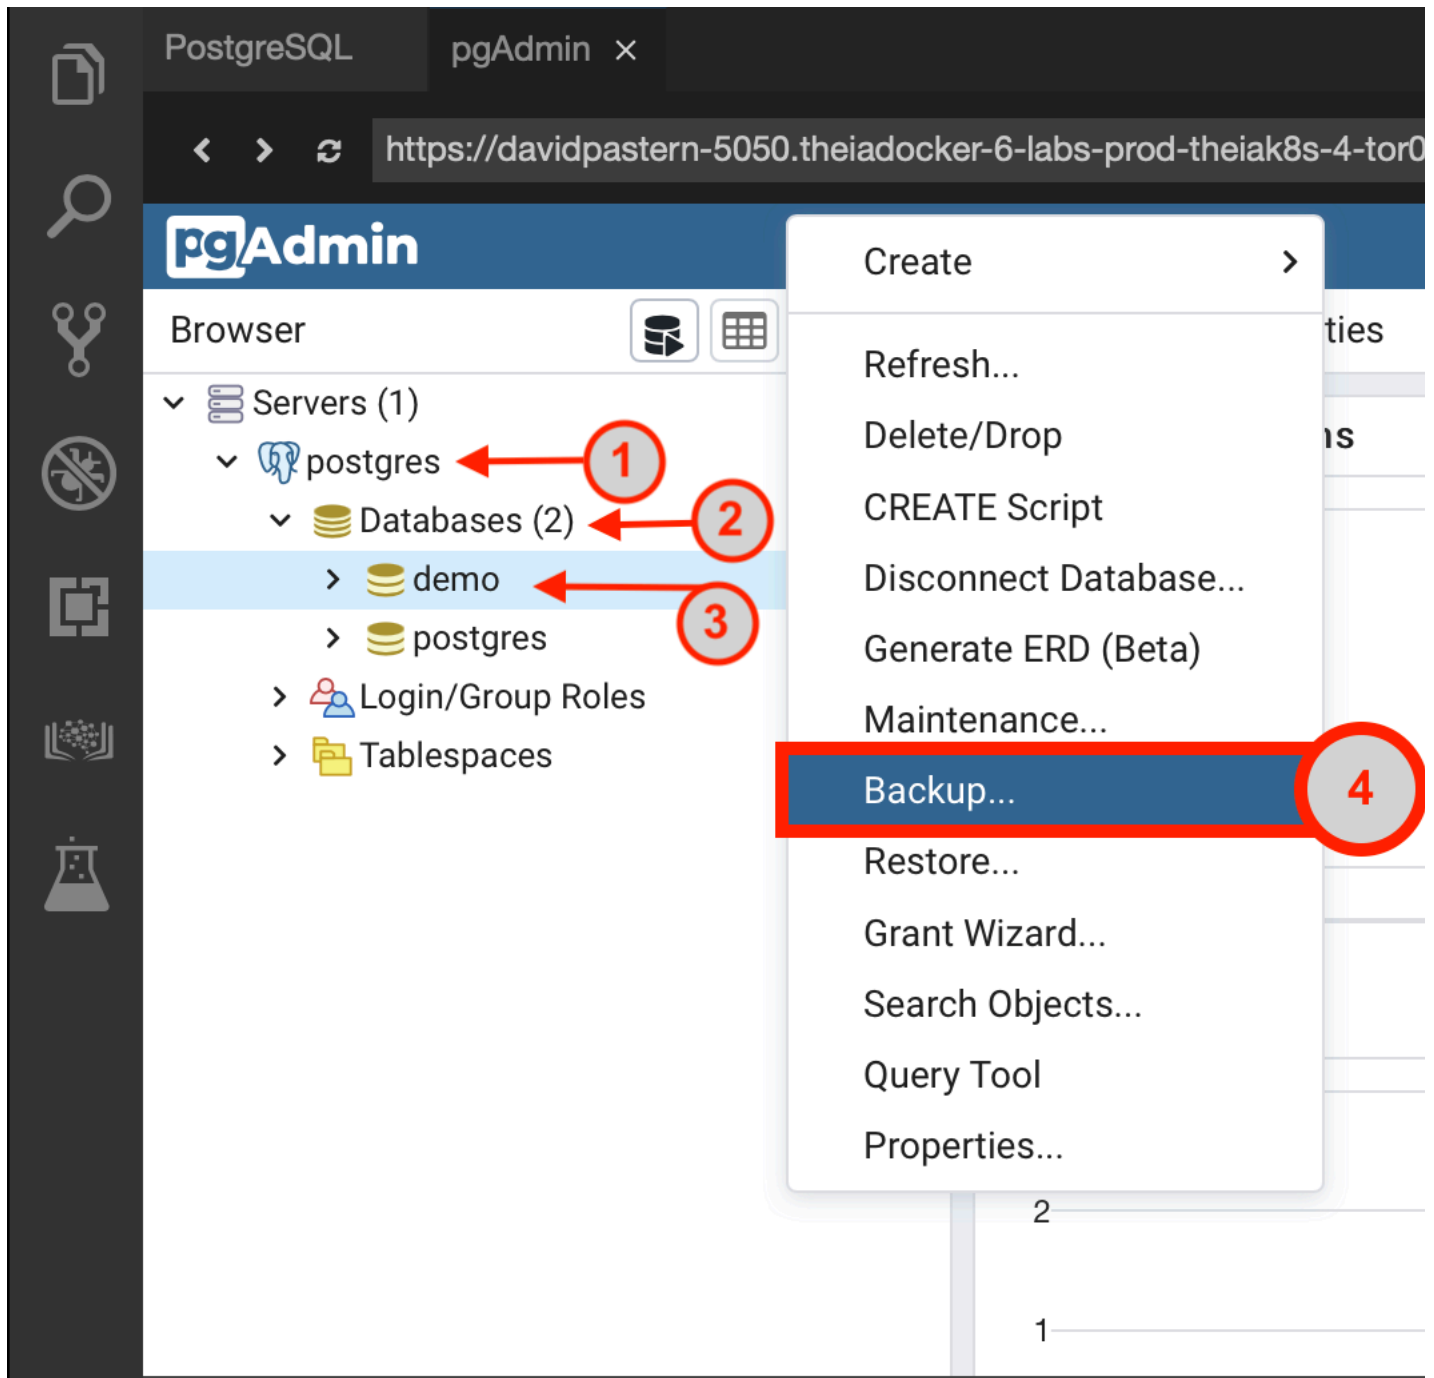

9. Enter a name for the backup (For example, "demo\_backup"), set the Format to Tar, then click the "Backup" button.

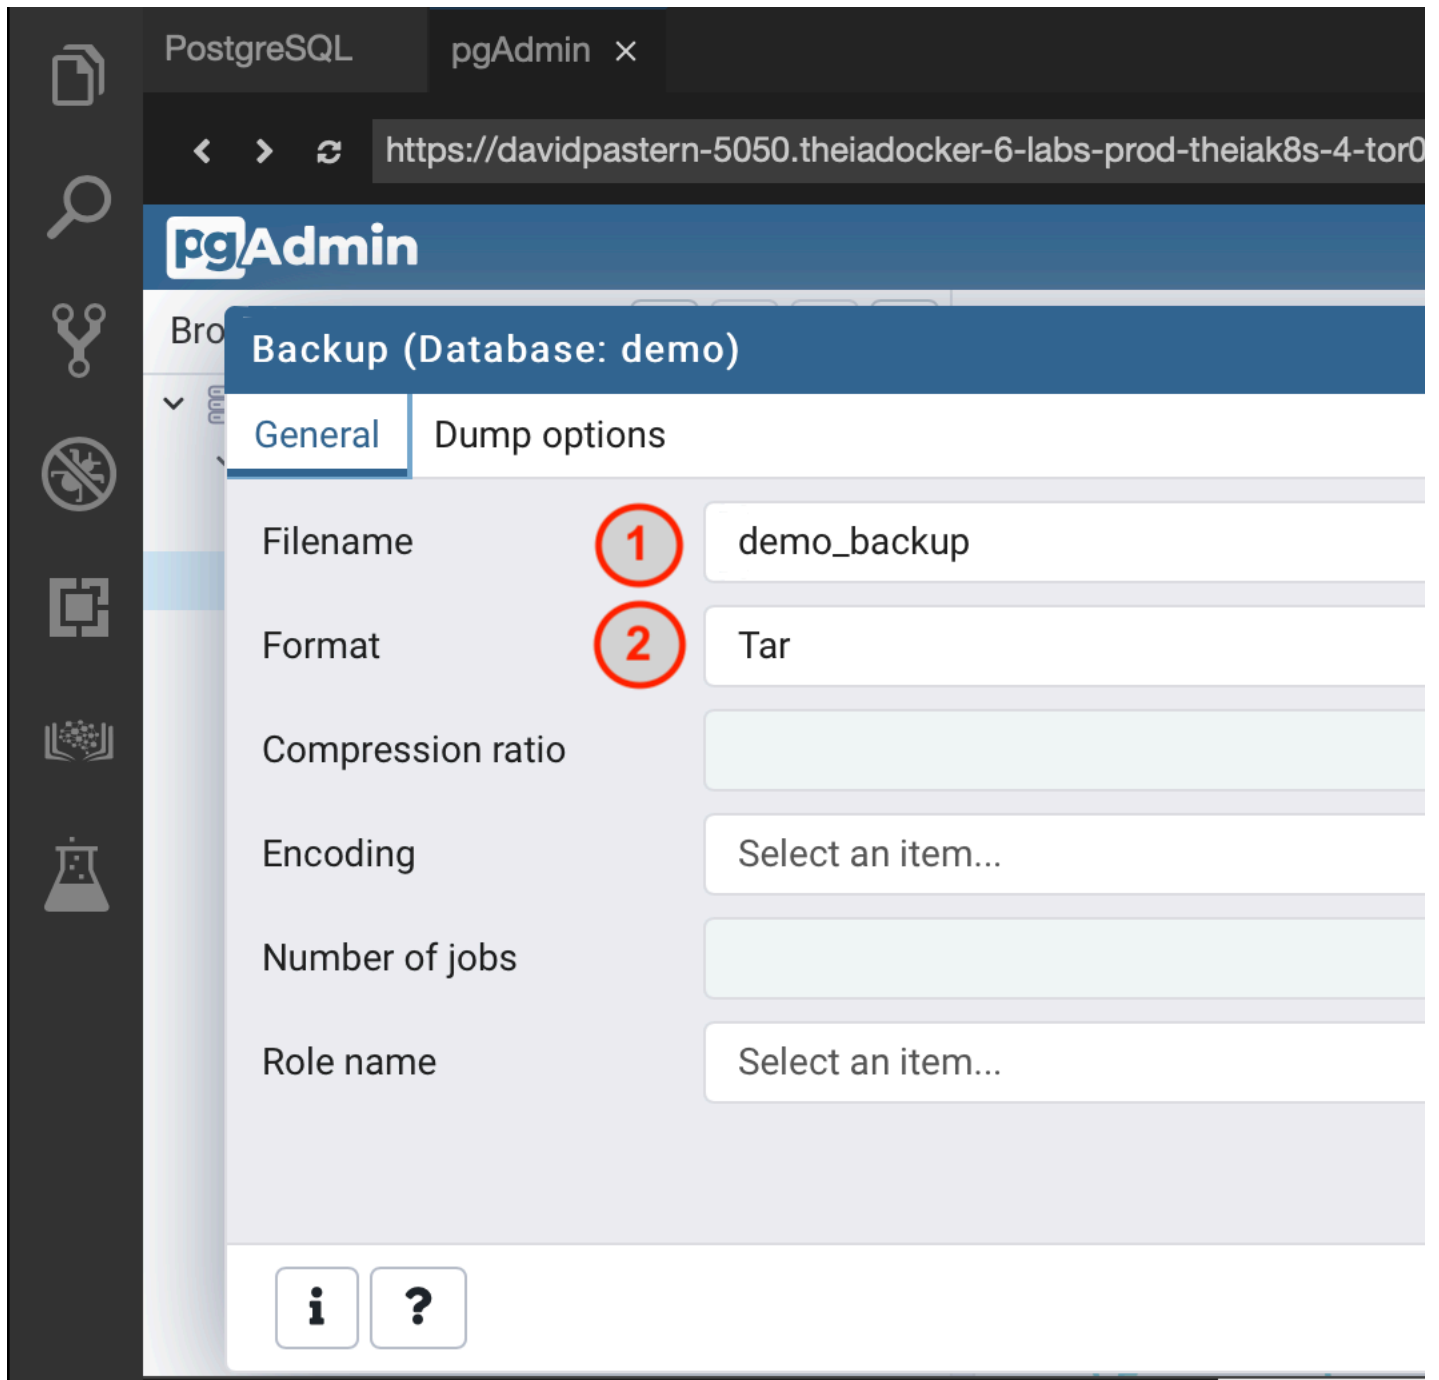


## Exercise 3: Restore a Full Backup after Accidental Deletion

In this exercise, suppose you find yourself in a situation where you accidentally dropped the entire database. Fortunately, you made a full backup of the database in the previous exercise, which you will use to restore the database.


### Task A: “Accidentally” Delete the Database

1. In the pgAdmin GUI, right click on the demo database and then click the “Delete/Drop” button.

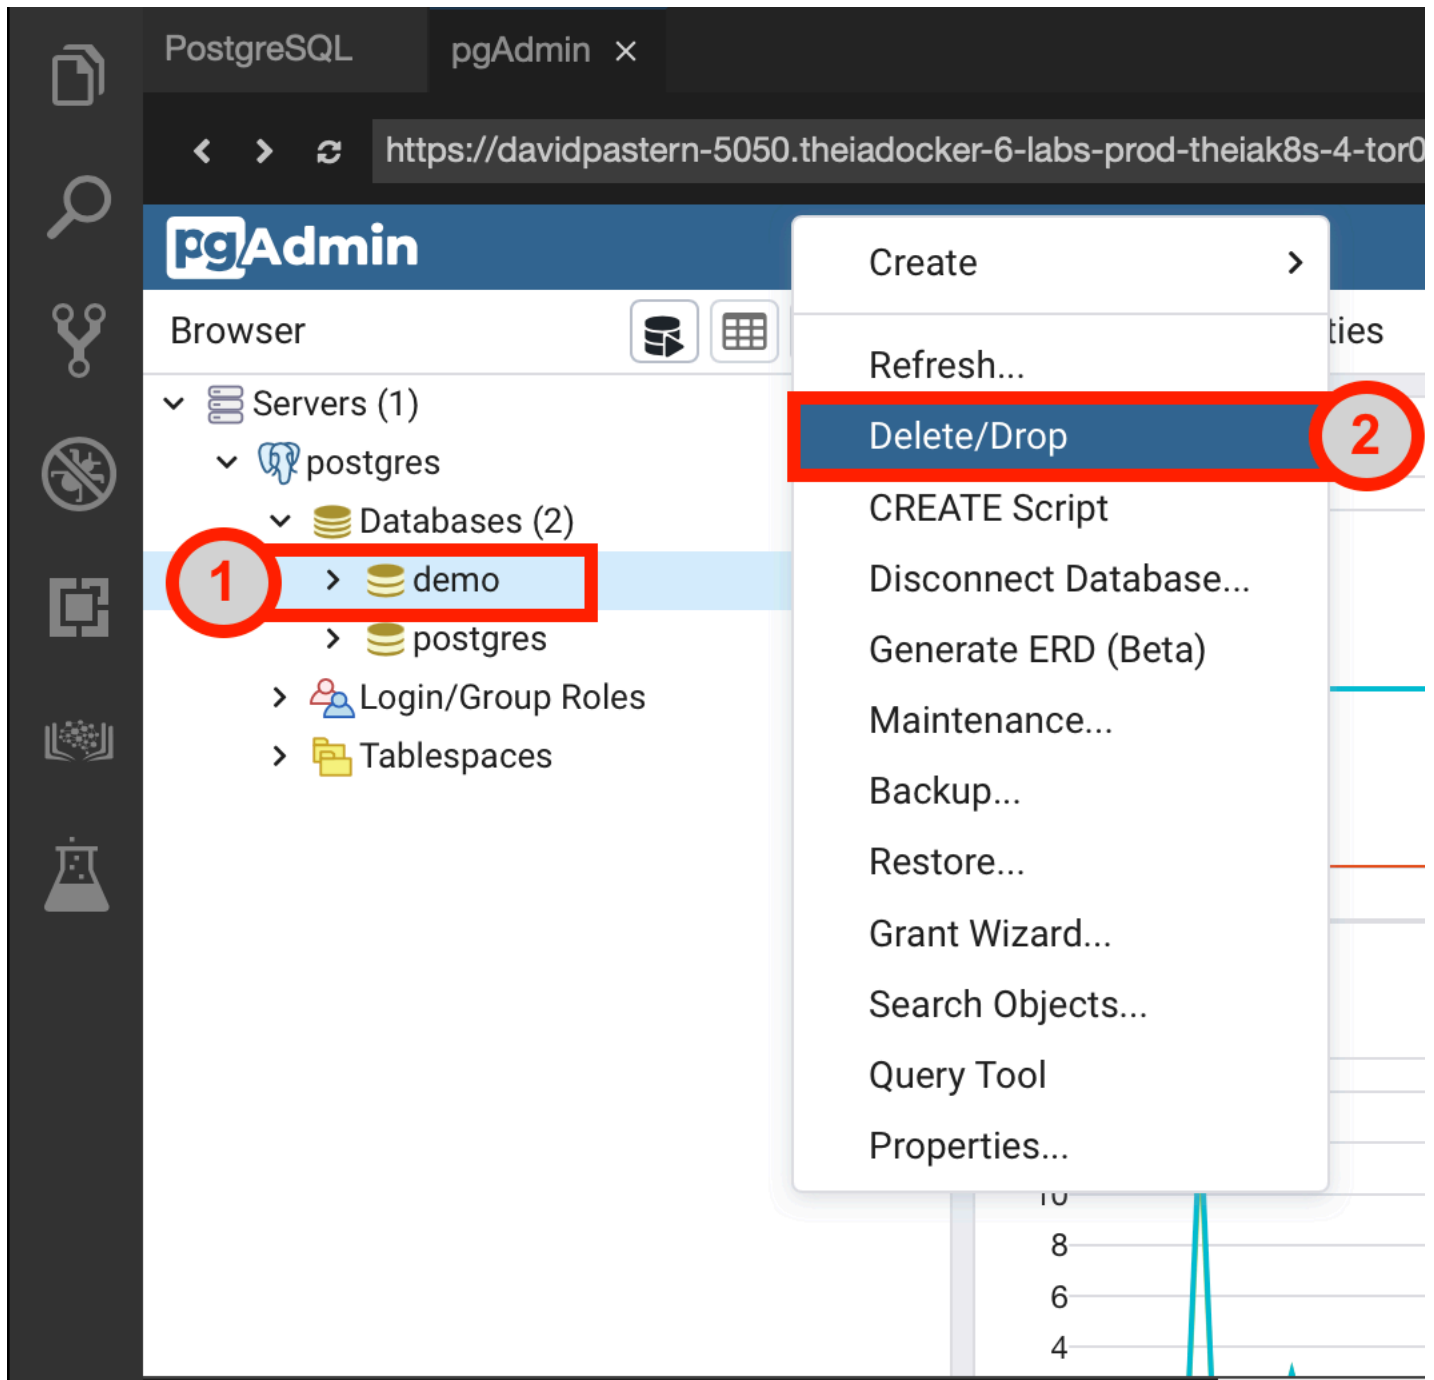

2. When prompted, click “Yes” to confirm the deletion of the database.

3. You will see that the demo database is no longer listed, which verifies that you have dropped it.

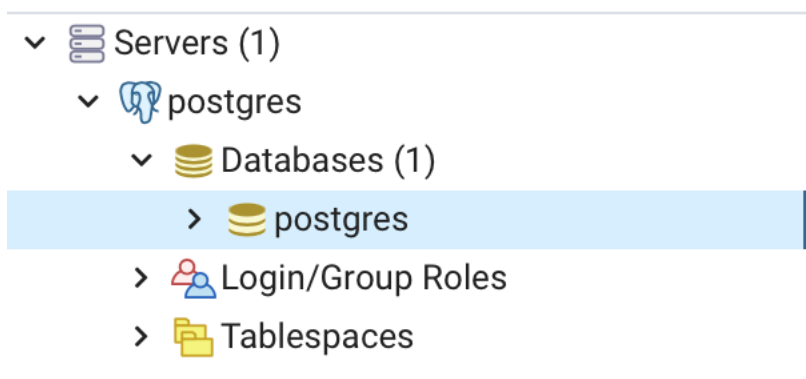


## Task B: Restore the Database using the Full Backup



You will now use the full backup you created in Exercise 2 to restore the database which was deleted.

1. First, you will need an empty database in which to restore the demo database. Create a new database in pgAdmin by right clicking “Databases” then clicking “Create” > “Database...”.

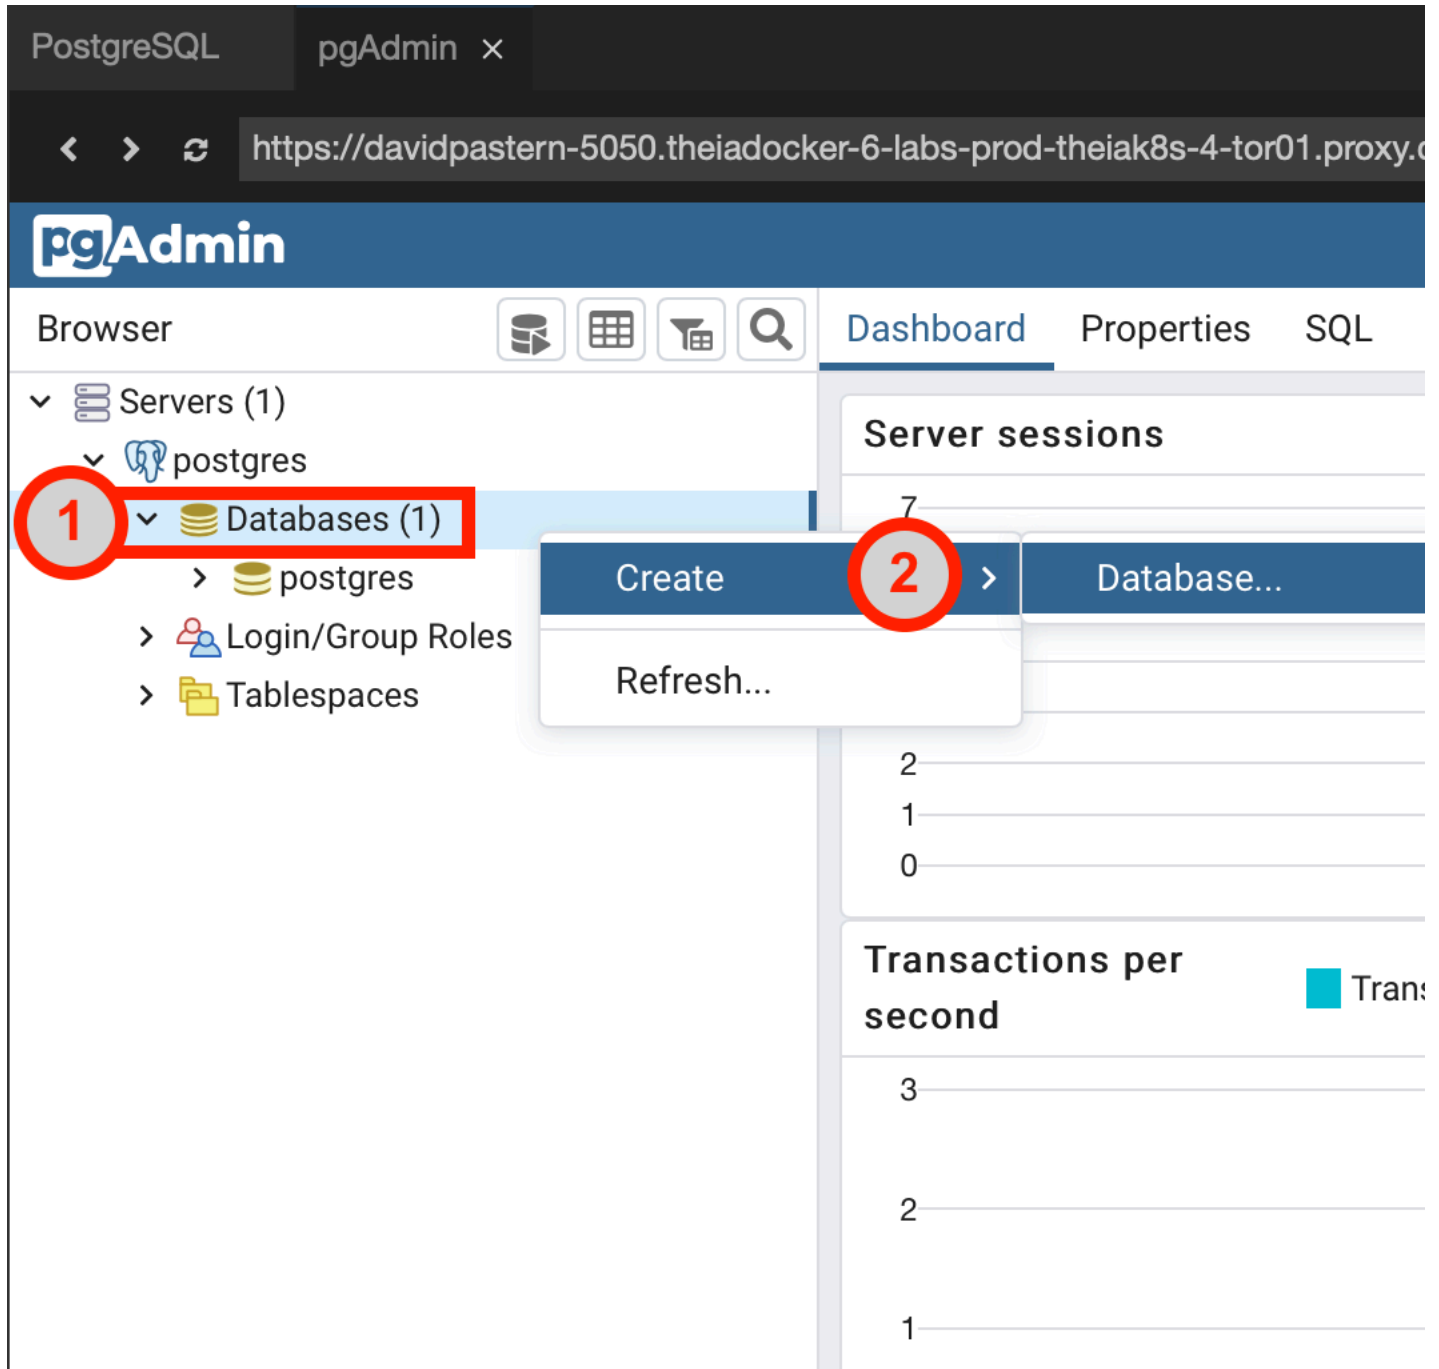

2. Name the database into which you will restore the original demo database (For example, restored\_demo), then click the “Save” button on the bottom right.

PostgreSQL pgAdmin x

< > ↺ https://davidpastern-5050.theiadocker-6-labs-prod-theiak8s-4-tor01.proxy.c

## Create - Database

General Definition Security Parameters Advanced SQL

Database restored\_demo

Owner postgres

Comment

1

i ? X Cancel

3. Next, to restore the backup you created in Task A into this new database, right click on the database you created (For example, `restored_demo`). Then click on the “Restore...” button.

The screenshot shows the pgAdmin web interface. In the left-hand 'Browser' pane, the tree structure is as follows: Servers (1) > postgres > Databases (2) > postgres > restored\_demo. The 'restored\_demo' database is highlighted with a red box and a red circle containing the number '1'. A right-click context menu is open over this database, listing various actions. The 'Restore...' option is highlighted with a red box and a red circle containing the number '2'. The menu items include: Create, Refresh..., Delete/Drop, CREATE Script, Disconnect Database..., Generate ERD (Beta), Maintenance..., Backup..., Restore..., Grant Wizard..., Search Objects..., Query Tool, and Properties... The background shows a dark-themed browser window with the URL 'https://davidpastern-5050.theiadocker-6-labs-prod-theiak8s-4-tor01.proxy.c...' and a 'Trans' label on the right.

4. Click on the button containing three dots by the Filename box.

PostgreSQL pgAdmin x

< > ↺ https://davidpastern-5050.theiadocker-6-labs-prod-theiak8s-4-tor01.proxy.c

# pgAdmin

Bro

## Restore (Database: restored\_demo)

General Restore options

Format Custom or tar

Filename

Number of jobs

Role name Select an item...

i ?

5. Near the bottom left of the window, open the “Format” drop down window and select “All files”.

PostgreSQL pgAdmin x

< > ↺ https://davidpastern-5050.theiadocker-6-labs-prod-theiak8s-4-tor01.proxy.c

# pgAdmin

Bro

## Select file

🏠 ⬆ /var/lib/pgadmin/ ↺

Name	Size
📄 demo_backup	99.1 MB
📄 pgadmin4.db	156.0 kB
📁 sessions	4.0 kB
📁 storage	4.0 kB

Show hidden files and folders? ☐

6. Select the backup you created in Task A (For example, `demo_backup`), then click the “Select” button near the bottom right of the window.

PostgreSQL pgAdmin x

< > ↺ https://davidpastern-5050.theiadocker-6-labs-prod-theiak8s-4-tor01.proxy.c

# pgAdmin

Bro

## Select file

🏠 ⬆ /var/lib/pgadmin/demo\_backup ↺

Name	Size
📄 demo_backup	99.1 MB
📄 pgadmin4.db	156.0 kB
📁 sessions	4.0 kB
📁 storage	4.0 kB

Show hidden files and folders? ☐

7. Then click on the “Restore” button at the bottom right of the window to restore the database.

PostgreSQL pgAdmin x

< > ↺ https://davidpastern-5050.theiadocker-6-labs-prod-theiak8s-4-tor01.proxy.c

# pgAdmin

Bro

## Restore (Database: restored\_demo)

General Restore options

Format	Custom or tar
Filename	/var/lib/pgadmin/demo_backup
Number of jobs	
Role name	Select an item...

i ?

8. You can now verify that the database was restored properly, including the addition you made to the `aircrafts_data` table. Open up the PostgreSQL CLI:

Lab IBMCloud Launch Application

File Edit Selection View Go Run Terminal Help

SKILLS NETWO... PostgreSQL ×

▼ DATABASES

- MySQL
- PostgreSQL
- MongoDB
- Cassandra

> CLOUD

> BIG DATA

> OTHER

# PostgreSQL

ACTIVE

v13.2 | v5.0 | v13.2

Connect to PostgreSQL and pgAdmin directly in your Skills

Start

Summary Connection Information Details

Your database and pgAdmin server are now ready to use and you can connect using the provided credentials. For more details on how to navigate Postgres, please refer to the documentation.

Username:

Password:

You can manage Postgres via:

pgAdmin [↗](#)

Or to interact with the database in the terminal, select one of the following options:

Postgres CLI New Terminal

0 0

9. In the CLI, enter the command:



```
1. 1
1. \connect restored_demo
```

Copied!

10. To set the proper search path for your database, enter the following into the CLI:

```
1. 1
1. SELECT pg_catalog.set_config('search_path', 'bookings', false);
```

Copied!

11. To see the restored tables in the database, enter:

```
1. 1
1. \dt
```

Copied!

You will see the same tables as in the original demo database.

List of relations			
Schema	Name	Type	Owner
bookings	aircrafts_data	table	postgres
bookings	airports_data	table	postgres
bookings	boarding_passes	table	postgres
bookings	bookings	table	postgres
bookings	flights	table	postgres
bookings	seats	table	postgres
bookings	ticket_flights	table	postgres
bookings	tickets	table	postgres
(8 rows)			

12. Recall that you added a new aircraft model (Airbus A380) to the original database. Verify that this addition was successfully backed up and restored by entering the following command:

```
1. 1
1. SELECT * FROM aircrafts_data;
```

Copied!

restored_demo=# SELECT * FROM aircrafts_data;		
aircraft_code	model	range
773	{"en": "Boeing 777-300"}	11100
763	{"en": "Boeing 767-300"}	7900
SU9	{"en": "Sukhoi Superjet-100"}	3000
320	{"en": "Airbus A320-200"}	5700
321	{"en": "Airbus A321-200"}	5600
319	{"en": "Airbus A319-100"}	6700
733	{"en": "Boeing 737-300"}	4200
CN1	{"en": "Cessna 208 Caravan"}	1200
CR2	{"en": "Bombardier CRJ-200"}	2700
380	{"en": "Airbus A380-800"}	15700
(10 rows)		

Notice that the Airbus A380 entry is there! Once again, you can enter \q to exit this view.

## Practice Exercise

Scenario: Suppose a passenger, Saniya Koreleva, books a flight with your airline company. Unfortunately, due to human error her first name was initially entered incorrectly into the database and you wish to correct it.

In this practice exercise, you will apply the techniques you learned in this lab to modify the database to correct the spelling of the passenger's name. Then, you will practice performing a full backup of the database.

1. First, in the `restored_demo` database, take a look at the original entry for the passenger in the "tickets" table using the PostgreSQL Command Line Interface. Use the `booking_ref` parameter to query the database. The booking reference for this passenger is 0002D8.

- ▶ [Hint \(Click Here\)](#)
- ▶ [Solution \(Click Here\)](#)

2. Next, suppose the passenger’s first name is actually spelled “Sanya” instead of “Saniya”. Modify the entry for this passenger to correct the spelling by changing the `passenger_name` to “SANYA KORELEVA”.

- ▶ [Hint \(Click Here\)](#)
- ▶ [Solution \(Click Here\)](#)

3. Now suppose that several other changes were done on the database, such as more bookings were created, flights scheduled, etc., and you wish to perform a full backup of the database. To complete this exercise, perform a full backup of the `restored_demo` database. Name the back up `restored_demo_backup.sql`.

- ▶ [Hint \(Click Here\)](#)
- ▶ [Solution \(Click Here\)](#)

## Conclusion

Congratulations! You have successfully completed the lab and have gained some familiarity on how to perform a full backup and restoration of a database using PostgreSQL.

To summarize, recall that you covered the following objectives:

- Restore a full database from a backup
- Update a database and perform a full backup
- Drop a database and then restore it

## Author

[David Pasternak](#)

## Other Contributors

Sandip Saha Joy, Rav Ahuja

## Changelog

Date	Version	Changed by	Change Description
2021-06-30	1.0	David Pasternak	Created initial version
2022-07-27	1.1	Lakshmi Holla	updated HTML tag
2023-05-05	1.2	Jaskomal Natt	Updated copyright date

© IBM Corporation 2023. All rights reserved.