

04 CSI online spoken: Spoken - Plotting and analysis - final data

Kirsten Stark

22 March, 2024

Load packages

```
#library(dplyr)  
library(tidyr)  
library(lme4)
```

```
## Loading required package: Matrix
```

```
##
```

```
## Attaching package: 'Matrix'
```

```
## The following objects are masked from 'package:tidyr':
```

```
##
```

```
##      expand, pack, unpack
```

```
library(lmerTest)
```

```
##
```

```
## Attaching package: 'lmerTest'
```

```
## The following object is masked from 'package:lme4':
```

```
##
```

```
##      lmer
```

```
## The following object is masked from 'package:stats':
```

```
##
```

```
##      step
```

```
library(Rmisc)
```

```
## Loading required package: lattice
```

```
## Loading required package: plyr
```

```
library(Cairo)
```

```
#library(strengejacke)
```

```
library(ggplot2)
```

```
# devtools::install_github("strengejacke/sjPlot")
```

```
library(sjPlot)
```

```
## Learn more about sjPlot with 'browseVignettes("sjPlot")'.
```

```
library(dplyr)
```

```
##
```

```
## Attaching package: 'dplyr'
```

```
## The following objects are masked from 'package:plyr':
```

```
##
```

```
##      arrange, count, desc, failwith, id, mutate, rename, summarise,  
##      summarize
```

```
## The following objects are masked from 'package:stats':
```

```
##
```

```
##      filter, lag
```

```
## The following objects are masked from 'package:base':
```

```
##
```

```
##      intersect, setdiff, setequal, union
```

```
options(scipen=999)
```

```
rm(list = ls())
```

```
options( "encoding" = "UTF-8" )
```

```
set.seed(99)
```

Load preprocessed data

```
# input
```

```
input = "aphasia_final.csv"
```

```
# load data
```

```
df <- read.csv2(here::here("data","transient_data_files", input), sep=",") ##>% select(-"X")
```

Check amount of participants and trials

```
# no. of participants:
```

```
length(unique(df$subject))
```

```
## [1] 40
```

```
# no. of trials is 160 per participant?
```

```
nrow(df) == 3*160 * length(unique(df$subject))
```

```
## [1] TRUE
```

```
#table(df$subject, df$session)
```

```
# how many non-responses
```

```
df %>% filter(VOT==0) %>% dplyr::group_by(type, subject, session) %>%  
  dplyr::summarise(length(VOT))
```

'summarise()' has grouped output by 'type', 'subject'. You can override using
the '.groups' argument.

```
## # A tibble: 86 x 4  
## # Groups:   type, subject [37]  
##   type subject session 'length(VOT)'  
##   <chr>   <int>   <int>      <int>  
## 1 PWA     101     1         8  
## 2 PWA     101     2         4  
## 3 PWA     103     1        40  
## 4 PWA     103     2        21  
## 5 PWA     103     3        27  
## 6 PWA     104     1        75  
## 7 PWA     104     2        52  
## 8 PWA     104     3        37  
## 9 PWA     105     1        10  
## 10 PWA    105     2         7  
## # i 76 more rows
```

```
# table(df$VOT==0, df$subject, df$session)
```

Drop filler trials

```
df <- df %>% filter(category!="Filler") %>% droplevels()
```

Add ordinal position

```
# add position number  
df <- df %>% group_by(subject, session, category) %>%  
  add_count() %>%  
  dplyr::mutate(PosOr = seq(1:n)) %>% dplyr::select(-n)  
table(df$PosOr)
```

```
##  
##    1    2    3    4    5  
## 2880 2880 2880 2880 2880
```

```
#table(df$PosOr, df$session, df$subject)
```

Factorize columns

```

# factorize columns
df$VOT <- as.numeric(as.character(df$VOT))
is.numeric(df$VOT)

## [1] TRUE

df$PosOr <- as.factor(df$PosOr)
df$group <- as.factor(df$type)
df$subject <- as.factor(df$subject)
df$session <- as.factor(df$session)

# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple

##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667

contrasts(df$session)<-my.simple
levels(df$session)

## [1] "1" "2" "3"

## Define contrast of group
contrasts(df$group) <- MASS::contr.sdif(2)
levels(df$group)

## [1] "control" "PWA"

## Define Ordinal position as continuous predictor variable
df$PosOr_cont <- as.numeric(scale(as.numeric(as.character(df$PosOr)),
                                   center = T, scale = F))

```

Errors and correct responses

Correct responses start with 1.

- 1 - correct.
- 1.1 - correct with alternative response.
- 1.2 - correct with phonematic paraphasia ($\leq 25\%$ of the word).
- 1.3 - correct with correct article [*].
- 1.4 - correct, but VOT invalid.

0 - wrong. 0.1 - wrong with phonematic paraphasia ($> 25\%$ of the word). 0.2 - wrong: semantic paraphasia (word in the experiment). 0.3 - wrong: semantic paraphasia (word not in the experiment). 0.4 - wrong: null reaction. 0.5 - wrong: replacement without connection to the word (word in the experiment)

0.6 - wrong: replacement without connection to the word (word not in the experiment).

0.7 - superordinate word.

0.8 - neologism. 0.9 - etc.

0.99 - TECHNICAL ERROR.

We will consider all responses in 1.1-1.3 for analyses of response times and responses 1.1-1.4 and 0.1-0.9 (not 1.4 and 0.99) for analyses of error rates.

```
## Add technical errors in the missing trials
sum(is.na(df$VOT)) # NA VOT so far are technical errors
```

```
## [1] 4
```

```
df$error[is.na(df$VOT)] <- "99"
df$correct[is.na(df$VOT)] <- "0"

## Two trials were forgotten to be classified, but AR == 99 --> technical error?
#sum(is.na(df$correct))
#df %>% filter(is.na(correct))
df$error[is.na(df$correct) & df$AR == "99"] <- "99"
df$correct[is.na(df$correct) & df$AR == "99"] <- "0"
sum(is.na(df$correct))
```

```
## [1] 0
```

```
## NR and 0.4 are the same -> replace this
df$error[df$error=="NR"] <- "4"

## Rename broken names
# unique(df$error)
df$error <- stringr::str_replace(df$error, ";;;;;", "")
df$error <- stringr::str_replace(df$error, "ok", "") # subject 113, session 2, trial 121 (Couch)
df$error <- gsub("?", NA, df$error, fixed = TRUE)
# unique(df$error)

# unique(df$correct)
df$correct <- stringr::str_replace(df$correct, ";;;;;", "")
# unique(df$correct)
```

```
## Overall amount of correct answers
sum(df$correct != 0)
```

```
## [1] 12589
```

```
sum(is.na(df$correct)) # these are the technical errors where no audio file was recorded
```

```
## [1] 0
```

```
## Overview of correct responses
table(df$correct)
```

```
##
##      0      1    1.1    1.2    1.3    1.4
## 1811 10901 1207    124    223    134
```

```
#df$VOT[df$correct==1.4]
```

```
# Overview of incorrect responses
sum(df$correct==0, na.rm=T)
```

```
## [1] 1811
```

```
sum(df$correct == 0 & !is.na(df$error)) # here the error classification was missing
```

```
## [1] 1810
```

```
df[df$correct == 0 & is.na(df$error),]
```

```
## # A tibble: 1 x 34
## # Groups:   subject, session, category [1]
##   type subject session trial item category supercategory VOT correct AR
##   <chr> <fct>   <fct>   <int> <chr> <chr>      <chr>          <dbl> <chr>  <chr>
## 1 PWA   113     2       121 couch Sitzen Möbel          1846 0     Cous
## # i 24 more variables: error <chr>, gender <int>, age <int>, language <int>,
## #   handedness <int>, CH01 <int>, CH01_01 <int>, CH01_02 <int>, CH01_03 <int>,
## #   CH01_04 <int>, CH02 <int>, CH02_01 <int>, CH02_02 <int>, CH02_03 <int>,
## #   CH02_04 <int>, CH03 <int>, array <int>, comments <lgl>, timetotal <chr>,
## #   time_correct <chr>, OR02_01 <chr>, PosOr <fct>, group <fct>,
## #   PosOr_cont <dbl>
```

```
df$error[df$correct == 0 & is.na(df$error)] <- 1 # phonet. paraphrasia > 25 %
```

Overview of correctness classifications by group

```
df %>% group_by(type) %>% dplyr::count(correct)
```

```
## # A tibble: 12 x 3
## # Groups:   type [2]
##   type correct    n
##   <chr>   <chr> <int>
## 1 PWA     0     1563
## 2 PWA     1     4756
## 3 PWA    1.1      502
## 4 PWA    1.2      107
## 5 PWA    1.3      153
## 6 PWA    1.4      119
## 7 control 0       248
## 8 control 1      6145
## 9 control 1.1      705
## 10 control 1.2       17
## 11 control 1.3       70
## 12 control 1.4       15
```

Errors

```
table(df$error)
```

```
##
##   1   2   3   4   5   6   7   8   9  99
## 57 188  94 851  33  46 137  32 270 103
```

Show amount of incorrect trials per ordinal position (excluding fillers):

```
## How many incorrect (correct) non-filler trials per ordinal position?
```

```
table(df$PosOr[df$category != "Filler" & df$correct == 0],
      df$correct[df$category != "Filler" & df$correct == 0])
```

```
##
##      0
##   1 320
##   2 349
##   3 375
##   4 347
##   5 420
```

```
table(df$PosOr[df$category != "Filler" & startsWith("1", df$correct)],
      df$correct[df$category != "Filler" & startsWith("1", df$correct)])
```

```
##
##      1
##   1 2254
##   2 2200
##   3 2158
##   4 2202
##   5 2087
```

```
## How many incorrect trials (no technical errors) per ordinal position?
```

```
table(df$PosOr[df$category != "Filler" & df$correct == 0 &
            df$error != 99])
```

```
##
##   1   2   3   4   5
## 303 333 347 331 394
```

Show amount of incorrect trials per subject

```
df %>% filter(category != "Filler") %>%
  group_by(subject, session) %>%
  dplyr::count(correct) %>%
  mutate(prop=round(n/160*100,2)) %>% #round(prop.table(n), 4) %>%
  filter(correct == "0") %>%
  dplyr::select(-c(correct, n))
```

```
## # A tibble: 115 x 3
## # Groups:   subject, session [115]
##   subject session prop
##   <fct>   <fct>   <dbl>
## 1 101     1       5.62
## 2 101     2       2.5
## 3 101     3       0.62
## 4 102     1       1.25
## 5 102     2       1.88
## 6 102     3       2.5
## 7 103     1      26.2
## 8 103     2      20.6
## 9 103     3      23.1
## 10 104    1      43.8
## # i 105 more rows
```

Total percentage of errors

```
sum(df$correct[df$category != "Filler"]=="0", na.rm=T)/nrow(df)%>%filter(category != "Filler"))
```

```
## [1] 0.1257639
```

Summarise erroneous and correct responses

```
classification_summary <- df %>% group_by(group, session) %>% count(correct) %>%
  mutate(correct = case_when(correct == "0" ~ "wrong sum",
                             correct == "1" ~ "correct",
                             correct == "1.1" ~
                               "correct with alternative response",
                             correct == "1.2" ~
                               "correct with phonematic paraphasia (<=25% of the word)",
                             correct == "1.3" ~ "correct with correct article",
                             correct == "1.4" ~ "correct, but VOT invalid")) %>%
  rename(classification=correct)

x <- df %>% group_by(group, session) %>% count(error) %>%
  mutate(error=as.character(error)) %>%
  mutate(error=case_when(
    error == "1" ~
      "wrong with phonematic paraphrasia (> 25 % of the word)",
    error == "2" ~
      "wrong: semantic paraphrasia (word in the experiment)",
    error == "3" ~
      "wrong: semantic paraphrasia (word not in the experiment)",
    error == "4" ~
      "wrong: null reaction",
    error == "5" ~
      "wrong: replacement without connection to the word (word in the experiment) ",
    error == "6" ~
      "wrong: replacement without connection to the word (word not in the experiment)",
    error == "7" ~ "wrong: superordinate word",
```



```

error == "8" ~ "wrong: neologism",
error == "9" ~ "wrong: etc.",
error == "99" ~ "TECHNICAL ERROR",
is.na(error) ~ "sum correct")) %>%
rename(classification = error)
(classification_summary <- rbind(classification_summary, x) %>%
  arrange(group, session))

```

```

## # A tibble: 96 x 4
## # Groups:   group, session [6]
##   group session classification      n
##   <fct>  <fct>  <chr>          <int>
## 1 control 1      wrong sum          116
## 2 control 1      correct          1917
## 3 control 1      correct with alternative response      291
## 4 control 1      correct with phonematic paraphasia (<=25% of the word)      2
## 5 control 1      correct with correct article          66
## 6 control 1      correct, but VOT invalid           8
## 7 control 1      wrong: semantic paraphrasia (word in the experiment)      15
## 8 control 1      wrong: semantic paraphrasia (word not in the experimen~      13
## 9 control 1      wrong: null reaction          14
## 10 control 1      wrong: replacement without connection to the word (wor~      2
## # i 86 more rows

```

```

# Export as word file
library(flextable)
huxt_word <- huxtable::huxtable(classification_summary)
huxt_word <- huxtable::set_number_format(huxt_word, round(2))
huxtable::quick_docx(
  huxt_word, file = here::here(
    "results", "tables",
    "CSI_online_aphasia_classification_summary.docx"),
  open = FALSE)

```

Subset data for reaction time and error analyses and delete fillers

As correct reaction times will be considered:

- 1 - correct.
- 1.1 - correct with alternative response.
- 1.2 - correct with phonematic paraphasia (<=25% of the word).
- 1.3 - correct with correct article [*].

```

df %>% mutate(correct_class = case_when(
  correct == 1 ~ 1,
  correct == 1.1 ~ 1,
  correct == 1.2 ~ 1,
  correct == 1.3 ~ 1,
  correct == 1.4 ~ 0,
  correct == 0 ~ 0)) -> df

```

```

# Fillers included

```

```
# df %>% group_by(group, session) %>% dplyr::count(correct_class)
table(df$correct_class)
```

```
##
##      0      1
## 1945 12455
```

```
# Fillers excluded
# df %>% filter(category != "Filler") %>%
#   group_by(group, session) %>% dplyr::count(correct_class)
table(df$correct_class[df$category != "Filler"])
```

```
##
##      0      1
## 1945 12455
```

```
### Save data frame for RT analyses: Only correct responses and no fillers
df_RTs <- df %>% filter(correct_class == 1 & category != "Filler")
# table(df_RTs$correct_class, df_RTs$correct)
# sum(df_RTs$VOT == 0); sum(is.na(df_RTs$VOT))

df_RTs %>% group_by(group, session) %>% count()
```

```
## # A tibble: 6 x 3
## # Groups:   group, session [6]
##   group session      n
##   <fct>   <fct>   <int>
## 1 control 1       2276
## 2 control 2       2312
## 3 control 3       2349
## 4 PWA     1       1723
## 5 PWA     2       1864
## 6 PWA     3       1931
```

```
(df_RTs %>% group_by(group, session) %>% count(correct) -> x)
```

```
## # A tibble: 24 x 4
## # Groups:   group, session [6]
##   group session correct      n
##   <fct>   <fct>   <chr>   <int>
## 1 control 1       1       1917
## 2 control 1     1.1       291
## 3 control 1     1.2         2
## 4 control 1     1.3        66
## 5 control 2       1      2095
## 6 control 2     1.1       209
## 7 control 2     1.2         6
## 8 control 2     1.3         2
## 9 control 3       1      2133
## 10 control 3    1.1       205
## # i 14 more rows
```

```
# sum(x$n)

print(paste0("Amount of trials that went into RT analyses: ",
             nrow(df_RTs)))
```

```
## [1] "Amount of trials that went into RT analyses: 12455"
```

```
table(df_RTs$group)
```

```
##
## control      PWA
##      6937      5518
```

As errors on the participant side will be considered:

- 1 - wrong with phonematic paraphrasia (> 25 % of the word).
- 2 - wrong: semantic paraphrasia (word in the experiment).
- 3 - wrong: semantic paraphrasia (word not in the experiment).
- 4 - wrong: null reaction.
- 5 - wrong: replacement without connection to the word (word in the experiment).
- 6 - wrong: replacement without connection to the word (word not in the experiment).
- 7 - superordinate word.
- 8 - neologism.
- 9 - etc.

```
df %>% mutate(error_class = case_when(
  error == 1 | error == 2 | error == 3 |
    error == 4 | error == 5 | error == 6 | error == 7 |
    error == 8 | error == 9 ~ 1,
  error == 99 | is.na(error) ~ 0)) -> df
# Overview including Fillers
# df %>% group_by(group, session) %>% count(error_class)
table(df$error_class)
```

```
##
##      0      1
## 12692 1708
```

```
# Overview excluding Fillers
# df %>% filter(category != "Filler") %>%
#   group_by(group, session) %>% count(error_class)
table(df$error_class[df$category != "Filler"])
```

```
##
##      0      1
## 12692 1708
```

```
#### Subset data for error analyses: All trials excluding technical errors, invalid RTs and fillers
df_errors <- df %>% filter(category != "Filler" &
                          (error != "99" | is.na(error)))
```

```
print(paste0("Amount of trials that went into RT analyses: ",
             nrow(df_errors)))
```

```
## [1] "Amount of trials that went into RT analyses: 14297"
```

```
table(df_errors$group)
```

```
##  
## control      PWA  
##      7119      7178
```

RESPONSE TIMES

```
sum(!is.na(df_RTs$error))
```

```
## [1] 0
```

Descriptives

```
(means_final<- df_RTs %>%  
  filter(category != "Filler") %>%  
  Rmisc::summarySEwithin(., "VOT", idvar = "subject",  
    withinvars = c("session", "PosOr"),  
    betweenvars = "group", na.rm = T))
```

##	group	session	PosOr	N	VOT	sd	se	ci
## 1	control	1	1	461	1297.252	386.6087	18.00616	35.38453
## 2	control	1	2	456	1278.075	368.6706	17.26458	33.92821
## 3	control	1	3	446	1352.942	419.3224	19.85549	39.02218
## 4	control	1	4	457	1329.444	375.5740	17.56861	34.52548
## 5	control	1	5	456	1347.666	395.4900	18.52052	36.39636
## 6	control	2	1	466	1204.941	327.2233	15.15832	29.78730
## 7	control	2	2	462	1244.987	364.0399	16.93667	33.28264
## 8	control	2	3	464	1213.458	289.9285	13.45959	26.44945
## 9	control	2	4	466	1244.242	296.8703	13.75225	27.02425
## 10	control	2	5	454	1266.531	329.4120	15.46007	30.38236
## 11	control	3	1	469	1199.645	323.1567	14.92199	29.32239
## 12	control	3	2	471	1173.122	282.9187	13.03621	25.61646
## 13	control	3	3	467	1208.308	305.2131	14.12358	27.75378
## 14	control	3	4	470	1232.751	306.1228	14.12039	27.74706
## 15	control	3	5	472	1263.283	349.0940	16.06835	31.57453
## 16	PWA	1	1	362	1280.805	463.4011	24.35582	47.89711
## 17	PWA	1	2	345	1352.300	518.0623	27.89154	54.85942
## 18	PWA	1	3	337	1374.660	515.0242	28.05516	55.18588
## 19	PWA	1	4	357	1334.771	468.7956	24.81129	48.79513
## 20	PWA	1	5	322	1390.007	538.3805	30.00277	59.02691
## 21	PWA	2	1	375	1168.998	438.9850	22.66909	44.57485
## 22	PWA	2	2	386	1188.463	443.3652	22.56670	44.36939

```
## 23    PWA      2    3 370 1212.971 435.7079 22.65138 44.54198
## 24    PWA      2    4 378 1245.738 457.2034 23.51600 46.23896
## 25    PWA      2    5 355 1308.230 496.4997 26.35147 51.82511
## 26    PWA      3    1 395 1144.157 373.7086 18.80332 36.96739
## 27    PWA      3    2 386 1183.630 457.0922 23.26538 45.74310
## 28    PWA      3    3 396 1224.247 442.1547 22.21911 43.68250
## 29    PWA      3    4 384 1223.097 437.4259 22.32230 43.88959
## 30    PWA      3    5 370 1273.044 469.5947 24.41307 48.00619
```

```
(means_final_cat<- df_RTs %>%
  filter(category != "Filler") %>%
  Rmisc::summarySEwithin(., "VOT", idvar = "category",
    withinvars = c("session", "PosOr"),
    betweenvars = "group", na.rm = T))
```

```
##      group session PosOr   N      VOT      sd      se      ci
## 1 control      1      1 461 1297.378 386.0154 17.97853 35.33023
## 2 control      1      2 456 1276.834 377.8956 17.69658 34.77718
## 3 control      1      3 446 1352.899 418.0216 19.79390 38.90113
## 4 control      1      4 457 1327.830 368.6545 17.24493 33.88939
## 5 control      1      5 456 1347.895 380.1481 17.80207 34.98447
## 6 control      2      1 466 1205.679 326.2835 15.11479 29.70175
## 7 control      2      2 462 1246.112 368.7969 17.15799 33.71756
## 8 control      2      3 464 1212.429 286.3328 13.29267 26.12143
## 9 control      2      4 466 1244.625 303.0652 14.03923 27.58818
## 10 control     2      5 454 1268.504 339.2988 15.92408 31.29423
## 11 control     3      1 469 1199.602 319.6380 14.75951 29.00311
## 12 control     3      2 471 1172.419 275.1627 12.67883 24.91421
## 13 control     3      3 467 1208.130 297.3314 13.75886 27.03708
## 14 control     3      4 470 1233.023 302.7635 13.96544 27.44258
## 15 control     3      5 472 1263.295 350.2301 16.12065 31.67729
## 16    PWA      1      1 362 1284.565 539.6713 28.36449 55.78039
## 17    PWA      1      2 345 1361.937 594.3400 31.99819 62.93673
## 18    PWA      1      3 337 1367.845 597.1421 32.52840 63.98497
## 19    PWA      1      4 357 1336.280 555.5199 29.40123 57.82193
## 20    PWA      1      5 322 1365.528 590.1073 32.88540 64.69813
## 21    PWA      2      1 375 1173.590 498.9082 25.76351 50.65949
## 22    PWA      2      2 386 1185.887 507.5593 25.83409 50.79356
## 23    PWA      2      3 370 1204.526 509.7624 26.50128 52.11249
## 24    PWA      2      4 378 1242.418 522.0492 26.85131 52.79711
## 25    PWA      2      5 355 1303.733 563.8296 29.92497 58.85308
## 26    PWA      3      1 395 1159.867 431.3062 21.70137 42.66497
## 27    PWA      3      2 386 1187.291 497.2603 25.30988 49.76289
## 28    PWA      3      3 396 1225.908 509.9080 25.62384 50.37616
## 29    PWA      3      4 384 1222.496 520.3697 26.55500 52.21185
## 30    PWA      3      5 370 1278.875 536.4006 27.88614 54.83569
```

```
(means_final_wo_session <- df_RTs %>%
  filter(category != "Filler") %>%
  Rmisc::summarySEwithin(., "VOT", idvar = "subject",
    withinvars = c("PosOr"),
    betweenvars = "group", na.rm = T))
```

```
##      group PosOr    N      VOT      sd      se      ci
## 1 control      1 1396 1233.645 377.5129 10.103901 19.82048
## 2 control      2 1389 1231.481 370.6296  9.944638 19.50814
## 3 control      3 1377 1256.889 376.4044 10.143497 19.89839
## 4 control      4 1393 1268.317 356.9347  9.563421 18.76027
## 5 control      5 1382 1292.193 389.9203 10.488703 20.57551
## 6   PWA        1 1132 1196.084 464.1391 13.795102 27.06687
## 7   PWA        2 1117 1237.396 516.8288 15.463937 30.34167
## 8   PWA        3 1103 1266.420 506.7019 15.256848 29.93575
## 9   PWA        4 1119 1266.373 493.1586 14.742514 28.92611
## 10  PWA        5 1047 1320.946 542.9417 16.779533 32.92538
```

```
# Export as word file
library(flextable)
huxt_word <- huxtable::huxtable(means_final)
huxt_word <- huxtable::set_number_format(huxt_word, round(2))
huxtable::quick_docx(huxt_word,
                      file = here::here("results", "tables",
                                         "CSI_online_aphasia_subject_RT_by_session.docx"),
                      open = FALSE)
```

Calculate the main effects

```
## Ordinal position effect
x <- df_RTs %>%
  filter(category != "Filler") %>%
  Rmisc::summarySEwithin(., "VOT", idvar = "subject",
                        withinvars = "PosOr", #c("session", "PosOr"),
                        # betweenvars = "group",
                        na.rm = T)
((x$VOT[1]-x$VOT[2])+(x$VOT[2]-x$VOT[3])+(x$VOT[3]-x$VOT[4])+(
  x$VOT[4]-x$VOT[5]))/4
```

```
## [1] -21.94008
```

```
((x$VOT[1]-x$VOT[5]))/4
```

```
## [1] -21.94008
```

```
## session effect
x <- df_RTs %>%
  filter(category != "Filler") %>%
  Rmisc::summarySEwithin(., "VOT", idvar = "subject",
                        withinvars = "session", #c("session", "PosOr"),
                        # betweenvars = "group",
                        na.rm = T)
(x$VOT[2]-x$VOT[1])
```

```
## [1] -101.4722
```

```
(x$VOT[3]-x$VOT[1])
```

```
## [1] -118.8204
```

```
## group effect
x <- df_RTs %>%
  filter(category != "Filler") %>%
  Rmisc::summarySE(., "VOT", #idvar = "subject",
                    #withinvars = "session", #c("session", "PosOr"),
                    groupvars = "group",
                    na.rm = T)
(x$VOT[2]-x$VOT[1])
```

```
## [1] 173.2174
```

Calculate increase mean by ordinal position, separately for each session (not controlled for random variances, weighted only per session):

```
means_final$increase <- NA
for(k in 1:length(unique(means_final$group))){
  for(i in 1:length(unique(means_final$session))){
    for(j in 2:length(unique(means_final$PosOr))) {
      means_final$increase[means_final$session==unique(means_final$session)[i] &
                           means_final$PosOr==unique(means_final$PosOr)[j] &
                           means_final$group == unique(means_final$group)[k]] <-
      means_final$VOT[means_final$session==unique(means_final$session)[i] &
                      means_final$PosOr==unique(means_final$PosOr)[j] &
                      means_final$group == unique(means_final$group)[k]] -
      means_final$VOT[means_final$session==unique(means_final$session)[i] &
                      means_final$PosOr==unique(means_final$PosOr)[j-1] &
                      means_final$group == unique(means_final$group)[k]]
    }
  }
}
# means_final

## Calculate overall mean increase per session (weighted)
## PWA
mean(means_final$increase[means_final$session==1 & means_final$group == "PWA"], na.rm=T)
```

```
## [1] 27.30054
```

```
## control
mean(means_final$increase[means_final$session==1 & means_final$group == "control"], na.rm=T)
```

```
## [1] 12.6036
```

```
means_final$PosOr_effect <- NA
means_final$PosOr_effect[means_final$PosOr==1] <- 1
for(k in 1:length(unique(means_final$group))){
  for(i in 1:length(unique(means_final$session))){
```

```

for(j in 2:length(unique(means_final$PosOr))) {
  means_final$PosOr_effect[
    means_final$session==unique(means_final$session)[i] &
    means_final$PosOr==unique(means_final$PosOr)[1] &
    means_final$group == unique(means_final$group)[k]] <-
  means_final$PosOr_effect[
    means_final$session==unique(means_final$session)[i] &
    means_final$PosOr==unique(means_final$PosOr)[1] &
    means_final$group == unique(means_final$group)[k]] +
  means_final$increase[means_final$session==unique(means_final$session)[i] &
    means_final$PosOr==unique(means_final$PosOr)[j] &
    means_final$group == unique(means_final$group)[k]] *
  (means_final$N[means_final$session==unique(means_final$session)[i] &
    means_final$PosOr==unique(means_final$PosOr)[j] &
    means_final$group == unique(means_final$group)[k]] +
    means_final$N[means_final$session==unique(means_final$session)[i] &
    means_final$PosOr==unique(means_final$PosOr)[j-1] &
    means_final$group == unique(means_final$group)[k]])
}
means_final$PosOr_effect[means_final$session==unique(means_final$session)[i] &
  means_final$PosOr==unique(means_final$PosOr)[1] &
  means_final$group == unique(means_final$group)[k]] <-
means_final$PosOr_effect[means_final$session==unique(means_final$session)[i] &
  means_final$PosOr==unique(means_final$PosOr)[1] &
  means_final$group == unique(means_final$group)[k]] /
(sum(means_final$N[means_final$session==unique(means_final$session)[i] &
  means_final$group == unique(means_final$group)[k]] +
  sum(means_final$N[means_final$session==unique(means_final$session)[i] &
    (means_final$PosOr=="2" |
    means_final$PosOr=="3" |
    means_final$PosOr=="4") &
    means_final$group == unique(means_final$group)[k]]))
}}
means_final

```

##	group	session	PosOr	N	VOT	sd	se	ci	increase
## 1	control	1	1	461	1297.252	386.6087	18.00616	35.38453	NA
## 2	control	1	2	456	1278.075	368.6706	17.26458	33.92821	-19.176859
## 3	control	1	3	446	1352.942	419.3224	19.85549	39.02218	74.867353
## 4	control	1	4	457	1329.444	375.5740	17.56861	34.52548	-23.498158
## 5	control	1	5	456	1347.666	395.4900	18.52052	36.39636	18.222054
## 6	control	2	1	466	1204.941	327.2233	15.15832	29.78730	NA
## 7	control	2	2	462	1244.987	364.0399	16.93667	33.28264	40.046543
## 8	control	2	3	464	1213.458	289.9285	13.45959	26.44945	-31.529745
## 9	control	2	4	466	1244.242	296.8703	13.75225	27.02425	30.784342
## 10	control	2	5	454	1266.531	329.4120	15.46007	30.38236	22.289241
## 11	control	3	1	469	1199.645	323.1567	14.92199	29.32239	NA
## 12	control	3	2	471	1173.122	282.9187	13.03621	25.61646	-26.522941
## 13	control	3	3	467	1208.308	305.2131	14.12358	27.75378	35.185898
## 14	control	3	4	470	1232.751	306.1228	14.12039	27.74706	24.443562
## 15	control	3	5	472	1263.283	349.0940	16.06835	31.57453	30.531484
## 16	PWA	1	1	362	1280.805	463.4011	24.35582	47.89711	NA
## 17	PWA	1	2	345	1352.300	518.0623	27.89154	54.85942	71.495131


```
## 18      PWA      1      3 337 1374.660 515.0242 28.05516 55.18588 22.360233
## 19      PWA      1      4 357 1334.771 468.7956 24.81129 48.79513 -39.889411
## 20      PWA      1      5 322 1390.007 538.3805 30.00277 59.02691 55.236193
## 21      PWA      2      1 375 1168.998 438.9850 22.66909 44.57485          NA
## 22      PWA      2      2 386 1188.463 443.3652 22.56670 44.36939 19.465021
## 23      PWA      2      3 370 1212.971 435.7079 22.65138 44.54198 24.508033
## 24      PWA      2      4 378 1245.738 457.2034 23.51600 46.23896 32.766688
## 25      PWA      2      5 355 1308.230 496.4997 26.35147 51.82511 62.491968
## 26      PWA      3      1 395 1144.157 373.7086 18.80332 36.96739          NA
## 27      PWA      3      2 386 1183.630 457.0922 23.26538 45.74310 39.473388
## 28      PWA      3      3 396 1224.247 442.1547 22.21911 43.68250 40.616714
## 29      PWA      3      4 384 1223.097 437.4259 22.32230 43.88959 -1.149424
## 30      PWA      3      5 370 1273.044 469.5947 24.41307 48.00619 49.946521
##      PosOr_effect
## 1      12.47980
## 2          NA
## 3          NA
## 4          NA
## 5          NA
## 6      15.41663
## 7          NA
## 8          NA
## 9          NA
## 10         NA
## 11      15.90047
## 12         NA
## 13         NA
## 14         NA
## 15         NA
## 16      27.37866
## 17         NA
## 18         NA
## 19         NA
## 20         NA
## 21      34.57573
## 22         NA
## 23         NA
## 24         NA
## 25         NA
## 26      32.08108
## 27         NA
## 28         NA
## 29         NA
## 30         NA
```

Trial types within correct responses

```
df %>% group_by(group) %>% count(correct)
```

```
## # A tibble: 12 x 3
## # Groups:   group [2]
##   group correct     n
```

```
##      <fct>   <chr>   <int>
## 1 control 0         248
## 2 control 1        6145
## 3 control 1.1       705
## 4 control 1.2        17
## 5 control 1.3        70
## 6 control 1.4        15
## 7 PWA      0       1563
## 8 PWA      1       4756
## 9 PWA     1.1       502
## 10 PWA     1.2       107
## 11 PWA     1.3       153
## 12 PWA     1.4       119
```

```
df %>% group_by(group,session) %>% count(correct)
```

```
## # A tibble: 36 x 4
## # Groups:   group, session [6]
##   group session correct    n
##   <fct>   <fct>   <chr>  <int>
## 1 control 1      0      116
## 2 control 1      1     1917
## 3 control 1     1.1     291
## 4 control 1     1.2        2
## 5 control 1     1.3     66
## 6 control 1     1.4        8
## 7 control 2      0     84
## 8 control 2      1    2095
## 9 control 2     1.1     209
## 10 control 2    1.2        6
## # i 26 more rows
```

Plotting

Make plots suitable for APA format, font sizes can be adjusted

```
apatheme <- theme_bw()+
  theme(plot.title=element_text(size=22,hjust = .5),# (family="Arial",size=22,hjust = .5),
        panel.grid.major=element_blank(), panel.grid.minor=element_blank(),
        panel.border=element_blank(),axis.line=element_line(),
        text=element_text(size=16))# text=element_text(family="Arial",size=16))

control_color <- "dark green" # #DDAA33"
PWA_color <- "purple" ##004488"
```

RTs across session, by ordinal position and group Line graph (only correct trials, without fillers):
RTs, split by group but summarised across sessions

```
(plot_vot <- means_final_wo_session %>%
  ggplot(., aes(x=PosOr, y=VOT,color=group, group=group)) +
  geom_point(aes(shape=group), size=3)+
```

```


scale_shape_manual(values=c(16,17))+
stat_summary(aes(linetype=group),fun=mean, geom="line", size = 0.5) +
scale_linetype_manual(values=c("dotted", "longdash"))+
geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, color=group), width = .1) +
scale_color_manual(values=c(control_color, PWA_color))+
apatheme+
scale_y_continuous(limits = c(1120, 1450),
                    breaks =seq(1150,1450, by = 50)) +
labs(x="Ordinal position",y ="VOT in ms", colour="Group",
      linetype="Group",
      shape="Group") +
theme(
  axis.title.y = element_text(margin = margin(0,10,0,0)),
  axis.title.x = element_text(margin = margin(10,0,0,0)),
  legend.key.width = unit(1, "cm"))

```

```

## Warning: Using 'size' aesthetic for lines was deprecated in ggplot2 3.4.0.
## i Please use 'linewidth' instead.
## This warning is displayed once every 8 hours.
## Call 'lifecycle::last_lifecycle_warnings()' to see where this warning was
## generated.

```

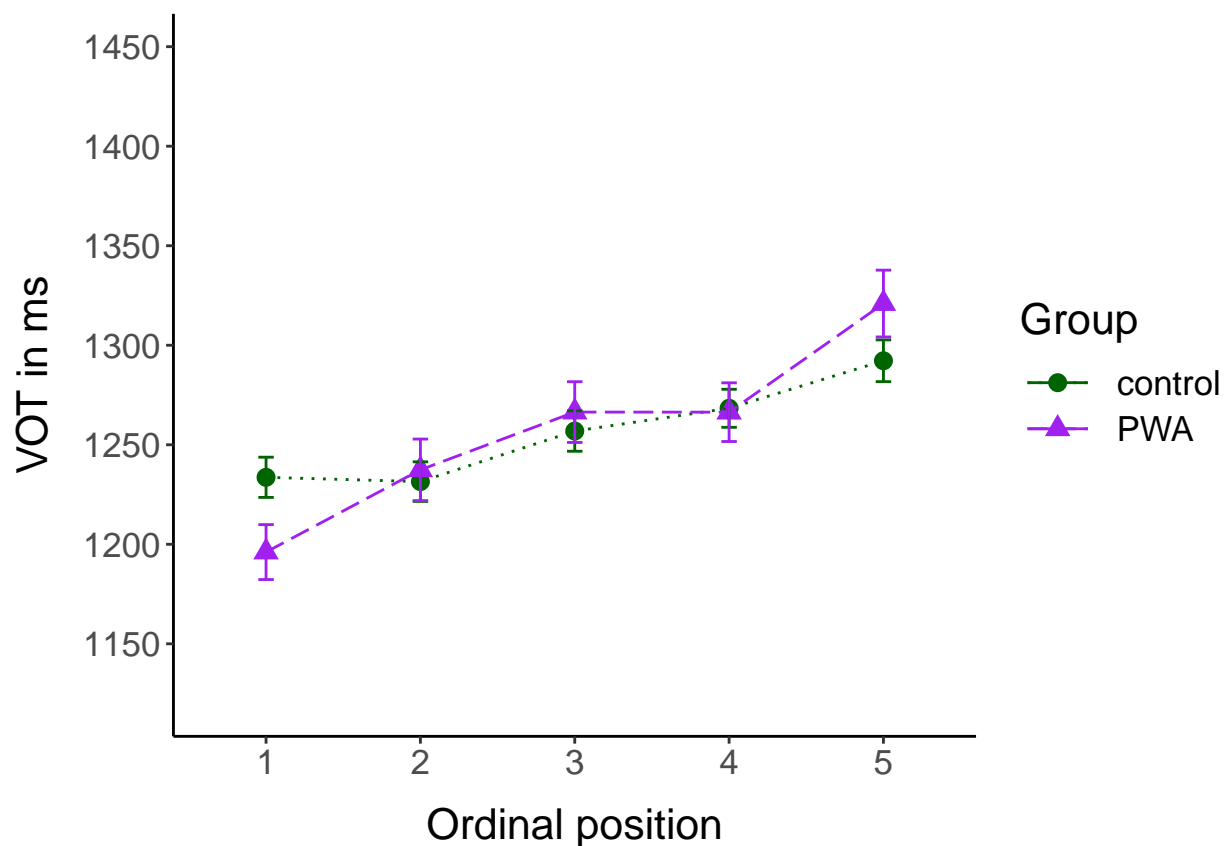

```

filename <- "CSI_online_aphasia_spoken_plot_rt_across_sessions.pdf"
ggsave(plot_vot, filename =

```

```

    here::here("results", "figures", filename),
    width = 18, height = 13, units = "cm",
    dpi = 300, device = cairo_pdf)

```

```

override.linetype<-c("longdash", "dashed", "dotted")
(plot_rt_repetition_PWA <- means_final %>% filter(group=="PWA") %>%
  mutate(session=case_when(session == "1" ~ "day 1",
                           session == "2" ~ "day 2",
                           session == "3" ~ "day 8")) %>%
  ggplot(., aes(x=PosOr, y=VOT, group=session, color = session)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=session),fun=mean,
              geom="line", size = 0.5) +
  scale_linetype_manual(values=c("longdash", "dashed", "dotted"))+
  scale_color_manual(values=c("#0072B2", "#E69F00", "#000000"))+
  geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = session),
              width =.1) +
  apatheme+
  scale_y_continuous(limits = c(1120, 1450),
                    breaks =seq(1150,1450, by = 50)) +
  labs(x="Ordinal Position ",y ="VOT (ms)", colour="Session",
       linetype="Session",
       title = "People with Aphasia") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"),
    legend.position="none")+
  guides(color=guide_legend(
    override.aes=list(linetype=override.linetype)))+
  scale_linetype(guide="none"))

```


RTs by Group, session, and ordinal position

```

## Scale for linetype is already present.
## Adding another scale for linetype, which will replace the existing scale.

```


People with Aphasia

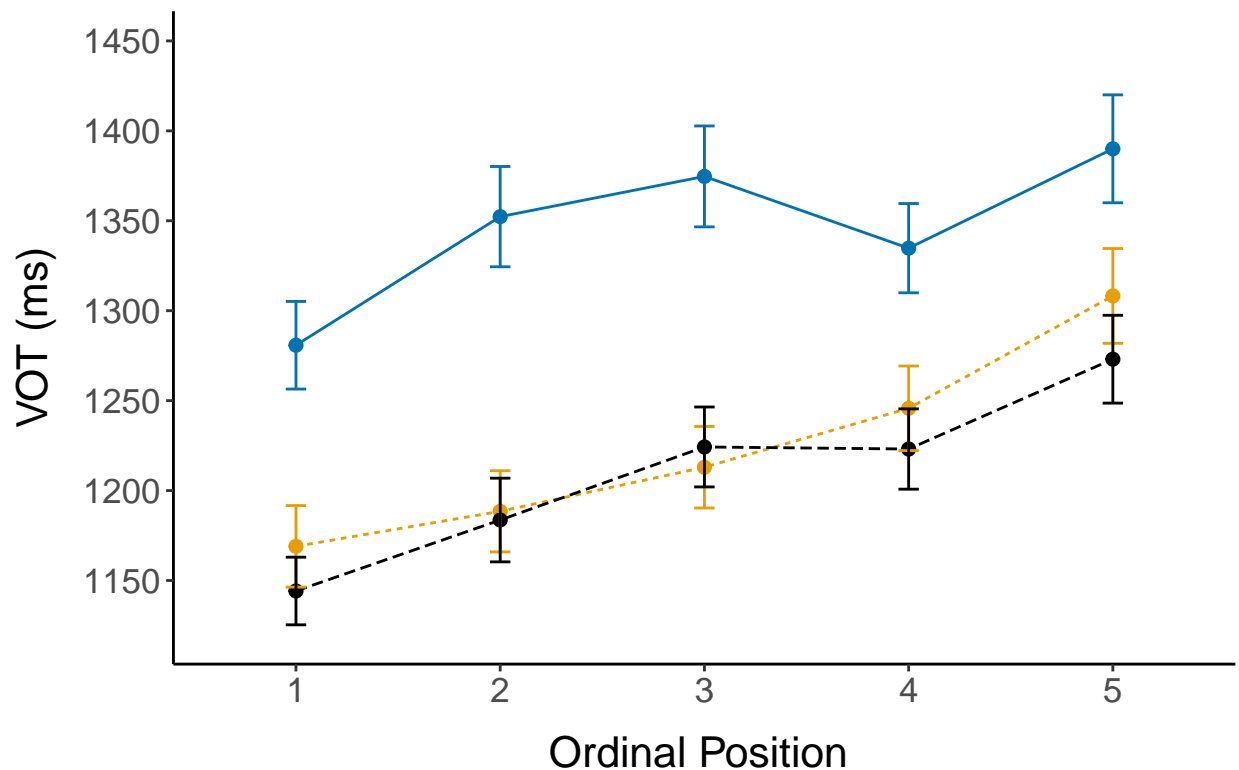

```
(plot_rt_repetition_control <- means_final %>%
  filter(group=="control") %>%
  mutate(session=case_when(session == "1" ~ "day 1",
                           session == "2" ~ "day 2",
                           session == "3" ~ "day 8")) %>%
  ggplot(., aes(x=PosOr, y=VOT, group=session, color = session)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=session),fun=mean,
              geom="line", size = 0.5) +
  scale_linetype_manual(values=c("longdash", "dashed", "dotted"))+
  scale_color_manual(values=c("#0072B2", "#E69F00", "#000000"))+
  geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = session),
              width =.1) +
  apatheme+
  scale_y_continuous(limits = c(1120, 1450),
                    breaks =seq(1150,1450, by = 50)) +
  labs(x="Ordinal Position ",y ="VOT (ms)", colour="Session", linetype="Session",
       title = "Control Group") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"))+
  guides(color=guide_legend(
    override.aes=list(linetype=override.linetype)))+
  scale_linetype(guide="none"))
```

```
## Scale for linetype is already present.
## Adding another scale for linetype, which will replace the existing scale.
```

Control Group

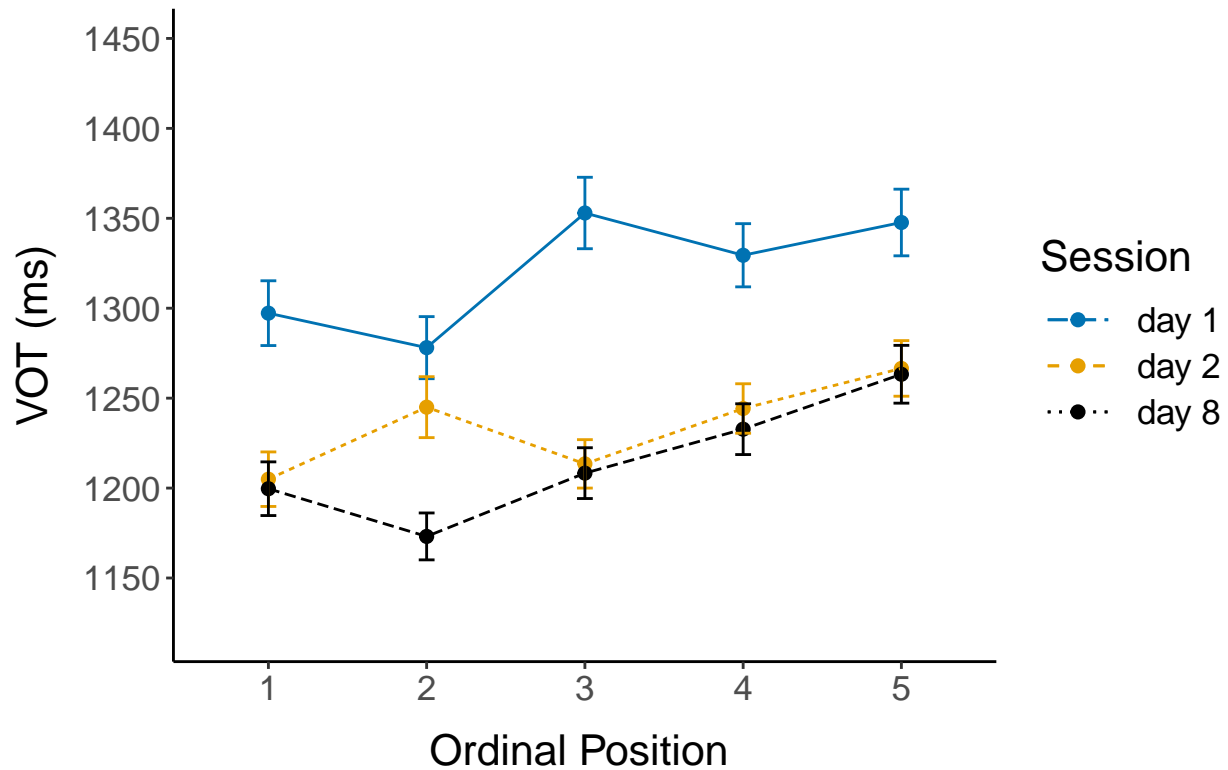

```
plots <- cowplot::plot_grid(
  plot_rt_repetition_PWA, plot_rt_repetition_control,
  nrow = 1, ncol=2, rel_widths = c(0.81,1), #rel_height = c(1,1),
  margin(1,1,1,1),
  labels = c("A", "B"), label_size = 34,
  label_fontfamily = "Helvetica", label_y = 1.01,
  label_x=-0.03)
```

```
## Warning in as_grob.default(plot): Cannot convert object of class
## marginsimpleUnitunitunit_v2 into a grob.
```

```
filename <- "CSI_online_aphasia_spoken_plot_rt_by_repetition.pdf"
ggsave(plots, filename =
  here::here("results", "figures", filename),
  width = 25, height = 13, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))
```

```

# means_subject <- df_RTs %>%
#   filter(category != "Filler") %>%
#   summarySEwithin(., "VOT", withinvars = c("subject", "session", "PosOr"),
#     betweenvars="group")
# (means_subject <- means_subject %>%
#   group_by(subject) %>%
#   dplyr::mutate(VOT_norm = VOT - first(VOT)))
#
# (boxplot <-
#   ggplot() +
#   ## boxplot
#   geom_boxplot(data=means_subject, aes(x = PosOr, y = VOT_norm,
#     color=group),
#     #colour = "grey",
#     width = 0.3, fatten = 1)+
#   # ### individual means
#   geom_jitter(data=means_subject, aes(x = PosOr, y = VOT_norm, color=group),
#     position = position_dodge(0.6),
#     shape=19,
#     #color = "dark grey",
#     size=2)+
#   ### group means
#   stat_summary(data=means_subject, aes(x = PosOr, y = VOT_norm,
#     color=group),
#     fun=mean, geom="point",
#     #colour = "black",
#     shape=18, size=5)+
#   ### line
#   stat_summary(data=means_subject, aes(x = PosOr, y = VOT_norm,
#     color=group, group=group),
#     fun=mean, geom="line",
#     #colour = "black",
#     linetype = "longdash")+
#
#   ## other stuff
#   #scale_y_continuous(breaks = seq(600, 1300, by = 50))+
#   labs(x="Ordinal Position", y="Normalized RTs (ms)") +
#   apatheme +
#   theme(
#     axis.title.y = element_text(margin = margin(0,10,0,0)),
#     axis.title.x = element_text(margin = margin(10,0,0,0))) +
#   coord_equal(ratio = 1/100))
#
# filename <- "CSI_online_aphasia_spoken_boxplot.pdf"
# ggsave(boxplot, filename =
#   here::here("results", "figures", filename),
#   width = 18, height = 18, units = "cm",
#   dpi = 300, device = cairo_pdf)
# #embedFonts(file = here::here("results", "figures", filename))

```

Normalized boxplot Export plot grid


```
# cowplot::plot_grid(plot_rt, boxplot,
#   nrow = 1, labels = c("A", "B"), label_fontfamily = "Arial") %>%
#   ggsave(filename = here::here("results", "figures",
#     "CSI_online_aphasia_typing_RTs_and_normalized_RTs"),
#   width = 18, height = 13, units = "cm", dpi = 300,
#   device = cairo_pdf)
# embedFonts(file = here::here("results", "figures", "CSI_online_typing_RTs_and_normalized_RTs"))
```

```
# (plot_rt_fillers <- df %>%
#   mutate(kind = case_when(category == "Filler" ~ "Filler",
#     category != "Filler" ~ "Experimental")) %>%
#   ggplot(., aes(x=PosOr, y=timing.01, group=kind, color=kind)) +
#   stat_summary(fun=mean, geom="point", size = 2) +
#   stat_summary(fun=mean, geom="line", size = 1) +
#   apatheme+
#   labs(x="Ordinal Position ", y="RT (ms)", color = "Trial type")+
#   annotate(geom="text", x=1.5, y=1350, label="n = 30",
#     color="black", size = 8))
#
# filename <- "CSI_online_typing_plot_rt_with_fillers.pdf"
# ggsave(plot_rt_fillers, filename =
#   here::here("results", "figures", filename),
#   width = 18, height = 13, units = "cm",
#   dpi = 300, device = cairo_pdf)
# embedFonts(file = here::here("results", "figures", filename))
```

... with fillers for control

Control: Plot RTs accross the experiment All correct trials (Excluding filler)

```
(plot_RTs_all <- ggplot(data=df_RTs, aes(x=trial, y=VOT,
  linetype=session, shape=session,
  color=group)) +
  stat_summary(aes(color=group, shape=session), fun=mean,
    geom="point", size = 2) +
  stat_summary(aes(color=group, linetype=session), fun=mean,
    geom="line", size = 1) +
  apatheme+
  labs(x="Trial ", y="VOT (ms)") +
  scale_color_manual(values=c(control_color, PWA_color)))
```
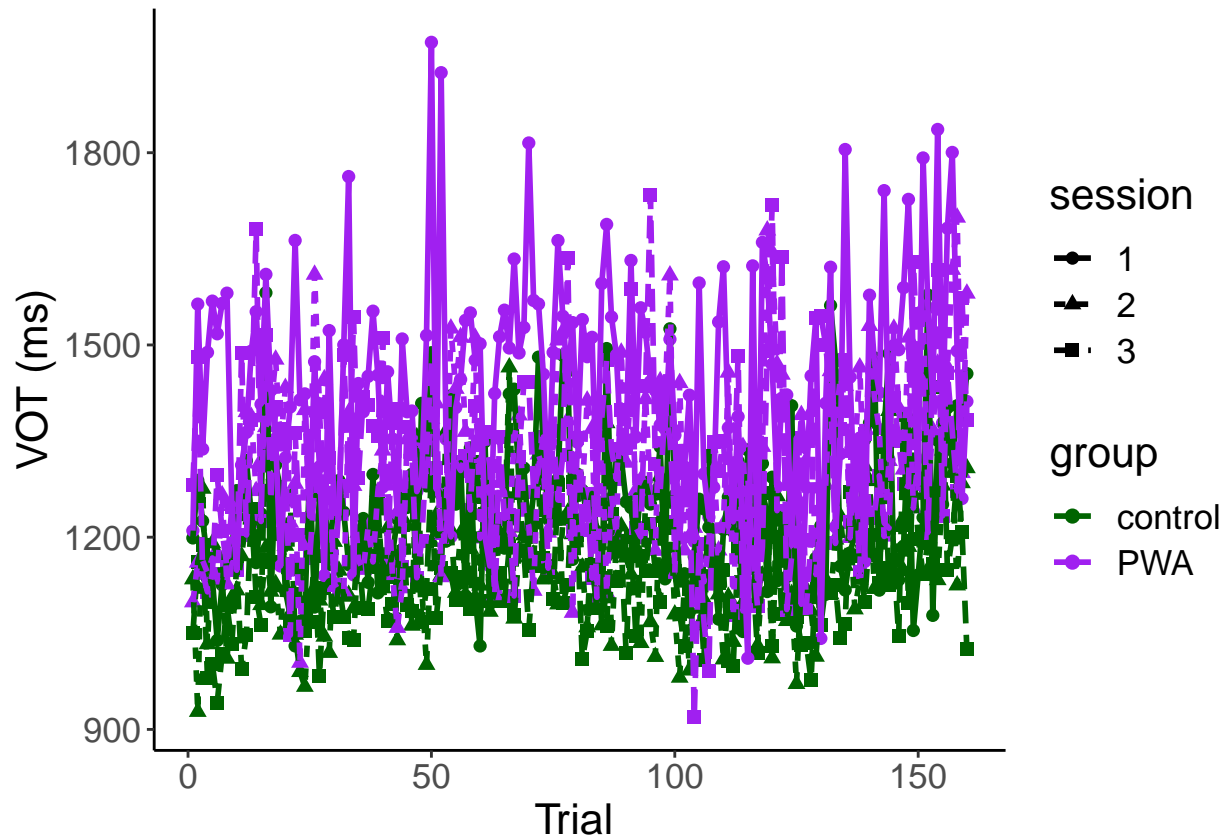
```
filename <- "CSI_online_aphasia_spoken_plot_rts_across_experiment.pdf"
ggsave(plot_RTs_all, filename =
  here::here("results", "figures", filename),
  width = 18, height = 13, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))
```

Inferential statistics

Contrast coding *Center predictor variable*

Across both groups.

```
write.csv2(df_RTs,
  here::here("data", "transient_data_files",
    "RT_data_final"),
  sep=",")
```

```
## Warning in write.csv2(df_RTs, here::here("data", "transient_data_files", :
## attempt to set 'sep' ignored
```

```
df_RTs$PosOr.cont <- scale(as.numeric(as.character(df_RTs$PosOr)),
  center = T, scale = F)
table(df_RTs$PosOr.cont)
```

```
##
## -1.98458450421517 -0.984584504215175 0.0154154957848252 1.01541549578483
##          2528          2506          2480          2512
## 2.01541549578483
##          2429
```

```
mean(df_RTs$PosOr.cont); sd(df_RTs$PosOr.cont)
```

```
## [1] -0.0000000000000002197888
```

```
## [1] 1.412368
```

For PWA only

```
df_RTs_PWA <- df_RTs %>% filter(group=="PWA") %>% droplevels()
df_RTs_PWA$PosOr.cont <- scale(as.numeric(as.character(df_RTs_PWA$PosOr)),
                               center = T, scale = F)
table(df_RTs_PWA$PosOr.cont)
```

```
##
## -1.96955418629938 -0.969554186299384 0.0304458137006161 1.03044581370062
##          1132          1117          1103          1119
## 2.03044581370062
##          1047
```

```
mean(df_RTs_PWA$PosOr.cont); sd(df_RTs_PWA$PosOr.cont)
```

```
## [1] -0.0000000000000001123241
```

```
## [1] 1.40862
```

Compute further contrasts

```
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##          2          3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_RTs$session)<-my.simple
levels(df_RTs$session)
```

```
## [1] "1" "2" "3"
```

```
contrasts(df_RT$PWA$session)<-my.simple
levels(df_RT$PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Define contrast of group
contrasts(df_RT$group) <- MASS::contr.sdif(2)
levels(df_RT$group)
```

```
## [1] "control" "PWA"
```

```
levels(df_RT$PWA$group)
```

```
## [1] "PWA"
```

didLMERconverge function

```
## This function provides a better convergence check for lme4 v>1.0 models, which have a nasty habit of
didLmerConverge = function(lmerModel){
  relativeMaxGradient=signif(max(abs(with(
    lmerModel@optinfo$derivs,solve(Hessian,gradient)))),3)
  if (relativeMaxGradient < 0.001) {
    cat(sprintf("\tThe relative maximum gradient of %s is less than our 0.001 criterion.\n\tYou can safely
  }
  else {
    cat(sprintf("The relative maximum gradient of %s exceeds our 0.001 criterion.\nThis looks like a re
  }
}


#didLmerConverge(m1)
```

Check distribution of data Are the data normally distributed or do they need to be converted? Does a Gamma function fit the data better?

Histogram of the reaction time data


```
hist(df_RT$VOT)
```

Histogram of df_RTs\$VOT

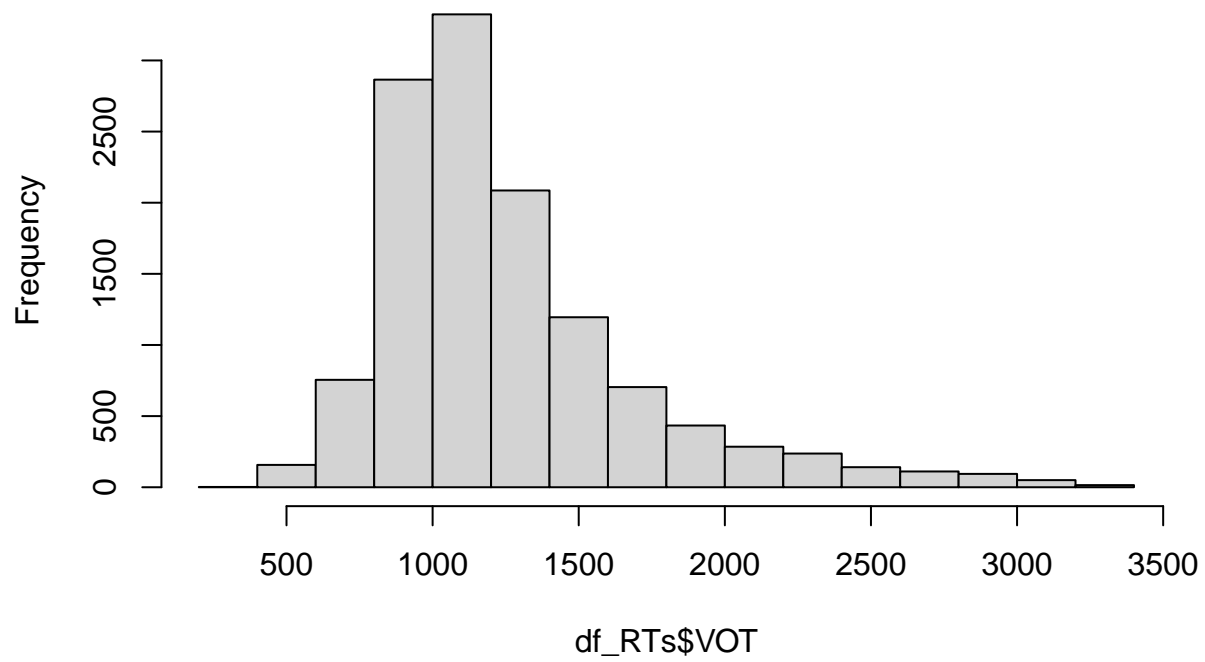

```
hist(df_RTs_PWA$VOT)
```

Histogram of df_RTs_PWA\$VOT

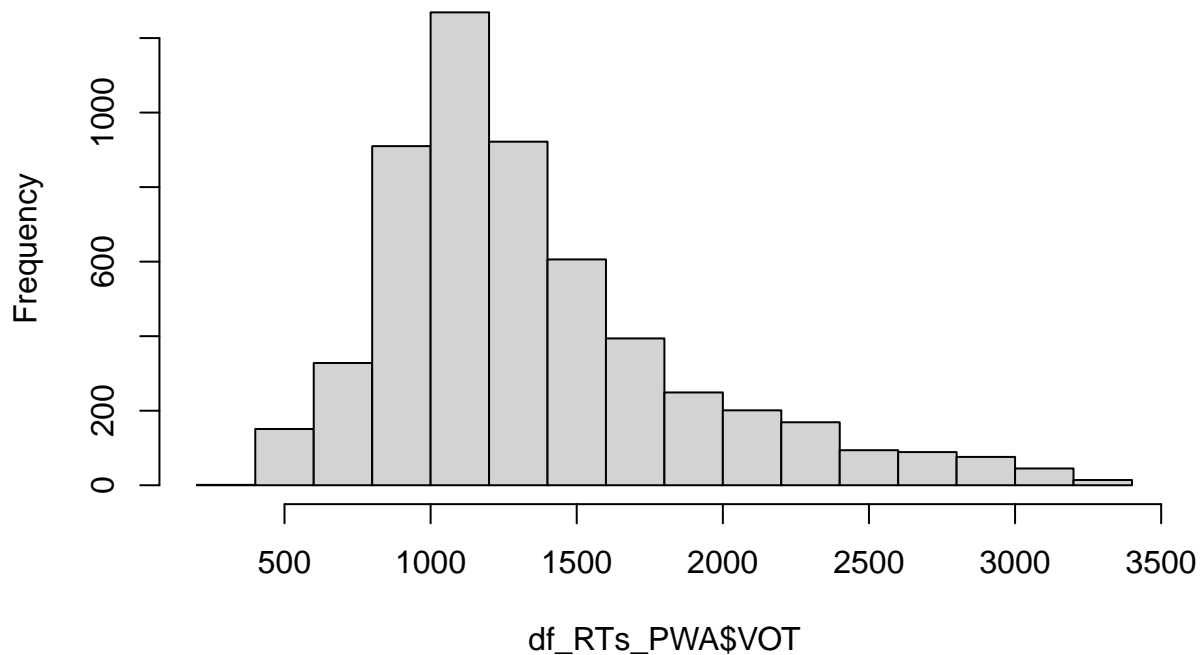

Exclude unrealistically short reaction times < 200 ms

```
sum(df_RTs$VOT < 200)
```

```
## [1] 0
```

```
df_RTs <- df_RTs %>% filter(VOT >=200)
```

```
sum(df_RTs_PWA$VOT < 200)
```


```
## [1] 0
```

```
df_RTs_PWA <- df_RTs_PWA %>% filter(VOT >=200)
```

LMMs: Transformed RTs In our pre-registration, we planned to conduct a GLMM with a Gamma distribution to account for the non-normality of the data. However, the standard errors seem suspiciously small and additional analyses showed that the GLMM doesn't converge with other types of analyses (see Appendix). Therefore, we decided to conduct an LMM with transformed RTs instead.

Analysis with factors Ordinal position x Session x Group *Box-cox test*
 (common transformations: -2 -> $1/(Y^2)$, -1 -> $1/y$, -0.5 -> $1/(\sqrt{y})$), 0 -> $\log(y)$, 0.5 -> \sqrt{y} , 1 -> y , 2 -> y^2 , 3 -> y^3)

```
MASS::boxcox(df_RTs$VOT ~ df_RTs$PosOr*df_RTs$session*df_RTs$group)
```

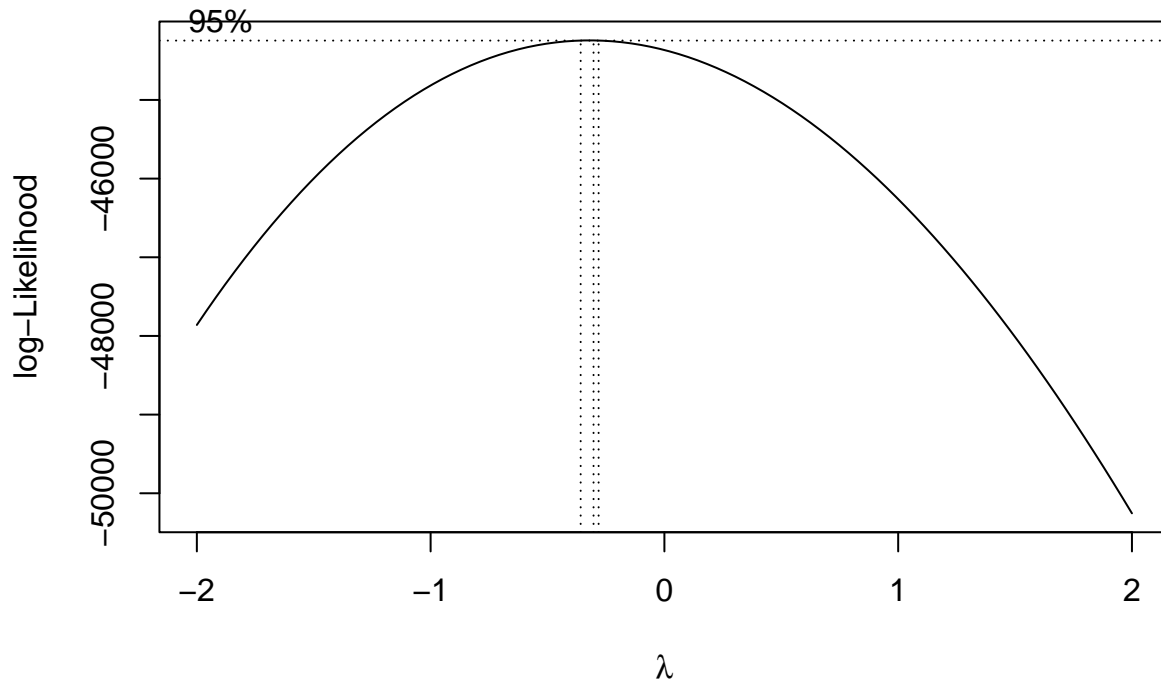

```
## Box-Cox suggests log transformation
df_RTs$lVOT <- log(df_RTs$VOT)
```

Compute full model, then compute step-wise reduction

```
library(lmerTest)
# m2_lmm <- lmer(lVOT ~ PosOr.cont*session*group +
#               (PosOr.cont*session/subject) +
#               (PosOr.cont*session*group/category),
#               data = df_RTs,
#               control=lmerControl(optimizer = "bobyqa"))
# didLmerConverge(m2_lmm)
```

Model fails to converge -> Reduce

```
# 1) Increase optimizer iterations
# m2_lmm <- lmer(lVOT ~ PosOr.cont*session*group +
#               (PosOr.cont*session/subject) +
#               (PosOr.cont*session*group/category),
#               data = df_RTs,
#               control=lmerControl(optimizer = "bobyqa",
#                                   optCtrl = list(maxfun = 2e5)))
```

```

# didLmerConverge(m2_lmm)

# 2) Omit correlation parameters as model still fails to converge
# m2_lmm <- afex::lmer_alt(lVOT ~ PosOr.cont*session*group +
#                           (PosOr.cont*session||subject) +
#                           (PosOr.cont*session*group||category),
#                           data = df_RTs,
#                           control=lmerControl(optimizer = "bobyqa",
#                                                 optCtrl = list(maxfun = 2e5)))

# 3) Model fit is still singular -> Further reduce the model
# m2_lmm <- afex::lmer_alt(lVOT ~ PosOr.cont*session*group +
#                           (PosOr.cont+session||subject) +
#                           (PosOr.cont+group||category),
#                           data = df_RTs,
#                           control=lmerControl(optimizer = "bobyqa",
#                                                 optCtrl = list(maxfun = 2e5)))

# 4) Does the model also converge when correlation parameters are included - yes!
m2_lmm <- lmer(lVOT ~ PosOr.cont*session*group +
               (PosOr.cont+session|subject) +
               (PosOr.cont+group|category),
               data = df_RTs,
               control=lmerControl(optimizer = "bobyqa",
                                   optCtrl = list(maxfun = 2e5)))

# rePCA(m2_lmm)
didLmerConverge(m2_lmm)

```

```

## The relative maximum gradient of 0.00000257 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.

```

```

## Warnings can be ignored

```

```

summary(m2_lmm)

```

```

## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula: lVOT ~ PosOr.cont * session * group + (PosOr.cont + session |
##           subject) + (PosOr.cont + group | category)
## Data: df_RTs
## Control: lmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
## REML criterion at convergence: 1158.2
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -4.8980 -0.6647 -0.1747  0.4804  5.6443
##
## Random effects:
##  Groups   Name                Variance  Std.Dev. Corr
##  subject  (Intercept)  0.03572310  0.189006
##           PosOr.cont    0.00010406  0.010201  0.18
##           session2      0.00339920  0.058303 -0.13  0.24
##           session3      0.00406330  0.063744 -0.49  0.26  0.64

```

```

## category (Intercept) 0.00884981 0.094073
##           Pos0r.cont 0.00002358 0.004856 0.07
##           group2-1   0.00090450 0.030075 0.08 0.16
## Residual              0.06154884 0.248090
## Number of obs: 12455, groups: subject, 40; category, 24
##
## Fixed effects:
##
##              Estimate      Std. Error      df t value
## (Intercept)      7.116562      0.035604    58.495400 199.883
## Pos0r.cont        0.016922      0.002489    30.170032   6.800
## session2         -0.076082      0.010856    38.392327  -7.008
## session3         -0.089211      0.011561    36.616785  -7.717
## group2-1          0.157635      0.060276    38.561991   2.615
## Pos0r.cont:session2 0.004635      0.003924  12260.584027   1.181
## Pos0r.cont:session3 0.003648      0.003895  12262.086513   0.937
## Pos0r.cont:group2-1 0.006992      0.004565    37.104902   1.532
## session2:group2-1  -0.025605      0.021711    38.391896  -1.179
## session3:group2-1  -0.020079      0.023122    36.616755  -0.868
## Pos0r.cont:session2:group2-1 0.013305      0.007848  12258.935598   1.695
## Pos0r.cont:session3:group2-1 0.003095      0.007790  12261.681674   0.397
##
##              Pr(>|t|)
## (Intercept)      < 0.0000000000000002 ***
## Pos0r.cont        0.00000014849 ***
## session2          0.00000002268 ***
## session3          0.00000000345 ***
## group2-1          0.0127 *
## Pos0r.cont:session2 0.2376
## Pos0r.cont:session3 0.3489
## Pos0r.cont:group2-1 0.1341
## session2:group2-1  0.2455
## session3:group2-1  0.3908
## Pos0r.cont:session2:group2-1 0.0901 .
## Pos0r.cont:session3:group2-1 0.6912
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr) Ps0r.c sessn2 sessn3 grp2-1 Ps0.:2 Ps0.:3 P0.:2- s2:2-1
## Pos0r.cont    0.114
## session2     -0.096  0.134
## session3     -0.361  0.151  0.612
## group2-1      0.006  0.008 -0.001 -0.002
## Ps0r.cnt:s2   0.000 -0.011  0.005  0.003  0.000
## Ps0r.cnt:s3   0.000 -0.020  0.003  0.003  0.000  0.515
## Ps0r.cn:2-1   0.001  0.069  0.001  0.002  0.126 -0.011 -0.016
## sssn2:gr2-1  -0.001  0.001  0.051  0.027 -0.114  0.007  0.005  0.146
## sssn3:gr2-1  -0.001  0.002  0.027  0.040 -0.426  0.005  0.007  0.164  0.612
## Ps0r.:2:2-1  0.000 -0.010  0.007  0.005  0.000  0.129  0.075 -0.012  0.005
## Ps0r.:3:2-1  0.000 -0.014  0.005  0.007  0.000  0.075  0.126 -0.022  0.003
##
##              s3:2-1 P0.:2:
## Pos0r.cont
## session2
## session3
## group2-1

```



```
## Ps0r.cnt:s2
## Ps0r.cnt:s3
## Ps0r.cn:2-1
## sssn2:gr2-1
## sssn3:gr2-1
## Ps0r.:2:2-1 0.003
## Ps0r.:3:2-1 0.003 0.515
```

```
anova(m2_lmm)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method
##
##          Sum Sq Mean Sq NumDF   DenDF F value    Pr(>F)
## Pos0r.cont      2.8457  2.84571     1    30.2 46.2349 0.00000014849 ***
## session         4.1782  2.08908     2    37.5 33.9418 0.00000000389 ***
## group           0.4210  0.42096     1    38.6  6.8394   0.01266 *
## Pos0r.cont:session 0.0949  0.04746     2 12260.9  0.7711   0.46251
## Pos0r.cont:group   0.1444  0.14438     1    37.1  2.3457   0.13411
## session:group      0.0877  0.04386     2    37.5  0.7125   0.49693
## Pos0r.cont:session:group 0.1958  0.09790     2 12259.7  1.5906   0.20385
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
saveRDS(m2_lmm, file = here::here("results", "tables", "CSI_online_aphasia_SessionxGroup_control_lmm_VOT.html"),
tab_model(m2_lmm, transform = NULL,
  show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
  title = "LMM of VOTs Predicted by Ordinal Position and Session",
  dv.labels = "Vocal Onset Time (log-transformed)",
  #string.pred = "",
  df.method = "satterthwaite",
  string.stat = "t-Value",
  file = here::here(
    "results", "tables",
    "CSI_online_aphasia_spoken_SessionxGroup_lmm_VOT.html"))
```

LMM of VOTs Predicted by Ordinal Position and Session

Vocal Onset Time (log-transformed)

Predictors

Estimates

CI

t-Value

p

(Intercept)

7.12

7.05 – 7.19

199.88

<0.001

PosOr cont
 0.02
 0.01 – 0.02
 6.80
 <0.001
 session [2]
 -0.08
 -0.10 – -0.05
 -7.01
 <0.001
 session [3]
 -0.09
 -0.11 – -0.07
 -7.72
 <0.001
 group2-1
 0.16
 0.04 – 0.28
 2.62
 0.013
 PosOr cont \times session [2]
 0.00
 -0.00 – 0.01
 1.18
 0.238
 PosOr cont \times session [3]
 0.00
 -0.00 – 0.01
 0.94
 0.349
 PosOr.cont:group2-1
 0.01
 -0.00 – 0.02
 1.53
 0.134
 session2:group2-1

-0.03
 -0.07 – 0.02
 -1.18
 0.246
 session3:group2-1
 -0.02
 -0.07 – 0.03
 -0.87
 0.391
 PosOr.cont:session2:group2-1
 0.01
 -0.00 – 0.03
 1.70
 0.090
 PosOr.cont:session3:group2-1
 0.00
 -0.01 – 0.02
 0.40
 0.691
 N subject
 40
 N category
 24
 Observations
 12455


```

## Check model
# performance::check_model(m2_lmm)
# ggResidpanel::resid_panel(m2_lmm, smoother = TRUE,
# qqbands = TRUE, type = "pearson")
  
```


PWA only

```


MASS::boxcox(df_RT$VOT ~ df_RT$group*df_RT$PosOr*df_RT$session)
  
```

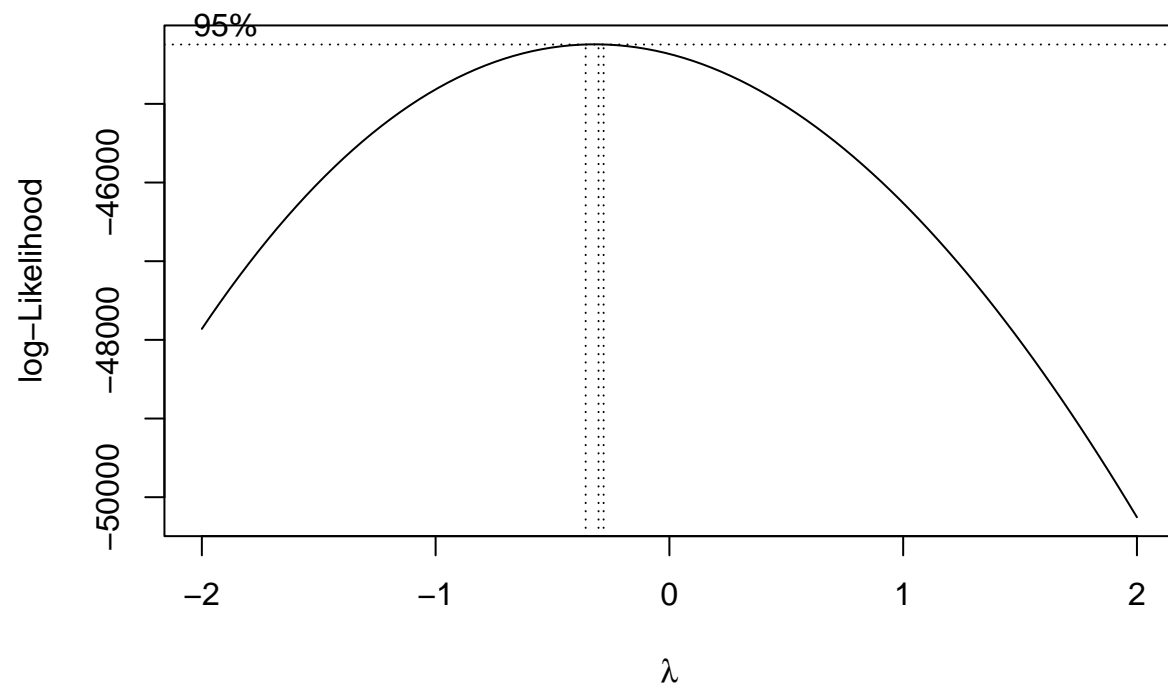

```
MASS::boxcox(df_RTs_PWA$VOT ~ df_RTs_PWA$PosOr*df_RTs_PWA$session)
```

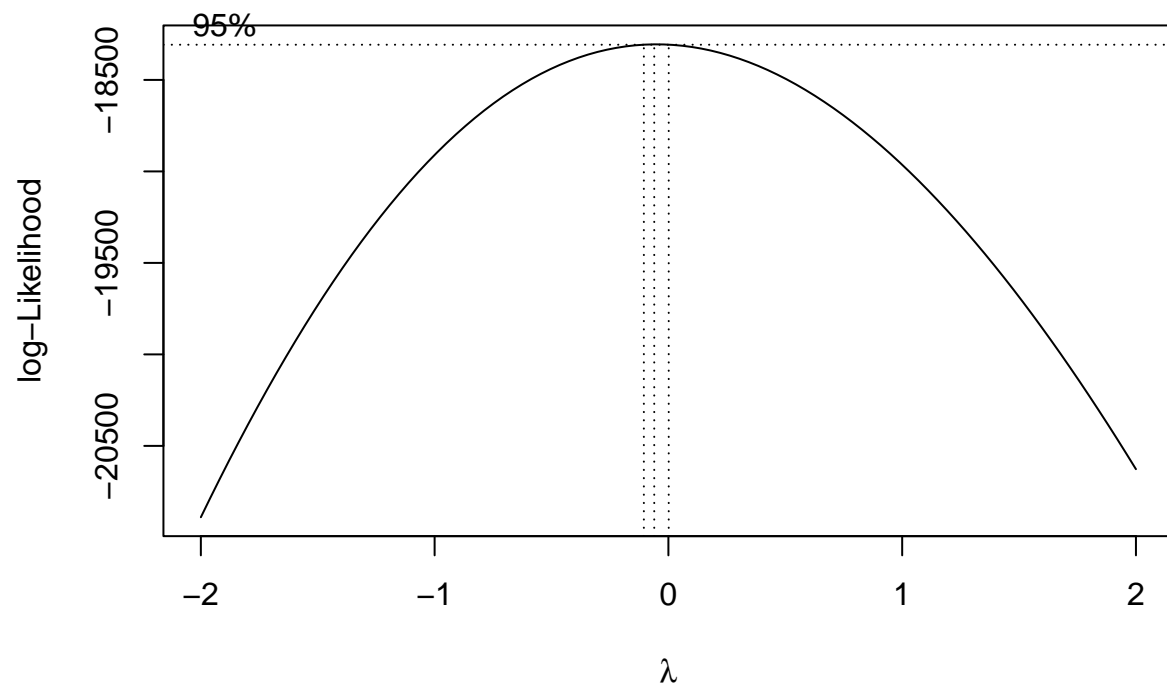

```
## Box-Cox suggests log transformation --> compute with log-transformed RTs as s control analysis  
MASS::boxcox(log(df_RTs_PWA$VOT) ~ df_RTs_PWA$PosOr*df_RTs_PWA$session)
```

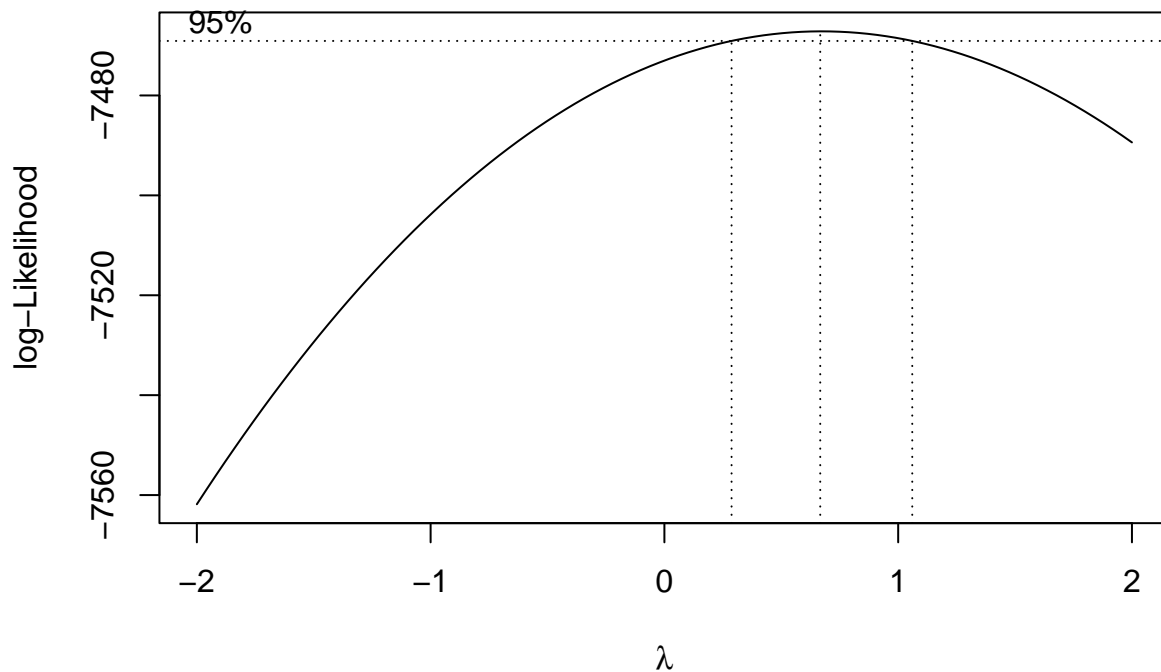

```
df_RTs_PWA$VOTlog <- log(df_RTs_PWA$VOT)
```

Compute full model, then compute step-wise reduction until model convergence

```
library(lmerTest)
# m1_lmm_PWA <- lmer(VOTlog ~ PosOr.cont*session +
#                   (PosOr.cont*session/subject) +
#                   (PosOr.cont*session/category),
#                   data = df_RTs_PWA,
#                   control=lmerControl(optimizer = "bobyqa"))
# didLmerConverge(m1_lmm_PWA)
```

Model fails to converge -> Reduce

```
# 1) Increase optimizer iterations
# m1_lmm_PWA <- lmer(VOTlog ~ PosOr.cont*session +
#                   (PosOr.cont*session/subject) +
#                   (PosOr.cont*session/category),
#                   data = df_RTs_PWA,
#                   control=lmerControl(optimizer = "bobyqa",
#                                       optCtrl = list(maxfun = 2e5)))
# didLmerConverge(m1_lmm_PWA)

# 2) Omit correlation parameters as model still fails to converge
# m1_lmm_PWA <- afex::lmer_alt(VOTlog ~ PosOr.cont*session +
```

```

#           (PosOr.cont*session||subject) +
#           (PosOr.cont*session||category),
#           data = df_RTs_PWA,
#           control=lmerControl(optimizer = "bobyqa",
#                               optCtrl = list(maxfun = 2e5)))
# rePCA(m1_lmm_PWA)

# 3) The model still has a singular fit -> reduce
# m1_lmm_PWA <- afex::lmer_alt(VOTlog ~ PosOr.cont*session +
#                             (PosOr.cont*session||subject) +
#                             (PosOr.cont*session-PosOr.cont||category),
#                             data = df_RTs_PWA,
#                             control=lmerControl(optimizer = "bobyqa",
#                                                 optCtrl = list(maxfun = 2e5)))
# m1_lmm_PWA <- afex::lmer_alt(VOTlog ~ PosOr.cont*session +
#                             (PosOr.cont*session||subject) +
#                             (PosOr.cont*session-PosOr.cont-session||category),
#                             data = df_RTs_PWA,
#                             control=lmerControl(optimizer = "bobyqa",
#                                                 optCtrl = list(maxfun = 2e5)))
# m1_lmm_PWA <- afex::lmer_alt(VOTlog ~ PosOr.cont*session +
#                             (PosOr.cont*session||subject) +
#                             (1|category),
#                             data = df_RTs_PWA,
#                             control=lmerControl(optimizer = "bobyqa",
#                                                 optCtrl = list(maxfun = 2e5)))
# m1_lmm_PWA <- afex::lmer_alt(VOTlog ~ PosOr.cont*session +
#                             (PosOr.cont+session||subject) +
#                             (1|category),
#                             data = df_RTs_PWA,
#                             control=lmerControl(optimizer = "bobyqa",
#                                                 optCtrl = list(maxfun = 2e5)))

# 4) Test whether the model also converges including correlation parameters -> yes
m1_lmm_PWA <- lmer(VOTlog ~ PosOr.cont*session +
                  (PosOr.cont+session|subject) +
                  (1|category),
                  data = df_RTs_PWA,
                  control=lmerControl(optimizer = "bobyqa",
                                      optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_lmm_PWA)

```

```

## The relative maximum gradient of 0.00000429 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.

```

```

## Warnings can be ignored

```

```

summary(m1_lmm_PWA)

```

```

## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula: VOTlog ~ PosOr.cont * session + (PosOr.cont + session | subject) +
##         (1 | category)

```

```
## Data: df_RT_S_PWA
## Control: lmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
## REML criterion at convergence: 1705.5
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -3.4857 -0.6809 -0.1843  0.5084  5.0807
##
## Random effects:
## Groups Name Variance Std.Dev. Corr
## category (Intercept) 0.0092445 0.09615
## subject (Intercept) 0.0616484 0.24829
##      PosOr.cont 0.0001271 0.01128 0.35
##      session2 0.0009406 0.03067 -0.26 0.07
##      session3 0.0035352 0.05946 -0.68 -0.14 0.21
## Residual 0.0760739 0.27581
## Number of obs: 5518, groups: category, 24; subject, 20
##
## Fixed effects:
##              Estimate Std. Error      df t value
## (Intercept)    7.195573    0.059036   23.613808 121.884
## PosOr.cont      0.020682    0.003710   17.682005  5.575
## session2     -0.088051    0.011650   16.035853 -7.558
## session3     -0.099095    0.016309   17.569075 -6.076
## PosOr.cont:session2  0.011439    0.006552  5438.077615  1.746
## PosOr.cont:session3  0.005320    0.006495  5440.067017  0.819
##              Pr(>|t|)
## (Intercept)    < 0.0000000000000002 ***
## PosOr.cont      0.00002905 ***
## session2      0.00000113 ***
## session3      0.00001071 ***
## PosOr.cont:session2  0.0809 .
## PosOr.cont:session3  0.4128
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##      (Intr) PsOr.c sessn2 sessn3 Ps0.:2
## PosOr.cont  0.224
## session2   -0.145  0.031
## session3   -0.523 -0.079  0.341
## PsOr.cnt:s2  0.000 -0.021  0.004  0.003
## PsOr.cnt:s3 -0.001 -0.035  0.003  0.003  0.522
```

```
anova(m1_lmm_PWA)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method
##              Sum Sq Mean Sq NumDF DenDF F value      Pr(>F)
## PosOr.cont    2.3644  2.36438      1   17.7 31.0800 0.0000290471 ***
## session       5.4010  2.70050      2   17.5 35.4984 0.0000006973 ***
## PosOr.cont:session 0.2328  0.11641      2 5437.7  1.5303      0.2166
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```



```

saveRDS(m1_lmm_PWA, file = here::here(
  "results", "tables", "CSI_online_aphasia_PWA_control_lmm_VOT.RDS"))
tab_model(m1_lmm_PWA, transform = NULL,
  show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
  title = "LMM of VOTs Predicted by Ordinal Position and Session",
  df.method = "satterthwaite",
  dv.labels = "Vocal Onset Time (log-transformed)",
  #string.pred = "",
  string.stat = "t-Value",
  file = here::here(
    "results", "tables",
    "CSI_online_aphasia_PWA_control_lmm_VOT.html"))

```

LMM of VOTs Predicted by Ordinal Position and Session

Vocal Onset Time (log-transformed)

Predictors

Estimates

CI

t-Value

p

(Intercept)

7.20

7.07 – 7.32

121.88

<0.001

PosOr cont

0.02

0.01 – 0.03

5.57

<0.001

session [2]

-0.09

-0.11 – -0.06

-7.56

<0.001

session [3]

-0.10

-0.13 – -0.06

-6.08

<0.001
 PosOr cont \times session [2]
 0.01
 -0.00 – 0.02
 1.75
 0.081
 PosOr cont \times session [3]
 0.01
 -0.01 – 0.02
 0.82
 0.413
 N subject
 20
 N category
 24
 Observations
 5518

ERROR RATES

Descriptives

```
df_errors %>% group_by(group) %>% count(error_class) %>%
  mutate(percentage=n/(nrow(df[df$category!="Filler" &
    df$group=="PWA",])))
```

Error types

```
## # A tibble: 4 x 4
## # Groups:   group [2]
##   group error_class      n percentage
##   <fct>      <dbl> <int>      <dbl>
## 1 control      0  6952      0.966
## 2 control      1   167      0.0232
## 3 PWA          0  5637      0.783
## 4 PWA          1  1541      0.214
```

```
df_errors %>% group_by(group, session) %>% count(error_class) %>%
  mutate(percentage=n/(nrow(df[df$category!="Filler" & df$group=="PWA" &
    df$session=="1",])))
```

```
## # A tibble: 12 x 5
## # Groups:   group, session [6]
##   group session error_class     n percentage
##   <fct>   <fct>         <dbl> <int>      <dbl>
## 1 control 1             0  2284    0.952
## 2 control 1             1    77    0.0321
## 3 control 2             0  2316    0.965
## 4 control 2             1    57    0.0238
## 5 control 3             0  2352    0.98
## 6 control 3             1    33    0.0138
## 7 PWA     1             0  1777    0.740
## 8 PWA     1             1   609    0.254
## 9 PWA     2             0  1892    0.788
## 10 PWA    2             1   506    0.211
## 11 PWA    3             0  1968    0.82
## 12 PWA    3             1   426    0.178
```

```
df_errors %>% group_by(group) %>% count(error) %>%
  mutate(percentage=n/(nrow(df[df$category!="Filler" &
    df$group=="PWA",])))
```

```
## # A tibble: 20 x 4
## # Groups:   group [2]
##   group error     n percentage
##   <fct> <chr> <int>      <dbl>
## 1 control 1         1  0.000139
## 2 control 2        40  0.00556
## 3 control 3        32  0.00444
## 4 control 4        31  0.00431
## 5 control 5         1  0.000139
## 6 control 6         6  0.000833
## 7 control 7        35  0.00486
## 8 control 8         3  0.000417
## 9 control 9        18  0.0025
## 10 control <NA>   6952  0.966
## 11 PWA     1         56  0.00778
## 12 PWA     2       148  0.0206
## 13 PWA     3         62  0.00861
## 14 PWA     4       820  0.114
## 15 PWA     5         32  0.00444
## 16 PWA     6         40  0.00556
## 17 PWA     7       102  0.0142
## 18 PWA     8         29  0.00403
## 19 PWA     9       252  0.035
## 20 PWA    <NA>   5637  0.783
```

```
df_errors %>% group_by(group, session) %>% count(error) %>%
  mutate(percentage=n/(nrow(df[df$category!="Filler" & df$group=="PWA" &
    df$session=="1",])))
```

```
## # A tibble: 54 x 5
## # Groups:   group, session [6]
##   group session error    n percentage
##   <fct>   <fct>   <chr> <int>      <dbl>
## 1 control 1      2      15  0.00625
## 2 control 1      3      13  0.00542
## 3 control 1      4      14  0.00583
## 4 control 1      6       2  0.000833
## 5 control 1      7      23  0.00958
## 6 control 1      9      10  0.00417
## 7 control 1     <NA>  2284  0.952
## 8 control 2      1       1  0.000417
## 9 control 2      2      17  0.00708
## 10 control 2     3      11  0.00458
## # i 44 more rows
```

```
table(df_errors$error_class, df_errors$error) # technical errors are not counted as errors
```

```
##
##      1  2  3  4  5  6  7  8  9
## 0  0  0  0  0  0  0  0  0  0
## 1  57 188 94 851 33 46 137 32 270
```

```
table(df_errors$error_class[is.na(df_errors$error)]) # correct responses
```

```
##
##      0
## 12589
```

```
error_overview <- data.frame(subject=factor(rep(unique(df$subject),
                                              each=5*3)),
                             group=factor(rep(c("PWA", "control"),
                                              each=20*5*3)),
                             session=factor(rep(c("1", "2", "3"),
                                              each=5,
                                              times=
                                                length(unique(df$subject)))),
                             PosOr=factor(rep(c("1", "2", "3", "4", "5"),
                                              times=length(unique(df$subject))*3)),
                             error_class=0)
x <- df_errors %>% group_by(subject, session, PosOr) %>%
  count(error_class) %>%
  filter(error_class==1)
for(i in 1:nrow(x)){
  error_overview$error_class[error_overview$subject==x$subject[i] &
                             error_overview$session==x$session[i] &
                             error_overview$PosOr==x$PosOr[i] ] <-
    x$n[i]
}
error_overview$percentage <- (error_overview$error_class/24)*100
```

```
(means_final_errors <- error_overview %>%
  group_by(group,session,PosOr) %>%
  summarise(count=sum(error_class), mean=mean(error_class),
            sd=sd(error_class), se=sd(error_class)/20,
            mean_p = mean(percentage),
            sd_p=sd(percentage), se_p=sd(percentage)/20))
```

Amount of errors

'summarise()' has grouped output by 'group', 'session'. You can override using the '.groups' argument.

```
## # A tibble: 30 x 10
## # Groups:   group, session [6]
##   group session PosOr count mean sd se mean_p sd_p se_p
##   <fct> <fct> <fct> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
## 1 control 1 1 13 0.65 0.745 0.0373 2.71 3.10 0.155
## 2 control 1 2 14 0.7 0.733 0.0366 2.92 3.05 0.153
## 3 control 1 3 19 0.95 0.759 0.0380 3.96 3.16 0.158
## 4 control 1 4 14 0.7 0.801 0.0401 2.92 3.34 0.167
## 5 control 1 5 17 0.85 0.745 0.0373 3.54 3.10 0.155
## 6 control 2 1 9 0.45 0.686 0.0343 1.87 2.86 0.143
## 7 control 2 2 15 0.75 1.02 0.0510 3.12 4.25 0.212
## 8 control 2 3 8 0.4 0.503 0.0251 1.67 2.09 0.105
## 9 control 2 4 9 0.45 0.759 0.0380 1.87 3.16 0.158
## 10 control 2 5 16 0.8 0.834 0.0417 3.33 3.47 0.174
## # i 20 more rows
```

```
# Export as word file
library(flextable)
huxt_word <- huxtable::huxtable(means_final_errors)
huxt_word <- huxtable::set_number_format(huxt_word, round(2))
huxtable::quick_docx(huxt_word,
  file =
    here::here(
      "results", "tables",
      "CSI_online_PWA_errors_by_session.docx"),
  open = FALSE)
```

Calculate increase mean by ordinal position, separately for each session (not controlled for random variances, weighted only per session):

```
means_final_errors$increase_count <- NA
means_final_errors$increase_mean <- NA
for(k in 1:length(unique(means_final_errors$group))){
  for(i in 1:length(unique(means_final_errors$session))){
    for(j in 2:length(unique(means_final_errors$PosOr))) {
      means_final_errors$increase_count[
        means_final_errors$session==unique(means_final_errors$session)[i] &
        means_final_errors$PosOr==unique(means_final_errors$PosOr)[j] &
        means_final_errors$group==unique(means_final_errors$group)[k]] <-
      means_final_errors$count[means_final_errors$session==
```

```

        unique(means_final_errors$session)[i] &
        means_final_errors$PosOr==
        unique(means_final_errors$PosOr)[j]&
        means_final_errors$group==unique(means_final_errors$group)[k]] -
means_final_errors$count[
  means_final_errors$session==
    unique(means_final_errors$session)[i] &
    means_final_errors$PosOr==
    unique(means_final_errors$PosOr)[j-1]&
    means_final_errors$group==unique(means_final_errors$group)[k]]
means_final_errors$increase_mean[
  means_final_errors$session==unique(means_final_errors$session)[i] &
  means_final_errors$PosOr==
  unique(means_final_errors$PosOr)[j]&
  means_final_errors$group==unique(means_final_errors$group)[k]] <-
means_final_errors$mean[
  means_final_errors$session==unique(means_final_errors$session)[i] &
  means_final_errors$PosOr==unique(means_final_errors$PosOr)[j]&
  means_final_errors$group==unique(means_final_errors$group)[k]] -
means_final_errors$mean[means_final_errors$session==
  unique(means_final_errors$session)[i] &
  means_final_errors$PosOr==
  unique(means_final_errors$PosOr)[j-1]&
  means_final_errors$group==
  unique(means_final_errors$group)[k]]
}}}
#means_final_errors

## Calculate overall mean increase per session (weighted: all PosOrs had the same amount of trials)
mean(means_final_errors$increase_mean[
  means_final_errors$session==1], na.rm=T)

```

```
## [1] 0.28125
```

```

means_final_errors$PosOr_effect <- NA
means_final_errors$PosOr_effect[means_final_errors$PosOr==1] <- 1
for(k in 1:length(unique(means_final_errors$group))){
for(i in 1:length(unique(means_final_errors$session))){
  means_final_errors$PosOr_effect[
    means_final_errors$session==unique(means_final_errors$session)[i] &
    means_final_errors$group==unique(means_final_errors$group)[k] &
    means_final_errors$PosOr=="1"] <-
    (means_final_errors$increase_mean[
      means_final_errors$session==unique(means_final_errors$session)[i] &
      means_final_errors$group==unique(means_final_errors$group)[k] &
      means_final_errors$PosOr=="2"]+
      means_final_errors$increase_mean[
        means_final_errors$session==
        unique(means_final_errors$session)[i] &
        means_final_errors$group==unique(means_final_errors$group)[k] &
        means_final_errors$PosOr=="3"]+
      means_final_errors$increase_mean[
        means_final_errors$session==

```

```

      unique(means_final_errors$session)[i] &
      means_final_errors$group==unique(means_final_errors$group)[k] &
      means_final_errors$PosOr=="4")+
      means_final_errors$increase_mean[
        means_final_errors$session==
          unique(means_final_errors$session)[i] &
          means_final_errors$group==unique(means_final_errors$group)[k] &
          means_final_errors$PosOr=="5"])/4
    }}
means_final_errors

```

```

## # A tibble: 30 x 13
## # Groups:   group, session [6]
##   group session PosOr count mean sd se mean_p sd_p se_p
##   <fct> <fct> <fct> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
## 1 control 1 1 13 0.65 0.745 0.0373 2.71 3.10 0.155
## 2 control 1 2 14 0.7 0.733 0.0366 2.92 3.05 0.153
## 3 control 1 3 19 0.95 0.759 0.0380 3.96 3.16 0.158
## 4 control 1 4 14 0.7 0.801 0.0401 2.92 3.34 0.167
## 5 control 1 5 17 0.85 0.745 0.0373 3.54 3.10 0.155
## 6 control 2 1 9 0.45 0.686 0.0343 1.87 2.86 0.143
## 7 control 2 2 15 0.75 1.02 0.0510 3.12 4.25 0.212
## 8 control 2 3 8 0.4 0.503 0.0251 1.67 2.09 0.105
## 9 control 2 4 9 0.45 0.759 0.0380 1.87 3.16 0.158
## 10 control 2 5 16 0.8 0.834 0.0417 3.33 3.47 0.174
## # i 20 more rows
## # i 3 more variables: increase_count <dbl>, increase_mean <dbl>,
## # PosOr_effect <dbl>

```

Different kinds of errors per ordinal position

```
table(df_errors$error)
```

```

##
## 1 2 3 4 5 6 7 8 9
## 57 188 94 851 33 46 137 32 270

```

```

(df_errors %>% group_by(group, session, error, PosOr) %>%
  count() -> z)

```

```

## # A tibble: 232 x 5
## # Groups:   group, session, error, PosOr [232]
##   group session error PosOr n
##   <fct> <fct> <chr> <fct> <int>
## 1 control 1 2 1 1
## 2 control 1 2 2 4
## 3 control 1 2 3 6
## 4 control 1 2 4 2
## 5 control 1 2 5 2
## 6 control 1 3 1 1
## 7 control 1 3 2 2
## 8 control 1 3 3 3

```

```
## 9 control 1      3      4      5
## 10 control 1     3      5      2
## # i 222 more rows
```

```
w <- data.frame(group=rep(c("control", "PWA"), each=3*10*5),
  session=rep(c("1","2","3"), each=10, times=2*5),
  error=rep(seq(1:10), each=5, times=2*3),
  PosOr=rep(seq(1:5), timed=10*3*2),
  n=NA)
for(i in 1:nrow(w)){
  l <- z %>% filter(group==w$group[i]&session==w$session[i]&
    error==w$error[i]&PosOr==w$PosOr[i])
  if(nrow(l)!=0) {
    w$n[i] <- l$n
  }
}
# mean increase per error type and ordinal position
y <- data.frame(group=rep(c("control", "PWA"), each=3*10),
  session=rep(c("1","2","3"), each=10, times=2),
  error=rep(seq(1:10), times=2*3),
  m_increase=NA)
w$error[is.na(w$error)] <- 10
for(i in 1:nrow(y)){
  a1 <- w$n[w$group==y$group[i]& w$error==y$error[i] &
    w$session==y$session[i] & w$PosOr==1]
  a2 <- w$n[w$group==y$group[i]& w$error==y$error[i] &
    w$session==y$session[i] & w$PosOr==2]
  a3 <- w$n[w$group==y$group[i]& w$error==y$error[i] &
    w$session==y$session[i] & w$PosOr==3]
  a4 <- w$n[w$group==y$group[i]& w$error==y$error[i] &
    w$session==y$session[i] & w$PosOr==4]
  a5 <- w$n[w$group==y$group[i]& w$error==y$error[i] &
    w$session==y$session[i] & w$PosOr==5]
  if(!is.na(a2)&!is.na(a1)){ y$m_increase[i] <- a2-a1 }
  if(!is.na(a3)&!is.na(a2)){ y$m_increase[i] <-
    y$m_increase[i]+a3-a2 }
  if(!is.na(a4)&!is.na(a3)){ y$m_increase[i] <-
    y$m_increase[i]+a4-a3}
  if(!is.na(a5)&!is.na(a4)){ y$m_increase[i] <-
    y$m_increase[i]+a5-a4 }
  n <- sum(!is.na(c(a1,a2,a3,a4,a5)))-1
  y$m_increase[i] <- y$m_increase[i]/n
}
y
```

```
##      group session error m_increase
## 1 control      1      1          NA
## 2 control      1      2 0.2500000
## 3 control      1      3 0.2500000
## 4 control      1      4 0.2500000
## 5 control      1      5          NA
## 6 control      1      6          NA
## 7 control      1      7 0.5000000
## 8 control      1      8          NA
```


## 9	control	1	9	0.2500000
## 10	control	1	10	NA
## 11	control	2	1	NA
## 12	control	2	2	NA
## 13	control	2	3	1.0000000
## 14	control	2	4	0.0000000
## 15	control	2	5	NA
## 16	control	2	6	NA
## 17	control	2	7	NA
## 18	control	2	8	0.0000000
## 19	control	2	9	NA
## 20	control	2	10	NA
## 21	control	3	1	NA
## 22	control	3	2	NA
## 23	control	3	3	-0.2500000
## 24	control	3	4	-0.5000000
## 25	control	3	5	NA
## 26	control	3	6	NA
## 27	control	3	7	NA
## 28	control	3	8	NA
## 29	control	3	9	NA
## 30	control	3	10	NA
## 31	PWA	1	1	NA
## 32	PWA	1	2	2.5000000
## 33	PWA	1	3	0.2500000
## 34	PWA	1	4	8.0000000
## 35	PWA	1	5	0.0000000
## 36	PWA	1	6	-0.5000000
## 37	PWA	1	7	-0.5000000
## 38	PWA	1	8	0.2500000
## 39	PWA	1	9	-0.7500000
## 40	PWA	1	10	NA
## 41	PWA	2	1	-0.7500000
## 42	PWA	2	2	0.5000000
## 43	PWA	2	3	-0.2500000
## 44	PWA	2	4	6.0000000
## 45	PWA	2	5	0.5000000
## 46	PWA	2	6	-0.2500000
## 47	PWA	2	7	-0.5000000
## 48	PWA	2	8	0.3333333
## 49	PWA	2	9	-0.5000000
## 50	PWA	2	10	NA
## 51	PWA	3	1	-0.2500000
## 52	PWA	3	2	1.0000000
## 53	PWA	3	3	0.0000000
## 54	PWA	3	4	2.0000000
## 55	PWA	3	5	-0.7500000
## 56	PWA	3	6	NA
## 57	PWA	3	7	0.2500000
## 58	PWA	3	8	NA
## 59	PWA	3	9	2.5000000
## 60	PWA	3	10	NA

```
# mean across sessions
(y %>% group_by(group, error) %>%
  summarise(n=sum(m_increase), isnotna=sum(!is.na(m_increase)),
            mean_increase=mean(m_increase, na.rm=T)) ->
  increase_errors)
```

'summarise()' has grouped output by 'group'. You can override using the
'.groups' argument.

```
## # A tibble: 20 x 5
## # Groups:   group [2]
##   group   error     n isnotna mean_increase
##   <chr>   <int> <dbl>   <int>         <dbl>
## 1 PWA         1 NA         2        -0.5
## 2 PWA         2  4         3         1.33
## 3 PWA         3  0         3         0
## 4 PWA         4 16         3         5.33
## 5 PWA         5 -0.25        3       -0.0833
## 6 PWA         6 NA         2       -0.375
## 7 PWA         7 -0.75        3       -0.25
## 8 PWA         8 NA         2         0.292
## 9 PWA         9  1.25        3         0.417
##10 PWA        10 NA         0        NaN
##11 control     1 NA         0        NaN
##12 control     2 NA         1         0.25
##13 control     3  1         3         0.333
##14 control     4 -0.25        3       -0.0833
##15 control     5 NA         0        NaN
##16 control     6 NA         0        NaN
##17 control     7 NA         1         0.5
##18 control     8 NA         1         0
##19 control     9 NA         1         0.25
##20 control    10 NA         0        NaN
```

```
increase_errors %>% filter(group=="PWA") %>% count()
```

```
## # A tibble: 1 x 2
## # Groups:   group [1]
##   group     n
##   <chr> <int>
## 1 PWA     10
```

```
y %>% filter(group=="PWA") %>%
  filter(!(error %in% c(4,9,10))) %>%
  group_by(session) %>%
  summarise(mean=mean(m_increase, na.rm=T))
```


```
## # A tibble: 3 x 2
##   session   mean
##   <chr>     <dbl>
## 1 1         0.333
## 2 2        -0.0595
## 3 3         0.05
```

Plotting

```
means_final_errors$session_group <- paste0(means_final_errors$group,
                                             means_final_errors$session)
means_final_errors %>% rename(Session = session, Group = group) %>%
  mutate(Group = factor(Group, levels=c("PWA", "control")))->
  means_final_errors

override.linetype<-c("dotted", "dashed")
(plot_error <- means_final_errors %>%
  mutate(Session=case_when(Session == "1" ~ "day 1",
                           Session == "2" ~ "day 2",
                           Session == "3" ~ "day 8")) %>%

  ggplot(., aes(x=PosOr, y=mean_p,
               color = Session)) +
  geom_point(size = 2)+
  stat_summary(aes(x=PosOr, y=mean_p, group=session_group,
                  color = Session, linetype=Group),
              fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dotted", "dashed"))+
  scale_color_manual(values=c("#0072B2", "#E69F00", "#000000"))+
  geom_errorbar(
    aes(ymin=mean_p-se_p, ymax=mean_p+se_p, group = Session), width =.1) +
  apatheme+
  scale_y_continuous(breaks = seq(0, 40, by = 5), limits=c(0,35))+
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"))+
  labs(x="Ordinal Position ",y ="Percentage of errors"))
```

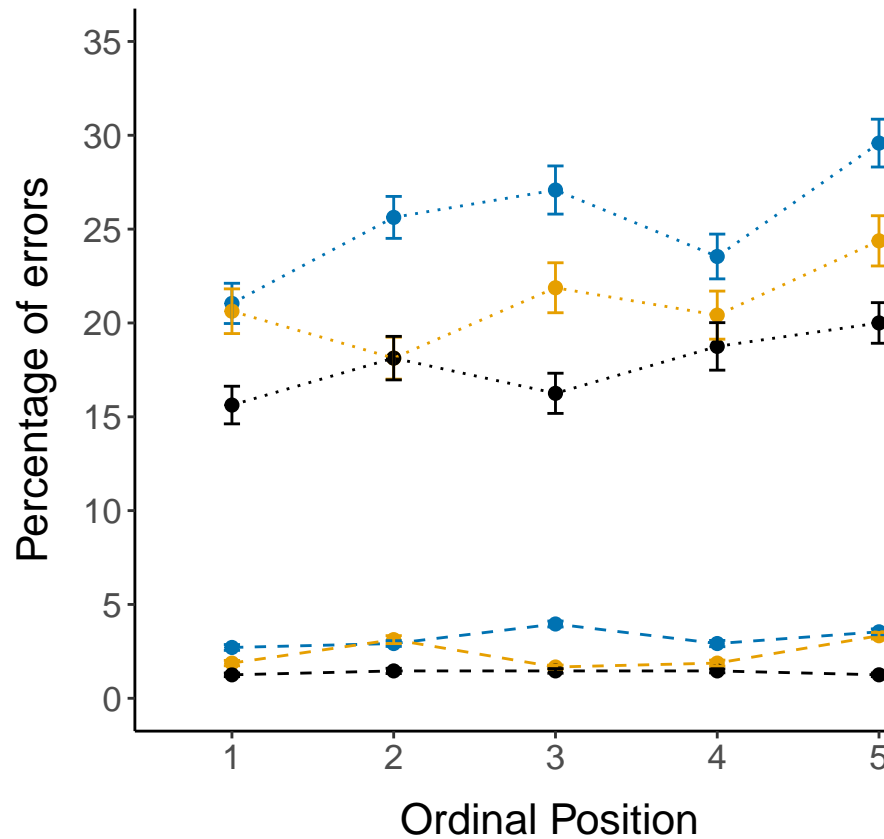

Errors by ordinal position and repetition

```


override.linetype<-c("solid", "dashed", "dotted")
(plot_error_PWA <- means_final_errors %>% filter(Group=="PWA") %>%
  mutate(Session=case_when(Session == "1" ~ "day 1",
                           Session == "2" ~ "day 2",
                           Session == "3" ~ "day 8")) %>%

  ggplot(., aes(x=PosOr, y=mean_p, group=Session, color = Session)) +
  geom_point( size = 2)+
  stat_summary(aes(linetype=Session),fun=mean, geom="line",
              size = 0.5) +
  scale_color_manual(values=c("#0072B2", "#E69F00", "#000000"))+
  geom_errorbar(aes(ymin=mean_p-se_p, ymax=mean_p+se_p, group = Session),
              width =.1) +

  apatheme+
  scale_y_continuous(breaks = seq(10,30, by = 5), limits=c(10,33))+
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"),
    legend.position="none")+
  guides(color=guide_legend(
    override.aes=list(linetype=override.linetype)))+
  labs(x="Ordinal Position ",y ="Percentage of errors",
       title="Patients with Aphasia"))


```

Patients with Aphasia

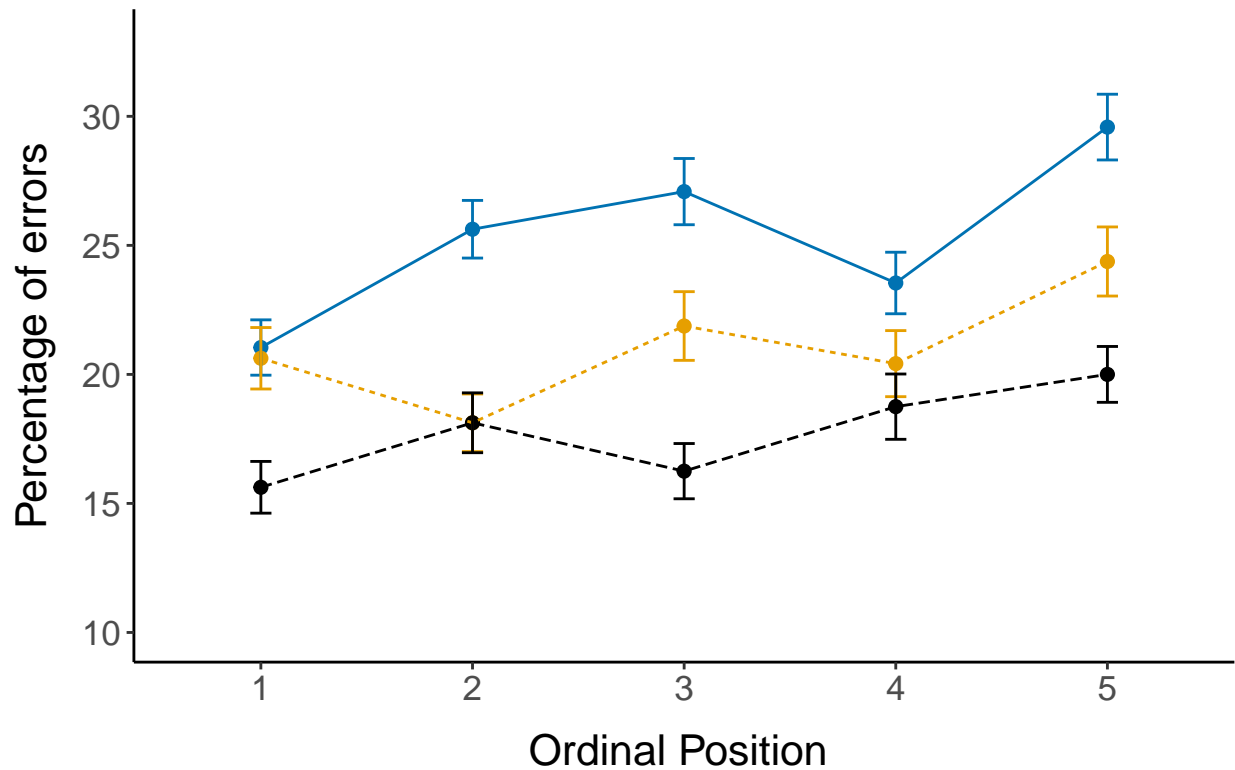

```
(plot_error_control <- means_final_errors %>% filter(Group=="control") %>%
  mutate(Session=case_when(Session == "1" ~ "day 1",
                           Session == "2" ~ "day 2",
                           Session == "3" ~ "day 8")) %>%
  ggplot(., aes(x=PosOr, y=mean_p, group=Session, color = Session)) +
  geom_point( size = 2)+
  stat_summary(aes(linetype=Session),fun=mean, geom="line",
              size = 0.5) +
  scale_color_manual(values=c("#0072B2", "#E69F00", "#000000"))+
  geom_errorbar(aes(ymin=mean_p-se_p, ymax=mean_p+se_p, group = Session), width =.1) +
  apatheme+
  scale_y_continuous(breaks = seq(0, 5, by =1), limits=c(0,5.5))+
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"))+
  guides(color=guide_legend(
    override.aes=list(linetype=override.linetype)))+
  labs(x="Ordinal Position ",y ="Percentage of errors",
       title="Control group"))
```

Control group

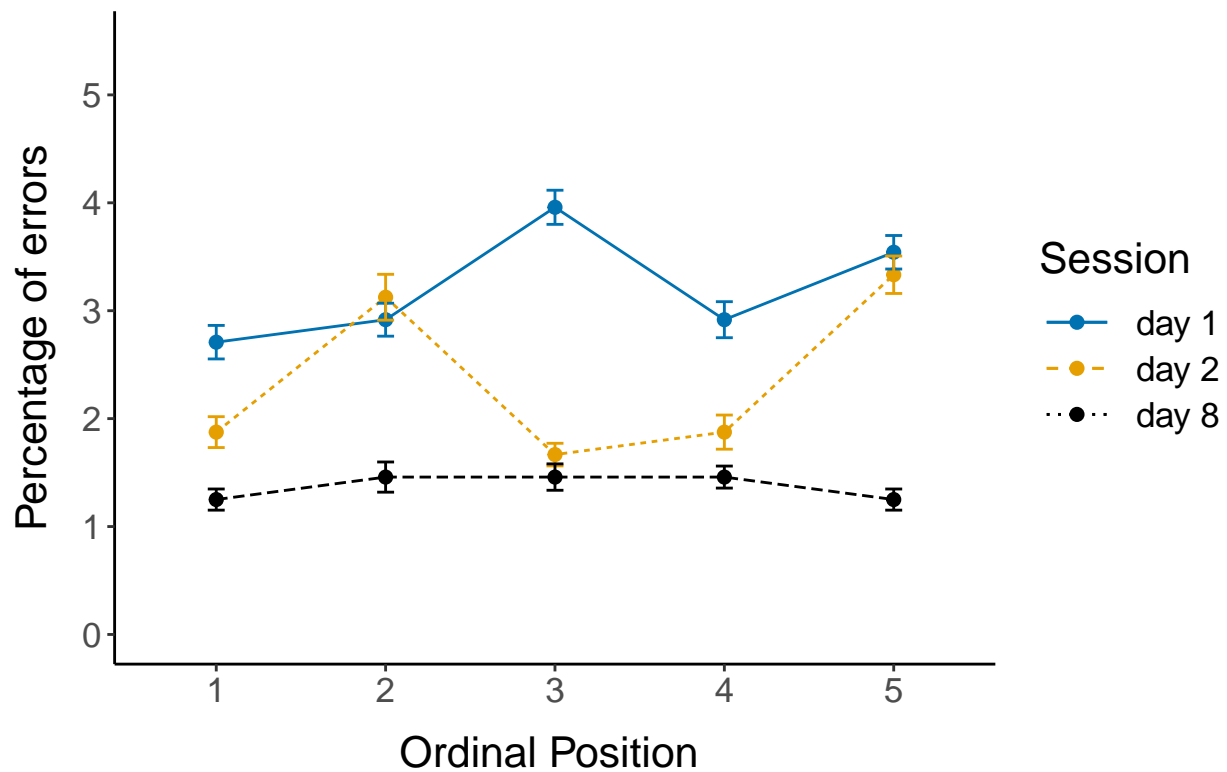

```
filename <- "CSI_online_spoken_plot_error.pdf"
ggsave(plot_error, filename =
  here::here("results", "figures", filename),
  width = 18, height = 13, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("data", "verbal_CSI", "Plots", filename))


ggsave(plot_error_PWA, filename =
  here::here("results", "figures",
    "CSI_online_spoken_plot_error_PWA.pdf"),
  width = 18, height = 13, units = "cm",
  dpi = 300, device = cairo_pdf)
ggsave(plot_error_control, filename =
  here::here("results", "figures",
    "CSI_online_spoken_plot_error_control.pdf"),
  width = 18, height = 13, units = "cm",
  dpi = 300, device = cairo_pdf)
```

```
(plot_errors_all <- ggplot(data=df_errors,
  aes(x=trial, y=error_class, linetype=session,
    shape=session, color=group)) +
  stat_summary(aes(color=group, shape=session), fun=mean,
    geom="point", size = 2)+
```

```

apatheme+
labs(x="Trial ",y ="Errors")+
scale_color_manual(values=c(control_color, PWA_color))

```

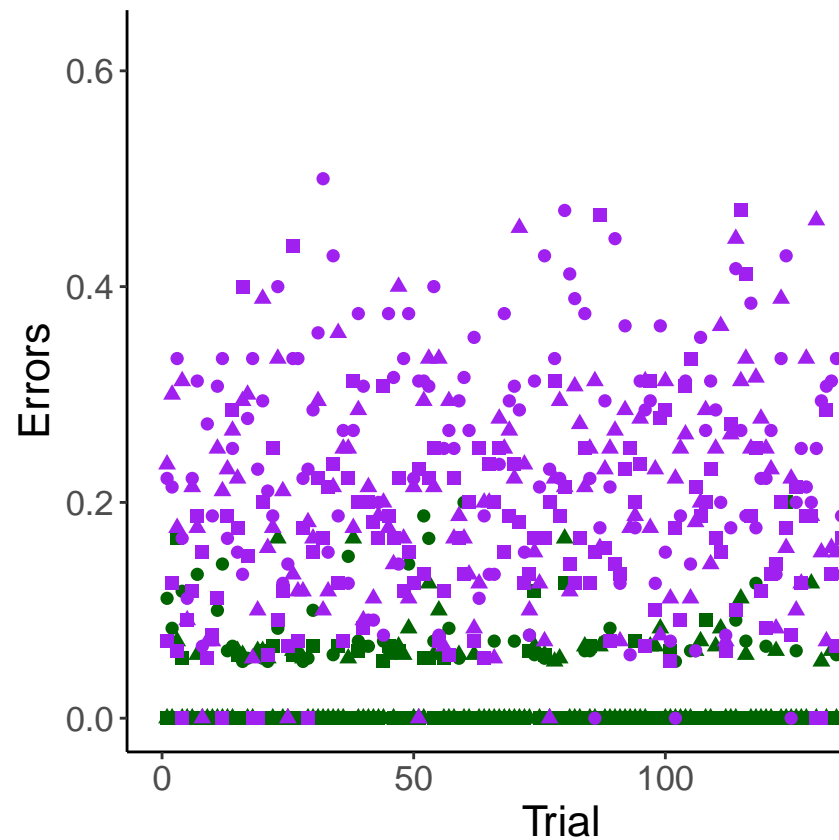

Control: Plot Errors accross the experiment

```

filename <- "CSI_online_aphasia_errors_across_experiment.pdf"
ggsave(plot_errors_all, filename =
  here::here("results", "figures", filename),
  width = 18, height = 13, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))

```

GLMM with binomial distribution

Contrast coding *Center predictor variable*

```

df_errors_PWA <- df_errors %>% filter(group=="PWA") %>% droplevels()
df_errors_PWA$PosOr.cont <-
  c(scale(as.numeric(as.character(df_errors_PWA$PosOr))),
    center = T, scale = F))

df_errors$PosOr.cont <-
  c(scale(as.numeric(as.character(df_errors$PosOr))),
    center = T, scale = F))

```

Contrast coding

```
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_errors$session)<-my.simple
levels(df_errors$session)
```

```
## [1] "1" "2" "3"
```

```
contrasts(df_errors_PWA$session)<-my.simple
levels(df_RTs_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Define contrast of group
contrasts(df_errors$group) <- MASS::contr.sdif(2)
levels(df_errors$group)
```

```
## [1] "control" "PWA"
```

```
levels(df_errors_PWA$group)
```

```
## [1] "PWA"
```

Error analyses with factors Ordinal position x Session x Group GLMM

Compute the full model with the maximal random structure. If model fails to converge, increase optimizer iterations, exclude correlation parameters, and step-wise reduce the random structure by excluding variables explaining close to zero variance. If the model converges, test whether it also converges with correlation parameters.

```
# m2_error <- glmer(error_class ~ PosOr.cont*session*group +
#                   (PosOr.cont*session/subject) +
#                   (PosOr.cont*session*group/category) ,
#                   data=df_errors, family = "binomial",
#                   control=glmerControl(optimizer = "bobyqa"))

# 2) The model fit is singular -> increase optimizer iterations
# m2_error <- glmer(error_class ~ PosOr.cont*session +
#                   (PosOr.cont*session/subject) +
#                   (PosOr.cont*session*group/category) ,
```



```

#           data=df_errors, family = "binomial",
#           control=glmerControl(optimizer = "bobyqa",
#                                optCtrl = list(maxfun = 2e5)))

# 3) Further reduce by excluding correlation parameters
# m2_error <- afex::lmer_alt(error_class ~ PosOr.cont*session*group +
# (PosOr.cont*session||subject) +
# (PosOr.cont*session*group||category) ,
# data=df_errors, family = "binomial",
# control=glmerControl(optimizer = "bobyqa",
#                       optCtrl = list(maxfun = 2e5)))

# 4) Model fit is still singular -> further reduce
# m2_error <- afex::lmer_alt(error_class ~ PosOr.cont*session*group +
# (PosOr.cont+session||subject) +
# (PosOr.cont*session*group-session-PosOr.cont:session-
# PosOr.cont:group-session:group||category) ,
# data=df_errors, family = "binomial",
# control=glmerControl(optimizer = "bobyqa",
#                       optCtrl = list(maxfun = 2e5)))
# m2_error <- afex::lmer_alt(error_class ~ PosOr.cont*session*group +
# (PosOr.cont||subject) +
# (PosOr.cont*session*group-
# session-PosOr.cont:session-
# PosOr.cont:group-
# session:group-PosOr.cont||category) ,
# data=df_errors, family = "binomial",
# control=glmerControl(optimizer = "bobyqa",
#                       optCtrl = list(maxfun = 2e5)))
m2_error <- afex::lmer_alt(error_class ~ PosOr.cont*session*group +
(PosOr.cont||subject) +
(group||category) ,
data=df_errors, family = "binomial",
control=glmerControl(optimizer = "bobyqa",
                      optCtrl = list(maxfun = 2e5)))

# rePCA(m2_error)
didLmerConverge(m2_error)

```

```

## The relative maximum gradient of 0.0000223 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.

```

```
summary(m2_error)
```

```

## Generalized linear mixed model fit by maximum likelihood (Laplace
## Approximation) [glmerMod]
## Family: binomial ( logit )
## Formula: error_class ~ PosOr.cont * session * group + (1 + re1.PosOr.cont ||
## subject) + (1 + re2.group2.1 || category)
## Data: data
## Control: glmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
##      AIC      BIC   logLik deviance df.resid
##  6765.5   6886.5  -3366.7   6733.5    14281

```

```

##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -3.6792 -0.2733 -0.1475 -0.0766 18.1422
##
## Random effects:
##      Groups      Name              Variance Std.Dev.
## subject      (Intercept)         1.3600   1.1662
## subject.1    re1.Pos0r.cont      0.0122   0.1105
## category     (Intercept)         0.5851   0.7649
## category.1   re2.group2.1        0.5462   0.7390
## Number of obs: 14297, groups:  subject, 40; category, 24
##
## Fixed effects:
##              Estimate Std. Error z value      Pr(>|z|)
## (Intercept)    -3.177551    0.250802 -12.670 < 0.0000000000000002
## Pos0r.cont       0.071908    0.036801   1.954      0.05071
## session2        -0.358856    0.097417  -3.684      0.00023
## session3        -0.802964    0.111893  -7.176    0.0000000000000717
## group2-1         2.622822    0.419473   6.253    0.000000000403528
## Pos0r.cont:session2 -0.009072    0.068635  -0.132      0.89485
## Pos0r.cont:session3 -0.048103    0.078753  -0.611      0.54133
## Pos0r.cont:group2-1  0.055179    0.073630   0.749      0.45361
## session2:group2-1  -0.063716    0.194829  -0.327      0.74364
## session3:group2-1   0.193391    0.223752   0.864      0.38742
## Pos0r.cont:session2:group2-1 -0.067615    0.137272  -0.493      0.62232
## Pos0r.cont:session3:group2-1  0.025370    0.157507   0.161      0.87204
##
## (Intercept)          ***
## Pos0r.cont            .
## session2              ***
## session3              ***
## group2-1              ***
## Pos0r.cont:session2
## Pos0r.cont:session3
## Pos0r.cont:group2-1
## session2:group2-1
## session3:group2-1
## Pos0r.cont:session2:group2-1
## Pos0r.cont:session3:group2-1
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr) Ps0r.c sessn2 sessn3 grp2-1 Ps0.:2 Ps0.:3 P0.:2- s2:2-1
## Pos0r.cont   -0.008
## session2      0.020 -0.012
## session3      0.056  0.012  0.383
## group2-1     -0.065  0.005 -0.017 -0.056
## Ps0r.cnt:s2  -0.002  0.080 -0.073 -0.024  0.004
## Ps0r.cnt:s3   0.004  0.243 -0.024 -0.024 -0.004  0.382
## Ps0r.cn:2-1   0.005 -0.496  0.012 -0.013 -0.010 -0.061 -0.210
## sssn2:gr2-1  -0.014  0.012 -0.625 -0.227  0.023  0.058  0.017 -0.012
## sssn3:gr2-1  -0.046 -0.014 -0.227 -0.693  0.066  0.017  0.011  0.012  0.383

```

```
## PsOr.:2:2-1  0.003 -0.061  0.058  0.017 -0.003 -0.624 -0.226  0.080 -0.073
## PsOr.:3:2-1 -0.003 -0.210  0.017  0.011  0.004 -0.226 -0.693  0.243 -0.024
##              s3:2-1 P0.:2:
## PosOr.cont
## session2
## session3
## group2-1
## PsOr.cnt:s2
## PsOr.cnt:s3
## PsOr.cn:2-1
## sssn2:gr2-1
## sssn3:gr2-1
## PsOr.:2:2-1 -0.024
## PsOr.:3:2-1 -0.024  0.382
```

```
# save model output
saveRDS(m2_error, file = here::here("results", "tables", "CSI_online_aphasia_SessionxGroup_glmm_errors.RDS"),
tab_model(m2_error, transform = NULL,
          show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
          title = "GLMM (Binomial distribution) of Errors Predicted by Ordinal Position and Session,
PWA only",
          dv.labels = "Error Rate",
          #string.pred = "",
          string.stat = "z-Value",
          file =
            here::here(
              "results", "tables",
              "CSI_online_aphasia_SessionxGroup_glmm_errors.html"))
```

GLMM (Binomial distribution) of Errors Predicted by Ordinal Position and Session, PWA only

Error Rate

Predictors

Log-Odds

CI

z-Value

p

(Intercept)

-3.18

-3.67 – -2.69

-12.67

<0.001

PosOr cont

0.07

-0.00 – 0.14

1.95

0.051
 session [2]
 -0.36
 -0.55 – -0.17
 -3.68
 <0.001
 session [3]
 -0.80
 -1.02 – -0.58
 -7.18
 <0.001
 group2-1
 2.62
 1.80 – 3.44
 6.25
 <0.001
 PosOr cont \times session [2]
 -0.01
 -0.14 – 0.13
 -0.13
 0.895
 PosOr cont \times session [3]
 -0.05
 -0.20 – 0.11
 -0.61
 0.541
 PosOr.cont:group2-1
 0.06
 -0.09 – 0.20
 0.75
 0.454
 session2:group2-1
 -0.06
 -0.45 – 0.32
 -0.33
 0.744

```

session3:group2-1
0.19
-0.25 – 0.63
0.86
0.387
PosOr.cont:session2:group2-1
-0.07
-0.34 – 0.20
-0.49
0.622
PosOr.cont:session3:group2-1
0.03
-0.28 – 0.33
0.16
0.872
N subject
40
N category
24
Observations
14297
Make the estimates interpretable

```

```

# Odds Ratio:
x <- data.frame(summary(m2_error)$coefficients)
x$Odds_Ratio <- plogis(x$Estimate)
x %>% dplyr::select(Estimate, Odds_Ratio) %>%
  mutate(Estimate=round(Estimate,2),
         Odds_Ratio=round(Odds_Ratio,2))

```

##	Estimate	Odds_Ratio
## (Intercept)	-3.18	0.04
## PosOr.cont	0.07	0.52
## session2	-0.36	0.41
## session3	-0.80	0.31
## group2-1	2.62	0.93
## PosOr.cont:session2	-0.01	0.50
## PosOr.cont:session3	-0.05	0.49
## PosOr.cont:group2-1	0.06	0.51
## session2:group2-1	-0.06	0.48
## session3:group2-1	0.19	0.55
## PosOr.cont:session2:group2-1	-0.07	0.48
## PosOr.cont:session3:group2-1	0.03	0.51

PWA only GLMM

```
# m1_error <- glmer(error_class ~ PosOr.cont*session +
#                   (PosOr.cont*session/subject) +
#                   (PosOr.cont*session/category) ,
#                   data =df_errors_PWA, family = "binomial",
#                   control=glmerControl(optimizer = "bobyqa"))

# 2) The model fit is singular -> reduce optimizer iterations
# m1_error <- glmer(error_class ~ PosOr.cont*session +
#                   (PosOr.cont*session/subject) +
#                   (PosOr.cont*session/category) ,
#                   data =df_errors_PWA, family = "binomial",
#                   control=glmerControl(optimizer = "bobyqa",
#                                         optCtrl = list(maxfun = 2e5)))

# 3) Further reduce by excluding correlation parameters
# m1_error <- afex::lmer_alt(error_class ~ PosOr.cont*session +
#                            (PosOr.cont*session//subject) +
#                            (PosOr.cont*session//category) ,
#                            data =df_errors_PWA, family = "binomial",
#                            control=glmerControl(optimizer = "bobyqa",
#                                                  optCtrl = list(maxfun = 2e5)))

# 4) Model fit is still singular -> further reduce
# m1_error <- afex::lmer_alt(error_class ~ PosOr.cont*session +
#                            (PosOr.cont*session//subject) +
#                            (1/category) ,
#                            data =df_errors_PWA, family = "binomial",
#                            control=glmerControl(optimizer = "bobyqa",
#                                                  optCtrl = list(maxfun = 2e5)))
# m1_error <- afex::lmer_alt(error_class ~ PosOr.cont*session +
#                            (PosOr.cont+session//subject) +
#                            (1/category) ,
#                            data =df_errors_PWA, family = "binomial",
#                            control=glmerControl(optimizer = "bobyqa",
#                                                  optCtrl = list(maxfun = 2e5)))
m1_error <- glmer(error_class ~ PosOr.cont*session +
                  (PosOr.cont |subject) +
                  (1|category) ,
                  data =df_errors_PWA, family = "binomial",
                  control=glmerControl(optimizer = "bobyqa",
                                        optCtrl = list(maxfun = 2e5)))
rePCA(m1_error)
```

```
## $category
## Standard deviations (1, ..., p=1):
## [1] 0.5889541
##
## Rotation (n x k) = (1 x 1):
##      [,1]
## [1,]    1
##
## $subject
```

```
## Standard deviations (1, ..., p=2):
## [1] 1.5014522 0.1293152
##
## Rotation (n x k) = (2 x 2):
##           [,1]      [,2]
## [1,] -0.99950726 -0.03138835
## [2,] -0.03138835  0.99950726
##
## attr("class")
## [1] "prcomplst"
```

```
didLmerConverge(m1_error)
```

```
## The relative maximum gradient of 0.00000289 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
summary(m1_error)
```

```
## Generalized linear mixed model fit by maximum likelihood (Laplace
## Approximation) [glmerMod]
## Family: binomial ( logit )
## Formula: error_class ~ PosOr.cont * session + (PosOr.cont | subject) +
##           (1 | category)
## Data: df_errors_PWA
## Control: glmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
##           AIC      BIC   logLik deviance df.resid
##    5336.7    5405.5  -2658.3   5316.7     7168
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -3.7692 -0.3964 -0.2423 -0.1216  10.6603
##
## Random effects:
## Groups Name Variance Std.Dev. Corr
## category (Intercept) 0.34687  0.5890
## subject (Intercept) 2.25215  1.5007
## PosOr.cont 0.01893  0.1376  0.34
## Number of obs: 7178, groups: category, 24; subject, 20
##
## Fixed effects:
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)    -1.86442    0.35937  -5.188 0.000000212474493786 ***
## PosOr.cont      0.08469    0.04309   1.965    0.0494 *
## session2     -0.39126    0.08430  -4.642 0.000003457979079708 ***
## session3     -0.70618    0.08763  -8.059 0.000000000000000771 ***
## PosOr.cont:session2 -0.04642    0.05957  -0.779    0.4358
## PosOr.cont:session3 -0.04163    0.06188  -0.673    0.5011
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr) PsOr.c sessn2 sessn3 Ps0.:2
```

```
## PosOr.cont    0.224
## session2      0.009  0.004
## session3      0.017  0.000  0.460
## PsOr.cnt:s2   0.001  0.050 -0.028 -0.014
## PsOr.cnt:s3   0.000  0.094 -0.014 -0.029  0.459
```

```
# save model output
saveRDS(m1_error, file =
  here::here("results", "tables",
    "CSI_online_aphasia_PWA_glmm_errors.RDS"))
tab_model(m1_error, transform = NULL,
  show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
  title = "GLMM (Binomial distribution) of Errors Predicted by Ordinal Position and Session,
  PWA only",
  dv.labels = "Error Rate",
  string.stat = "z-Value",
  file = here::here(
    "results", "tables",
    "CSI_online_aphasia_PWA_glmm_errors.html"))
```

GLMM (Binomial distribution) of Errors Predicted by Ordinal Position and Session, PWA only

Error Rate

Predictors

Log-Odds

CI

z-Value

p

(Intercept)

-1.86

-2.57 – -1.16

-5.19

<0.001

PosOr cont

0.08

0.00 – 0.17

1.97

0.049

session [2]

-0.39

-0.56 – -0.23

-4.64

<0.001


```

session [3]
-0.71
-0.88 – -0.53
-8.06
<0.001
PosOr cont × session [2]
-0.05
-0.16 – 0.07
-0.78
0.436
PosOr cont × session [3]
-0.04
-0.16 – 0.08
-0.67
0.501
N subject
20
N category
24
Observations
7178
Make the estimates interpretable

```

```

# Odds Ratio:
x <- data.frame(summary(m1_error)$coefficients)
x$Odds_Ratio <- plogis(x$Estimate)
x %>% dplyr::select(Estimate, Odds_Ratio) %>%
  mutate(Estimate=round(Estimate,2),
         Odds_Ratio=round(Odds_Ratio,2))

```

##	Estimate	Odds_Ratio
## (Intercept)	-1.86	0.13
## PosOr.cont	0.08	0.52
## session2	-0.39	0.40
## session3	-0.71	0.33
## PosOr.cont:session2	-0.05	0.49
## PosOr.cont:session3	-0.04	0.49

```

# m2_error_control <- glmer(error_class ~ PosOr.cont*session +
#                           (PosOr.cont*session/subject) +
#                           (PosOr.cont*session/category) ,
#                           data =df_errors[df_errors$group=="control",],
#                           family = "binomial",
#                           control=glmerControl(optimizer = "bobyqa"))
# m2_error_control <- afex::lmer_alt(error_class ~ PosOr.cont*session +
#                                   (PosOr.cont*session//subject) +
#                                   (PosOr.cont*session//category) ,
#                                   data =df_errors[df_errors$group=="control",],
#                                   family = "binomial",
#                                   control=glmerControl(optimizer = "bobyqa"))
# m2_error_control <- afex::lmer_alt(error_class ~ PosOr.cont*session +
#                                   (1/subject) +
#                                   (PosOr.cont*session-PosOr.cont-session//category) ,
#                                   data =df_errors[df_errors$group=="control",],
#                                   family = "binomial",
#                                   control=glmerControl(optimizer = "bobyqa"))
m2_error_control <- glmer(error_class ~ PosOr.cont*session +
                          (1|subject) +
                          (1|category) ,
                          data =df_errors[df_errors$group=="control",],
                          family = "binomial",
                          control=glmerControl(optimizer = "bobyqa"))

# rePCA(m2_error_control)
didLmerConverge(m2_error_control)

```

Exploratory follow-up: Make sure there is enough power in the control group

```
## The relative maximum gradient of 0.0000012 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
summary(m2_error_control)
```

```
## Generalized linear mixed model fit by maximum likelihood (Laplace
## Approximation) [glmerMod]
## Family: binomial ( logit )
## Formula: error_class ~ PosOr.cont * session + (1 | subject) + (1 | category)
## Data: df_errors[df_errors$group == "control", ]
## Control: glmerControl(optimizer = "bobyqa")
##
##      AIC      BIC    logLik deviance df.resid
##  1414.1   1469.1   -699.1   1398.1     7111
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -0.6002 -0.1607 -0.0987 -0.0622  22.0736
##
## Random effects:
## Groups Name Variance Std.Dev.
## category (Intercept) 1.7351  1.3172
## subject (Intercept) 0.2353  0.4851
```

```
## Number of obs: 7119, groups:  category, 24; subject, 20
```

```
##
```

```
## Fixed effects:
```

```
##              Estimate Std. Error z value      Pr(>|z|)
## (Intercept)   -4.61206    0.32706 -14.102 < 0.0000000000000002 ***
## Pos0r.cont      0.04362    0.05789   0.753      0.4512
## session2     -0.33004    0.17645  -1.870      0.0614 .
## session3     -0.89977    0.20691  -4.349    0.0000137 ***
## Pos0r.cont:session2  0.02371    0.12453   0.190      0.8490
## Pos0r.cont:session3 -0.06058    0.14603  -0.415      0.6783
```

```
## ---
```

```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
##
```

```
## Correlation of Fixed Effects:
```

```
##              (Intr) Ps0r.c sessn2 sessn3 Ps0.:2
## Pos0r.cont   -0.012
## session2      0.029 -0.017
## session3      0.086  0.017  0.367
## Ps0r.cnt:s2  -0.005  0.101 -0.082 -0.025
## Ps0r.cnt:s3   0.006  0.315 -0.025 -0.021  0.367
```

```
# save model output
```

```
saveRDS(m2_error_control, file = here::here("results", "tables", "CSI_online_aphasia_Session_control_group_errors.html"),
  tab_model(m2_error_control, transform = NULL,
    show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
    title = "GLMM (Binomial distribution) of Errors Predicted by Ordinal Position and Session, Control group only",
    dv.labels = "Error Rate",
    #string.pred = "",
    string.stat = "z-Value",
    file = here::here(
      "results", "tables",
      "CSI_online_aphasia_Session_control_group_errors.html"))
```

GLMM (Binomial distribution) of Errors Predicted by Ordinal Position and Session, Control group only

Error Rate

Predictors

Log-Odds

CI

z-Value

p

(Intercept)

-4.61

-5.25 – -3.97

-14.10

<0.001

PosOr cont
0.04
-0.07 – 0.16
0.75
0.451
session [2]
-0.33
-0.68 – 0.02
-1.87
0.061
session [3]
-0.90
-1.31 – -0.49
-4.35
<0.001
PosOr cont × session [2]
0.02
-0.22 – 0.27
0.19
0.849
PosOr cont × session [3]
-0.06
-0.35 – 0.23
-0.41
0.678
N subject
20
N category
24
Observations
7119

Control analyses: Covariate tests (AAT, LEMO test, MPO, lesion size)

Add covariates individually into the converging models, and use LRT to assess which covariates explain additional variance when added to the main model. Then conduct one model with all covariates that explain additional variance.

Add covariates

```
read.csv2(here::here("data", "additional_data",
                     "questionnaire-test_data.csv")) -> tests
```

```
read.csv2(here::here("data", "additional_data",
                     "MRT_ROIs.csv")) -> mrt
mrt$Proband_in <- mrt$Proband_in+100
mrt$SoSci_ID <- toupper(mrt$SoSci_ID)
all(mrt$SoSci_ID %in% df_RTs_PWA$OR02_01) &
  all(df_RTs_PWA$OR02_01 %in% mrt$SoSci_ID)
```

```
## [1] TRUE
```

```
# table(df_RTs_PWA$subject)
```

Combine with PWA data

```
df_RTs_PWA$TokenTest <- NA
df_RTs_PWA$AAT <- NA
df_RTs_PWA$AAT_spontansprache <- NA
df_RTs_PWA$LEMO <- NA
df_RTs_PWA$mont_post_onset <- NA
df_RTs_PWA$LHoverall <- NA
df_RTs_PWA$ATL <- NA
df_RTs_PWA$IFG <- NA
df_RTs_PWA$MTG_ITG <- NA
df_RTs_PWA$SMG_AG <- NA
df_RTs_PWA$Precentral <- NA
df_RTs_PWA$ID <- NA
df_RTs_PWA$SoSci_ID <- NA
df_RTs_PWA$Proband_in <- NA
for(i in 1:nrow(mrt)){
  df_RTs_PWA$TokenTest[
    toupper(df_RTs_PWA$OR02_01) == toupper(tests$Code[i])] <-
    as.numeric(as.character(tests$Token.Test..Prozentrang.[i]))
  df_RTs_PWA$AAT[
    toupper(df_RTs_PWA$OR02_01) == toupper(tests$Code[i])] <-
    as.numeric(as.character(tests$AAT.Ben.gesamt..Prozentrang.[i]))
}
```

```

df_RTs_PWA$AAT_spontansprache[
  toupper(df_RTs_PWA$OR02_01) == toupper(tests$Code[i])] <-
  as.numeric(as.character(tests$AAT.Untertest.Spontansprache.Semantik..Punktwert.Anzahl.korrekt.[i]))
df_RTs_PWA$LEMO[
  toupper(df_RTs_PWA$OR02_01) == toupper(tests$Code[i])] <-
  as.numeric(as.character(tests$LEMO.V15.Syn.aud..Mit.Abl..n.40...Anz.korr[i]))
df_RTs_PWA$months_post_onset[
  toupper(df_RTs_PWA$OR02_01) == toupper(tests$Code[i])] <-
  as.numeric(as.character(tests$MPO..months.post.onset.[i]))
df_RTs_PWA$LHoverall[
  df_RTs_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  as.numeric(as.character(mrt$LH.Gesamt[i]))
df_RTs_PWA$ATL[
  df_RTs_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  as.numeric(as.character(mrt$ATL[i]))
df_RTs_PWA$IFG[
  df_RTs_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  as.numeric(as.character(mrt$IFGorb.op.tri[i]))
df_RTs_PWA$MTG_ITG[
  df_RTs_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  as.numeric(as.character(mrt$MTG...ITG[i]))
df_RTs_PWA$SMG_AG[
  df_RTs_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  as.numeric(as.character(mrt$SMG...AG[i]))
df_RTs_PWA$Precentral[
  df_RTs_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  as.numeric(as.character(mrt$Precentral[i]))
df_RTs_PWA$ID[
  df_RTs_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  mrt$ID[i]
df_RTs_PWA$SoSci_ID[
  df_RTs_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  mrt$SoSci_ID[i]
df_RTs_PWA$Proband_in[
  df_RTs_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  as.numeric(as.character(mrt$Proband_in[i]))
}

```

Warning: Unknown or uninitialised column: 'months_post_onset'.

```
sum(!(df_RTs_PWA$OR02_01==df_RTs_PWA$SoSci_ID), na.rm=T)
```

```
## [1] 0
```

```

write.csv(df_RTs_PWA, here::here(
  "data", "additional_data",
  "CSI_online_aphasia_raw_data_for_RT_analyses_incl_MRT.csv"))

```

```

df_errors_PWA$TokenTest <- NA
df_errors_PWA$AAT <- NA
df_errors_PWA$AAT_spontansprache <- NA

```

```

df_errors_PWA$LEMO <- NA
df_errors_PWA$mont_post_onset <- NA
df_errors_PWA$LHoverall <- NA
df_errors_PWA$ATL <- NA
df_errors_PWA$IFG <- NA
df_errors_PWA$MTG_ITG <- NA
df_errors_PWA$SMG_AG <- NA
df_errors_PWA$Precentral <- NA
df_errors_PWA$ID <- NA
df_errors_PWA$SoSci_ID <- NA
df_errors_PWA$Proband_in <- NA
for(i in 1:nrow(mrt)){
  df_errors_PWA$TokenTest[
    toupper(df_errors_PWA$OR02_01) == toupper(tests$Code[i])] <-
    as.numeric(as.character(tests$Token.Test..Prozentrang.[i]))
  df_errors_PWA$AAT[
    toupper(df_errors_PWA$OR02_01) == toupper(tests$Code[i])] <-
    as.numeric(as.character(tests$AAT.Ben.gesamt..Prozentrang.[i]))
  df_errors_PWA$AAT_spontansprache[
    toupper(df_errors_PWA$OR02_01) == toupper(tests$Code[i])] <-
    as.numeric(as.character(
      tests$AAT.Untertest.Spontansprache.Semantik..Punktwert.Anzahl.korrekt.[i]))
  df_errors_PWA$LEMO[
    toupper(df_errors_PWA$OR02_01) == toupper(tests$Code[i])] <-
    as.numeric(as.character(
      tests$LEMO.V15.Syn.aud..Mit.Abl..n.40...Anz.korr[i]))
  df_errors_PWA$months_post_onset[
    toupper(df_errors_PWA$OR02_01) == toupper(tests$Code[i])] <-
    as.numeric(as.character(tests$MPO..months.post.onset.[i]))
  df_errors_PWA$LHoverall[
    df_errors_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
    as.numeric(as.character(mrt$LH.Gesamt[i]))
  df_errors_PWA$ATL[
    df_errors_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
    as.numeric(as.character(mrt$ATL[i]))
  df_errors_PWA$IFG[
    df_errors_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
    as.numeric(as.character(mrt$IFGorb.op.tri[i]))
  df_errors_PWA$MTG_ITG[
    df_errors_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
    as.numeric(as.character(mrt$MTG...ITG[i]))
  df_errors_PWA$SMG_AG[
    df_errors_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
    as.numeric(as.character(mrt$SMG...AG[i]))
  df_errors_PWA$Precentral[
    df_errors_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
    as.numeric(as.character(mrt$Precentral[i]))
  df_errors_PWA$ID[
    df_errors_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
    mrt$ID[i]
  df_errors_PWA$SoSci_ID[
    df_errors_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
    mrt$SoSci_ID[i]
}

```

```
df_errors_PWA$Proband_in[
  df_errors_PWA$OR02_01 == mrt$SoSci_ID[i]] <-
  as.numeric(as.character(mrt$Proband_in[i]))
}
```

```
## Warning: Unknown or uninitialised column: 'months_post_onset'.
```

```
sum(!(df_errors_PWA$OR02_01==df_errors_PWA$SoSci_ID), na.rm=T)
```

```
## [1] 0
```

```
write.csv(df_errors_PWA, here::here(
  "data", "additional_data",
  "CSI_online_aphasia_raw_data_for_error_analyses_incl_MRT.csv"))
```

Add tests individually and assess whether they explain additional variance

AAT: Token test

RTs Add into converging model

```
df_RT_PWA$PosOr.cont <- scale(as.numeric(as.character(df_RT_PWA$PosOr)),
                              center = T, scale = F)
table(df_RT_PWA$PosOr.cont)
```

```
##
## -1.96955418629938 -0.969554186299384 0.0304458137006161 1.03044581370062
##          1132          1117          1103          1119
##  2.03044581370062
##          1047
```

```
mean(df_RT_PWA$PosOr.cont); sd(df_RT_PWA$PosOr.cont)
```

```
## [1] -0.0000000000000001123241
```

```
## [1] 1.40862
```

```
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##          2          3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```



```
contrasts(df_RTSPWA$session)<-my.simple
levels(df_RTSPWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center token test
```

```
df_RTSPWA$TokenTest_c <- scale(df_RTSPWA$TokenTest, center=T, scale=T)
```

```
m1_lmm_PWA_tt <- lmer(VOTlog ~ PosOr.cont*session*TokenTest_c +
  (PosOr.cont+session|subject) +
  (1|category),
  data = df_RTSPWA,
  control=lmerControl(optimizer = "bobyqa",
    optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_lmm_PWA_tt)
```

```
## The relative maximum gradient of 0.000000998 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored
```

```
# summary(m1_lmm_PWA_tt)
```

```
# anova(m1_lmm_PWA_tt)
```

```
#
```

```
# saveRDS(m1_lmm_PWA_tt, file = here::here("results", "tables", "CSI_online_aphasia_PWA_lmm_VOT_plus-T"))
```

```
# tab_model(m1_lmm_PWA_tt, transform = NULL,
```

```
#   show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
```

```
#   title = "LMM of VOTs Predicted by Ordinal Position and Session",
```

```
#   df.method = "satterthwaite",
```

```
#   dv.labels = "Vocal Onset Time (log-transformed)",
```

```
#   #string.pred = "",
```

```
#   string.stat = "t-Value",
```

```
#   file = here::here(
```

```
#     "results", "tables",
```

```
#     "CSI_online_aphasia_PWA_control_lmm_VOT-TokenTest.html"))
```

Does the model with Token test fit the data better? -> yes!

```
#summary(m1_lmm_PWA)
```

```
anova(m1_lmm_PWA, m1_lmm_PWA_tt)
```

```
## refitting model(s) with ML (instead of REML)
```

```
## Data: df_RTSPWA
```

```
## Models:
```

```
## m1_lmm_PWA: VOTlog ~ PosOr.cont * session + (PosOr.cont + session | subject) + (1 | category)
```

```
## m1_lmm_PWA_tt: VOTlog ~ PosOr.cont * session * TokenTest_c + (PosOr.cont + session | subject) + (1 |
```

```
##      npar    AIC    BIC logLik deviance Chisq Df Pr(>Chisq)
```

```
## m1_lmm_PWA      18 1697.5 1816.5 -830.73   1661.5
```

```
## m1_lmm_PWA_tt   24 1696.5 1855.2 -824.23   1648.5 13.004  6    0.04297 *
```

```
## ---
```

```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Errors Add into converging model

```
df_errors_PWA$PosOr.cont <- scale(as.numeric(as.character(df_errors_PWA$PosOr)),
                                  center = T, scale = F)
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_errors_PWA$session)<-my.simple
levels(df_errors_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center token test
df_errors_PWA$TokenTest_c <-
  scale(df_errors_PWA$TokenTest, center=T, scale=T)
```

```
m1_glmm_PWA_tt <- glmer(error_class ~ PosOr.cont*session*TokenTest_c +
                        (PosOr.cont |subject) +
                        (1|category) ,
                        data =df_errors_PWA, family = "binomial",
                        control=glmerControl(optimizer = "bobyqa",
                                              optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_glmm_PWA_tt)
```

```
## The relative maximum gradient of 0.00000284 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored
```

```
# summary(m1_glmm_PWA_tt)
# anova(m1_glmm_PWA_tt)
#
# saveRDS(m1_glmm_PWA_tt, file = here::here("results", "tables", "CSI_online_aphasia_PWA_lmm_error_plu
# tab_model(m1_glmm_PWA_tt,transform = NULL,
#           show.re.var = F, show.stat = T,show.r2 = F,show.icc = F,
#           title = "GLMM of errors Predicted by Ordinal Position and Session",
#           dv.labels = "Errors",
#           #string.pred = "",
#           string.stat = "z-Value",
#           file = here::here(
#             "results", "tables",
#             "CSI_online_aphasia_PWA_control_glmm_error_TokenTest.html"))
```

Does the model with Token test fit the data better? -> yes!

```
#summary(m1_lmm_PWA)
anova(m1_error, m1_glmm_PWA_tt)
```

```
## Data: df_errors_PWA
## Models:
## m1_error: error_class ~ PosOr.cont * session + (PosOr.cont | subject) + (1 | category)
## m1_glmm_PWA_tt: error_class ~ PosOr.cont * session * TokenTest_c + (PosOr.cont | subject) + (1 | category)
##          npar      AIC      BIC logLik deviance Chisq Df Pr(>Chisq)
## m1_error      10 5336.7 5405.5 -2658.3   5316.7
## m1_glmm_PWA_tt 16 5326.5 5436.5 -2647.2   5294.5 22.208  6    0.00111 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

AAT: Naming test

RTs Add into converging model

```
df_RTs_PWA$PosOr.cont <- scale(as.numeric(as.character(df_RTs_PWA$PosOr))),
                             center = T, scale = F)
table(df_RTs_PWA$PosOr.cont)
```

```
##
## -1.96955418629938 -0.969554186299384 0.0304458137006161 1.03044581370062
##          1132          1117          1103          1119
## 2.03044581370062
##          1047
```

```
mean(df_RTs_PWA$PosOr.cont); sd(df_RTs_PWA$PosOr.cont)
```

```
## [1] -0.00000000000000001123241
```

```
## [1] 1.40862
```

```
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##          2          3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_RTs_PWA$session)<-my.simple
levels(df_RTs_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center naming test
df_RTs_PWA$AAT_c <- scale(df_RTs_PWA$AAT, center=T, scale=T)

m1_lmm_PWA_aat <- lmer(VOTlog ~ PosOr.cont*session*AAT_c +
  (PosOr.cont+session|subject) +
  (1|category),
  data = df_RTs_PWA,
  control=lmerControl(optimizer = "bobyqa",
    optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_lmm_PWA_aat)
```

```
## The relative maximum gradient of 0.0000013 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored
```

```
# summary(m1_lmm_PWA_aat)
# anova(m1_lmm_PWA_aat)
#
# saveRDS(m1_lmm_PWA_aat, file = here::here("results", "tables", "CSI_online_aphasia_PWA_lmm_VOT_plus-
# tab_model(m1_lmm_PWA_aat, transform = NULL,
#   show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
#   title = "LMM of VOTs Predicted by Ordinal Position and Session",
#   df.method = "satterthwaite",
#   dv.labels = "Vocal Onset Time (log-transformed)",
#   #string.pred = "",
#   string.stat = "t-Value",
#   file = here::here(
#     "results", "tables",
#     "CSI_online_aphasia_PWA_control_lmm_VOT_AachenAphase.html"))
```

Does the model with Token test fit the data better? -> yes!

```
#summary(m1_lmm_PWA)
anova(m1_lmm_PWA, m1_lmm_PWA_aat)
```

```
## refitting model(s) with ML (instead of REML)
```

```
## Data: df_RTs_PWA
## Models:
## m1_lmm_PWA: VOTlog ~ PosOr.cont * session + (PosOr.cont + session | subject) + (1 | category)
## m1_lmm_PWA_aat: VOTlog ~ PosOr.cont * session * AAT_c + (PosOr.cont + session | subject) + (1 | cate
##          npar      AIC      BIC logLik deviance Chisq Df Pr(>Chisq)
## m1_lmm_PWA      18 1697.5 1816.5 -830.73  1661.5
## m1_lmm_PWA_aat   24 1695.9 1854.6 -823.93  1647.9 13.609  6    0.03432 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Errors Add into converging model

```
df_errors_PWA$PosOr.cont <- scale(as.numeric(as.character(df_errors_PWA$PosOr)),
                                center = T, scale = F)

# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_errors_PWA$session)<-my.simple
levels(df_errors_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center naming test
df_errors_PWA$AAT_c <- scale(df_errors_PWA$AAT, center=T, scale=T)
```

```
m1_glmm_PWA_aat <- glmer(error_class ~ PosOr.cont*session*AAT_c +
                        (PosOr.cont |subject) +
                        (1|category) ,
                        data =df_errors_PWA, family = "binomial",
                        control=glmerControl(optimizer = "bobyqa",
                                              optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_glmm_PWA_aat)
```

```
## The relative maximum gradient of 0.00000131 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored
```

```
# summary(m1_glmm_PWA_aat)
# anova(m1_glmm_PWA_aat)
#
# saveRDS(m1_glmm_PWA_aat, file = here::here(
#   "results", "tables", "CSI_online_aphasia_PWA_lmm_error_plus-AAT.RDS"))
# tab_model(m1_glmm_PWA_aat, transform = NULL,
#   show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
#   title = "GLMM of errors Predicted by Ordinal Position and Session",
#   dv.labels = "Errors",
#   #string.pred = "",
#   string.stat = "z-Value",
#   file = here::here(
#     "results", "tables",
#     "CSI_online_aphasia_PWA_control_glmm_error_AAT.html"))
```

Does the model with Naming subtest fit the data better? -> yes!

```
#summary(m1_lmm_PWA)
anova(m1_error, m1_glmm_PWA_aat)
```

```
## Data: df_errors_PWA
## Models:
## m1_error: error_class ~ PosOr.cont * session + (PosOr.cont | subject) + (1 | category)
## m1_glmm_PWA_aat: error_class ~ PosOr.cont * session * AAT_c + (PosOr.cont | subject) + (1 | category)
##          npar      AIC      BIC logLik deviance Chisq Df Pr(>Chisq)
## m1_error      10 5336.7 5405.5 -2658.3   5316.7
## m1_glmm_PWA_aat 16 5318.5 5428.6 -2643.3   5286.5 30.169  6 0.0000365 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

AAT: Spontaneous speech test

RTs Add into converging model

```
df_RTs_PWA$PosOr.cont <- scale(as.numeric(as.character(df_RTs_PWA$PosOr))),
                             center = T, scale = F)
table(df_RTs_PWA$PosOr.cont)
```

```
##
## -1.96955418629938 -0.969554186299384 0.0304458137006161 1.03044581370062
##          1132          1117          1103          1119
## 2.03044581370062
##          1047
```

```
mean(df_RTs_PWA$PosOr.cont); sd(df_RTs_PWA$PosOr.cont)
```

```
## [1] -0.0000000000000001123241
```

```
## [1] 1.40862
```

```
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##          2          3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_RTs_PWA$session)<-my.simple
levels(df_RTs_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center spontaneous speech test
df_RTSPWA$AAT_spontansprache_c <-
  scale(df_RTSPWA$AAT_spontansprache, center=T, scale=T)
```

```
m1_lmm_PWA_aat_spontansprache <- lmer(
  VOTlog ~ PosOr.cont*session*AAT_spontansprache_c +
    (PosOr.cont+session|subject) +
    (1|category),
  data = df_RTSPWA,
  control=lmerControl(optimizer = "bobyqa",
    optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_lmm_PWA_aat_spontansprache)
```

```
## The relative maximum gradient of 0.0000112 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Model converges
```

```
# summary(m1_lmm_PWA_aat_spontansprache)
# anova(m1_lmm_PWA_aat_spontansprache)
#
# saveRDS(m1_lmm_PWA_spontansprache, file = here::here("results", "tables", "CSI_online_aphasia_PWA_lm
# tab_model(m1_lmm_aat_spontansprache, transform = NULL,
#           show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
#           title = "LMM of VOTs Predicted by Ordinal Position and Session",
#           df.method = "satterthwaite",
#           dv.labels = "Vocal Onset Time (log-transformed)",
#           #string.pred = "",
#           string.stat = "t-Value",
#           file = here::here(
#             "results", "tables", "CSI_online_aphasia_PWA_control_lmm_VOT_AachenAphase_Spontansprache.
```

Does the model with Token test fit the data better? -> no, only a trend.

```
#summary(m1_lmm_PWA)
anova(m1_lmm_PWA, m1_lmm_PWA_aat_spontansprache)
```

```
## refitting model(s) with ML (instead of REML)
```

```
## Data: df_RTSPWA
```

```
## Models:
```

```
## m1_lmm_PWA: VOTlog ~ PosOr.cont * session + (PosOr.cont + session | subject) + (1 | category)
```

```
## m1_lmm_PWA_aat_spontansprache: VOTlog ~ PosOr.cont * session * AAT_spontansprache_c + (PosOr.cont +
```

```
##           npar    AIC    BIC logLik deviance Chisq Df
## m1_lmm_PWA           18 1697.5 1816.5 -830.73   1661.5
## m1_lmm_PWA_aat_spontansprache 24 1697.7 1856.5 -824.87   1649.7 11.732  6
##           Pr(>Chisq)
```

```
## m1_lmm_PWA
```

```
## m1_lmm_PWA_aat_spontansprache    0.06822 .
```

```
## ---
```

```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Errors Add into converging model

```
df_errors_PWA$PosOr.cont <-  
  scale(as.numeric(as.character(df_errors_PWA$PosOr)),  
        center = T, scale = F)  
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding  
c<-contr.treatment(3)  
my.coding<-matrix(rep(1/3, 6), ncol=2)  
my.simple<-c-my.coding  
my.simple
```

```
##           2           3  
## 1 -0.3333333 -0.3333333  
## 2  0.6666667 -0.3333333  
## 3 -0.3333333  0.6666667
```

```
contrasts(df_errors_PWA$session)<-my.simple  
levels(df_errors_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center spontaneous speech test  
df_errors_PWA$AAT_spontansprache_c <-  
  scale(df_errors_PWA$AAT_spontansprache, center=T, scale=T)
```

```
m1_glmm_PWA_aat_spontan <- glmer(error_class ~ PosOr.cont*session*  
                                AAT_spontansprache_c +  
                                (PosOr.cont |subject) +  
                                (1|category) ,  
                                data =df_errors_PWA, family = "binomial",  
                                control=glmerControl(optimizer = "bobyqa",  
                                                       optCtrl = list(maxfun = 2e5)))  
didLmerConverge(m1_glmm_PWA_aat_spontan)
```

```
## The relative maximum gradient of 0.0000073 is less than our 0.001 criterion.  
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored
```

```
# summary(m1_glmm_PWA_aat_spontan)  
# anova(m1_glmm_PWA_aat_spontan)  
#  
# saveRDS(m1_glmm_PWA_aat_spontan, file = here::here("results", "tables", "CSI_online_aphasia_PWA_lmm_...  
# tab_model(m1_glmm_PWA_aat_spontan,transform = NULL,  
#           show.re.var = F, show.stat = T,show.r2 = F,show.icc = F,  
#           title = "GLMM of errors Predicted by Ordinal Position and Session",  
#           dv.labels = "Errors",  
#           #string.pred = "",  
#           string.stat = "z-Value",  
#           file = here::here("results", "tables", "CSI_online_aphasia_PWA_control_glmm_error_AAT_spont...
```

Does the model with spontaneous speech test fit the data better? -> yes!


```
#summary(m1_lmm_PWA)
anova(m1_error, m1_glmm_PWA_aat_spontan)
```

```
## Data: df_errors_PWA
## Models:
## m1_error: error_class ~ PosOr.cont * session + (PosOr.cont | subject) + (1 | category)
## m1_glmm_PWA_aat_spontan: error_class ~ PosOr.cont * session * AAT_spontansprache_c + (PosOr.cont | s
##
##          npar      AIC      BIC logLik deviance Chisq Df
## m1_error          10 5336.7 5405.5 -2658.3   5316.7
## m1_glmm_PWA_aat_spontan 16 5335.9 5446.0 -2652.0   5303.9 12.753 6
##
##          Pr(>Chisq)
## m1_error
## m1_glmm_PWA_aat_spontan    0.04713 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

LEMO

RTs Add into converging model

```
df_RTs_PWA$PosOr.cont <-
  scale(as.numeric(as.character(df_RTs_PWA$PosOr)),
        center = T, scale = F)
table(df_RTs_PWA$PosOr.cont)
```

```
##
## -1.96955418629938 -0.969554186299384 0.0304458137006161 1.03044581370062
##          1132          1117          1103          1119
## 2.03044581370062
##          1047
```

```
mean(df_RTs_PWA$PosOr.cont); sd(df_RTs_PWA$PosOr.cont)
```

```
## [1] -0.00000000000000001123241
```

```
## [1] 1.40862
```

```
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##          2          3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_RTSPWA$session)<-my.simple
levels(df_RTSPWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center LEMO test
```

```
df_RTSPWA$LEMO_c <- scale(df_RTSPWA$LEMO, center=T, scale=T)
```

```
m1_lmm_PWA_lemo <- lmer(VOTlog ~ PosOr.cont*session*LEMO_c +
  (PosOr.cont+session|subject) +
  (1|category),
  data = df_RTSPWA,
  control=lmerControl(optimizer = "bobyqa",
    optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_lmm_PWA_lemo)
```

```
## The relative maximum gradient of 0.00000141 is less than our 0.001 criterion.
```

```
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored
```

```
# summary(m1_lmm_PWA_lemo)
```

```
# anova(m1_lmm_PWA_lemo)
```

```
#
```

```
# saveRDS(m1_lmm_PWA_lemo, file = here::here(
```

```
#   "results", "tables", "CSI_online_aphasia_PWA_lmm_VOT_plus-LEMO.RDS"))
```

```
# tab_model(m1_lmm_PWA_lemo, transform = NULL,
```

```
#   show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
```

```
#   title = "LMM of VOTs Predicted by Ordinal Position and Session",
```

```
#   df.method = "satterthwaite",
```

```
#   dv.labels = "Vocal Onset Time (log-transformed)",
```

```
#   #string.pred = "",
```

```
#   string.stat = "t-Value",
```

```
#   file = here::here(
```

```
#     "results", "tables",
```

```
#     "CSI_online_aphasia_PWA_control_lmm_VOT_LEMO.html"))
```

Does the model with LEMO fit the data better? -> no! (but a trend)

```
#summary(m1_lmm_PWA)
```

```
anova(m1_lmm_PWA, m1_lmm_PWA_lemo)
```

```
## refitting model(s) with ML (instead of REML)
```

```
## Data: df_RTSPWA
```

```
## Models:
```

```
## m1_lmm_PWA: VOTlog ~ PosOr.cont * session + (PosOr.cont + session | subject) + (1 | category)
```

```
## m1_lmm_PWA_lemo: VOTlog ~ PosOr.cont * session * LEMO_c + (PosOr.cont + session | subject) + (1 | category)
```

```
##               npar    AIC    BIC logLik deviance Chisq Df Pr(>Chisq)
```

```
## m1_lmm_PWA      18 1697.5 1816.5 -830.73   1661.5
```

```
## m1_lmm_PWA_lemo  24 1698.7 1857.5 -825.34   1650.7 10.776  6    0.09554 .
```

```
## ---
```

```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Errors Add into converging model

```
df_errors_PWA$PosOr.cont <- scale(as.numeric(as.character(df_errors_PWA$PosOr)),
                                  center = T, scale = F)

# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_errors_PWA$session)<-my.simple
levels(df_errors_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center LEMO test
df_errors_PWA$LEMO_c <- scale(df_errors_PWA$LEMO, center=T, scale=T)
```

Compute further contrasts

```
m1_glmm_PWA_lemo <- glmer(error_class ~ PosOr.cont*session*LEMO_c +
                          (PosOr.cont |subject) +
                          (1|category) ,
                          data=df_errors_PWA, family = "binomial",
                          control=glmerControl(optimizer = "bobyqa",
                                                  optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_glmm_PWA_lemo)
```

```
## The relative maximum gradient of 0.00000715 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

Warnings can be ignored

```
# summary(m1_glmm_PWA_lemo)
# anova(m1_glmm_PWA_lemo)
#
# saveRDS(m1_glmm_PWA_lemo, file = here::here("results", "tables", "CSI_online_aphasia_PWA_lmm_error_p
# tab_model(m1_glmm_PWA_lemo,transform = NULL,
#           show.re.var = F, show.stat = T,show.r2 = F,show.icc = F,
#           title = "GLMM of errors Predicted by Ordinal Position and Session",
#           dv.labels = "Errors",
#           #string.pred = "",
#           string.stat = "z-Value",
#           file = here::here(
#             "results", "tables",
#             "CSI_online_aphasia_PWA_control_glmm_error_Lemo.html"))
```

Does the model with LEMO test fit the data better? -> no!

```
#summary(m1_lmm_PWA)
anova(m1_error, m1_glmm_PWA_lemo)
```

```
## Data: df_errors_PWA
## Models:
## m1_error: error_class ~ PosOr.cont * session + (PosOr.cont | subject) + (1 | category)
## m1_glmm_PWA_lemo: error_class ~ PosOr.cont * session * LEMO_c + (PosOr.cont | subject) + (1 | category)
##               npar      AIC      BIC logLik deviance Chisq Df Pr(>Chisq)
## m1_error           10 5336.7 5405.5 -2658.3   5316.7
## m1_glmm_PWA_lemo    16 5340.5 5450.6 -2654.3   5308.5 8.1693  6      0.226
```

Time since stroke

RTs Add into converging model

```
df_RTs_PWA$PosOr.cont <- scale(as.numeric(as.character(df_RTs_PWA$PosOr))),
                             center = T, scale = F)
table(df_RTs_PWA$PosOr.cont)
```

```
##
## -1.96955418629938 -0.969554186299384 0.0304458137006161 1.03044581370062
##               1132               1117               1103               1119
## 2.03044581370062
##               1047
```

```
mean(df_RTs_PWA$PosOr.cont); sd(df_RTs_PWA$PosOr.cont)
```

```
## [1] -0.0000000000000001123241
```

```
## [1] 1.40862
```

```
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_RTs_PWA$session)<-my.simple
levels(df_RTs_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center months post onset
df_RTs_PWA$months_post_onset_c <- scale(df_RTs_PWA$months_post_onset,
                                         center=T, scale=T)
```

```
m1_lmm_PWA_MPO <- lmer(VOTlog ~ PosOr.cont*session*months_post_onset_c +
                      (PosOr.cont+session|subject) +
                      (1|category),
                      data = df_RTs_PWA,
                      control=lmerControl(optimizer = "bobyqa",
                                           optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_lmm_PWA_MPO)
```

```
## The relative maximum gradient of 0.00000365 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored

# summary(m1_lmm_PWA_MPO)
# anova(m1_lmm_PWA_MPO)
#
# saveRDS(m1_lmm_PWA_MPO, file = here::here(
#   "results", "tables", "CSI_online_aphasia_PWA_lmm_VOT_plus-MPO.RDS"))
# tab_model(m1_lmm_PWA_MPO, transform = NULL,
#   show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
#   title = "LMM of VOTs Predicted by Ordinal Position and Session",
#   df.method = "satterthwaite",
#   dv.labels = "Vocal Onset Time (log-transformed)",
#   #string.pred = "",
#   string.stat = "t-Value",
#   file = here::here(
#     "results", "tables",
#     "CSI_online_aphasia_PWA_control_lmm_VOT_MPO.html"))
```

Does the model with MPO fit the data better? -> no!

```
#summary(m1_lmm_PWA)
anova(m1_lmm_PWA, m1_lmm_PWA_MPO)
```

```
## refitting model(s) with ML (instead of REML)
```

```
## Data: df_RTs_PWA
```

```
## Models:
```

```
## m1_lmm_PWA: VOTlog ~ PosOr.cont * session + (PosOr.cont + session | subject) + (1 | category)
## m1_lmm_PWA_MPO: VOTlog ~ PosOr.cont * session * months_post_onset_c + (PosOr.cont + session | subject)
##      npar    AIC    BIC logLik deviance  Chisq Df Pr(>Chisq)
## m1_lmm_PWA      18 1697.5 1816.5 -830.73   1661.5
## m1_lmm_PWA_MPO   24 1703.4 1862.2 -827.69   1655.4 6.0782  6    0.4145
```

Errors Add into converging model

```
df_errors_PWA$PosOr.cont <-
  scale(as.numeric(as.character(df_errors_PWA$PosOr)),
        center = T, scale = F)

# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_errors_PWA$session)<-my.simple
levels(df_errors_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center months post onset
df_errors_PWA$MPO_c <-
  scale(df_errors_PWA$months_post_onset, center=T, scale=T)
```

```
m1_glmm_PWA_MPO <- glmer(error_class ~ PosOr.cont*session*MPO_c +
  (PosOr.cont |subject) +
  (1|category) ,
  data =df_errors_PWA, family = "binomial",
  control=glmerControl(optimizer = "bobyqa",
    optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_glmm_PWA_MPO)
```

```
## The relative maximum gradient of 0.000006 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored
```

```
# summary(m1_glmm_PWA_MPO)
# anova(m1_glmm_PWA_MPO)
#
# saveRDS(m1_glmm_PWA_MPO, file = here::here(
#   "results", "tables", "CSI_online_aphasia_PWA_lmm_error_plus-MPO.RDS"))
# tab_model(m1_glmm_PWA_MPO, transform = NULL,
#   show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
#   title =
#     "GLMM of errors Predicted by Ordinal Position and Session",
#   #df.method = "satterthwaite",
#   dv.labels = "Errors",
#   #string.pred = "",
#   string.stat = "z-Value",
#   file = here::here(
#     "results", "tables",
#     "CSI_online_aphasia_PWA_control_glmm_error_MPO.html"))
```

Does the model with MPO fit the data better? -> no!

```
#summary(m1_lmm_PWA)
anova(m1_error, m1_glmm_PWA_MPO)
```

```
## Data: df_errors_PWA
## Models:
## m1_error: error_class ~ PosOr.cont * session + (PosOr.cont | subject) + (1 | category)
## m1_glmm_PWA_MPO: error_class ~ PosOr.cont * session * MPO_c + (PosOr.cont | subject) + (1 | category)
##               npar      AIC      BIC  logLik deviance  Chisq Df Pr(>Chisq)
## m1_error              10 5336.7 5405.5 -2658.3   5316.7
## m1_glmm_PWA_MPO      16 5341.8 5451.9 -2654.9   5309.8 6.8914 6      0.331
```

Lesion size

```
df_RTs_PWA$LHoverall_c <- scale(df_RTs_PWA$LHoverall, center=T, scale=F)

m1_lmm_PWA_LH <- lmer(VOTlog ~ PosOr.cont*session*LHoverall_c +
  (PosOr.cont+session|subject) +
  (1|category),
  data = df_RTs_PWA,
  control=lmerControl(optimizer = "bobyqa",
    optCtrl = list(maxfun = 2e5)))

didLmerConverge(m1_lmm_PWA_LH)
```

RTs

```
## The relative maximum gradient of 0.00000407 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored
```

```
# summary(m1_lmm_PWA_LH)
# anova(m1_lmm_PWA_LH)
#
# saveRDS(m1_lmm_PWA_LH, file = here::here("results", "tables",
#   "CSI_online_aphasia_PWA_lmm_VOT_plus-Lesion-size.RDS"))
# tab_model(m1_lmm_PWA_LH, transform = NULL,
#   show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
#   title = "LMM of VOTs Predicted by Ordinal Position and Session",
#   df.method = "satterthwaite",
#   dv.labels = "Vocal Onset Time (log-transformed)",
#   #string.pred = "",
#   string.stat = "t-Value",
#   file = here::here(
#     "results", "tables",
#     "CSI_online_aphasia_PWA_control_lmm_VOT_Lesion-size.html"))
```

Does the model with lesion size fit the data better? -> no!

```
#summary(m1_lmm_PWA)
anova(m1_lmm_PWA, m1_lmm_PWA_LH)
```

```
## refitting model(s) with ML (instead of REML)
```

```
## Data: df_RTs_PWA
## Models:
## m1_lmm_PWA: VOTlog ~ PosOr.cont * session + (PosOr.cont + session | subject) + (1 | category)
## m1_lmm_PWA_LH: VOTlog ~ PosOr.cont * session * LHoverall_c + (PosOr.cont + session | subject) + (1 |
##               npar      AIC      BIC logLik deviance Chisq Df Pr(>Chisq)
## m1_lmm_PWA      18 1697.5 1816.5 -830.73 1661.5
## m1_lmm_PWA_LH   24 1704.3 1863.1 -828.15 1656.3 5.1739 6 0.5217
```

Errors Add into converging model

```
df_errors_PWA$PosOr.cont <- scale(as.numeric(as.character(df_errors_PWA$PosOr))),
                                center = T, scale = F)
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_errors_PWA$session)<-my.simple
levels(df_errors_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center lesion size
df_errors_PWA$LHoverall_c <- scale(df_errors_PWA$LHoverall, center=T, scale=T)
```

```
m1_glmm_PWA_LH <- glmer(error_class ~ PosOr.cont*session*LHoverall_c +
                        (PosOr.cont |subject) +
                        (1|category) ,
                        data =df_errors_PWA, family = "binomial",
                        control=glmerControl(optimizer = "bobyqa",
                                              optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_glmm_PWA_LH)
```

```
## The relative maximum gradient of 0.00000659 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```



```
## Warnings can be ignored

# summary(m1_glmm_PWA_LH)
# anova(m1_glmm_PWA_LH)
#
# saveRDS(m1_glmm_PWA_LH, file = here::here("results", "tables", "CSI_online_aphasia_PWA_lmm_error_plu
# tab_model(m1_glmm_PWA_LH, transform = NULL,
#           show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
#           title = "GLMM of errors Predicted by Ordinal Position and Session",
#           dv.labels = "Errors",
#           #string.pred = "",
#           string.stat = "z-Value",
#           file = here::here(
#             "results", "tables",
#             "CSI_online_aphasia_PWA_control_glmm_error_LH.html"))
```

Does the model with Token test fit the data better? -> yes!

```
#summary(m1_lmm_PWA)
anova(m1_error, m1_glmm_PWA_LH)
```

```
## Data: df_errors_PWA
## Models:
## m1_error: error_class ~ PosOr.cont * session + (PosOr.cont | subject) + (1 | category)
## m1_glmm_PWA_LH: error_class ~ PosOr.cont * session * LHoverall_c + (PosOr.cont | subject) + (1 | cat
##           npar      AIC      BIC logLik deviance Chisq Df Pr(>Chisq)
## m1_error           10 5336.7 5405.5 -2658.3   5316.7
## m1_glmm_PWA_LH     16 5333.9 5444.0 -2651.0   5301.9 14.746  6    0.02232 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Add covariates explaining significant variance in a single model

RTs Add Token Test and Naming Test into converging model.

```
cor.test(df_RTs_PWA$AAT_c, df_RTs_PWA$TokenTest_c)
```

```
##
## Pearson's product-moment correlation
##
## data: df_RTs_PWA$AAT_c and df_RTs_PWA$TokenTest_c
## t = 110.24, df = 5516, p-value < 0.00000000000000022
## alternative hypothesis: true correlation is not equal to 0
## 95 percent confidence interval:
##  0.8209312 0.8374132
## sample estimates:
##      cor
## 0.8293525
```

```
df_RTs_PWA$PosOr.cont <- scale(as.numeric(as.character(df_RTs_PWA$PosOr)),
                               center = T, scale = F)
# define contrasts of session: compare 1 to 2 and 1 to 3, intercept is the grand mean => simple coding
c<-contr.treatment(3)
my.coding<-matrix(rep(1/3, 6), ncol=2)
my.simple<-c-my.coding
my.simple
```

```
##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667
```

```
contrasts(df_RTs_PWA$session)<-my.simple
levels(df_RTs_PWA$session)
```

```
## [1] "1" "2" "3"
```

```
## Center token test and Naming test
df_RTs_PWA$TokenTest_c <- scale(df_RTs_PWA$TokenTest, center=T, scale=T)
df_RTs_PWA$AAT_c <- scale(df_RTs_PWA$AAT, center=T, scale=T)

m1_lmm_PWA_tt_aat <- lmer(VOTlog ~ PosOr.cont*session*(TokenTest_c*AAT_c)+
                          (PosOr.cont+session|subject) +
                          (1|category),
                          data = df_RTs_PWA,
                          control=lmerControl(optimizer = "bobyqa",
                                                optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1_lmm_PWA_tt_aat)
```

```
## The relative maximum gradient of 0.000124 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## Warnings can be ignored
```

```
summary(m1_lmm_PWA_tt_aat)
```

```
## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula: VOTlog ~ PosOr.cont * session * (TokenTest_c * AAT_c) + (PosOr.cont +
## session | subject) + (1 | category)
## Data: df_RTs_PWA
## Control: lmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
## REML criterion at convergence: 1810.1
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -3.4968 -0.6792 -0.1915  0.5042  5.0319
##
```

```

## Random effects:
##   Groups   Name      Variance Std.Dev. Corr
##   category (Intercept) 0.0092600 0.09623
##   subject  (Intercept) 0.0409836 0.20244
##           Pos0r.cont  0.0001357 0.01165   0.27
##           session2    0.0005339 0.02311  -0.55   0.39
##           session3    0.0029467 0.05428  -0.61   0.09   0.05
##   Residual              0.0761189 0.27590
## Number of obs: 5518, groups:  category, 24; subject, 20
##
## Fixed effects:
##                                     Estimate Std. Error      df
## (Intercept)                       7.194167    0.056486   20.594370
## Pos0r.cont                        0.016263    0.004697   21.433722
## session2                         -0.071053    0.013778   17.687842
## session3                         -0.078038    0.018663   20.704486
## TokenTest_c                      -0.026982    0.073995   16.095249
## AAT_c                            -0.198863    0.091339   16.428960
## Pos0r.cont:session2              0.015077    0.008743  5424.195608
## Pos0r.cont:session3              0.008715    0.008385  5431.728865
## TokenTest_c:AAT_c               -0.048308    0.030970   16.515486
## Pos0r.cont:TokenTest_c          -0.001060    0.006471   21.750345
## Pos0r.cont:AAT_c                0.006637    0.009542   33.501731
## session2:TokenTest_c            -0.014041    0.018817   18.561124
## session3:TokenTest_c            0.003742    0.025955   20.863974
## session2:AAT_c                  -0.026912    0.028832   25.851015
## session3:AAT_c                  -0.010841    0.036113   30.139853
## Pos0r.cont:TokenTest_c:AAT_c     0.004082    0.003375   39.082828
## session2:TokenTest_c:AAT_c      -0.019027    0.010650   33.041850
## session3:TokenTest_c:AAT_c      -0.015318    0.012639   34.144950
## Pos0r.cont:session2:TokenTest_c -0.014488    0.012062  5423.457225
## Pos0r.cont:session3:TokenTest_c -0.012646    0.012000  5424.747740
## Pos0r.cont:session2:AAT_c        -0.005411    0.019067  5418.272739
## Pos0r.cont:session3:AAT_c        -0.006923    0.018310  5438.091709
## Pos0r.cont:session2:TokenTest_c:AAT_c -0.004311    0.006971  5070.771048
## Pos0r.cont:session3:TokenTest_c:AAT_c -0.004446    0.006325  5375.875481
##                                     t value      Pr(>|t|)
## (Intercept)                    127.361 < 0.0000000000000002 ***
## Pos0r.cont                      3.462          0.002280 **
## session2                       -5.157          0.0000698 ***
## session3                       -4.181          0.000432 ***
## TokenTest_c                     -0.365          0.720121
## AAT_c                           -2.177          0.044363 *
## Pos0r.cont:session2             1.724          0.084677 .
## Pos0r.cont:session3             1.039          0.298667
## TokenTest_c:AAT_c              -1.560          0.137757
## Pos0r.cont:TokenTest_c          -0.164          0.871368
## Pos0r.cont:AAT_c                0.696          0.491501
## session2:TokenTest_c            -0.746          0.464916
## session3:TokenTest_c            0.144          0.886732
## session2:AAT_c                  -0.933          0.359248
## session3:AAT_c                  -0.300          0.766084
## Pos0r.cont:TokenTest_c:AAT_c     1.210          0.233685
## session2:TokenTest_c:AAT_c      -1.787          0.083187 .

```

```
## session3:TokenTest_c:AAT_c          -1.212          0.233862
## Pos0r.cont:session2:TokenTest_c      -1.201          0.229720
## Pos0r.cont:session3:TokenTest_c      -1.054          0.292032
## Pos0r.cont:session2:AAT_c            -0.284          0.776599
## Pos0r.cont:session3:AAT_c            -0.378          0.705356
## Pos0r.cont:session2:TokenTest_c:AAT_c -0.618          0.536333
## Pos0r.cont:session3:TokenTest_c:AAT_c -0.703          0.482137
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
##
## Correlation matrix not shown by default, as p = 24 > 12.
## Use print(x, correlation=TRUE) or
##     vcov(x)           if you need it
```

```
anova(m1_lmm_PWA_tt_aat)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method
##
##              Sum Sq Mean Sq NumDF  DenDF F value
## Pos0r.cont      0.91237  0.91237    1    21.4 11.9861
## session         2.58647  1.29323    2    19.7 16.9897
## TokenTest_c      0.01012  0.01012    1    16.1  0.1330
## AAT_c           0.36082  0.36082    1    16.4  4.7403
## Pos0r.cont:session 0.22815  0.11408    2 5433.5  1.4986
## TokenTest_c:AAT_c  0.18520  0.18520    1    16.5  2.4331
## Pos0r.cont:TokenTest_c 0.00204  0.00204    1    21.8  0.0268
## Pos0r.cont:AAT_c   0.03683  0.03683    1    33.5  0.4838
## session:TokenTest_c 0.05496  0.02748    2    19.8  0.3610
## session:AAT_c      0.06634  0.03317    2    29.6  0.4358
## Pos0r.cont:TokenTest_c:AAT_c 0.11138  0.11138    1    39.1  1.4632
## session:TokenTest_c:AAT_c 0.27243  0.13622    2    36.2  1.7895
## Pos0r.cont:session:TokenTest_c 0.12624  0.06312    2 5424.5  0.8292
## Pos0r.cont:session:AAT_c 0.01157  0.00578    2 5418.3  0.0760
## Pos0r.cont:session:TokenTest_c:AAT_c 0.04416  0.02208    2 5239.2  0.2901
##
##              Pr(>F)
## Pos0r.cont      0.00228 **
## session         0.00005137 ***
## TokenTest_c      0.72012
## AAT_c           0.04436 *
## Pos0r.cont:session 0.22352
## TokenTest_c:AAT_c  0.13776
## Pos0r.cont:TokenTest_c 0.87137
## Pos0r.cont:AAT_c   0.49150
## session:TokenTest_c 0.70148
## session:AAT_c      0.65084
## Pos0r.cont:TokenTest_c:AAT_c 0.23369
## session:TokenTest_c:AAT_c  0.18151
## Pos0r.cont:session:TokenTest_c 0.43645
## Pos0r.cont:session:AAT_c  0.92684
## Pos0r.cont:session:TokenTest_c:AAT_c 0.74821
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```

saveRDS(m1_lmm_PWA_tt_aat, file = here::here("results", "tables",
"CSI_online_aphasia_PWA_lmm_VOT_plus-TokenTest-plus-AachenAphasie.RDS"))
tab_model(m1_lmm_PWA_tt_aat, transform = NULL,
  show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
  title = "LMM of VOTs Predicted by Ordinal Position and Session",
  df.method = "satterthwaite",
  dv.labels = "Vocal Onset Time (log-transformed)",
  #string.pred = "",
  string.stat = "t-Value",
  file = here::here(
    "results", "tables",
    "CSI_online_aphasia_PWA_control_lmm_VOT-TokenTestAachenAphase.html"))

```

LMM of VOTs Predicted by Ordinal Position and Session

Vocal Onset Time (log-transformed)

Predictors

Estimates

CI

t-Value

p

(Intercept)

7.19

7.08 – 7.31

127.36

<0.001

PosOr cont

0.02

0.01 – 0.03

3.46

0.002

session [2]

-0.07

-0.10 – -0.04

-5.16

<0.001

session [3]

-0.08

-0.12 – -0.04

-4.18

<0.001
 TokenTest c
 -0.03
 $-0.18 - 0.13$
 -0.36
 0.720
 AAT c
 -0.20
 $-0.39 - -0.01$
 -2.18
 0.044
 PosOr cont \times session [2]
 0.02
 $-0.00 - 0.03$
 1.72
 0.085
 PosOr cont \times session [3]
 0.01
 $-0.01 - 0.03$
 1.04
 0.299
 TokenTest c \times AAT c
 -0.05
 $-0.11 - 0.02$
 -1.56
 0.138
 PosOr cont \times TokenTest c
 -0.00
 $-0.01 - 0.01$
 -0.16
 0.871
 PosOr cont \times AAT c
 0.01
 $-0.01 - 0.03$
 0.70
 0.492

session [2] \times TokenTest c
 -0.01
 -0.05 – 0.03
 -0.75
 0.465
 session [3] \times TokenTest c
 0.00
 -0.05 – 0.06
 0.14
 0.887
 session [2] \times AAT c
 -0.03
 -0.09 – 0.03
 -0.93
 0.359
 session [3] \times AAT c
 -0.01
 -0.08 – 0.06
 -0.30
 0.766
 (PosOr cont \times TokenTestc) \times AAT c
 0.00
 -0.00 – 0.01
 1.21
 0.234
 (session [2] \times TokenTestc) \times AAT c
 -0.02
 -0.04 – 0.00
 -1.79
 0.083
 (session [3] \times TokenTestc) \times AAT c
 -0.02
 -0.04 – 0.01
 -1.21
 0.234
 (PosOr cont \times session[2]) \times TokenTest c

-0.01
 -0.04 – 0.01
 -1.20
 0.230
 (PosOr cont \times session[3]) \times TokenTest c
 -0.01
 -0.04 – 0.01
 -1.05
 0.292
 (PosOr cont \times session[2]) \times AAT c
 -0.01
 -0.04 – 0.03
 -0.28
 0.777
 (PosOr cont \times session[3]) \times AAT c
 -0.01
 -0.04 – 0.03
 -0.38
 0.705
 (PosOr cont \times session [2] \times TokenTest c) \times AAT c
 -0.00
 -0.02 – 0.01
 -0.62
 0.536
 (PosOr cont \times session [3] \times TokenTest c) \times AAT c
 -0.00
 -0.02 – 0.01
 -0.70
 0.482
 N subject
 20
 N category
 24
 Observations
 5518

Main effect of Naming Test. Trend between Ordinal position and Session 2-1 \times Token Test \times Naming and Ordinal position \times Session2-1

Does the model with Naming and Token test fit the data better? -> no (Trend)! Does the model with Naming and Token test fit the data better than the model only with Naming? -> no! => The variance explained by the token Test is also explained by the naming test Does the model with Naming test fit the data better than the main model? -> yes!

```
#summary(m1_lmm_PWA)
```

```
anova(m1_lmm_PWA, m1_lmm_PWA_tt_aat)
```

```
## refitting model(s) with ML (instead of REML)
```

```
## Data: df_RTs_PWA
```

```
## Models:
```

```
## m1_lmm_PWA: VOTlog ~ PosOr.cont * session + (PosOr.cont + session | subject) + (1 | category)
```

```
## m1_lmm_PWA_tt_aat: VOTlog ~ PosOr.cont * session * (TokenTest_c * AAT_c) + (PosOr.cont + session | s
```

```
##          npar      AIC      BIC logLik deviance Chisq Df Pr(>Chisq)
```

```
## m1_lmm_PWA          18 1697.5 1816.5 -830.73   1661.5
```

```
## m1_lmm_PWA_tt_aat   36 1706.5 1944.6 -817.23   1634.5 27.003 18    0.07893 .
```

```
## ---
```

```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
anova(m1_lmm_PWA_aat, m1_lmm_PWA_tt_aat)
```

```
## refitting model(s) with ML (instead of REML)
```

```
## Data: df_RTs_PWA
```

```
## Models:
```

```
## m1_lmm_PWA_aat: VOTlog ~ PosOr.cont * session * AAT_c + (PosOr.cont + session | subject) + (1 | cate
```

```
## m1_lmm_PWA_tt_aat: VOTlog ~ PosOr.cont * session * (TokenTest_c * AAT_c) + (PosOr.cont + session | s
```

```
##          npar      AIC      BIC logLik deviance Chisq Df Pr(>Chisq)
```

```
## m1_lmm_PWA_aat      24 1695.9 1854.6 -823.93   1647.9
```

```
## m1_lmm_PWA_tt_aat   36 1706.5 1944.6 -817.23   1634.5 13.394 12    0.341
```

```
anova(m1_lmm_PWA, m1_lmm_PWA_aat)
```

```
## refitting model(s) with ML (instead of REML)
```

```
## Data: df_RTs_PWA
```

```
## Models:
```

```
## m1_lmm_PWA: VOTlog ~ PosOr.cont * session + (PosOr.cont + session | subject) + (1 | category)
```

```
## m1_lmm_PWA_aat: VOTlog ~ PosOr.cont * session * AAT_c + (PosOr.cont + session | subject) + (1 | cate
```

```
##          npar      AIC      BIC logLik deviance Chisq Df Pr(>Chisq)
```

```
## m1_lmm_PWA          18 1697.5 1816.5 -830.73   1661.5
```

```
## m1_lmm_PWA_aat      24 1695.9 1854.6 -823.93   1647.9 13.609  6    0.03432 *
```

```
## ---
```

```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
(means_final<- df_RTs_PWA %>%
```

```
  filter(category != "Filler") %>%
```

```
  Rmisc::summarySEwithin(., "VOT", idvar = "category",
```

```
    withinvars = c("session", "PosOr"),
```

```
    betweenvars = c("subject", "AAT"), na.rm = T))
```

Plot Naming test

Automatically converting the following non-factors to factors: AAT

Warning in qt(conf.interval/2 + 0.5, datac\$N - 1): NaNs produced

##	subject	AAT	session	PosOr	N	VOT	sd	se	ci
## 1	101	98	1	1	21	1358.8342	334.4313	72.97888	152.23128
## 2	101	98	1	2	21	1430.7892	502.1845	109.58564	228.59165
## 3	101	98	1	3	23	1413.1229	519.2279	108.26651	224.53099
## 4	101	98	1	4	23	1279.2801	295.1891	61.55118	127.64933
## 5	101	98	1	5	23	1350.1123	495.6944	103.35943	214.35434
## 6	101	98	2	1	21	1236.0914	302.2888	65.96482	137.60020
## 7	101	98	2	2	24	1326.5282	394.2046	80.46668	166.45802
## 8	101	98	2	3	24	1264.7366	358.0604	73.08876	151.19563
## 9	101	98	2	4	24	1265.4449	309.4372	63.16360	130.66386
## 10	101	98	2	5	23	1350.5869	304.4667	63.48570	131.66127
## 11	101	98	3	1	22	1416.6396	352.1802	75.08507	156.14795
## 12	101	98	3	2	24	1383.0282	295.8206	60.38413	124.91408
## 13	101	98	3	3	24	1395.3616	291.3443	59.47040	123.02390
## 14	101	98	3	4	24	1375.4866	306.0538	62.47298	129.23520
## 15	101	98	3	5	24	1448.2782	295.9528	60.41111	124.96990
## 16	102	99	1	1	23	1422.7249	225.5446	47.02930	97.53280
## 17	102	99	1	2	23	1414.3154	251.7954	52.50297	108.88450
## 18	102	99	1	3	24	1428.2095	448.5557	91.56105	189.40846
## 19	102	99	1	4	24	1369.3762	238.9167	48.76867	100.88568
## 20	102	99	1	5	24	1557.6679	538.5309	109.92716	227.40166
## 21	102	99	2	1	23	1362.6814	320.0028	66.72519	138.37957
## 22	102	99	2	2	23	1352.6659	142.4267	29.69803	61.58994
## 23	102	99	2	3	23	1311.2218	176.2680	36.75441	76.22399
## 24	102	99	2	4	24	1331.5429	278.0828	56.76341	117.42406
## 25	102	99	2	5	24	1335.4179	226.0472	46.14170	95.45138
## 26	102	99	3	1	22	1306.8330	125.3060	26.71533	55.55758
## 27	102	99	3	2	24	1313.3345	177.1961	36.16999	74.82333
## 28	102	99	3	3	24	1241.7095	149.4035	30.49685	63.08755
## 29	102	99	3	4	23	1221.7000	107.7878	22.47530	46.61092
## 30	102	99	3	5	23	1317.8740	231.2996	48.22929	100.02143
## 31	103	97	1	1	21	1361.0269	562.2646	122.69620	255.93980
## 32	103	97	1	2	16	1405.8564	609.2341	152.30854	324.63796
## 33	103	97	1	3	14	1328.5140	284.6623	76.07919	164.35911
## 34	103	97	1	4	13	1229.9043	255.3610	70.82440	154.31311
## 35	103	97	1	5	14	1699.2952	746.5394	199.52104	431.03900
## 36	103	97	2	1	17	1059.3012	243.1891	58.98202	125.03629
## 37	103	97	2	2	20	1289.7725	450.1449	100.65546	210.67430
## 38	103	97	2	3	15	1522.8085	569.9557	147.16192	315.63093
## 39	103	97	2	4	17	1443.1595	717.8321	174.09986	369.07521
## 40	103	97	2	5	15	1386.7726	328.5558	84.83275	181.94816
## 41	103	97	3	1	18	1186.1687	468.7756	110.49148	233.11664
## 42	103	97	3	2	14	1099.7207	521.9427	139.49506	301.36076
## 43	103	97	3	3	17	1375.7002	458.5532	111.21548	235.76629
## 44	103	97	3	4	18	1384.9941	558.6514	131.67539	277.81080
## 45	103	97	3	5	16	1560.5688	611.2170	152.80426	325.69457
## 46	104	42	1	1	10	1468.3396	246.4016	77.91903	176.26509
## 47	104	42	1	2	11	1691.7417	399.8614	120.56276	268.63057

## 48	104	42	1	3 12	1725.2447	431.3717	124.52629	274.08051
## 49	104	42	1	4 7	1441.4886	527.8736	199.51745	488.20162
## 50	104	42	1	5 5	1614.7065	487.4739	218.00494	605.27875
## 51	104	42	2	1 12	1035.0665	388.5741	112.17169	246.88821
## 52	104	42	2	2 12	1322.7785	552.9101	159.61139	351.30229
## 53	104	42	2	3 10	1314.1556	275.2344	87.03676	196.89083
## 54	104	42	2	4 12	1356.2325	363.5779	104.95589	231.00635
## 55	104	42	2	5 8	1393.5998	349.2836	123.49041	292.00843
## 56	104	42	3	1 8	936.5166	178.8433	63.23066	149.51675
## 57	104	42	3	2 13	1045.0030	532.7783	147.76610	321.95468
## 58	104	42	3	3 15	1448.6131	631.5807	163.07342	349.75771
## 59	104	42	3	4 12	1363.5948	475.8995	137.38035	302.37210
## 60	104	42	3	5 7	1166.0978	296.0612	111.90063	273.81098
## 61	105	91	1	1 23	1278.9679	378.5265	78.92823	163.68714
## 62	105	91	1	2 22	1494.3695	433.7760	92.48136	192.32551
## 63	105	91	1	3 19	1487.5053	355.1332	81.47315	171.16875
## 64	105	91	1	4 23	1518.1817	505.4801	105.39990	218.58600
## 65	105	91	1	5 17	1578.3854	289.7805	70.28209	148.99138
## 66	105	91	2	1 22	1187.2017	250.4083	53.38723	111.02482
## 67	105	91	2	2 22	1120.1581	229.1538	48.85576	101.60113
## 68	105	91	2	3 24	1361.6607	373.0931	76.15732	157.54341
## 69	105	91	2	4 22	1462.1650	491.2600	104.73698	217.81248
## 70	105	91	2	5 20	1427.1733	435.0271	97.27502	203.59895
## 71	105	91	3	1 24	1216.7441	342.5561	69.92398	144.64876
## 72	105	91	3	2 23	1197.1853	286.6926	59.77954	123.97517
## 73	105	91	3	3 23	1303.6391	408.6771	85.21507	176.72524
## 74	105	91	3	4 21	1388.2115	528.1858	115.25959	240.42729
## 75	105	91	3	5 22	1367.0737	407.8340	86.95049	180.82345
## 76	106	94	1	1 14	1501.7248	608.7942	162.70709	351.50730
## 77	106	94	1	2 14	1555.0141	698.3146	186.63242	403.19484
## 78	106	94	1	3 11	1289.5354	494.3328	149.04695	332.09731
## 79	106	94	1	4 13	1761.3040	587.0137	162.80831	354.72883
## 80	106	94	1	5 12	1312.3281	495.3372	142.99154	314.72226
## 81	106	94	2	1 15	1429.7351	542.5796	140.09346	300.47059
## 82	106	94	2	2 17	1303.2390	788.9694	191.35319	405.65065
## 83	106	94	2	3 17	1155.0023	343.8604	83.39839	176.79669
## 84	106	94	2	4 17	1262.1727	462.2090	112.10214	237.64592
## 85	106	94	2	5 13	1740.9447	674.4934	187.07082	407.59231
## 86	106	94	3	1 21	1129.6410	305.2924	66.62027	138.96744
## 87	106	94	3	2 16	1151.1251	364.1948	91.04870	194.06571
## 88	106	94	3	3 21	1438.3866	619.6676	135.22255	282.06930
## 89	106	94	3	4 15	1119.3104	557.6370	143.98125	308.80907
## 90	106	94	3	5 17	1361.5606	623.4413	151.20673	320.54395
## 91	107	93	1	1 19	1259.4564	240.0093	55.06190	115.68076
## 92	107	93	1	2 23	1343.6728	241.3333	50.32147	104.36035
## 93	107	93	1	3 21	1388.6323	202.2287	44.12992	92.05340
## 94	107	93	1	4 23	1580.5209	530.0543	110.52396	229.21266
## 95	107	93	1	5 18	1537.8752	343.6372	80.99607	170.88677
## 96	107	93	2	1 23	1300.9721	320.2956	66.78624	138.50618
## 97	107	93	2	2 23	1271.6666	331.2548	69.07140	143.24531
## 98	107	93	2	3 24	1330.3263	438.0095	89.40832	184.95520
## 99	107	93	2	4 23	1465.8063	454.6168	94.79416	196.59106
## 100	107	93	2	5 22	1373.2215	370.4001	78.96957	164.22621
## 101	107	93	3	1 23	1211.1407	164.9986	34.40459	71.35074

## 102	107	93	3	2	24	1299.6179	380.6672	77.70338	160.74168
## 103	107	93	3	3	23	1291.7542	278.2545	58.02008	120.32627
## 104	107	93	3	4	23	1345.1355	316.6392	66.02383	136.92505
## 105	107	93	3	5	21	1322.7340	304.3807	66.42131	138.55242
## 106	108	99	1	1	22	1438.9657	405.9183	86.54208	179.97410
## 107	108	99	1	2	22	1275.0738	420.6970	89.69290	186.52659
## 108	108	99	1	3	22	1629.5510	547.5762	116.74364	242.78169
## 109	108	99	1	4	19	1398.0983	398.5282	91.42864	192.08444
## 110	108	99	1	5	17	1525.8691	426.0546	103.33342	219.05707
## 111	108	99	2	1	23	1237.0282	298.1722	62.17320	128.93932
## 112	108	99	2	2	23	1339.0127	297.7694	62.08921	128.76514
## 113	108	99	2	3	23	1373.2258	484.9160	101.11199	209.69342
## 114	108	99	2	4	23	1236.3170	342.8446	71.48803	148.25711
## 115	108	99	2	5	21	1521.5263	486.2544	106.10942	221.34036
## 116	108	99	3	1	24	1154.2816	187.9833	38.37194	79.37840
## 117	108	99	3	2	20	1223.6215	254.7277	56.95884	119.21621
## 118	108	99	3	3	22	1331.1782	408.2782	87.04520	181.02040
## 119	108	99	3	4	24	1310.7399	388.2077	79.24257	163.92574
## 120	108	99	3	5	19	1376.1429	391.7063	89.86360	188.79641
## 121	109	52	1	1	5	1553.7081	684.2034	305.98507	849.55074
## 122	109	52	1	2	4	1678.2281	376.5009	188.25047	599.09701
## 123	109	52	1	3	3	1174.4947	1047.8762	604.99161	2603.06879
## 124	109	52	1	4	6	1548.3169	255.5026	104.30850	268.13354
## 125	109	52	1	5	2	1369.1947	562.0209	397.40876	5049.55701
## 126	109	52	2	1	2	1274.4031	466.5656	329.91172	4191.92584
## 127	109	52	2	2	4	1086.4697	484.8184	242.40922	771.45432
## 128	109	52	2	3	4	1293.5114	393.9115	196.95576	626.80112
## 129	109	52	2	4	3	1312.8725	592.5290	342.09679	1471.92367
## 130	109	52	2	5	5	1406.8581	470.9505	210.61547	584.76230
## 131	109	52	3	1	5	1063.5614	655.2707	293.04598	813.62607
## 132	109	52	3	2	5	1439.2347	326.4862	146.00907	405.38617
## 133	109	52	3	3	5	1250.1781	689.2695	308.25070	855.84113
## 134	109	52	3	4	7	1310.9876	685.1531	258.96353	633.66094
## 135	109	52	3	5	7	1375.6471	456.2471	172.44521	421.95822
## 136	110	100	1	1	22	1257.7886	359.3965	76.62359	159.34748
## 137	110	100	1	2	19	1514.5425	550.3031	126.24819	265.23761
## 138	110	100	1	3	21	1334.1082	411.9154	89.88732	187.50166
## 139	110	100	1	4	17	1526.6584	450.0413	109.15105	231.38990
## 140	110	100	1	5	20	1694.7038	537.7702	120.24907	251.68420
## 141	110	100	2	1	23	1507.9951	583.6788	121.70544	252.40163
## 142	110	100	2	2	22	1311.4739	382.5842	81.56723	169.62833
## 143	110	100	2	3	23	1148.0501	171.1203	35.68106	73.99799
## 144	110	100	2	4	22	1276.1592	346.0953	73.78776	153.45006
## 145	110	100	2	5	22	1382.7185	476.3793	101.56440	211.21474
## 146	110	100	3	1	24	1243.3291	243.5664	49.71779	102.84908
## 147	110	100	3	2	24	1362.4957	531.6914	108.53104	224.51357
## 148	110	100	3	3	23	1294.4569	299.5477	62.46000	129.53412
## 149	110	100	3	4	23	1282.5385	286.9295	59.82893	124.07761
## 150	110	100	3	5	22	1265.8550	282.2211	60.16975	125.12985
## 151	111	96	1	1	21	1302.4626	428.0049	93.39832	194.82549
## 152	111	96	1	2	20	1415.6848	336.3217	75.20382	157.40339
## 153	111	96	1	3	18	1676.8457	560.6042	132.13568	278.78192
## 154	111	96	1	4	22	1442.8978	355.8347	75.86422	157.76829
## 155	111	96	1	5	19	1450.4708	488.6445	112.10273	235.51910

## 156	111 96	2	1 22	1200.5480	442.8777	94.42184	196.36096
## 157	111 96	2	2 19	1348.6471	452.2510	103.75349	217.97800
## 158	111 96	2	3 19	1277.7434	364.0641	83.52204	175.47330
## 159	111 96	2	4 24	1153.7975	269.9575	55.10485	113.99306
## 160	111 96	2	5 23	1202.3603	407.1926	84.90553	176.08329
## 161	111 96	3	1 21	1335.7529	486.6526	106.19630	221.52161
## 162	111 96	3	2 20	1275.1954	344.1587	76.95622	161.07122
## 163	111 96	3	3 18	1471.8820	433.2202	102.11099	215.43535
## 164	111 96	3	4 23	1351.5992	400.8776	83.58876	173.35247
## 165	111 96	3	5 22	1491.5915	511.9152	109.14070	226.97050
## 166	112 28	1	1 8	1316.5080	563.7412	199.31263	471.29948
## 167	112 28	1	2 5	1526.7209	454.1961	203.12268	563.95898
## 168	112 28	1	3 2	1076.8031	471.1768	333.17228	4233.35518
## 169	112 28	1	4 5	1423.9047	449.4000	200.97779	558.00381
## 170	112 28	1	5 2	1845.2852	217.5909	153.85997	1954.97634
## 171	112 28	2	1 7	1253.1491	350.4492	132.45733	324.11141
## 172	112 28	2	2 8	1492.6312	508.3645	179.73400	425.00338
## 173	112 28	2	3 4	1582.2843	425.4618	212.73088	677.00461
## 174	112 28	2	4 1	1352.9281	NA	NA	NaN
## 175	112 28	2	5 2	1714.9906	530.0052	374.77029	4761.90806
## 176	112 28	3	1 12	1138.1022	386.9141	111.69248	245.83349
## 177	112 28	3	2 7	1153.2813	321.1385	121.37893	297.00355
## 178	112 28	3	3 5	1428.7531	436.7453	195.31845	542.29097
## 179	112 28	3	4 4	1370.4906	223.2388	111.61939	355.22271
## 180	112 28	3	5 6	1369.6596	268.2209	109.50071	281.48054
## 181	113 100	1	1 21	1310.5205	443.3600	96.74909	201.81506
## 182	113 100	1	2 17	1439.9194	483.2373	117.20226	248.45769
## 183	113 100	1	3 17	1318.5734	339.0773	82.23831	174.33744
## 184	113 100	1	4 23	1399.5255	449.1382	93.65179	194.22193
## 185	113 100	1	5 20	1443.0444	418.9173	93.67275	196.05932
## 186	113 100	2	1 20	1201.2809	154.8110	34.61680	72.45379
## 187	113 100	2	2 23	1254.5001	384.4238	80.15790	166.23731
## 188	113 100	2	3 21	1244.8037	213.3766	46.56258	97.12784
## 189	113 100	2	4 19	1548.4409	454.7210	104.32014	219.16848
## 190	113 100	2	5 20	1512.8014	420.9777	94.13347	197.02362
## 191	113 100	3	1 18	1333.6522	250.8663	59.12976	124.75289
## 192	113 100	3	2 21	1243.2475	236.1940	51.54175	107.51421
## 193	113 100	3	3 22	1396.6814	445.0887	94.89323	197.34128
## 194	113 100	3	4 24	1209.4381	187.7392	38.32211	79.27532
## 195	113 100	3	5 19	1505.9964	548.9517	125.93816	264.58626
## 196	114 97	1	1 21	1484.1272	552.6513	120.59841	251.56388
## 197	114 97	1	2 15	1556.1974	587.5475	151.70412	325.37297
## 198	114 97	1	3 15	1458.5554	532.1168	137.39198	294.67648
## 199	114 97	1	4 17	1301.5413	353.8481	85.82077	181.93190
## 200	114 97	1	5 19	1394.6748	418.2269	95.94782	201.57889
## 201	114 97	2	1 20	1136.6087	245.9145	54.98815	115.09153
## 202	114 97	2	2 17	1215.5708	246.5963	59.80839	126.78812
## 203	114 97	2	3 19	1277.2423	253.1440	58.07522	122.01151
## 204	114 97	2	4 20	1466.7039	449.8238	100.58367	210.52404
## 205	114 97	2	5 18	1233.0174	291.5303	68.71434	144.97459
## 206	114 97	3	1 21	1133.5303	239.4278	52.24744	108.98625
## 207	114 97	3	2 22	1518.9333	667.0300	142.21127	295.74452
## 208	114 97	3	3 21	1272.4256	401.2322	87.55605	182.63872
## 209	114 97	3	4 22	1374.3754	373.6283	79.65783	165.65753

## 210	114 97	3	5 20	1495.3315	586.9165	131.23852	274.68538
## 211	115 100	1	1 21	1573.0226	481.1330	104.99184	219.00914
## 212	115 100	1	2 22	1477.9638	302.1047	64.40895	133.94573
## 213	115 100	1	3 23	1676.7618	447.1677	93.24092	193.36982
## 214	115 100	1	4 23	1354.8829	275.5391	57.45388	119.15206
## 215	115 100	1	5 19	1478.5661	267.1714	61.29332	128.77249
## 216	115 100	2	1 23	1335.1289	375.6216	78.32252	162.43096
## 217	115 100	2	2 21	1444.7999	552.2098	120.50207	251.36291
## 218	115 100	2	3 24	1376.3193	416.3729	84.99176	175.81885
## 219	115 100	2	4 22	1159.6730	174.2527	37.15079	77.25930
## 220	115 100	2	5 22	1259.2721	236.9885	50.52613	105.07483
## 221	115 100	3	1 22	1185.6920	409.7421	87.35730	181.66946
## 222	115 100	3	2 23	1263.2928	508.4072	106.01023	219.85177
## 223	115 100	3	3 24	1137.7360	232.3564	47.42956	98.11552
## 224	115 100	3	4 24	1383.9026	371.9953	75.93322	157.07984
## 225	115 100	3	5 22	1222.9151	319.3913	68.09446	141.61019
## 226	116 100	1	1 23	1349.4370	273.5274	57.03441	118.28212
## 227	116 100	1	2 22	1422.4348	339.1662	72.31048	150.37787
## 228	116 100	1	3 20	1520.7922	402.9043	90.09214	188.56503
## 229	116 100	1	4 22	1411.9017	245.3698	52.31302	108.79088
## 230	116 100	1	5 24	1496.7804	335.8464	68.55435	141.81548
## 231	116 100	2	1 24	1210.7387	256.9263	52.44486	108.49047
## 232	116 100	2	2 24	1276.5304	259.1567	52.90013	109.43226
## 233	116 100	2	3 24	1226.1971	272.0759	55.53726	114.88757
## 234	116 100	2	4 23	1371.8827	298.0578	62.14936	128.88988
## 235	116 100	2	5 24	1493.0721	515.0257	105.12917	217.47627
## 236	116 100	3	1 24	1262.7804	272.8139	55.68790	115.19919
## 237	116 100	3	2 24	1335.8637	236.6758	48.31124	99.93941
## 238	116 100	3	3 23	1334.7807	263.4028	54.92328	113.90390
## 239	116 100	3	4 23	1270.1552	209.5029	43.68437	90.59584
## 240	116 100	3	5 24	1345.6971	198.5101	40.52071	83.82348
## 241	117 100	1	1 19	1403.0974	415.2946	95.27512	200.16559
## 242	117 100	1	2 17	1339.9588	247.1947	59.95353	127.09581
## 243	117 100	1	3 21	1555.5001	550.5829	120.14704	250.62233
## 244	117 100	1	4 20	1423.8212	374.6269	83.76912	175.33078
## 245	117 100	1	5 21	1579.0680	586.8863	128.06908	267.14743
## 246	117 100	2	1 21	1291.3708	448.2158	97.80872	204.02541
## 247	117 100	2	2 23	1265.4818	369.6322	77.07365	159.84097
## 248	117 100	2	3 23	1346.1346	413.1105	86.13949	178.64238
## 249	117 100	2	4 22	1230.5466	261.3275	55.71521	115.86612
## 250	117 100	2	5 21	1384.1038	405.2388	88.43035	184.46248
## 251	117 100	3	1 23	1316.1883	469.1563	97.82584	202.87838
## 252	117 100	3	2 22	1219.4350	226.2870	48.24454	100.33002
## 253	117 100	3	3 24	1409.7018	433.5256	88.49305	183.06182
## 254	117 100	3	4 22	1259.2501	430.0137	91.67922	190.65738
## 255	117 100	3	5 24	1303.9518	327.6630	66.88394	138.35997
## 256	118 100	1	1 21	1382.3957	527.3595	115.07927	240.05116
## 257	118 100	1	2 21	1522.9463	619.2724	135.13632	281.88942
## 258	118 100	1	3 21	1532.9058	549.0874	119.82070	249.94161
## 259	118 100	1	4 21	1514.7571	629.7051	137.41293	286.63834
## 260	118 100	1	5 17	1378.0469	481.2649	116.72387	247.44356
## 261	118 100	2	1 21	1135.4206	474.2366	103.48690	215.86990
## 262	118 100	2	2 24	1220.0276	321.5133	65.62862	135.76315
## 263	118 100	2	3 23	1215.3544	335.6795	69.99401	145.15870

## 264	118	100	2	4	21	1293.3228	367.7129	80.24152	167.38088
## 265	118	100	2	5	23	1432.7240	572.8981	119.45750	247.73970
## 266	118	100	3	1	23	1273.8291	416.3052	86.80564	180.02387
## 267	118	100	3	2	24	1427.4026	616.6584	125.87487	260.39201
## 268	118	100	3	3	23	1236.0785	411.9566	85.89889	178.14340
## 269	118	100	3	4	21	1316.0199	467.8253	102.08786	212.95154
## 270	118	100	3	5	20	1454.8378	642.8706	143.75023	300.87270
## 271	119	83	1	1	19	1389.3999	431.9863	99.10445	208.21072
## 272	119	83	1	2	18	1349.1446	435.3157	102.60489	216.47740
## 273	119	83	1	3	18	1408.7464	483.9850	114.07636	240.68008
## 274	119	83	1	4	18	1339.8588	466.4117	109.93430	231.94110
## 275	119	83	1	5	17	1329.4041	362.4648	87.91062	186.36220
## 276	119	83	2	1	21	1543.9834	373.2356	81.44670	169.89483
## 277	119	83	2	2	22	1278.1155	484.0949	103.20939	214.63567
## 278	119	83	2	3	16	1424.1952	392.3671	98.09177	209.07766
## 279	119	83	2	4	21	1502.5358	418.0943	91.23567	190.31427
## 280	119	83	2	5	15	1654.3117	356.3750	92.01563	197.35391
## 281	119	83	3	1	21	1408.9437	439.2475	95.85166	199.94306
## 282	119	83	3	2	22	1097.6799	330.6858	70.50246	146.61789
## 283	119	83	3	3	21	1241.5090	330.0779	72.02890	150.24965
## 284	119	83	3	4	21	1210.6017	338.0194	73.76189	153.86460
## 285	119	83	3	5	22	1244.0312	502.9982	107.23957	223.01690
## 286	120	75	1	1	8	1250.6518	369.9371	130.79251	309.27514
## 287	120	75	1	2	13	1677.0523	612.9922	170.01344	370.42746
## 288	120	75	1	3	12	1204.3829	356.7538	102.98594	226.67053
## 289	120	75	1	4	18	1420.0321	490.9063	115.70773	244.12197
## 290	120	75	1	5	12	1465.3693	643.4496	185.74791	408.82840
## 291	120	75	2	1	15	1273.0214	503.6087	130.03121	278.88920
## 292	120	75	2	2	15	1185.5242	315.6730	81.50642	174.81388
## 293	120	75	2	3	10	1650.1187	759.4871	240.17092	543.30436
## 294	120	75	2	4	18	1317.0788	459.1972	108.23381	228.35337
## 295	120	75	2	5	14	1562.7185	586.0235	156.62137	338.35990
## 296	120	75	3	1	19	1175.8661	206.2909	47.32637	99.42901
## 297	120	75	3	2	14	1216.7220	378.7311	101.22013	218.67280
## 298	120	75	3	3	18	1156.6040	312.5545	73.66981	155.42971
## 299	120	75	3	4	10	1562.5556	557.6170	176.33399	398.89520
## 300	120	75	3	5	13	1428.6633	520.7045	144.41746	314.65860

```

override.linetype<-c("dashed")
(plot_rt_repetition_PWA_session1 <- means_final %>%
  filter(session=="1") %>%
  ggplot(., aes(x=PosOr, y=VOT, group=AAT, color = AAT)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=AAT, color=AAT),
    fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+
  scale_colour_manual(values=c("#feedec", "#fdcac6", "#fca7a0",
    "#fb8479", "#fa6153",
    "#f93e2d", "#f81b07",
    "#d21706", "#ac1305",
    "#860f04", "#5f0b03",
    "#390602", "#130201"))+
  geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = AAT), width =.1) +
  apatheme+

```

```


scale_y_continuous(limits = c(600, 2400),
                   breaks = seq(800, 2400, by = 200)) +
labs(x="Ordinal Position ", y="RT (ms)", colour="Session",
     linetype="Session",
     title = "Session 1") +
theme(
  axis.title.y = element_text(margin = margin(0,10,0,0)),
  axis.title.x = element_text(margin = margin(10,0,0,0)),
  legend.key.width = unit(1, "cm"),
  legend.position="none")+
guides(color=guide_legend(
  override.aes=list(linetype=override.linetype)))+
scale_linetype(guide="none")

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

Session 1

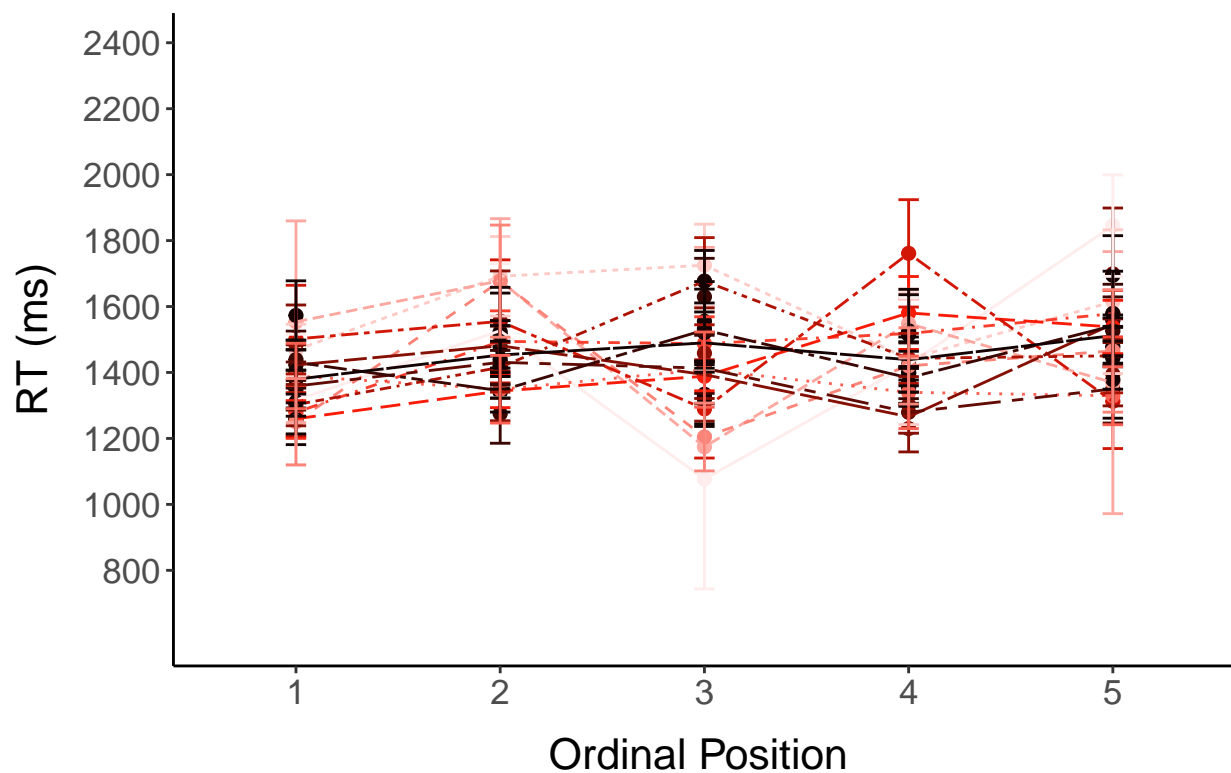

```

(plot_rt_repetition_PWA_session2 <- means_final %>%
  filter(session=="2") %>%
  ggplot(., aes(x=PosOr, y=VOT, group=AAT, color = AAT)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=AAT, color=AAT),
               fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+

```



```


scale_colour_manual(values=c("#feedec", "#fdcac6", "#fca7a0",
                             "#fb8479", "#fa6153",
                             "#f93e2d", "#f81b07",
                             "#d21706", "#ac1305",
                             "#860f04", "#5f0b03",
                             "#390602", "#130201"))+

geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = AAT), width =.1) +
apatheme+
scale_y_continuous(limits = c(600, 2400),
                   breaks =seq(800,2400, by = 200)) +
labs(x="Ordinal Position ",y ="RT (ms)", colour="Session",
      linetype="Session",
      title = "Session 2") +
theme(
  axis.title.y = element_text(margin = margin(0,10,0,0)),
  axis.title.x = element_text(margin = margin(10,0,0,0)),
  legend.key.width = unit(1, "cm"),
  legend.position="none")+
guides(color=guide_legend(
  override.aes=list(linetype=override.linetype)))+
scale_linetype(guide="none")

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

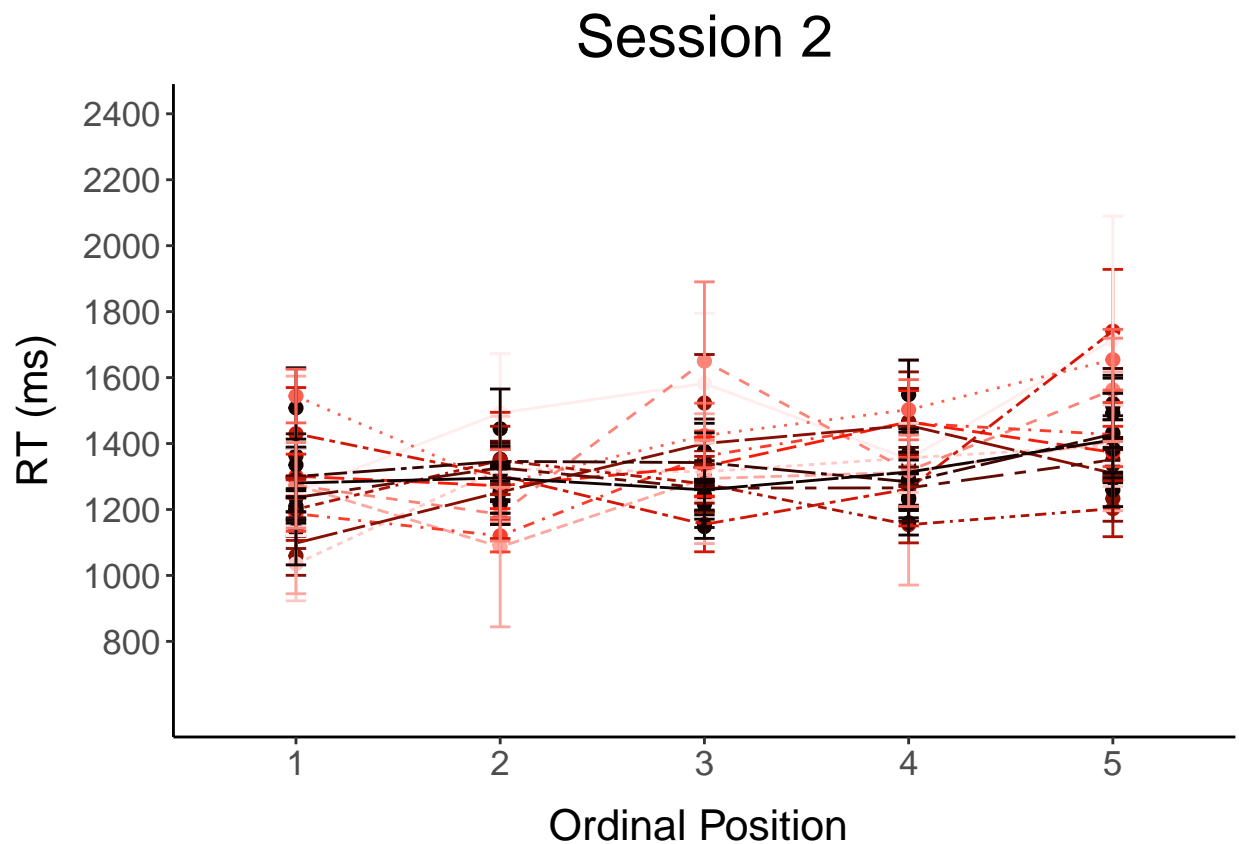

```


(plot_rt_repetition_PWA_session3 <- means_final %>%
  filter(session=="3") %>%
  ggplot(., aes(x=PosOr, y=VOT, group=AAT, color = AAT)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=AAT, color=AAT),
    fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+
  scale_colour_manual(values=c("#feedec", "#fdcac6", "#fca7a0",
    "#fb8479", "#fa6153",
    "#f93e2d", "#f81b07",
    "#d21706", "#ac1305",
    "#860f04", "#5f0b03",
    "#390602", "#130201"))+
  geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = AAT), width =.1) +
  apatheme+
  scale_y_continuous(limits = c(600, 2400),
    breaks =seq(800,2400, by = 200)) +
  labs(x="Ordinal Position ",y ="RT (ms)", colour="Naming score",
    # linetype="Session",
    title = "Session 3") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"),
    legend.position="right")+
  scale_linetype(guide="none"))

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

Session 3

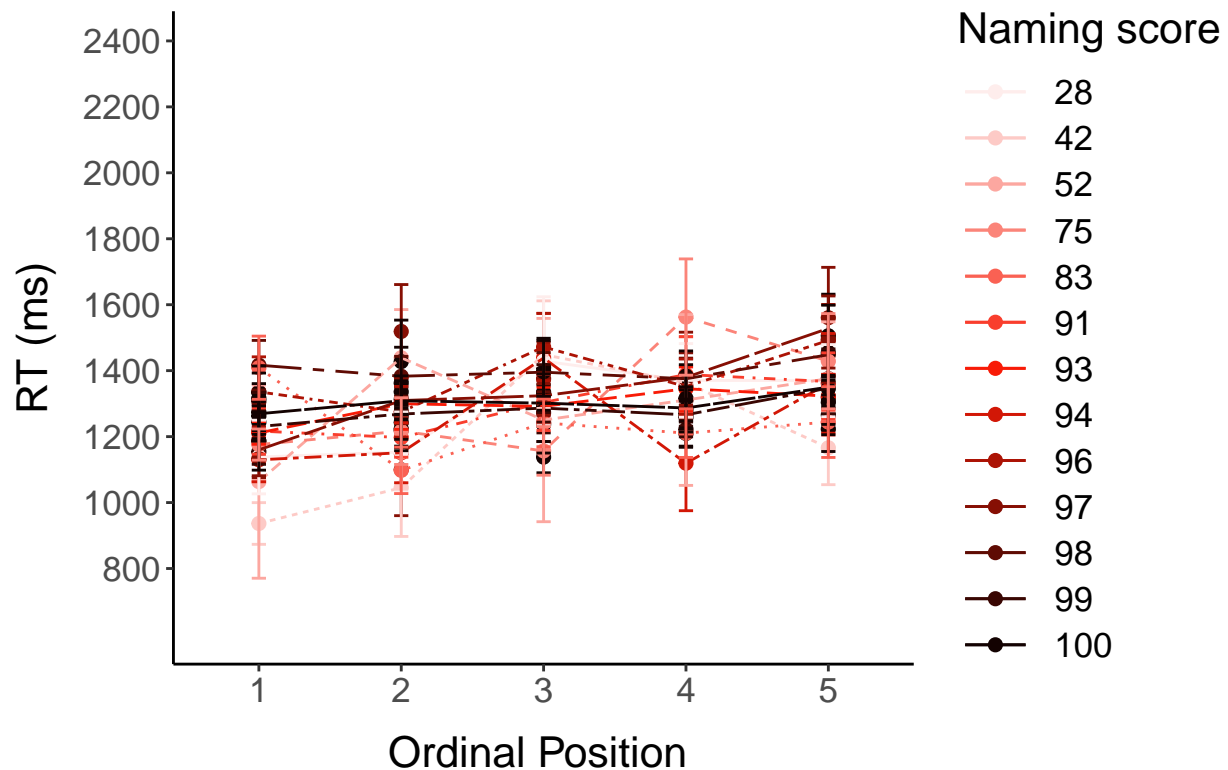

```
plots <- cowplot::plot_grid(plot_rt_repetition_PWA_session1,
                             plot_rt_repetition_PWA_session2,
                             plot_rt_repetition_PWA_session3,
                             nrow = 1, ncol=3, rel_widths = c(0.81,0.81,1),
                             margin(1,1,1,1),
                             labels = c("B", "C", "D"),label_size = 34,
                             label_fontfamily = "Helvetica", label_y = 1.01,
                             label_x=-0.03)
```

```
## Warning in as_grob.default(plot): Cannot convert object of class
## marginsimpleUnitunitunit_v2 into a grob.
```

```
filename <- "CSI_online_aphasia_spoken_plot_PWA_AAT_scores.pdf"
ggsave(plots, filename =
  here::here("results", "figures", filename),
  width = 25, height = 13, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))
```

```
#### Trying to understand the interaction:
# median split of means final
median(as.numeric(as.character(means_final$AAT)))
```

```
## [1] 97
```

```

means_final %>%
  mutate(med_split=case_when(as.numeric(as.character(AAT)) >
    median(as.numeric(as.character(
      means_final$AAT))) ~ "high",
    as.numeric(as.character(AAT)) <
    median(as.numeric(as.character(
      means_final$AAT))) ~ "low",
    as.numeric(as.character(AAT)) ==
    median(as.numeric(as.character(
      means_final$AAT))) ~
      "median"),
    mean_split=case_when(
    as.numeric(as.character(AAT)) >
    mean(as.numeric(as.character(
      means_final$AAT))) ~ "high",
    as.numeric(as.character(AAT)) <
    mean(as.numeric(as.character(
      means_final$AAT))) ~ "low",
    as.numeric(as.character(AAT)) ==
    mean(as.numeric(as.character(
      means_final$AAT))) ~ "median")) ->
    means_final

means_final %>% group_by(med_split) %>% summarise(mean=mean(VOT),
                                                    sd = sd(VOT))

```

```

## # A tibble: 3 x 3
##   med_split mean    sd
##   <chr>      <dbl> <dbl>
## 1 high      1356.  113.
## 2 low       1364.  169.
## 3 median    1355.  153.

```

```

means_final %>% group_by(mean_split) %>% summarise(mean=mean(VOT),
                                                    sd = sd(VOT))

```

```

## # A tibble: 2 x 3
##   mean_split mean    sd
##   <chr>      <dbl> <dbl>
## 1 high      1357.  128.
## 2 low       1366.  186.

```

```

(means_final<- df_RTs_PWA %>%
  filter(category != "Filler") %>%
  Rmisc::summarySE(.,measurevar="VOT",
    groupvars = c("subject","AAT"), na.rm = T))

```

```


##   subject AAT    N      VOT      sd      se      ci
## 1      101  98 345  775.3710 380.0659 20.46206 40.24650
## 2      102  99 351  886.8604 292.5880 15.61719 30.71535
## 3      103  97 245 1355.3306 560.3643 35.80036 70.51719
## 4      104  42 154 1745.7143 508.6572 40.98876 80.97700

```

```
## 5      105  91 327 1586.3639 436.7228 24.15083  47.51114
## 6      106  94 233 1639.8584 592.6691 38.82705  76.49867
## 7      107  93 333 1300.3393 379.0231 20.77034  40.85806
## 8      108  99 324 1264.6759 434.0358 24.11310  47.43856
## 9      109  52  67 2169.3731 617.2171 75.40507 150.55108
## 10     110 100 327 1220.1957 449.9797 24.88394  48.95336
## 11     111  96 311 1837.2637 464.0219 26.31227  51.77323
## 12     112  28  78 1705.7179 569.9750 64.53696 128.50951
## 13     113 100 305 1151.9082 401.5656 22.99358  45.24672
## 14     114  97 287 1278.4530 486.1275 28.69520  56.48056
## 15     115 100 335 1465.9582 430.1200 23.49997  46.22659
## 16     116 100 348 1238.8707 350.2938 18.77772  36.93247
## 17     117 100 323 1336.9969 427.5771 23.79103  46.80548
## 18     118 100 324 1414.3981 539.9319 29.99621  59.01262
## 19     119  83 292 1560.5582 483.6372 28.30273  55.70400
## 20     120  75 209 1469.4641 537.0199 37.14644  73.23179
```

```
(plot_rt_PWA_AAT <- means_final %>%
  ggplot(., aes(x=AAT, y=VOT)) +
  geom_point(size = 2)+
  scale_colour_manual(values=c("#feedec", "#fdcac6", "#fca7a0",
                                "#fb8479", "#fa6153",
                                "#f93e2d", "#f81b07",
                                "#d21706", "#ac1305",
                                "#860f04", "#5f0b03",
                                "#390602", "#130201"))+
  geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = AAT), width =.1) +
  apatheme+
  scale_y_continuous(limits = c(600, 2400),
                     breaks =seq(800,2400, by = 200)) +
  labs(x="Naming test percentile score ",y ="RT (ms)", colour="Naming score",
       # linetype="Session",
       title = "Mean RTs across sessions and\nordinal positions by Naming test score") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"),
    legend.position="none")+
  scale_linetype(guide="none"))
```

Mean RTs across sessions and ordinal positions by Naming test score

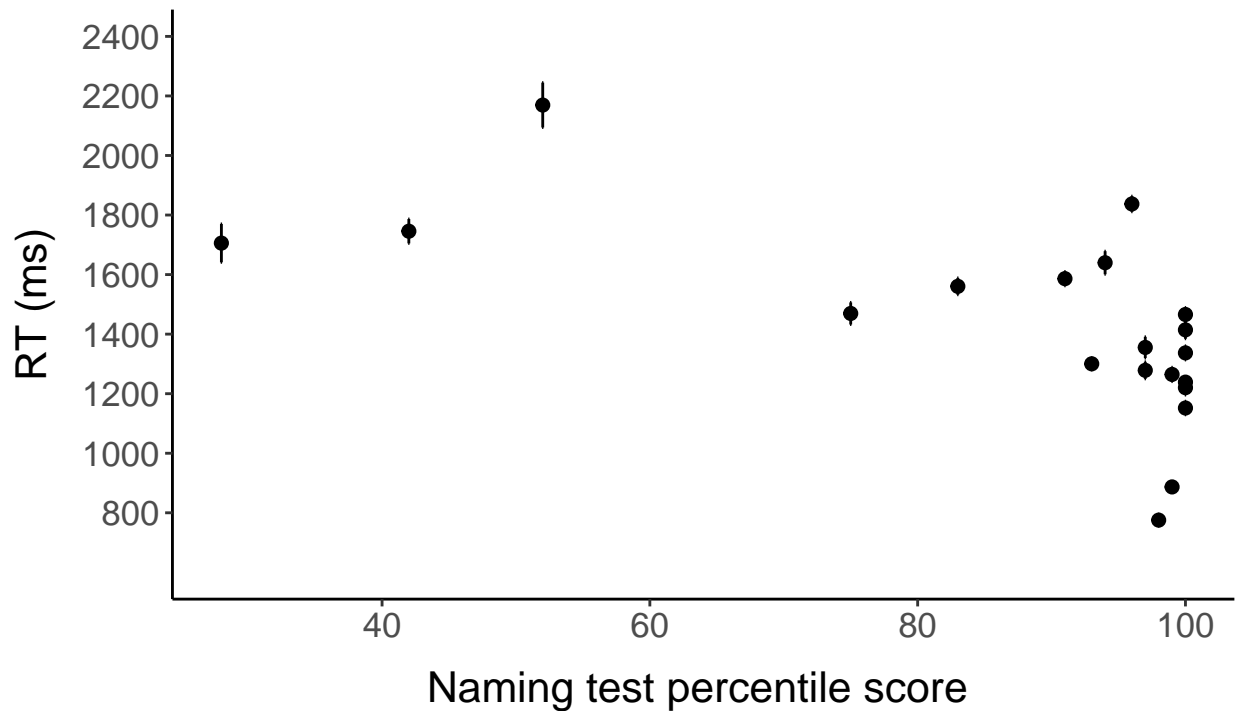

```
filename <- "CSI_online_aphasia_spoken_plot_PWA_AAT.pdf"
ggsave(plot_rt_PWA_AAT, filename =
  here::here("results", "figures", filename),
  width = 15, height = 10, units = "cm",
  dpi = 300, device = cairo_pdf)

plots2 <- cowplot::plot_grid(plot_rt_PWA_AAT, plots,
  nrow = 1, ncol=2, rel_widths = c(0.81,0.81,1),
  rel_height = c(4,1),
  margin(1.5,1.5,1.5,1.5),
  labels = c("A", ""), label_size = 34,
  #label_fontfamily = "Helvetica",
  label_y = 1.01,
  label_x=-0.03)
```

```
## Warning in as_grob.default(plot): Cannot convert object of class numeric into a
## grob.
```

```
## Warning in as_grob.default(plot): Cannot convert object of class
## marginsimpleUnitunitunit_v2 into a grob.
```

```
filename <- "CSI_online_aphasia_spoken_plot_PWA_AAT_summary_plot.pdf"
ggsave(plots2, filename =
  here::here("results", "figures", filename),
```

```
width = 25, height = 20, units = "cm",  
dpi = 300, device = cairo_pdf)
```

Errors Add into converging model

```
cor.test(df_errors_PWA$TokenTest_c, df_errors_PWA$LHoverall_c)
```

```
##  
## Pearson's product-moment correlation  
##  
## data: df_errors_PWA$TokenTest_c and df_errors_PWA$LHoverall_c  
## t = -44.023, df = 7176, p-value < 0.00000000000000022  
## alternative hypothesis: true correlation is not equal to 0  
## 95 percent confidence interval:  
## -0.4791506 -0.4427161  
## sample estimates:  
## cor  
## -0.4611277
```

```
cor.test(df_errors_PWA$AAT_c, df_errors_PWA$LHoverall_c)
```

```
##  
## Pearson's product-moment correlation  
##  
## data: df_errors_PWA$AAT_c and df_errors_PWA$LHoverall_c  
## t = -55.609, df = 7176, p-value < 0.00000000000000022  
## alternative hypothesis: true correlation is not equal to 0  
## 95 percent confidence interval:  
## -0.5647379 -0.5323978  
## sample estimates:  
## cor  
## -0.5487731
```

```
cor.test(df_errors_PWA$AAT_c, df_errors_PWA$TokenTest_c)
```

```
##  
## Pearson's product-moment correlation  
##  
## data: df_errors_PWA$AAT_c and df_errors_PWA$TokenTest_c  
## t = 151.84, df = 7176, p-value < 0.00000000000000022  
## alternative hypothesis: true correlation is not equal to 0  
## 95 percent confidence interval:  
## 0.8676779 0.8786656  
## sample estimates:  
## cor  
## 0.8732828
```

```
cor.test(df_errors_PWA$AAT_spontansprache, df_errors_PWA$TokenTest_c)
```

```
##
## Pearson's product-moment correlation
##
## data: df_errors_PWA$AAT_spontansprache and df_errors_PWA$TokenTest_c
## t = 66.274, df = 7176, p-value < 0.00000000000000022
## alternative hypothesis: true correlation is not equal to 0
## 95 percent confidence interval:
## 0.6016264 0.6303336
## sample estimates:
## cor
## 0.6161846
```

```
# m1_glmm_PWA_all <- glmer(error_class ~
#                               PosOr.cont*session*TokenTest_c*AAT_c*LHoverall_c +
#                               (PosOr.cont |subject) +
#                               (1|category) ,
#                               data=df_errors_PWA, family = "binomial",
#                               control=glmerControl(optimizer = "bobyqa",
#                               optCtrl = list(maxfun = 2e5)))
# m1_glmm_PWA_all <- afex::lmer_alt(error_class ~
#                               PosOr.cont*session*(TokenTest_c*AAT_c*
#                               AAT_spontansprache_c*
#                               LHoverall_c) +
#                               (PosOr.cont |subject) +
#                               (1|category) ,
#                               data=df_errors_PWA, family = "binomial",
#                               control=glmerControl(optimizer = "bobyqa",
#                               optCtrl = list(maxfun = 2e5)))

m1_glmm_PWA_all <- afex::lmer_alt(error_class ~
                                PosOr.cont*session*(TokenTest_c+AAT_c+
                                AAT_spontansprache_c+
                                LHoverall_c) +
                                (PosOr.cont |subject) +
                                (1|category) ,
                                data=df_errors_PWA, family = "binomial",
                                control=glmerControl(optimizer = "bobyqa",
                                optCtrl = list(maxfun = 2e5)))

# m1_glmm_PWA_all <- afex::lmer_alt(error_class ~
#                               PosOr.cont*session*(TokenTest_c*AAT_c*
#                               LHoverall_c) +
#                               (PosOr.cont |subject) +
#                               (1|category) ,
#                               data=df_errors_PWA, family = "binomial",
#                               control=glmerControl(optimizer = "bobyqa",
#                               optCtrl = list(maxfun = 2e5)))

didLmerConverge(m1_glmm_PWA_all)
```

```
## The relative maximum gradient of 0.0000465 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```



```
## Warnings can be ignored
```

```
summary(m1_glmm_PWA_all)
```

```
## Generalized linear mixed model fit by maximum likelihood (Laplace
##   Approximation) [glmerMod]
##   Family: binomial   ( logit )
## Formula:
## error_class ~ PosOr.cont * session * (TokenTest_c + AAT_c + AAT_spontansprache_c +
##   LHoverall_c) + (1 + re1.PosOr.cont | subject) + (1 | category)
##   Data: data
## Control: glmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
##      AIC      BIC    logLik deviance df.resid
##  5329.1   5563.0  -2630.5   5261.1     7144
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -3.9219 -0.3912 -0.2415 -0.1200  9.8488
##
## Random effects:
##   Groups   Name                Variance Std.Dev. Corr
##   category (Intercept)         0.349037 0.5908
##   subject  (Intercept)         0.661274 0.8132
##           re1.PosOr.cont 0.007276 0.0853   0.05
## Number of obs: 7178, groups:  category, 24; subject, 20
##
## Fixed effects:
##
##              Estimate Std. Error z value
## (Intercept)    -1.868138   0.223130  -8.372
## PosOr.cont         0.091736   0.036639   2.504
## session2        -0.444675   0.089118  -4.990
## session3        -0.736607   0.092820  -7.936
## TokenTest_c     -0.078771   0.404053  -0.195
## AAT_c           -1.134324   0.402664  -2.817
## AAT_spontansprache_c -0.071116   0.239747  -0.297
## LHoverall_c      0.002373   0.222665   0.011
## PosOr.cont:session2 -0.049177   0.062922  -0.782
## PosOr.cont:session3 -0.042042   0.065504  -0.642
## PosOr.cont:TokenTest_c -0.082566   0.063911  -1.292
## PosOr.cont:AAT_c   -0.062287   0.062476  -0.997
## PosOr.cont:AAT_spontansprache_c 0.093650   0.047339   1.978
## PosOr.cont:LHoverall_c -0.054721   0.038568  -1.419
## session2:TokenTest_c -0.033723   0.150716  -0.224
## session3:TokenTest_c -0.198145   0.154573  -1.282
## session2:AAT_c     -0.044075   0.155617  -0.283
## session3:AAT_c      0.053915   0.156123   0.345
## session2:AAT_spontansprache_c -0.017978   0.113045  -0.159
## session3:AAT_spontansprache_c 0.233157   0.121585   1.918
## session2:LHoverall_c 0.127220   0.102052   1.247
## session3:LHoverall_c 0.176587   0.102239   1.727
## PosOr.cont:session2:TokenTest_c -0.085100   0.106578  -0.798
## PosOr.cont:session3:TokenTest_c -0.218500   0.109560  -1.994
```

```

## Pos0r.cont:session2:AAT_c          0.154716    0.110082    1.405
## Pos0r.cont:session3:AAT_c          0.292621    0.110689    2.644
## Pos0r.cont:session2:AAT_spontansprache_c -0.024067    0.079779   -0.302
## Pos0r.cont:session3:AAT_spontansprache_c -0.070096    0.085723   -0.818
## Pos0r.cont:session2:LHoverall_c     0.112933    0.072131    1.566
## Pos0r.cont:session3:LHoverall_c     0.042705    0.072236    0.591
##                                     Pr(>|z|)
## (Intercept)                        < 0.0000000000000002 ***
## Pos0r.cont                          0.01229 *
## session2                            0.00000060468889586 ***
## session3                            0.000000000000000209 ***
## TokenTest_c                         0.84543
## AAT_c                               0.00485 **
## AAT_spontansprache_c                0.76675
## LHoverall_c                        0.99150
## Pos0r.cont:session2                 0.43448
## Pos0r.cont:session3                 0.52098
## Pos0r.cont:TokenTest_c              0.19640
## Pos0r.cont:AAT_c                    0.31878
## Pos0r.cont:AAT_spontansprache_c     0.04790 *
## Pos0r.cont:LHoverall_c              0.15596
## session2:TokenTest_c                0.82295
## session3:TokenTest_c                0.19988
## session2:AAT_c                      0.77700
## session3:AAT_c                      0.72984
## session2:AAT_spontansprache_c       0.87364
## session3:AAT_spontansprache_c       0.05516 .
## session2:LHoverall_c                0.21254
## session3:LHoverall_c                0.08413 .
## Pos0r.cont:session2:TokenTest_c     0.42459
## Pos0r.cont:session3:TokenTest_c     0.04611 *
## Pos0r.cont:session2:AAT_c           0.15989
## Pos0r.cont:session3:AAT_c           0.00820 **
## Pos0r.cont:session2:AAT_spontansprache_c 0.76290
## Pos0r.cont:session3:AAT_spontansprache_c 0.41352
## Pos0r.cont:session2:LHoverall_c     0.11742
## Pos0r.cont:session3:LHoverall_c     0.55440
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

```

##
## Correlation matrix not shown by default, as p = 30 > 12.
## Use print(x, correlation=TRUE) or
##     vcov(x)         if you need it

```

```
anova(m1_glmm_PWA_all)
```

```

## Analysis of Variance Table
##
##      npar Sum Sq Mean Sq F value
## Pos0r.cont      1  8.624    8.624  8.6237
## session          2 62.788   31.394 31.3940
## TokenTest_c      1 34.852   34.852 34.8517
## AAT_c            1  8.540    8.540  8.5397

```

## AAT_spontansprache_c	1	0.207	0.207	0.2073
## LHoverall_c	1	0.001	0.001	0.0013
## PosOr.cont:session	2	0.667	0.333	0.3333
## PosOr.cont:TokenTest_c	1	2.824	2.824	2.8242
## PosOr.cont:AAT_c	1	0.180	0.180	0.1801
## PosOr.cont:AAT_spontansprache_c	1	5.376	5.376	5.3759
## PosOr.cont:LHoverall_c	1	2.205	2.205	2.2053
## session:TokenTest_c	2	4.480	2.240	2.2402
## session:AAT_c	2	1.148	0.574	0.5740
## session:AAT_spontansprache_c	2	4.964	2.482	2.4820
## session:LHoverall_c	2	3.168	1.584	1.5840
## PosOr.cont:session:TokenTest_c	2	0.550	0.275	0.2752
## PosOr.cont:session:AAT_c	2	6.627	3.314	3.3137
## PosOr.cont:session:AAT_spontansprache_c	2	0.666	0.333	0.3329
## PosOr.cont:session:LHoverall_c	2	2.469	1.234	1.2344

```
saveRDS(m1_glmm_PWA_all, file = here::here("results", "tables", "CSI_online_aphasia_PWA_lmm_error_TokenTest_Naming_Lesionsize.html"),
tab_model(m1_glmm_PWA_tt, transform = NULL,
  show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
  title =
    "GLMM of errors Predicted by Ordinal Position and Session",
  dv.labels = "Errors",
  #string.pred = "",
  string.stat = "z-Value",
  file = here::here(
    "results", "tables",
    "CSI_online_aphasia_PWA_control_glmm_error_TokenTest_Naming_Lesionsize.html"))
```

GLMM of errors Predicted by Ordinal Position and Session

Errors

Predictors

Log-Odds

CI

z-Value

p

(Intercept)

-1.87

-2.37 – -1.37

-7.33

<0.001

PosOr cont

0.09

0.01 – 0.17

2.14

0.032
 session [2]
 -0.43
 -0.61 – -0.26
 -4.96
 <0.001
 session [3]
 -0.74
 -0.92 – -0.56
 -8.01
 <0.001
 TokenTest c
 -1.12
 -1.55 – -0.68
 -5.03
 <0.001
 PosOr cont \times session [2]
 -0.05
 -0.17 – 0.07
 -0.77
 0.441
 PosOr cont \times session [3]
 -0.05
 -0.18 – 0.08
 -0.75
 0.451
 PosOr cont \times TokenTest c
 -0.05
 -0.12 – 0.02
 -1.45
 0.146
 session [2] \times TokenTest c
 -0.15
 -0.30 – -0.01
 -2.07
 0.038

```

session [3] × TokenTest c
-0.12
-0.26 – 0.03
-1.55
0.120
(PosOr cont × session[2]) × TokenTest c
-0.03
-0.13 – 0.07
-0.59
0.558
(PosOr cont × session[3]) × TokenTest c
-0.04
-0.14 – 0.07
-0.71
0.478
N subject
20
N category
24
Observations
7178
Plot errors and Tests

```

```

(means_final<- df_errors_PWA %>%
  filter(category != "Filler") %>%
  Rmisc::summarySEwithin(., "error_class", idvar = "category",
    withinvars = c("session", "PosOr"),
    betweenvars = c("subject", "AAT", "TokenTest",
      "AAT_spontansprache"),
    na.rm = T))

```

```
## Automatically converting the following non-factors to factors: AAT, TokenTest, AAT_spontansprache
```

	subject	AAT	TokenTest	AAT_spontansprache	session	PosOr	N	error_class
## 1	101	98	97		3	1	1 23	0.275139242
## 2	101	98	97		3	1	2 23	0.275139242
## 3	101	98	97		3	1	3 24	0.230953597
## 4	101	98	97		3	1	4 23	0.188182721
## 5	101	98	97		3	1	5 23	0.194393901
## 6	101	98	97		3	2	1 23	0.275139242
## 7	101	98	97		3	2	2 24	0.189286931
## 8	101	98	97		3	2	3 24	0.189286931
## 9	101	98	97		3	2	4 24	0.189286931

## 10	101	98	97	3	2	5 24	0.230953597
## 11	101	98	97	3	3	1 24	0.230953597
## 12	101	98	97	3	3	2 24	0.189286931
## 13	101	98	97	3	3	3 24	0.189286931
## 14	101	98	97	3	3	4 24	0.189286931
## 15	101	98	97	3	3	5 24	0.189286931
## 16	102	99	99	4	1	1 24	0.231350423
## 17	102	99	99	4	1	2 24	0.231350423
## 18	102	99	99	4	1	3 24	0.189683756
## 19	102	99	99	4	1	4 24	0.189683756
## 20	102	99	99	4	1	5 24	0.189683756
## 21	102	99	99	4	2	1 24	0.231350423
## 22	102	99	99	4	2	2 24	0.231350423
## 23	102	99	99	4	2	3 24	0.231350423
## 24	102	99	99	4	2	4 24	0.189683756
## 25	102	99	99	4	2	5 24	0.189683756
## 26	102	99	99	4	3	1 24	0.273017089
## 27	102	99	99	4	3	2 24	0.189683756
## 28	102	99	99	4	3	3 24	0.189683756
## 29	102	99	99	4	3	4 24	0.231350423
## 30	102	99	99	4	3	5 24	0.231350423
## 31	103	97	95	4	1	1 24	0.028572645
## 32	103	97	95	4	1	2 24	0.236905978
## 33	103	97	95	4	1	3 24	0.320239311
## 34	103	97	95	4	1	4 24	0.361905978
## 35	103	97	95	4	1	5 24	0.320239311
## 36	103	97	95	4	2	1 24	0.195239311
## 37	103	97	95	4	2	2 24	0.070239311
## 38	103	97	95	4	2	3 24	0.236905978
## 39	103	97	95	4	2	4 24	0.195239311
## 40	103	97	95	4	2	5 24	0.195239311
## 41	103	97	95	4	3	1 24	0.153572645
## 42	103	97	95	4	3	2 24	0.320239311
## 43	103	97	95	4	3	3 24	0.195239311
## 44	103	97	95	4	3	4 24	0.153572645
## 45	103	97	95	4	3	5 24	0.236905978
## 46	104	42	39	3	1	1 24	0.189683756
## 47	104	42	39	3	1	2 24	0.189683756
## 48	104	42	39	3	1	3 24	0.189683756
## 49	104	42	39	3	1	4 24	0.356350423
## 50	104	42	39	3	1	5 24	0.439683756
## 51	104	42	39	3	2	1 24	0.189683756
## 52	104	42	39	3	2	2 24	0.106350423
## 53	104	42	39	3	2	3 24	0.273017089
## 54	104	42	39	3	2	4 24	0.189683756
## 55	104	42	39	3	2	5 24	0.314683756
## 56	104	42	39	3	3	1 24	0.231350423
## 57	104	42	39	3	3	2 24	0.064683756
## 58	104	42	39	3	3	3 24	0.064683756
## 59	104	42	39	3	3	4 24	0.189683756
## 60	104	42	39	3	3	5 24	0.231350423
## 61	105	91	79	4	1	1 24	0.175794867
## 62	105	91	79	4	1	2 24	0.217461534
## 63	105	91	79	4	1	3 24	0.259128200

## 64	105	91	79	4	1	4 24	0.175794867
## 65	105	91	79	4	1	5 24	0.425794867
## 66	105	91	79	4	2	1 24	0.217461534
## 67	105	91	79	4	2	2 24	0.217461534
## 68	105	91	79	4	2	3 24	0.134128200
## 69	105	91	79	4	2	4 24	0.217461534
## 70	105	91	79	4	2	5 24	0.259128200
## 71	105	91	79	4	3	1 24	0.134128200
## 72	105	91	79	4	3	2 24	0.175794867
## 73	105	91	79	4	3	3 24	0.175794867
## 74	105	91	79	4	3	4 24	0.259128200
## 75	105	91	79	4	3	5 24	0.175794867
## 76	106	94	86	3	1	1 24	0.267461534
## 77	106	94	86	3	1	2 24	0.309128200
## 78	106	94	86	3	1	3 24	0.350794867
## 79	106	94	86	3	1	4 24	0.309128200
## 80	106	94	86	3	1	5 24	0.350794867
## 81	106	94	86	3	2	1 24	0.267461534
## 82	106	94	86	3	2	2 24	0.142461534
## 83	106	94	86	3	2	3 24	0.184128200
## 84	106	94	86	3	2	4 24	0.184128200
## 85	106	94	86	3	2	5 24	0.309128200
## 86	106	94	86	3	3	1 24	0.017461534
## 87	106	94	86	3	3	2 24	0.184128200
## 88	106	94	86	3	3	3 24	0.017461534
## 89	106	94	86	3	3	4 24	0.142461534
## 90	106	94	86	3	3	5 24	0.184128200
## 91	107	93	97	4	1	1 24	0.236905978
## 92	107	93	97	4	1	2 24	0.195239311
## 93	107	93	97	4	1	3 24	0.278572645
## 94	107	93	97	4	1	4 24	0.195239311
## 95	107	93	97	4	1	5 24	0.361905978
## 96	107	93	97	4	2	1 24	0.195239311
## 97	107	93	97	4	2	2 24	0.195239311
## 98	107	93	97	4	2	3 24	0.153572645
## 99	107	93	97	4	2	4 24	0.195239311
## 100	107	93	97	4	2	5 24	0.236905978
## 101	107	93	97	4	3	1 24	0.153572645
## 102	107	93	97	4	3	2 24	0.153572645
## 103	107	93	97	4	3	3 24	0.195239311
## 104	107	93	97	4	3	4 24	0.195239311
## 105	107	93	97	4	3	5 24	0.278572645
## 106	108	99	93	4	1	1 24	0.181152010
## 107	108	99	93	4	1	2 24	0.222818677
## 108	108	99	93	4	1	3 24	0.222818677
## 109	108	99	93	4	1	4 24	0.306152010
## 110	108	99	93	4	1	5 24	0.347818677
## 111	108	99	93	4	2	1 24	0.181152010
## 112	108	99	93	4	2	2 24	0.181152010
## 113	108	99	93	4	2	3 24	0.181152010
## 114	108	99	93	4	2	4 24	0.181152010
## 115	108	99	93	4	2	5 23	0.226277959
## 116	108	99	93	4	3	1 24	0.139485343
## 117	108	99	93	4	3	2 24	0.222818677

## 118	108	99	93	4	3	3 24	0.222818677
## 119	108	99	93	4	3	4 24	0.139485343
## 120	108	99	93	4	3	5 24	0.264485343
## 121	109	52	58	3	1	1 23	0.241598870
## 122	109	52	58	3	1	2 24	0.207739311
## 123	109	52	58	3	1	3 24	0.291072645
## 124	109	52	58	3	1	4 23	0.157747938
## 125	109	52	58	3	1	5 24	0.332739311
## 126	109	52	58	3	2	1 24	0.332739311
## 127	109	52	58	3	2	2 24	0.249405978
## 128	109	52	58	3	2	3 24	0.249405978
## 129	109	52	58	3	2	4 24	0.249405978
## 130	109	52	58	3	2	5 24	0.249405978
## 131	109	52	58	3	3	1 24	0.166072645
## 132	109	52	58	3	3	2 24	0.207739311
## 133	109	52	58	3	3	3 23	0.095636137
## 134	109	52	58	3	3	4 24	0.166072645
## 135	109	52	58	3	3	5 23	0.008679615
## 136	110	100	97	4	1	1 24	0.214683756
## 137	110	100	97	4	1	2 24	0.298017089
## 138	110	100	97	4	1	3 24	0.256350423
## 139	110	100	97	4	1	4 24	0.423017089
## 140	110	100	97	4	1	5 24	0.298017089
## 141	110	100	97	4	2	1 24	0.173017089
## 142	110	100	97	4	2	2 24	0.173017089
## 143	110	100	97	4	2	3 24	0.173017089
## 144	110	100	97	4	2	4 24	0.173017089
## 145	110	100	97	4	2	5 24	0.214683756
## 146	110	100	97	4	3	1 24	0.131350423
## 147	110	100	97	4	3	2 24	0.131350423
## 148	110	100	97	4	3	3 24	0.173017089
## 149	110	100	97	4	3	4 24	0.173017089
## 150	110	100	97	4	3	5 24	0.214683756
## 151	111	96	99	4	1	1 24	0.209128200
## 152	111	96	99	4	1	2 24	0.250794867
## 153	111	96	99	4	1	3 24	0.334128200
## 154	111	96	99	4	1	4 24	0.167461534
## 155	111	96	99	4	1	5 24	0.292461534
## 156	111	96	99	4	2	1 24	0.167461534
## 157	111	96	99	4	2	2 24	0.292461534
## 158	111	96	99	4	2	3 24	0.292461534
## 159	111	96	99	4	2	4 24	0.084128200
## 160	111	96	99	4	2	5 24	0.125794867
## 161	111	96	99	4	3	1 24	0.209128200
## 162	111	96	99	4	3	2 24	0.250794867
## 163	111	96	99	4	3	3 24	0.292461534
## 164	111	96	99	4	3	4 24	0.125794867
## 165	111	96	99	4	3	5 24	0.125794867
## 166	112	28	15	3	1	1 24	0.073474965
## 167	112	28	15	3	1	2 23	0.234559532
## 168	112	28	15	3	1	3 23	0.349944148
## 169	112	28	15	3	1	4 23	0.238142905
## 170	112	28	15	3	1	5 20	0.323255184
## 171	112	28	15	3	2	1 24	0.115141631

## 172	112 28	15	3	2	2 24	0.115141631
## 173	112 28	15	3	2	3 24	0.240141631
## 174	112 28	15	3	2	4 24	0.365141631
## 175	112 28	15	3	2	5 24	0.365141631
## 176	112 28	15	3	3	1 24	-0.051525035
## 177	112 28	15	3	3	2 24	0.156808298
## 178	112 28	15	3	3	3 24	0.240141631
## 179	112 28	15	3	3	4 24	0.281808298
## 180	112 28	15	3	3	5 24	0.198474965
## 181	113 100	99	4	1	1 24	0.214683756
## 182	113 100	99	4	1	2 24	0.298017089
## 183	113 100	99	4	1	3 24	0.214683756
## 184	113 100	99	4	1	4 24	0.131350423
## 185	113 100	99	4	1	5 24	0.214683756
## 186	113 100	99	4	2	1 24	0.214683756
## 187	113 100	99	4	2	2 24	0.131350423
## 188	113 100	99	4	2	3 24	0.214683756
## 189	113 100	99	4	2	4 24	0.298017089
## 190	113 100	99	4	2	5 24	0.256350423
## 191	113 100	99	4	3	1 24	0.256350423
## 192	113 100	99	4	3	2 24	0.214683756
## 193	113 100	99	4	3	3 24	0.173017089
## 194	113 100	99	4	3	4 24	0.089683756
## 195	113 100	99	4	3	5 24	0.298017089
## 196	114 97	86	3	1	1 24	0.144048835
## 197	114 97	86	3	1	2 24	0.394048835
## 198	114 97	86	3	1	3 24	0.394048835
## 199	114 97	86	3	1	4 24	0.310715502
## 200	114 97	86	3	1	5 24	0.227382169
## 201	114 97	86	3	2	1 24	0.185715502
## 202	114 97	86	3	2	2 24	0.310715502
## 203	114 97	86	3	2	3 24	0.227382169
## 204	114 97	86	3	2	4 24	0.185715502
## 205	114 97	86	3	2	5 24	0.269048835
## 206	114 97	86	3	3	1 23	0.097499491
## 207	114 97	86	3	3	2 24	0.102382169
## 208	114 97	86	3	3	3 24	0.144048835
## 209	114 97	86	3	3	4 24	0.102382169
## 210	114 97	86	3	3	5 22	0.111653453
## 211	115 100	83	4	1	1 24	0.284128200
## 212	115 100	83	4	1	2 24	0.200794867
## 213	115 100	83	4	1	3 24	0.159128200
## 214	115 100	83	4	1	4 24	0.159128200
## 215	115 100	83	4	1	5 24	0.367461534
## 216	115 100	83	4	2	1 24	0.200794867
## 217	115 100	83	4	2	2 24	0.242461534
## 218	115 100	83	4	2	3 24	0.159128200
## 219	115 100	83	4	2	4 24	0.242461534
## 220	115 100	83	4	2	5 24	0.200794867
## 221	115 100	83	4	3	1 24	0.242461534
## 222	115 100	83	4	3	2 24	0.200794867
## 223	115 100	83	4	3	3 24	0.159128200
## 224	115 100	83	4	3	4 24	0.159128200
## 225	115 100	83	4	3	5 24	0.242461534

## 226	116 100	83	3	1	1 24	0.228572645
## 227	116 100	83	3	1	2 24	0.270239311
## 228	116 100	83	3	1	3 24	0.270239311
## 229	116 100	83	3	1	4 24	0.270239311
## 230	116 100	83	3	1	5 24	0.186905978
## 231	116 100	83	3	2	1 24	0.186905978
## 232	116 100	83	3	2	2 24	0.186905978
## 233	116 100	83	3	2	3 24	0.186905978
## 234	116 100	83	3	2	4 24	0.228572645
## 235	116 100	83	3	2	5 24	0.186905978
## 236	116 100	83	3	3	1 24	0.186905978
## 237	116 100	83	3	3	2 24	0.186905978
## 238	116 100	83	3	3	3 24	0.228572645
## 239	116 100	83	3	3	4 24	0.228572645
## 240	116 100	83	3	3	5 24	0.186905978
## 241	117 100	99	4	1	1 24	0.289683756
## 242	117 100	99	4	1	2 24	0.414683756
## 243	117 100	99	4	1	3 24	0.248017089
## 244	117 100	99	4	1	4 24	0.248017089
## 245	117 100	99	4	1	5 24	0.206350423
## 246	117 100	99	4	2	1 24	0.206350423
## 247	117 100	99	4	2	2 24	0.164683756
## 248	117 100	99	4	2	3 24	0.164683756
## 249	117 100	99	4	2	4 24	0.206350423
## 250	117 100	99	4	2	5 24	0.248017089
## 251	117 100	99	4	3	1 24	0.164683756
## 252	117 100	99	4	3	2 24	0.206350423
## 253	117 100	99	4	3	3 24	0.123017089
## 254	117 100	99	4	3	4 24	0.206350423
## 255	117 100	99	4	3	5 24	0.123017089
## 256	118 100	99	4	1	1 24	0.250794867
## 257	118 100	99	4	1	2 24	0.209128200
## 258	118 100	99	4	1	3 24	0.250794867
## 259	118 100	99	4	1	4 24	0.250794867
## 260	118 100	99	4	1	5 24	0.375794867
## 261	118 100	99	4	2	1 24	0.250794867
## 262	118 100	99	4	2	2 24	0.125794867
## 263	118 100	99	4	2	3 24	0.167461534
## 264	118 100	99	4	2	4 24	0.250794867
## 265	118 100	99	4	2	5 24	0.167461534
## 266	118 100	99	4	3	1 24	0.167461534
## 267	118 100	99	4	3	2 24	0.125794867
## 268	118 100	99	4	3	3 24	0.167461534
## 269	118 100	99	4	3	4 24	0.167461534
## 270	118 100	99	4	3	5 24	0.292461534
## 271	119 83	74	4	1	1 24	0.180358359
## 272	119 83	74	4	1	2 23	0.237872162
## 273	119 83	74	4	1	3 24	0.305358359
## 274	119 83	74	4	1	4 24	0.263691692
## 275	119 83	74	4	1	5 24	0.263691692
## 276	119 83	74	4	2	1 24	0.138691692
## 277	119 83	74	4	2	2 24	0.138691692
## 278	119 83	74	4	2	3 24	0.305358359
## 279	119 83	74	4	2	4 24	0.180358359

## 280	119	83	74	4	2	5 24	0.388691692
## 281	119	83	74	4	3	1 24	0.180358359
## 282	119	83	74	4	3	2 24	0.138691692
## 283	119	83	74	4	3	3 24	0.180358359
## 284	119	83	74	4	3	4 24	0.180358359
## 285	119	83	74	4	3	5 24	0.138691692
## 286	120	75	21	3	1	1 24	0.317064708
## 287	120	75	21	3	1	2 24	0.275398042
## 288	120	75	21	3	1	3 24	0.317064708
## 289	120	75	21	3	1	4 24	0.067064708
## 290	120	75	21	3	1	5 24	0.317064708
## 291	120	75	21	3	2	1 24	0.192064708
## 292	120	75	21	3	2	2 24	0.150398042
## 293	120	75	21	3	2	3 24	0.400398042
## 294	120	75	21	3	2	4 24	0.067064708
## 295	120	75	21	3	2	5 24	0.233731375
## 296	120	75	21	3	3	1 24	0.025398042
## 297	120	75	21	3	3	2 24	0.192064708
## 298	120	75	21	3	3	3 23	0.023379408
## 299	120	75	21	3	3	4 24	0.358731375
## 300	120	75	21	3	3	5 24	0.275398042
##	sd	se	ci				
## 1	0.26416256	0.055081702	0.11423246				
## 2	0.27785430	0.057936626	0.12015321				
## 3	0.19259716	0.039313732	0.08132665				
## 4	0.05087420	0.010608003	0.02199965				
## 5	0.04381574	0.009136214	0.01894735				
## 6	0.27617995	0.057587501	0.11942917				
## 7	0.05007002	0.010220500	0.02114272				
## 8	0.05007002	0.010220500	0.02114272				
## 9	0.05007002	0.010220500	0.02114272				
## 10	0.19259716	0.039313732	0.08132665				
## 11	0.20809817	0.042477861	0.08787215				
## 12	0.05007002	0.010220500	0.02114272				
## 13	0.05007002	0.010220500	0.02114272				
## 14	0.05007002	0.010220500	0.02114272				
## 15	0.05007002	0.010220500	0.02114272				
## 16	0.21171683	0.043216517	0.08940018				
## 17	0.19650149	0.040110699	0.08297530				
## 18	0.06374282	0.013011448	0.02691623				
## 19	0.06374282	0.013011448	0.02691623				
## 20	0.06374282	0.013011448	0.02691623				
## 21	0.21171683	0.043216517	0.08940018				
## 22	0.21171683	0.043216517	0.08940018				
## 23	0.16183472	0.033034374	0.06833681				
## 24	0.06374282	0.013011448	0.02691623				
## 25	0.06374282	0.013011448	0.02691623				
## 26	0.23844953	0.048673306	0.10068841				
## 27	0.06374282	0.013011448	0.02691623				
## 28	0.06374282	0.013011448	0.02691623				
## 29	0.16183472	0.033034374	0.06833681				
## 30	0.16183472	0.033034374	0.06833681				
## 31	0.33435403	0.068249730	0.14118532				
## 32	0.44333886	0.090496166	0.18720558				

```

## 33 0.45770001 0.093427624 0.19326977
## 34 0.50667559 0.103424721 0.21395034
## 35 0.50295881 0.102666037 0.21238088
## 36 0.43285329 0.088355809 0.18277792
## 37 0.38591488 0.078774546 0.16295756
## 38 0.43627762 0.089054797 0.18422388
## 39 0.43996949 0.089808396 0.18578282
## 40 0.49321658 0.100677413 0.20826710
## 41 0.43923360 0.089658183 0.18547208
## 42 0.48408060 0.098812538 0.20440931
## 43 0.49321658 0.100677413 0.20826710
## 44 0.45995619 0.093888164 0.19422247
## 45 0.42910020 0.087589712 0.18119312
## 46 0.44619973 0.091080139 0.18841362
## 47 0.49251646 0.100534501 0.20797146
## 48 0.43205537 0.088192933 0.18244098
## 49 0.50188568 0.102446985 0.21192774
## 50 0.43918450 0.089648160 0.18545135
## 51 0.38652912 0.078899927 0.16321693
## 52 0.49878216 0.101813482 0.21061723
## 53 0.42844632 0.087456240 0.18091702
## 54 0.47322185 0.096596007 0.19982406
## 55 0.47198975 0.096344505 0.19930379
## 56 0.49605066 0.101255916 0.20946382
## 57 0.45694548 0.093273606 0.19295115
## 58 0.42159610 0.086057943 0.17802442
## 59 0.41743201 0.085207952 0.17626608
## 60 0.47034193 0.096008145 0.19860798
## 61 0.15751258 0.032152121 0.06651173
## 62 0.28158025 0.057477329 0.11890091
## 63 0.30432811 0.062120715 0.12850649
## 64 0.20843165 0.042545933 0.08801297
## 65 0.44752213 0.091350071 0.18897202
## 66 0.28158025 0.057477329 0.11890091
## 67 0.30283626 0.061816193 0.12787654
## 68 0.09964568 0.020340089 0.04207668
## 69 0.28158025 0.057477329 0.11890091
## 70 0.28318410 0.057804713 0.11957816
## 71 0.09964568 0.020340089 0.04207668
## 72 0.15751258 0.032152121 0.06651173
## 73 0.22283387 0.045485774 0.09409449
## 74 0.30432811 0.062120715 0.12850649
## 75 0.23636014 0.048246811 0.09980613
## 76 0.49300665 0.100634561 0.20817845
## 77 0.46309637 0.094529151 0.19554845
## 78 0.45477871 0.092831315 0.19203621
## 79 0.44948402 0.091750542 0.18980046
## 80 0.54201494 0.110638336 0.22887284
## 81 0.47373201 0.096700141 0.20003948
## 82 0.42583090 0.086922368 0.17981262
## 83 0.44208201 0.090239613 0.18667486
## 84 0.38981822 0.079571312 0.16460580
## 85 0.47631986 0.097228384 0.20113224
## 86 0.36655137 0.074821984 0.15478107

```

87 0.43500038 0.088794080 0.18368455
88 0.31159721 0.063604515 0.13157596
89 0.44017532 0.089850411 0.18586974
90 0.35652984 0.072776349 0.15054935
91 0.26032840 0.053139312 0.10992704
92 0.22885001 0.046713812 0.09663488
93 0.28158025 0.057477329 0.11890091
94 0.22885001 0.046713812 0.09663488
95 0.38285144 0.078149223 0.16166398
96 0.18368121 0.037493769 0.07756177
97 0.22885001 0.046713812 0.09663488
98 0.09081336 0.018537200 0.03834712
99 0.22885001 0.046713812 0.09663488
100 0.22166943 0.045248083 0.09360279
101 0.09081336 0.018537200 0.03834712
102 0.09081336 0.018537200 0.03834712
103 0.16591445 0.033867146 0.07005953
104 0.22885001 0.046713812 0.09663488
105 0.31292328 0.063875197 0.13213591
106 0.22845068 0.046632300 0.09646626
107 0.27406555 0.055943396 0.11572773
108 0.27406555 0.055943396 0.11572773
109 0.37406234 0.076355155 0.15795267
110 0.39730809 0.081100174 0.16776849
111 0.19941754 0.040705934 0.08420664
112 0.21442606 0.043769536 0.09054418
113 0.18318344 0.037392164 0.07735158
114 0.21442606 0.043769536 0.09054418
115 0.27965050 0.058311161 0.12092995
116 0.08217039 0.016772961 0.03469751
117 0.29586194 0.060392565 0.12493154
118 0.26248952 0.053580448 0.11083960
119 0.08217039 0.016772961 0.03469751
120 0.31680172 0.064666881 0.13377363
121 0.34298663 0.071517656 0.14831854
122 0.44883802 0.091618677 0.18952767
123 0.33469683 0.068319705 0.14133008
124 0.43300244 0.090287251 0.18724430
125 0.27550136 0.056236480 0.11633402
126 0.36304493 0.074106236 0.15330043
127 0.39358441 0.080340082 0.16619612
128 0.39358441 0.080340082 0.16619612
129 0.37923251 0.077410512 0.16013584
130 0.37570648 0.076690765 0.15864693
131 0.42244457 0.086231137 0.17838270
132 0.43222093 0.088226727 0.18251089
133 0.45822238 0.095545972 0.19815022
134 0.40199564 0.082057017 0.16974787
135 0.44054150 0.091859252 0.19050443
136 0.28921254 0.059035262 0.12212374
137 0.36301589 0.074100309 0.15328817
138 0.34038859 0.069481529 0.14373349
139 0.41817532 0.085359680 0.17657995
140 0.37974057 0.077514219 0.16035038

141 0.20329837 0.041498106 0.08584537
142 0.21803992 0.044507213 0.09207018
143 0.18740077 0.038253021 0.07913240
144 0.21803992 0.044507213 0.09207018
145 0.25497128 0.052045794 0.10766493
146 0.08693064 0.017744642 0.03670759
147 0.08693064 0.017744642 0.03670759
148 0.21803992 0.044507213 0.09207018
149 0.20329837 0.041498106 0.08584537
150 0.28921254 0.059035262 0.12212374
151 0.30720585 0.062708131 0.12972165
152 0.36513656 0.074533188 0.15418365
153 0.39509370 0.080648164 0.16683344
154 0.28740228 0.058665744 0.12135934
155 0.37887633 0.077337807 0.15998544
156 0.22703341 0.046343000 0.09586780
157 0.37058885 0.075646132 0.15648595
158 0.36211174 0.073915750 0.15290638
159 0.12785727 0.026098756 0.05398939
160 0.24643770 0.050303884 0.10406151
161 0.37955879 0.077477113 0.16027362
162 0.38176834 0.077928136 0.16120663
163 0.37058885 0.075646132 0.15648595
164 0.25873291 0.052813634 0.10925333
165 0.24643770 0.050303884 0.10406151
166 0.45775172 0.093438178 0.19329160
167 0.38670665 0.080633911 0.16722450
168 0.30412939 0.063415362 0.13151541
169 0.43961919 0.091666939 0.19010560
170 0.27114954 0.060630879 0.12690189
171 0.42747381 0.087257726 0.18050636
172 0.44025589 0.089866858 0.18590376
173 0.35696806 0.072865801 0.15073439
174 0.35421482 0.072303798 0.14957180
175 0.32138039 0.065601498 0.13570704
176 0.45773774 0.093435325 0.19328570
177 0.39820525 0.081283306 0.16814733
178 0.36556447 0.074620534 0.15436434
179 0.38522945 0.078634632 0.16266813
180 0.39528600 0.080687417 0.16691464
181 0.28342770 0.057854438 0.11968102
182 0.38353807 0.078289380 0.16195392
183 0.31458672 0.064214745 0.13283832
184 0.21845495 0.044591931 0.09224544
185 0.29418097 0.060049439 0.12422173
186 0.28342770 0.057854438 0.11968102
187 0.24524463 0.050060350 0.10355772
188 0.29418097 0.060049439 0.12422173
189 0.35842420 0.073163034 0.15134927
190 0.40279176 0.082219523 0.17008404
191 0.37067031 0.075662761 0.15652035
192 0.28342770 0.057854438 0.11968102
193 0.28547480 0.058272299 0.12054543
194 0.14996549 0.030611577 0.06332487

195 0.36698650 0.074910805 0.15496481
196 0.37209081 0.075952719 0.15712017
197 0.47407026 0.096769186 0.20018231
198 0.45933570 0.093761506 0.19396045
199 0.42826240 0.087418697 0.18083935
200 0.41662251 0.085042714 0.17592426
201 0.35529221 0.072523718 0.15002674
202 0.44949107 0.091751981 0.18980343
203 0.44693400 0.091230021 0.18872368
204 0.34835663 0.071107999 0.14709810
205 0.42398940 0.086546474 0.17903502
206 0.28284247 0.058976733 0.12231026
207 0.30946437 0.063169149 0.13067534
208 0.31809510 0.064930890 0.13431978
209 0.30946437 0.063169149 0.13067534
210 0.27662304 0.058976230 0.12264778
211 0.32778772 0.066909388 0.13841262
212 0.17853692 0.036443696 0.07538953
213 0.08307413 0.016957436 0.03507913
214 0.08307413 0.016957436 0.03507913
215 0.37767907 0.077093417 0.15947988
216 0.21047041 0.042962092 0.08887386
217 0.24326682 0.049656631 0.10272257
218 0.08307413 0.016957436 0.03507913
219 0.26758383 0.054620320 0.11299074
220 0.22474201 0.045875271 0.09490023
221 0.26758383 0.054620320 0.11299074
222 0.19515791 0.039836442 0.08240796
223 0.08307413 0.016957436 0.03507913
224 0.08307413 0.016957436 0.03507913
225 0.26758383 0.054620320 0.11299074
226 0.19302449 0.039400959 0.08150709
227 0.27275655 0.055676198 0.11517499
228 0.27275655 0.055676198 0.11517499
229 0.27275655 0.055676198 0.11517499
230 0.04949713 0.010103559 0.02090080
231 0.04949713 0.010103559 0.02090080
232 0.04949713 0.010103559 0.02090080
233 0.04949713 0.010103559 0.02090080
234 0.20849373 0.042558604 0.08803918
235 0.04949713 0.010103559 0.02090080
236 0.04949713 0.010103559 0.02090080
237 0.04949713 0.010103559 0.02090080
238 0.19302449 0.039400959 0.08150709
239 0.19302449 0.039400959 0.08150709
240 0.04949713 0.010103559 0.02090080
241 0.39316758 0.080254996 0.16602011
242 0.44021452 0.089858412 0.18588629
243 0.33621939 0.068630496 0.14197300
244 0.31720832 0.064749877 0.13394533
245 0.29369672 0.059950592 0.12401725
246 0.26004658 0.053081786 0.10980804
247 0.20776839 0.042410544 0.08773289
248 0.19224079 0.039240987 0.08117617

249 0.26004658 0.053081786 0.10980804
250 0.33621939 0.068630496 0.14197300
251 0.20776839 0.042410544 0.08773289
252 0.27172671 0.055465982 0.11474013
253 0.09283325 0.018949508 0.03920004
254 0.27172671 0.055465982 0.11474013
255 0.09283325 0.018949508 0.03920004
256 0.33124345 0.067614786 0.13987184
257 0.27746014 0.056636313 0.11716114
258 0.33124345 0.067614786 0.13987184
259 0.33124345 0.067614786 0.13987184
260 0.43687042 0.089175801 0.18447420
261 0.31192926 0.063672293 0.13171617
262 0.07793044 0.015907485 0.03290714
263 0.20090805 0.041010184 0.08483603
264 0.34048994 0.069502219 0.14377629
265 0.20090805 0.041010184 0.08483603
266 0.20090805 0.041010184 0.08483603
267 0.07793044 0.015907485 0.03290714
268 0.22975292 0.046898118 0.09701615
269 0.22975292 0.046898118 0.09701615
270 0.38051217 0.077671721 0.16067620
271 0.34272581 0.069958612 0.14472042
272 0.39125102 0.081581476 0.16918963
273 0.45371729 0.092614654 0.19158801
274 0.43660875 0.089122388 0.18436371
275 0.39667748 0.080971451 0.16750221
276 0.30096982 0.061435208 0.12708841
277 0.30096982 0.061435208 0.12708841
278 0.41543375 0.084800059 0.17542229
279 0.31082014 0.063445895 0.13124783
280 0.45147088 0.092156108 0.19063943
281 0.31436831 0.064170164 0.13274610
282 0.29046799 0.059291531 0.12265388
283 0.33019921 0.067401632 0.13943090
284 0.33354130 0.068083832 0.14084214
285 0.27957195 0.057067385 0.11805288
286 0.41026926 0.083745863 0.17324152
287 0.43038964 0.087852918 0.18173761
288 0.40262847 0.082186193 0.17001509
289 0.49884304 0.101825910 0.21064294
290 0.52251662 0.106658259 0.22063942
291 0.38119054 0.077810193 0.16096265
292 0.46021639 0.093941278 0.19433234
293 0.50940369 0.103981593 0.21510231
294 0.43925364 0.089662274 0.18548055
295 0.45219333 0.092303578 0.19094450
296 0.36996861 0.075519525 0.15622404
297 0.37295449 0.076129015 0.15748487
298 0.44881004 0.093583363 0.19408002
299 0.41517373 0.084746983 0.17531249
300 0.43754591 0.089313685 0.18475943


```

override.linetype<-c("dashed")
(plot_error_repetition_PWA_session1_Naming <-
  means_final %>% filter(session=="1") %>%
  ggplot(., aes(x=PosOr, y=error_class, group=subject, color = AAT)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=AAT, color=AAT),
    fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+
  scale_colour_manual(values=c("#feedec", "#fdcac6", "#fca7a0",
                                "#fb8479", "#fa6153",
                                "#f93e2d", "#f81b07",
                                "#d21706", "#ac1305",
                                "#860f04", "#5f0b03",
                                "#390602", "#130201"))+


  geom_errorbar(
    aes(ymin=error_class-se, ymax=error_class+se, group = AAT),
    width =.1) +
  apatheme+
  scale_y_continuous(limits = c(0, 0.5),
    breaks =seq(0,0.5, by = 0.1)) +
  labs(x="Ordinal Position ",y ="Errors", colour="Session",
    linetype="Session",
    title = "Session 1") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"),
    legend.position="none")+
  guides(color=guide_legend(
    override.aes=list(linetype=override.linetype)))+
  scale_linetype(guide="none"))

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

Session 1

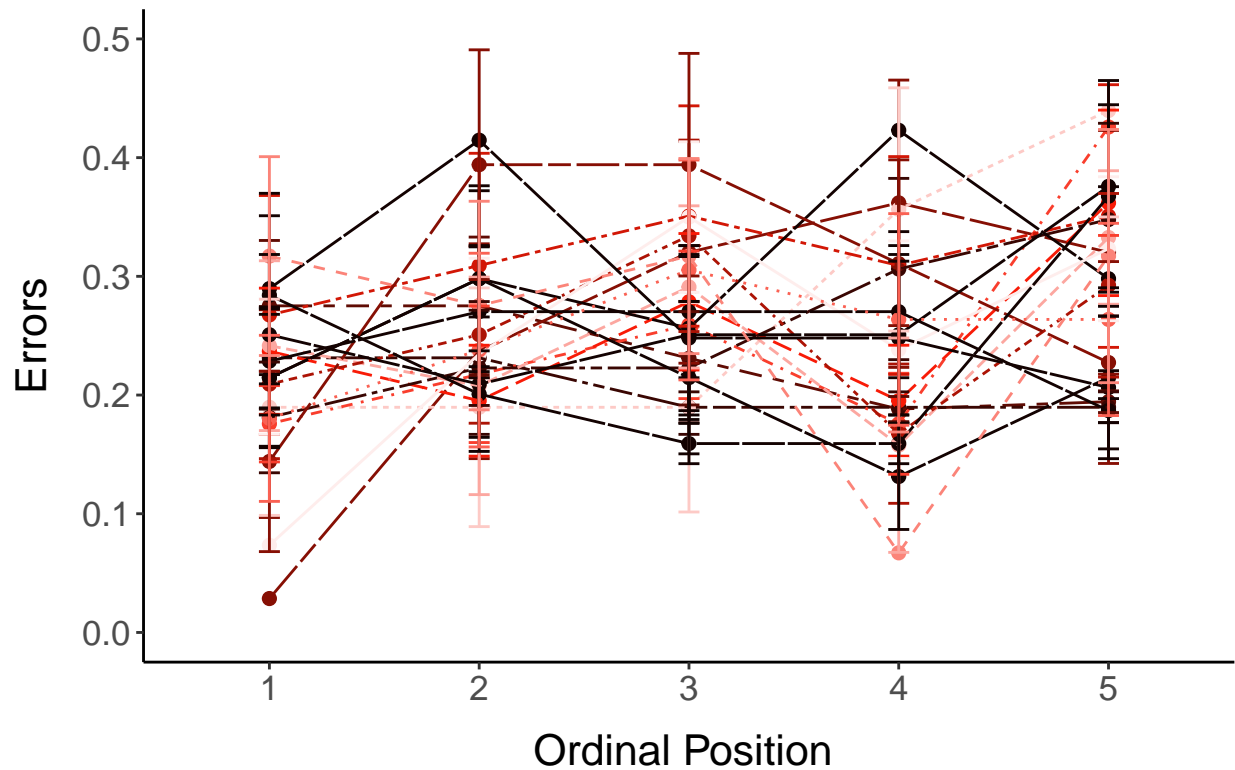


```
(plot_error_repetition_PWA_session2_Naming <- means_final %>%
  filter(session=="2") %>%
  ggplot(., aes(x=PosOr, y=error_class, group=subject, color = AAT)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=AAT, color=AAT),
    fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+
  scale_colour_manual(values=c("#feedec", "#fdcac6", "#fca7a0",
    "#fb8479", "#fa6153",
    "#f93e2d", "#f81b07",
    "#d21706", "#ac1305",
    "#860f04", "#5f0b03",
    "#390602", "#130201"))+
  geom_errorbar(aes(ymin=error_class-se, ymax=error_class+se,
    group = AAT), width =.1) +
  apatheme+
  scale_y_continuous(limits = c(0, 0.5),
    breaks =seq(0,0.5, by = 0.1)) +
  labs(x="Ordinal Position ",y ="Errors",
    colour="Session", linetype="Session",
    title = "Session 2") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"),
    legend.position="none")+
```

```
guides(color=guide_legend(
  override.aes=list(linetype=override.linetype)))+
  scale_linetype(guide="none"))
```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

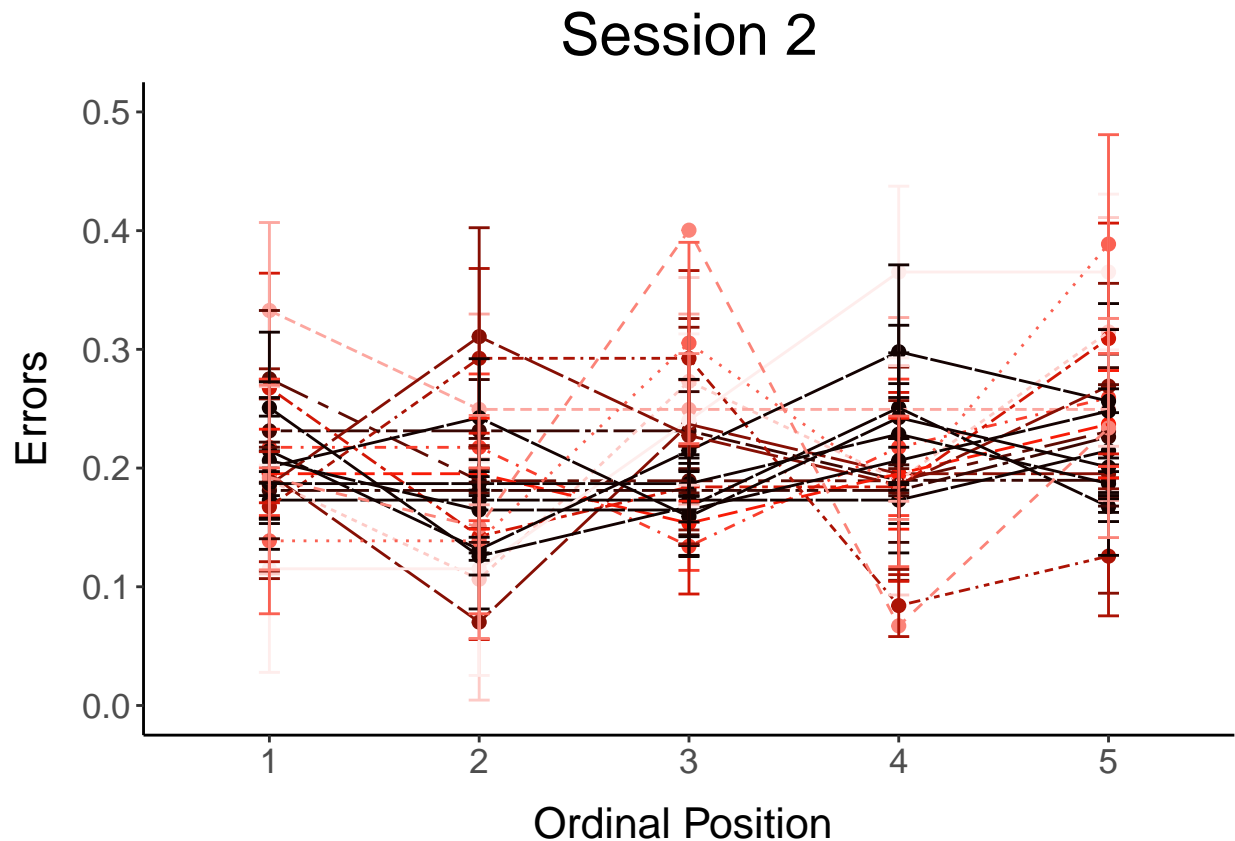

```
(plot_error_repetition_PWA_session3_Naming <- means_final %>%
  filter(session=="3") %>%
  ggplot(., aes(x=PosOr, y=error_class, group=subject, color = AAT)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=AAT, color=AAT),
    fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+
  scale_colour_manual(values=c("#feedec", "#fdcac6", "#fca7a0",
    "#fb8479", "#fa6153",
    "#f93e2d", "#f81b07",
    "#d21706", "#ac1305",
    "#860f04", "#5f0b03",
    "#390602", "#130201"))+
  geom_errorbar(aes(ymin=error_class-se, ymax=error_class+se,
    group = AAT), width = .1) +
  apatheme+
  scale_y_continuous(limits = c(0, 0.5),
```

```

breaks =seq(0,0.5, by = 0.1)) +
labs(x="Ordinal Position ",y ="Errors", colour="Naming\npercentile",
# linetype="Session",
title = "Session 3") +
theme(
axis.title.y = element_text(margin = margin(0,10,0,0)),
axis.title.x = element_text(margin = margin(10,0,0,0)),
legend.key.width = unit(1, "cm"),
legend.position="right")+
scale_linetype(guide="none"))


```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

Warning: Removed 1 rows containing non-finite values ('stat_summary()').

Warning: Removed 1 rows containing missing values ('geom_point()').

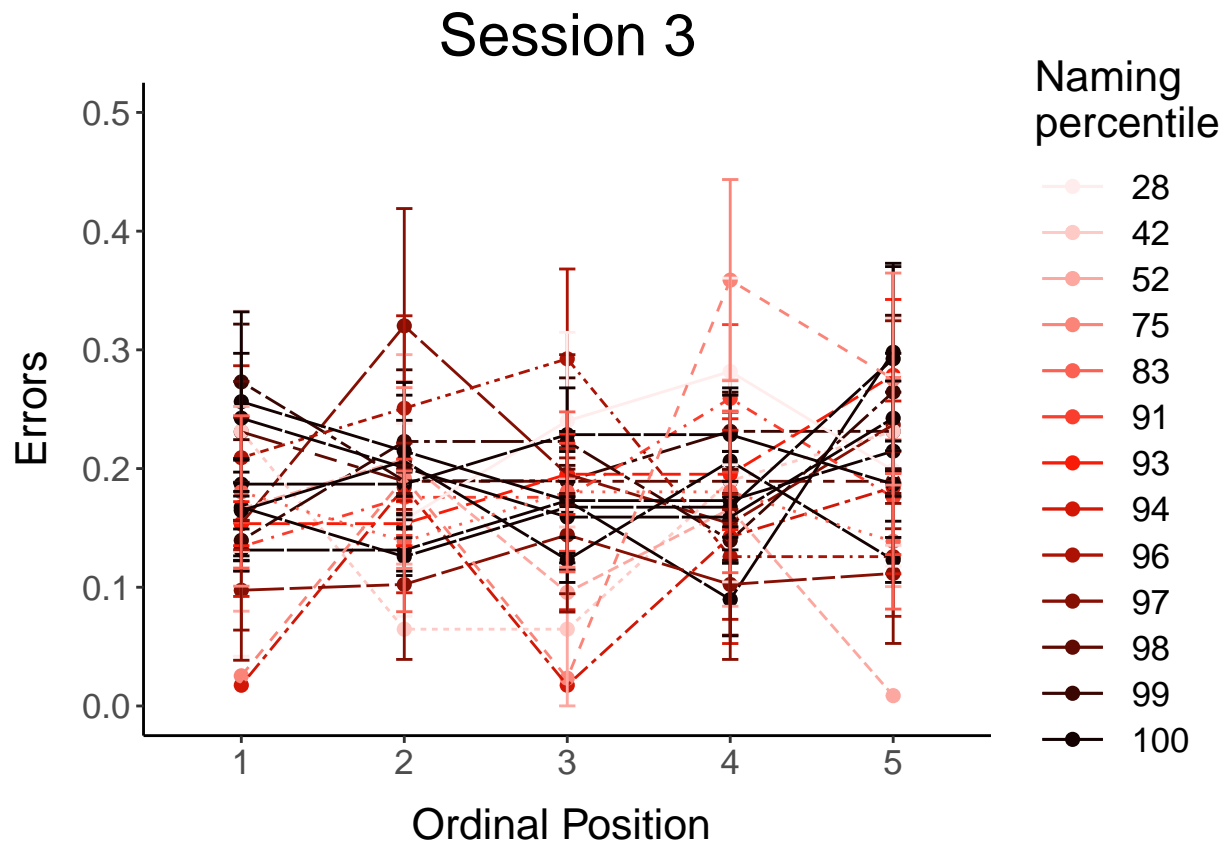

```

(plot_error_repetition_PWA_session1_Token <-
means_final %>% filter(session=="1") %>%
ggplot(., aes(x=PosOr, y=error_class, group=subject, color = TokenTest)) +
geom_point(size = 2)+
stat_summary(aes(linetype=TokenTest, color=TokenTest),
fun=mean, geom="line", size = 0.5) +

```

```


scale_linetype_manual(values=c("dashed"))+
scale_colour_manual(values=c("#f2ecfd", "#d7c5f9", "#bd9ef5",
                             "#a378f1", "#8851ee",
                             "#6e2aea", "#5915d4",
                             "#4911ae", "#380e87",
                             "#280a61", "#18063a",
                             "#080213"))+
geom_errorbar(aes(ymin=error_class-se, ymax=error_class+se, group = TokenTest),
              width =.1) +
apatheme+
scale_y_continuous(limits = c(0, 0.5),
                   breaks =seq(0,0.5, by = 0.1)) +
labs(x="Ordinal Position ",y ="Errors", colour="Session",
     linetype="Session",
     title = "Session 1") +
theme(
  axis.title.y = element_text(margin = margin(0,10,0,0)),
  axis.title.x = element_text(margin = margin(10,0,0,0)),
  legend.key.width = unit(1, "cm"),
  legend.position="none")+
guides(color=guide_legend(
  override.aes=list(linetype=override.linetype)))+
scale_linetype(guide="none")

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

Session 1

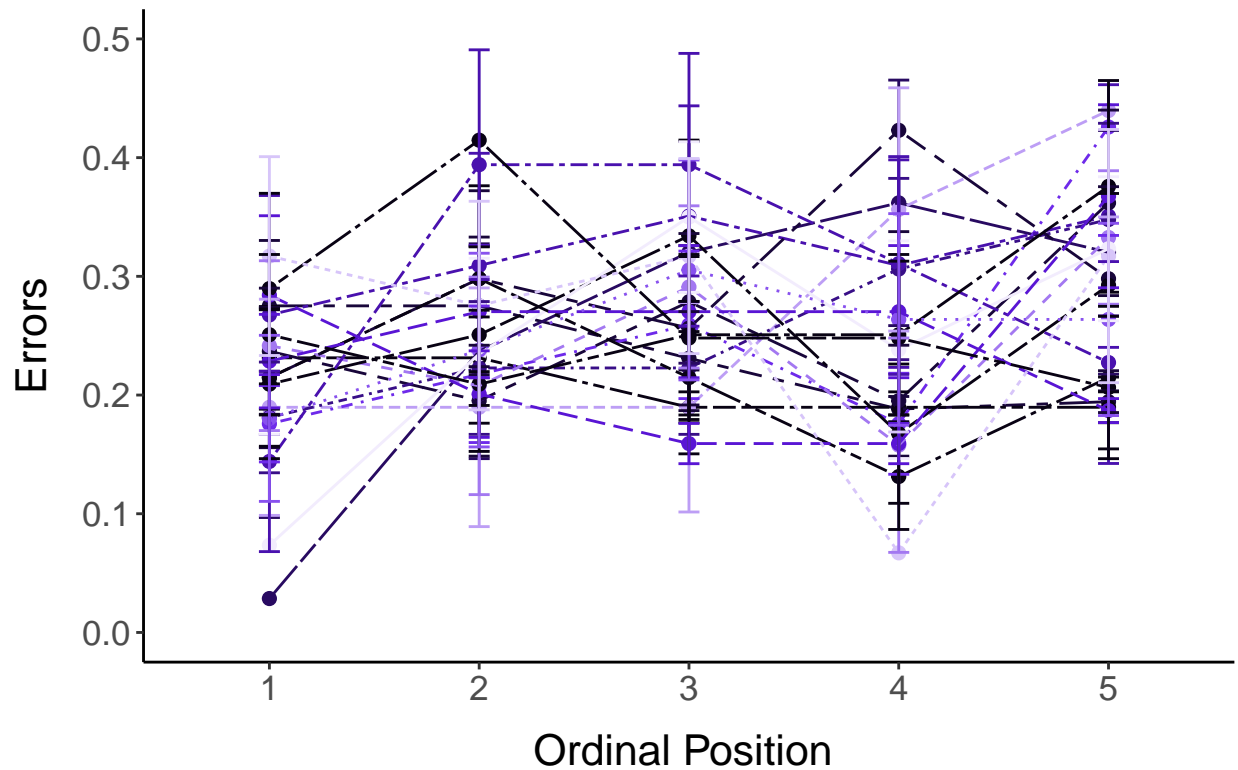


```
(plot_error_repetition_PWA_session2_Token <- means_final %>%
  filter(session=="2") %>%
  ggplot(., aes(x=PosOr, y=error_class, group=subject, color = TokenTest)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=TokenTest, color=TokenTest),
    fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+
  scale_colour_manual(values=c("#f2ecfd", "#d7c5f9", "#bd9ef5",
    "#a378f1", "#8851ee",
    "#6e2aea", "#5915d4",
    "#4911ae", "#380e87",
    "#280a61", "#18063a",
    "#080213"))+
  geom_errorbar(aes(ymin=error_class-se, ymax=error_class+se,
    group = TokenTest), width =.1) +
  apatheme+
  scale_y_continuous(limits = c(0, 0.5),
    breaks =seq(0,0.5, by = 0.1)) +
  labs(x="Ordinal Position ",y ="Errors",
    colour="Session", linetype="Session",
    title = "Session 2") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"),
    legend.position="none")+
```

```
guides(color=guide_legend(
  override.aes=list(linetype=override.linetype)))+
  scale_linetype(guide="none"))
```

```
## Scale for linetype is already present.
```

```
## Adding another scale for linetype, which will replace the existing scale.
```

Session 2

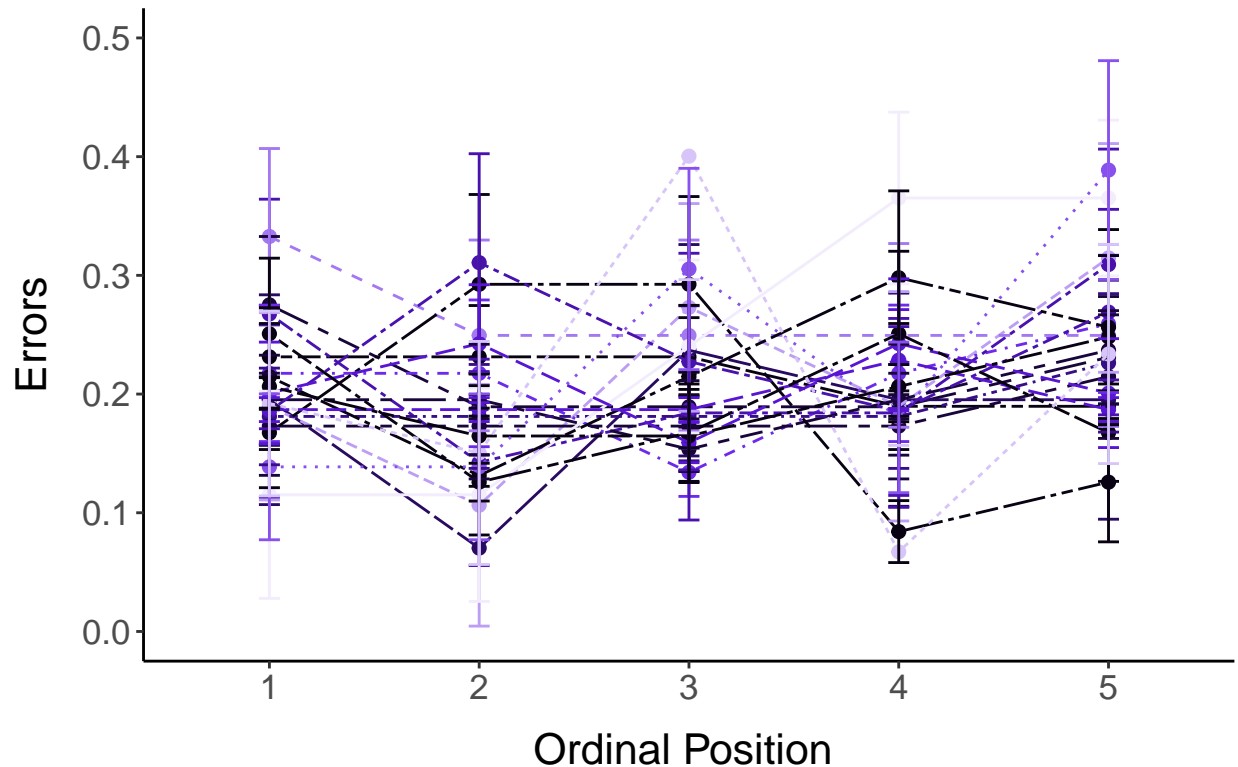

```
(plot_error_repetition_PWA_session3_Token <- means_final %>%
  filter(session=="3") %>%
  ggplot(., aes(x=PosOr, y=error_class, group=subject, color = TokenTest)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=TokenTest, color=TokenTest),
    fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+
  scale_colour_manual(values=c("#f2ecfd", "#d7c5f9", "#bd9ef5",
    "#a378f1", "#8851ee",
    "#6e2aea", "#5915d4",
    "#4911ae", "#380e87",
    "#280a61", "#18063a",
    "#080213"))+
  geom_errorbar(aes(ymin=error_class-se, ymax=error_class+se,
    group = TokenTest), width = .1) +
  apatheme+
  scale_y_continuous(limits = c(0, 0.5),
```

```

breaks =seq(0,0.5, by = 0.1)) +
labs(x="Ordinal Position ",y ="Errors", colour="Token test\npercentile",
# linetype="Session",
title = "Session 3") +
theme(
axis.title.y = element_text(margin = margin(0,10,0,0)),
axis.title.x = element_text(margin = margin(10,0,0,0)),
legend.key.width = unit(1, "cm"),
legend.position="right")+
scale_linetype(guide="none"))


```

```

## Scale for linetype is already present.
## Adding another scale for linetype, which will replace the existing scale.

## Warning: Removed 1 rows containing non-finite values ('stat_summary()').
## Removed 1 rows containing missing values ('geom_point()').

```

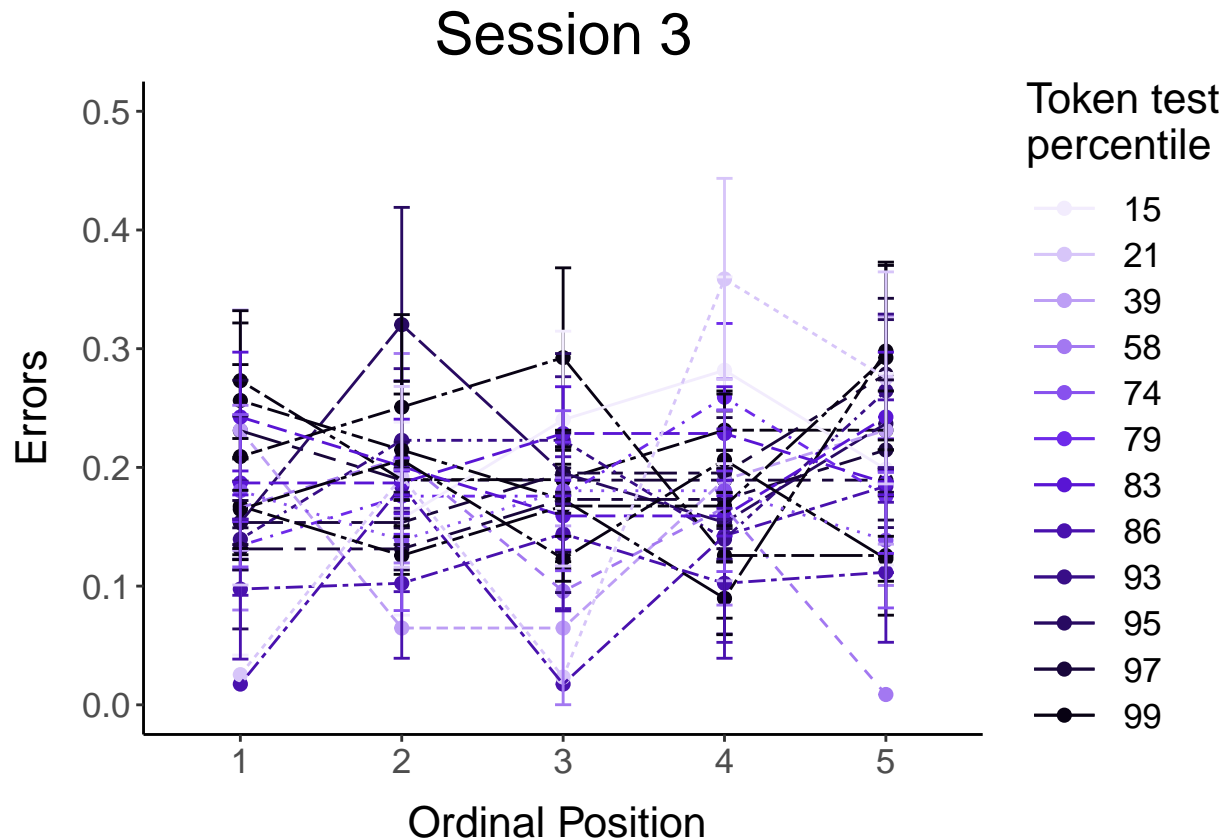

```

(plot_error_repetition_PWA_session1_Speech <-
means_final %>% filter(session=="1") %>%
ggplot(., aes(x=PosOr, y=error_class, group=subject,
color = AAT_spontansprache)) +
geom_point(size = 2)+
stat_summary(aes(linetype=AAT_spontansprache,
color=AAT_spontansprache),

```



```


    fun=mean, geom="line", size = 0.5) +
scale_linetype_manual(values=c("dashed"))+
scale_colour_manual(values=c("#76ff76", "#008900"))+
geom_errorbar(aes(ymin=error_class-se, ymax=error_class+se,
    group = AAT_spontansprache),
    width =.1) +

apatheme+
scale_y_continuous(limits = c(0, 0.5),
    breaks =seq(0,0.5, by = 0.1)) +
labs(x="Ordinal Position ",y ="Errors", colour="Session",
    linetype="Session",
    title = "Session 1") +
theme(
axis.title.y = element_text(margin = margin(0,10,0,0)),
axis.title.x = element_text(margin = margin(10,0,0,0)),
legend.key.width = unit(1, "cm"),
legend.position="none")+
guides(color=guide_legend(
    override.aes=list(linetype=override.linetype)))+
scale_linetype(guide="none")

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

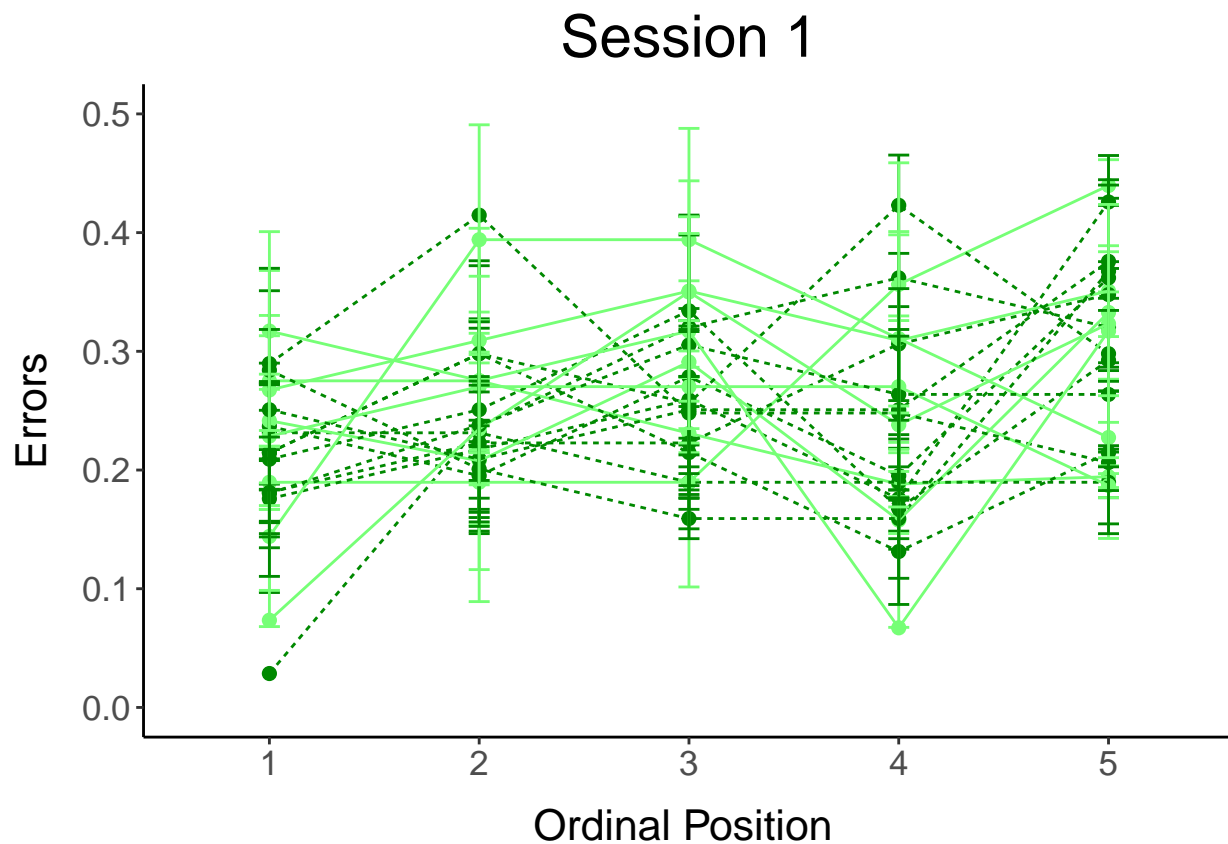

```

(plot_error_repetition_PWA_session2_Speech <- means_final %>%
  filter(session=="2") %>%
  ggplot(., aes(x=PosOr, y=error_class, group=subject, color = AAT_spontansprache)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=AAT_spontansprache, color=AAT_spontansprache),
    fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+
  scale_colour_manual(values=c("#76ff76", "#008900"))+
  geom_errorbar(aes(ymin=error_class-se, ymax=error_class+se,
    group = AAT_spontansprache), width =.1) +


  apatheme+
  scale_y_continuous(limits = c(0, 0.5),
    breaks =seq(0,0.5, by = 0.1)) +
  labs(x="Ordinal Position ",y ="Errors",
    colour="Session", linetype="Session",
    title = "Session 2") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"),
    legend.position="none")+
  guides(color=guide_legend(
    override.aes=list(linetype=override.linetype)))+
  scale_linetype(guide="none"))

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

Session 2

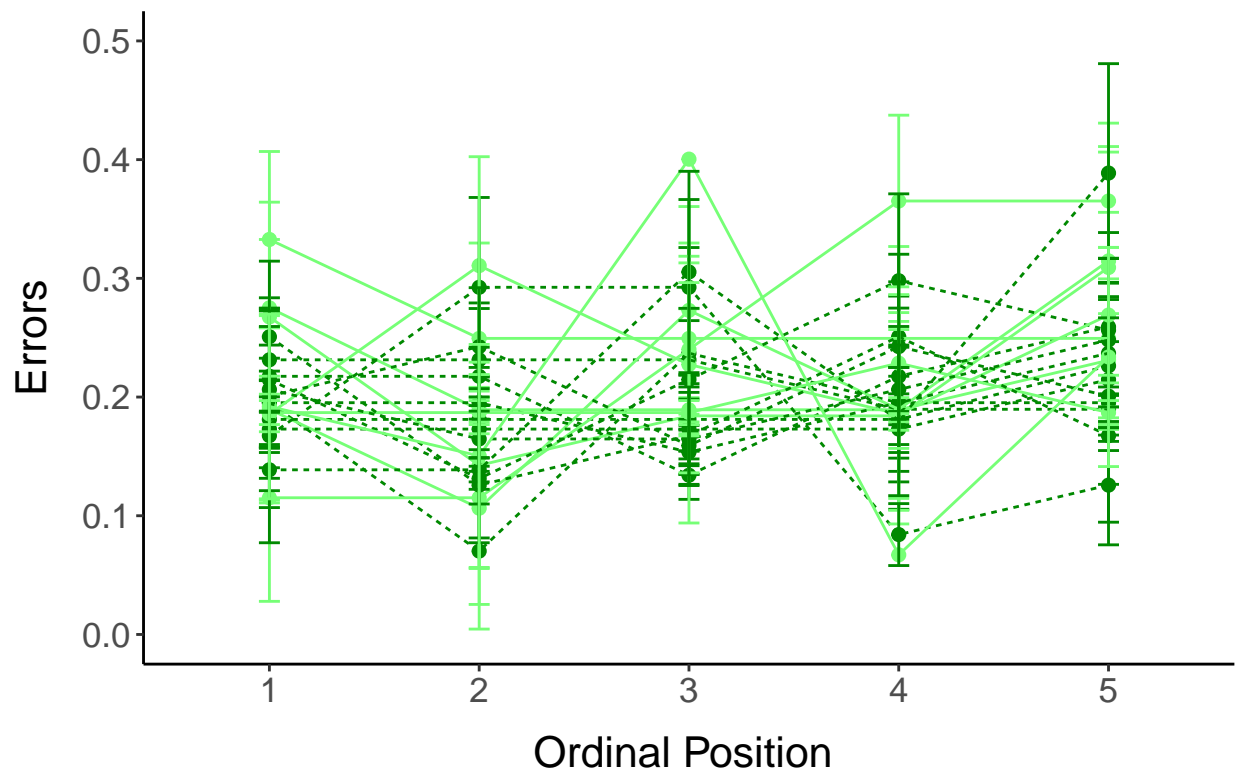


```
(plot_error_repetition_PWA_session3_Speech <- means_final %>%
  filter(session=="3") %>%
  ggplot(., aes(x=PosOr, y=error_class, group=subject, color = AAT_spontansprache)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=AAT_spontansprache, color=AAT_spontansprache),
    fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("dashed"))+
  scale_colour_manual(values=c("#76ff76", "#008900"))+
  geom_errorbar(aes(ymin=error_class-se, ymax=error_class+se,
    group = AAT_spontansprache), width =.1) +
  apatheme+
  scale_y_continuous(limits = c(0, 0.5),
    breaks =seq(0,0.5, by = 0.1)) +
  labs(x="Ordinal Position ",y ="Errors",
    colour="Spontaneous\nspeech\nscore",
    # linetype="Session",
    title = "Session 3") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"),
    legend.position="right")+
  scale_linetype(guide="none"))
```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

```
## Warning: Removed 1 rows containing non-finite values ('stat_summary()').
## Removed 1 rows containing missing values ('geom_point()').
```

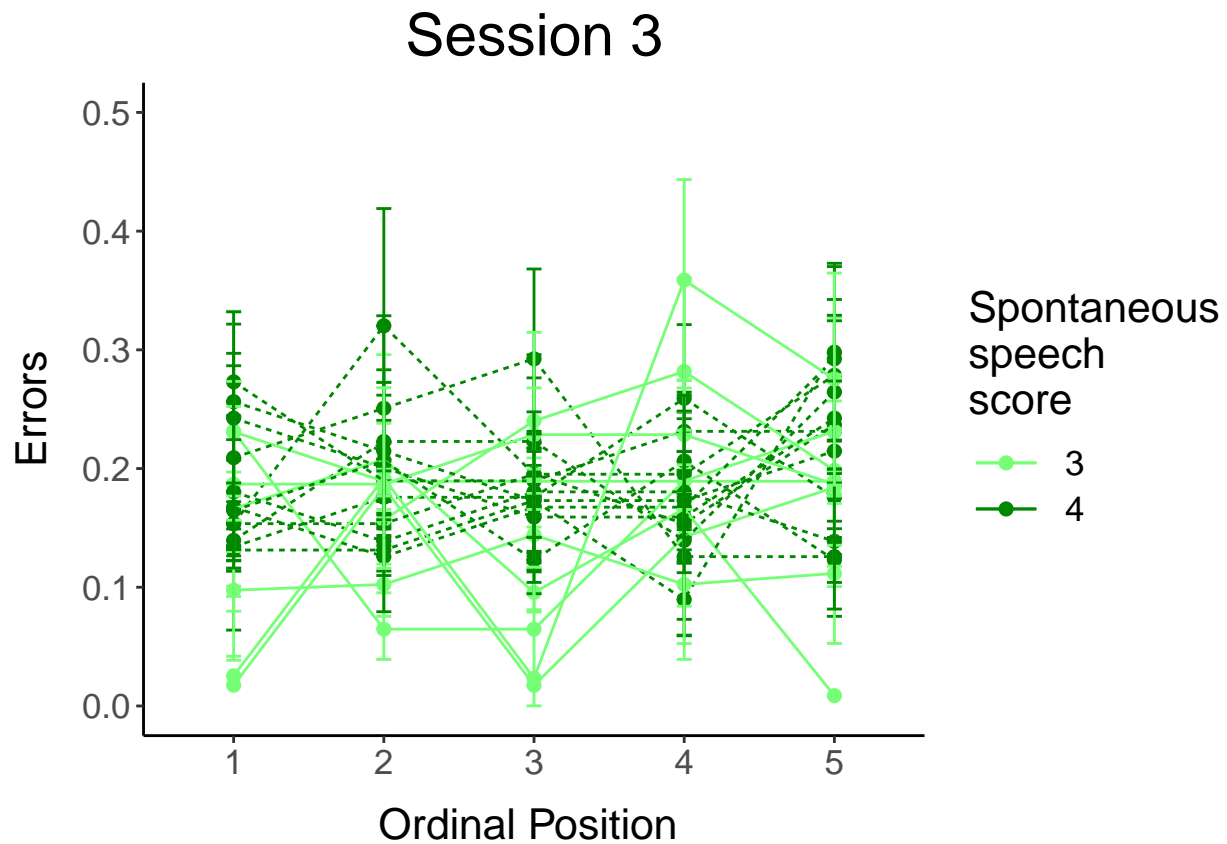

```
plots <- cowplot::plot_grid(plot_error_repetition_PWA_session1_Naming,
                             plot_error_repetition_PWA_session2_Naming,
                             plot_error_repetition_PWA_session3_Naming,
                             plot_error_repetition_PWA_session1_Token,
                             plot_error_repetition_PWA_session2_Token,
                             plot_error_repetition_PWA_session3_Token,
                             plot_error_repetition_PWA_session1_Speech,
                             plot_error_repetition_PWA_session2_Speech,
                             plot_error_repetition_PWA_session3_Speech,
                             nrow = 3, ncol=3,
                             rel_widths = c(0.81,0.81,1,0.81,0.81,1,0.81,0.81,1),
                             margin(1,1,1,1),
                             labels = c("A", "", "", "B", "", "", "C", "", ""),
                             label_size = 34,
                             label_fontfamily = "Helvetica", label_y = 1.01,
                             label_x=-0.03)
```

```
## Warning: Removed 1 rows containing non-finite values ('stat_summary()').
## Removed 1 rows containing missing values ('geom_point()').
```

```
## Warning: Removed 1 rows containing non-finite values ('stat_summary()').
```

```
## Warning: Removed 1 rows containing missing values ('geom_point()').
```

```
## Warning: Removed 1 rows containing non-finite values ('stat_summary()').
```

```
## Warning: Removed 1 rows containing missing values ('geom_point()').
```

```
## Warning in as_grob.default(plot): Cannot convert object of class  
## marginsimpleUnitunitunit_v2 into a grob.
```

```
filename <- "CSI_online_aphasia_spoken_plot_PWA_Error_Test_scores.pdf"  
ggsave(plots, filename =  
  here::here("results", "figures", filename),  
  width = 25, height = 39, units = "cm",  
  dpi = 300, device = cairo_pdf)  
#embedFonts(file = here::here("results", "figures", filename))  
#  
# # Naming percenile scores: median split of means final  
# median(as.numeric(as.character(means_final$AAT)))  
# means_final %>%  
#   mutate(med_split=case_when(as.numeric(as.character(AAT)) >  
#     median(as.numeric(as.character(means_final$AAT))) ~ "high",  
#     as.numeric(as.character(AAT)) <  
#       median(as.numeric(as.character(means_final$AAT))) ~ "low",  
#     as.numeric(as.character(AAT)) == median(as.numeric(as.character(  
#       means_final$AAT))) ~  
#       "median"),  
#   mean_split=case_when(as.numeric(as.character(AAT)) >  
#     mean(as.numeric(as.character(means_final$AAT))) ~  
#     "high",  
#     as.numeric(as.character(AAT)) < mean(as.numeric(as.character(  
#       means_final$AAT))) ~ "low",  
#     as.numeric(as.character(AAT)) == mean(as.numeric(as.character(  
#       means_final$AAT))) ~ "median")) -> means_final  
#  
# means_final %>% group_by(session, med_split, PosOr) %>%  
#   summarise(mean=mean(error_class), sd = sd(error_class))  
# means_final %>% group_by(session, mean_split, PosOr) %>%  
#   summarise(mean=mean(error_class), sd = sd(error_class))  
#  
#  
# # Token Test percenile scores: median split of means final  
# median(as.numeric(as.character(means_final$TokenTest)))  
# means_final %>% mutate(med_split=case_when(  
#   as.numeric(as.character(TokenTest)) >  
#     median(as.numeric(as.character(means_final$TokenTest))) ~ "high",  
#   as.numeric(as.character(TokenTest)) <  
#     median(as.numeric(as.character(means_final$TokenTest))) ~ "low",  
#   as.numeric(as.character(TokenTest)) ==  
#     median(as.numeric(as.character( means_final$TokenTest))) ~ "median",  
#   mean_split=case_when(  
#     as.numeric(as.character(TokenTest)) >  
#       mean(as.numeric(as.character(means_final$TokenTest))) ~ "high",  
#     as.numeric(as.character(TokenTest)) <
```

```

#       mean(as.numeric(as.character( means_final$TokenTest))) ~ "low",
#       as.numeric(as.character(TokenTest)) ==
#       mean(as.numeric(as.character(means_final$TokenTest))) ~ "median")) ->
#       means_final
#
# means_final %>% group_by(session, med_split, PosOr) %>%
#       summarise(mean=mean(error_class), sd = sd(error_class))
# means_final %>% group_by(session, mean_split, PosOr) %>%
#       summarise(mean=mean(error_class),sd = sd(error_class))
#
# # Spontaneous speech scores: median split of means final
# median(as.numeric(as.character(means_final$AAT_spontansprache)))
# means_final %>%
#       mutate(med_split=case_when(
#             as.numeric(as.character(AAT_spontansprache)) >
#             median(as.numeric(as.character(
#                   means_final$AAT_spontansprache))) ~ "high",
#             as.numeric(as.character(AAT_spontansprache)) <
#             median(as.numeric(as.character(
#                   means_final$AAT_spontansprache))) ~ "low",
#             as.numeric(as.character(AAT_spontansprache)) ==
#             median(as.numeric(as.character(
#                   means_final$AAT_spontansprache))) ~ "median"),
#             mean_split=case_when(
#                   as.numeric(as.character(AAT_spontansprache)) >
#                   mean(as.numeric(as.character(
#                         means_final$AAT_spontansprache))) ~ "high"
#                   as.numeric(as.character(AAT_spontansprache)) <
#                   mean(as.numeric(as.character(
#                         means_final$AAT_spontansprache))) ~ "low",
#                   as.numeric(as.character(AAT_spontansprache)) ==
#                   mean(as.numeric(as.character(
#                         means_final$AAT_spontansprache))) ~ "median")) -> means_final
#
# means_final %>% group_by(med_split, PosOr) %>%
#       summarise(mean=mean(error_class), sd = sd(error_class))
# means_final %>% group_by(mean_split, PosOr) %>%
#       summarise(mean=mean(error_class), sd = sd(error_class))
#
# #### Nested models
# #
# # summary(afex::lmer_alt(error_class ~
# #       session/(PosOr.cont*(TokenTest_c+AAT_c+
# #             AAT_spontansprache_c+
# #             LHoverall_c)) +
# #       (PosOr.cont |subject) +
# #       (1|category) ,
# #       data =df_errors_PWA, family = "binomial",
# #       control=glmerControl(optimizer = "bobyqa",
# #             optCtrl = list(maxfun = 2e5))))

```

Additional (pre-planned) analyses

Preregistered analyses with GLMM

We deviated from our preregistered analyses because SEs seemed suspiciously small.

Check fit of normal vs gamma distribution in histograms, q-q-plots and using objective criteria:

1) Fit normal and gamma distributions to the reaction time data

```
library(fitdistrplus)
```

```
## Loading required package: MASS
```

```
##
```

```
## Attaching package: 'MASS'
```

```
## The following object is masked from 'package:dplyr':
```

```
##
```

```
##      select
```

```
## Loading required package: survival
```

```
## Warning: package 'survival' was built under R version 4.3.2
```

```
fit.normal<- fitdist(df_RTs$VOT, distr = "norm", method = "mle")
summary(fit.normal)
```

```
## Fitting of the distribution ' norm ' by maximum likelihood
```

```
## Parameters :
```

```
##      estimate Std. Error
```

```
## mean 1256.4520    4.029886
```

```
## sd    449.7363    2.849560
```

```
## Loglikelihood: -93756.26   AIC:  187516.5   BIC:  187531.4
```

```
## Correlation matrix:
```

```
##      mean sd
```

```
## mean    1  0
```

```
## sd      0  1
```

```
#plot(fit.normal)
```

```
fit.normal_PWA<- fitdist(df_RTs_PWA$VOT, distr = "norm", method = "mle")
summary(fit.normal_PWA)
```

```
## Fitting of the distribution ' norm ' by maximum likelihood
```

```
## Parameters :
```

```
##      estimate Std. Error
```

```
## mean 1352.928    7.160560
```

```
## sd    531.897    5.063163
```

```
## Loglikelihood: -42463.15   AIC:  84930.31   BIC:  84943.54
```

```
## Correlation matrix:
##      mean sd
## mean    1  0
## sd      0  1
```

```
#plot(fit.normal_PWA)
```

```
fit.gamma <- fitdist(df_RT$VOT, distr = "gamma", method = "mle")
summary(fit.gamma)
```

```
## Fitting of the distribution ' gamma ' by maximum likelihood
## Parameters :
##      estimate      Std. Error
## shape 9.303155467 0.09618813487
## rate  0.007404132 0.00007718889
## Loglikelihood: -92203.61   AIC:  184411.2   BIC:  184426.1
## Correlation matrix:
##      shape      rate
## shape 1.0000000 0.9610023
## rate  0.9610023 1.0000000
```

```
#plot(fit.gamma)
```

```
fit.gamma_PWA <- fitdist(df_RT_PWA$VOT, distr = "gamma", method = "mle")
summary(fit.gamma_PWA)
```

```
## Fitting of the distribution ' gamma ' by maximum likelihood
## Parameters :
##      estimate      Std. Error
## shape 7.228017511 0.10366210322
## rate  0.005343025 0.00007644925
## Loglikelihood: -41893.43   AIC:  83790.86   BIC:  83804.09
## Correlation matrix:
##      shape      rate
## shape 1.0000000 0.9414491
## rate  0.9414491 1.0000000
```

```
#plot(fit.gamma_PWA)
```

```
# library(actuar)
# fit.invgamma <- fitdist(df_RT$VOT, distr = "invgamma", method = "mle")
# summary(fit.invgauss)
# #plot(fit.invgauss)
#
# fit.invgamma_PWA <- fitdist(df_RT_PWA$VOT, distr = "invgamma", method = "mle")
# summary(fit.invgamma_PWA)
# #plot(fit.invgauss_PWA)
```

```
library(actuar)
```

```
##
## Attaching package: 'actuar'
```



```
## The following objects are masked from 'package:stats':  
##  
##      sd, var
```

```
## The following object is masked from 'package:grDevices':  
##  
##      cm
```

```
fit.invgauss <- fitdist(  
  df_RTs$VOT, distr = "invgauss", start = list(mean = 5, shape = 1),  
  method = "mle")
```

```
## Warning in checkparamlist(arg_startfix$start.arg, arg_startfix$fix.arg, : Some  
## parameter names have no starting/fixed value but have a default value:  
## dispersion.
```

```
summary(fit.invgauss)
```

```
## Fitting of the distribution ' invgauss ' by maximum likelihood  
## Parameters :  
##      estimate Std. Error  
## mean    1256.267    3.737018  
## shape 11394.058 151.349229  
## Loglikelihood: -91804.31  AIC: 183612.6  BIC: 183627.5  
## Correlation matrix:  
##      mean      shape  
## mean  1.000000000 0.002057613  
## shape 0.002057613 1.000000000
```

```
#plot(fit.invgauss)
```

```
fit.invgauss_PWA <- fitdist(df_RTs_PWA$VOT, distr = "invgauss",  
  start = list(mean = 5, shape = 1),  
  method = "mle")
```

```
## Warning in checkparamlist(arg_startfix$start.arg, arg_startfix$fix.arg, : Some  
## parameter names have no starting/fixed value but have a default value:  
## dispersion.
```

```
## Warning in sqrt(diag(varcovar)): NaNs produced
```

```
## Warning in sqrt(1/diag(V)): NaNs produced
```


```
## Warning in cov2cor(varcovar): diag(.) had 0 or NA entries; non-finite result is  
## doubtful
```

```
summary(fit.invgauss_PWA)
```


```
## Fitting of the distribution ' invgauss ' by maximum likelihood
## Parameters :
##      estimate Std. Error
## mean  99734.213      NaN
## shape 1176.467    22.41566
## Loglikelihood: -47351.68   AIC:  94707.36   BIC:  94720.59
## Correlation matrix:
##      mean shape
## mean    1    NaN
## shape NaN    1
```

```
#plot(fit.invgauss_PWA)
```

```
MASS::boxcox(df_RT$PWA$VOT~df_RT$PWA$PosOr_cont*df_RT$PWA$session)
```

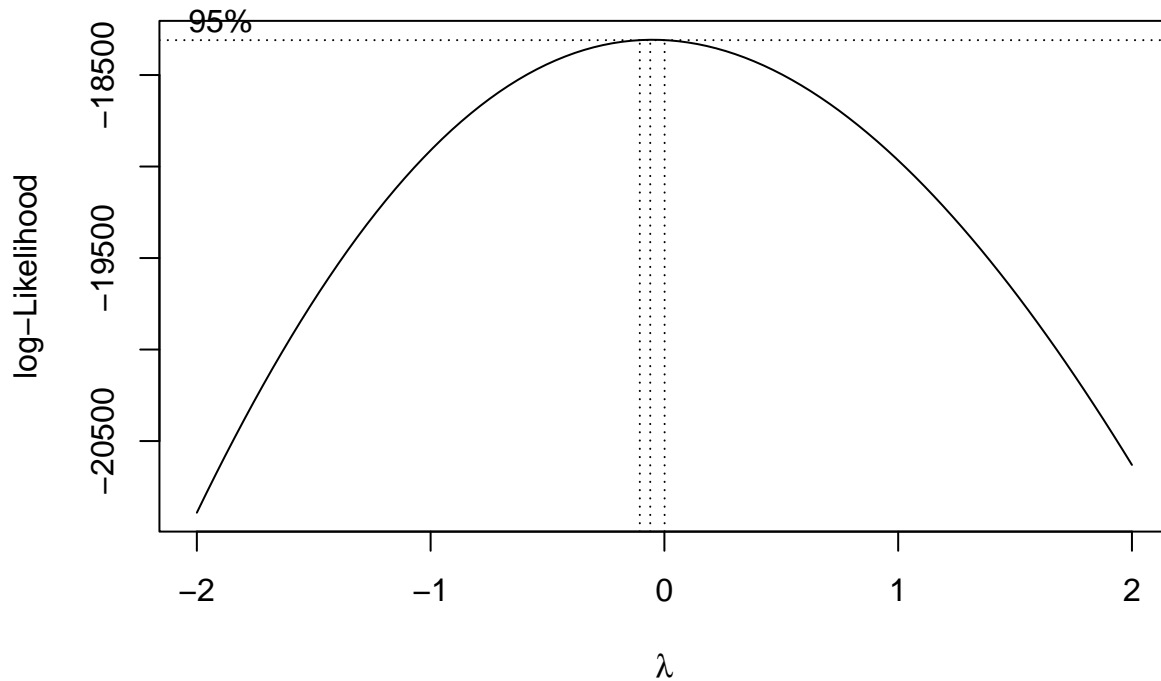

```
MASS::boxcox(df_RT$VOT~df_RT$PosOr_cont*df_RT$session*df_RT$group)
```

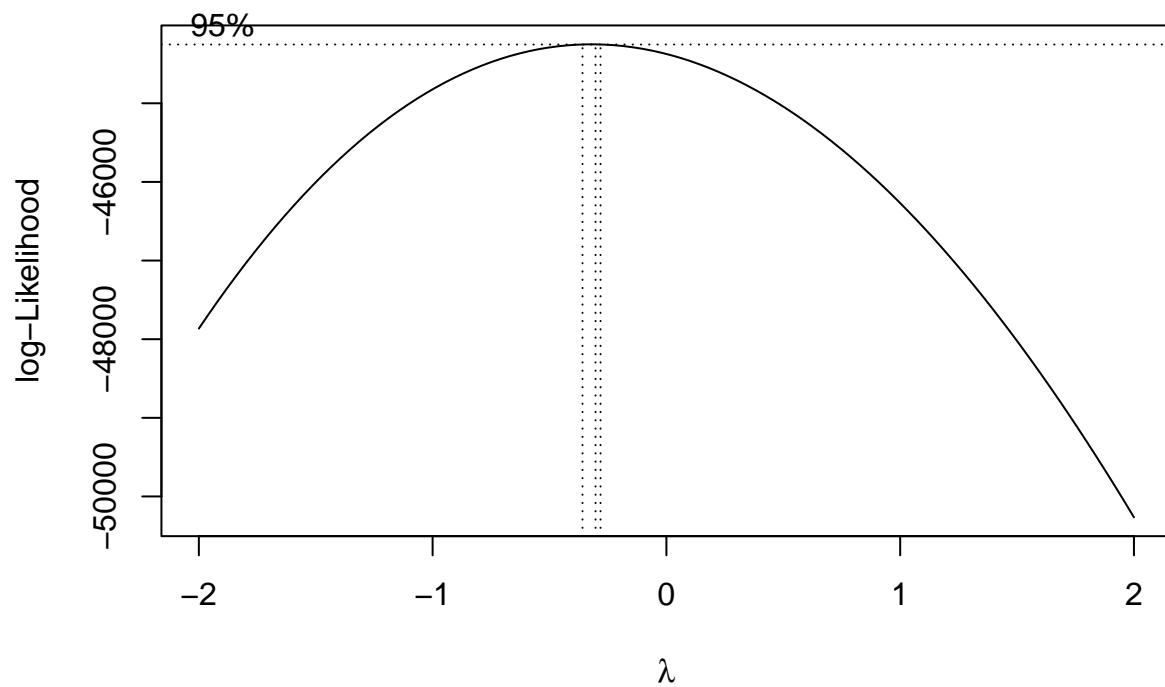


```
fit.transf <- fitdist(log(df_RTs$VOT), distr = "norm",method = "mle")
fit.transf_PWA <- fitdist(log(df_RTs_PWA$VOT),
                           distr = "norm",method = "mle")
```

- 2) Compare the fit of the two distributions
Visually compare fit of both distributions in histogram


```
denscomp(list(fit.gamma, fit.invgauss))
```

Histogram and theoretical densities

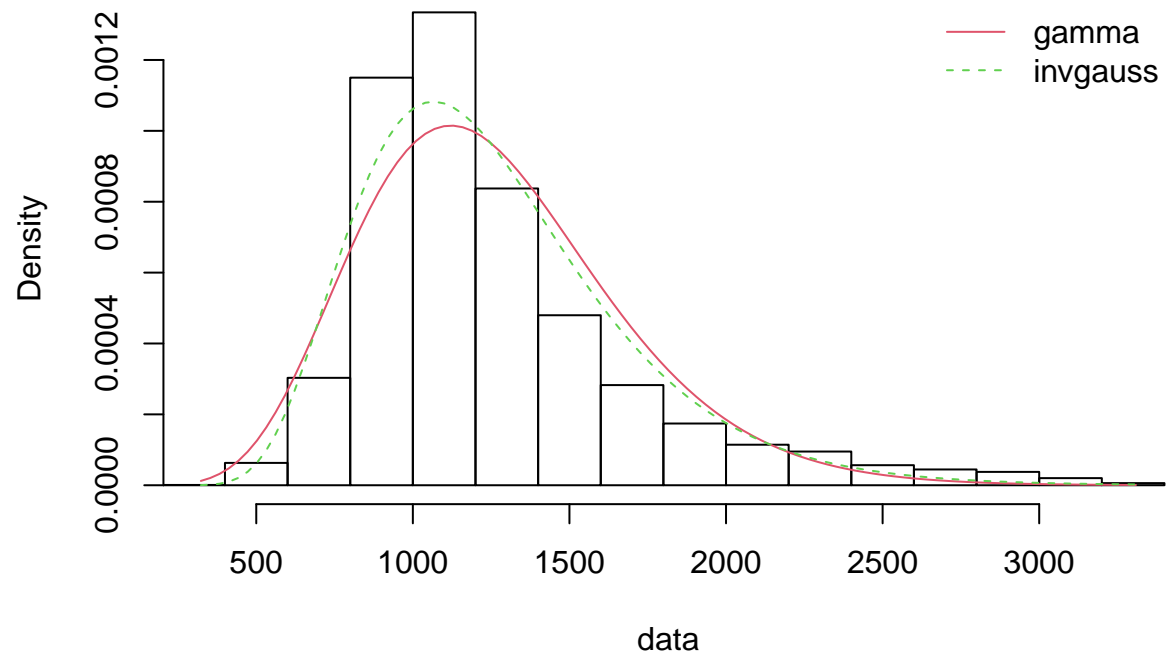


```
denscomp(list(fit.transf))
```

Histogram and theoretical densities

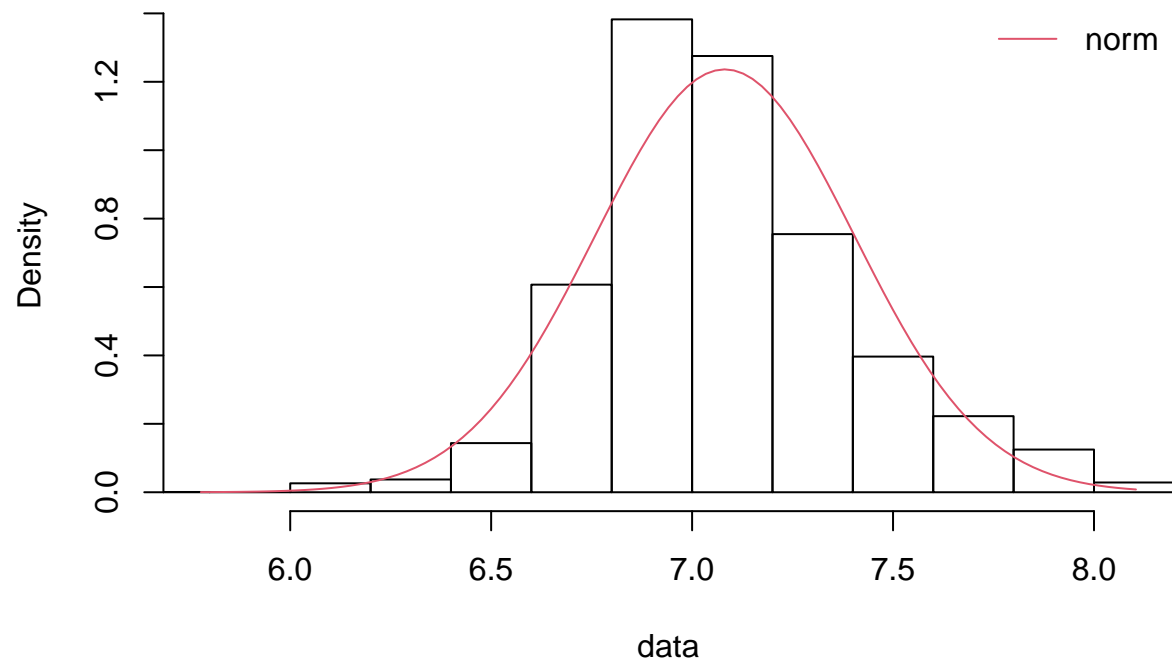


```
denscomp(list(fit.gamma_PWA, fit.invgauss_PWA))
```

Histogram and theoretical densities

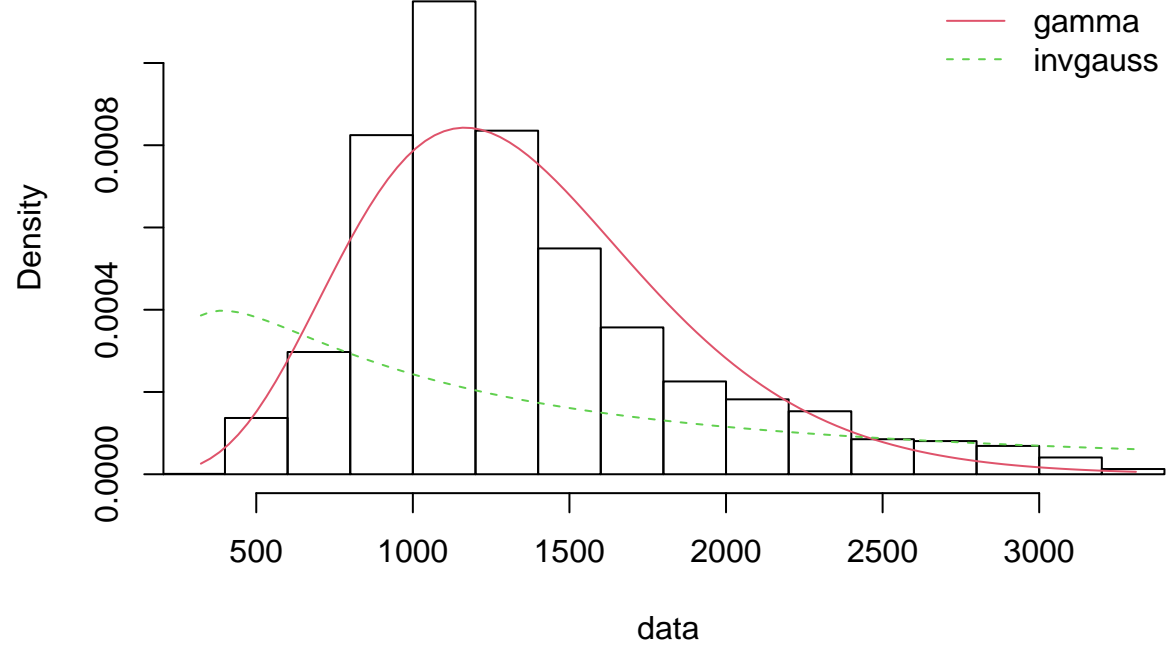


```
denscomp(list(fit.transf_PWA))
```

Histogram and theoretical densities

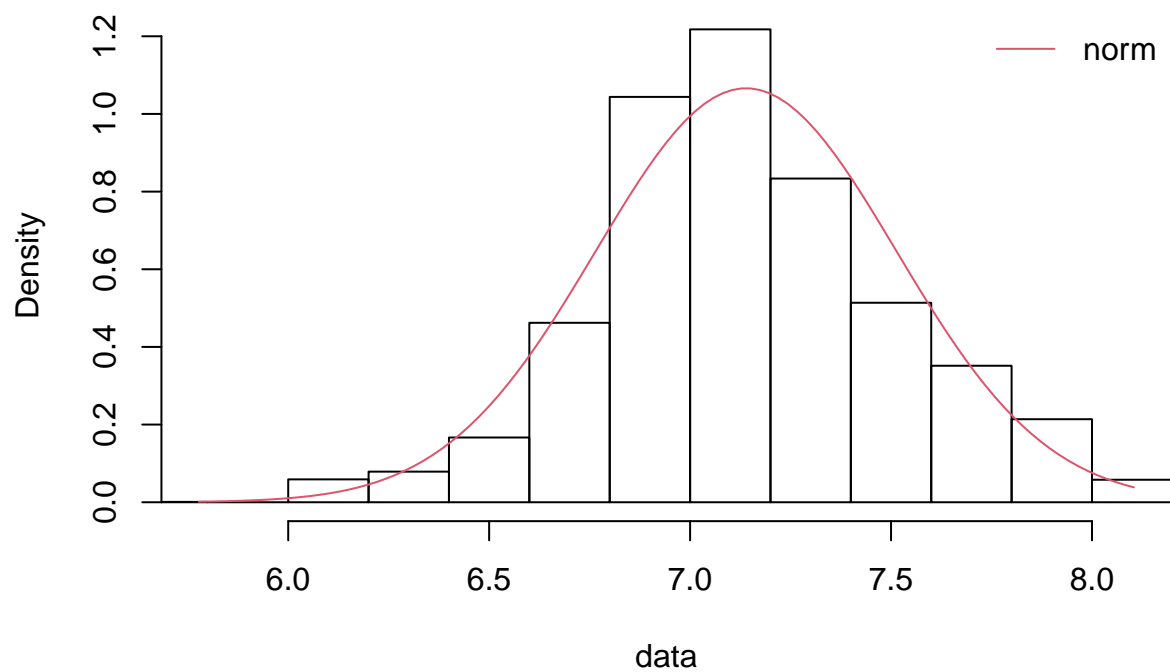


Visually compare fit of both distributions in Q-Q-plots


```
qqcomp(list(fit.gamma, fit.invgauss))
```

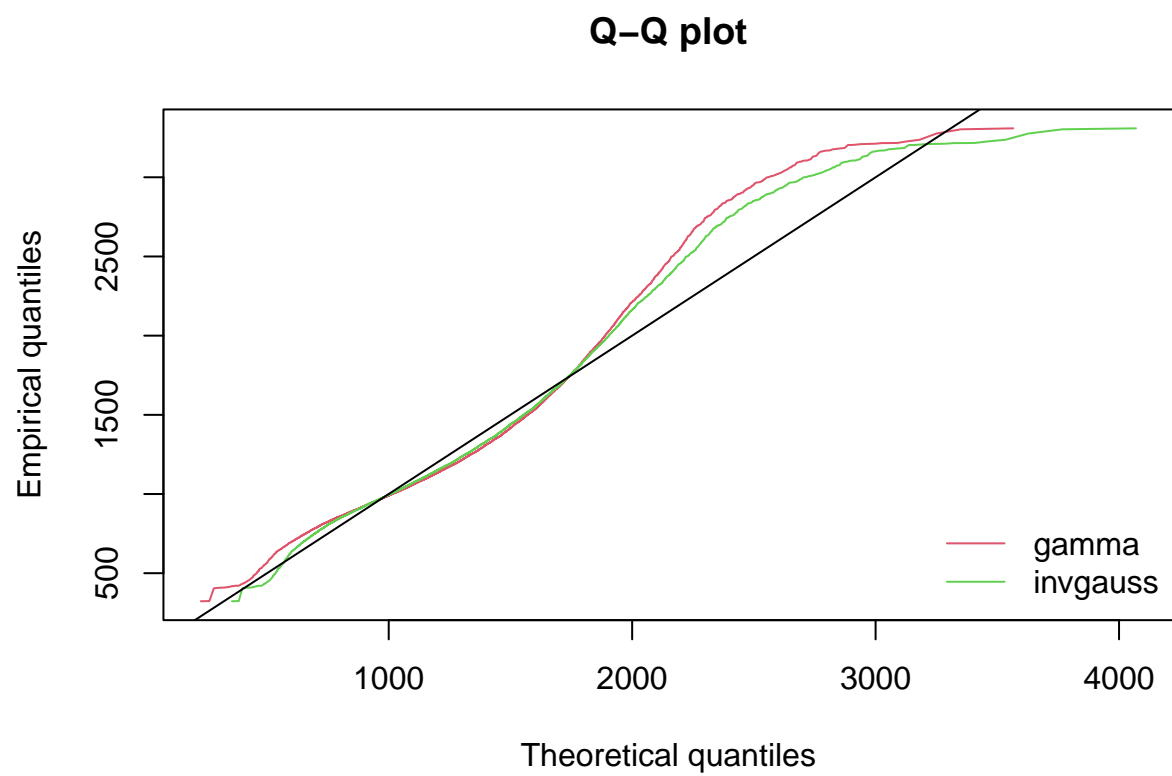


```
qqcomp(list(fit.transf))
```
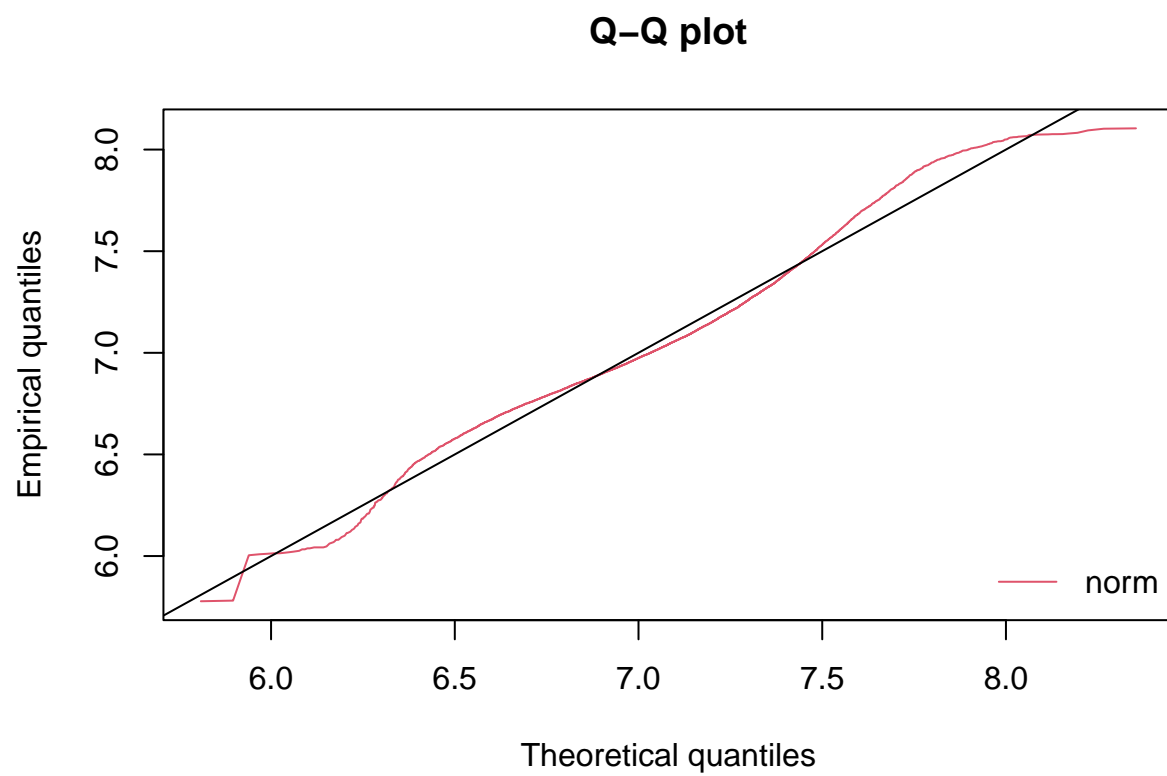
```
qqcomp(list(fit.gamma_PWA))#, fit.invgauss_PWA))
```

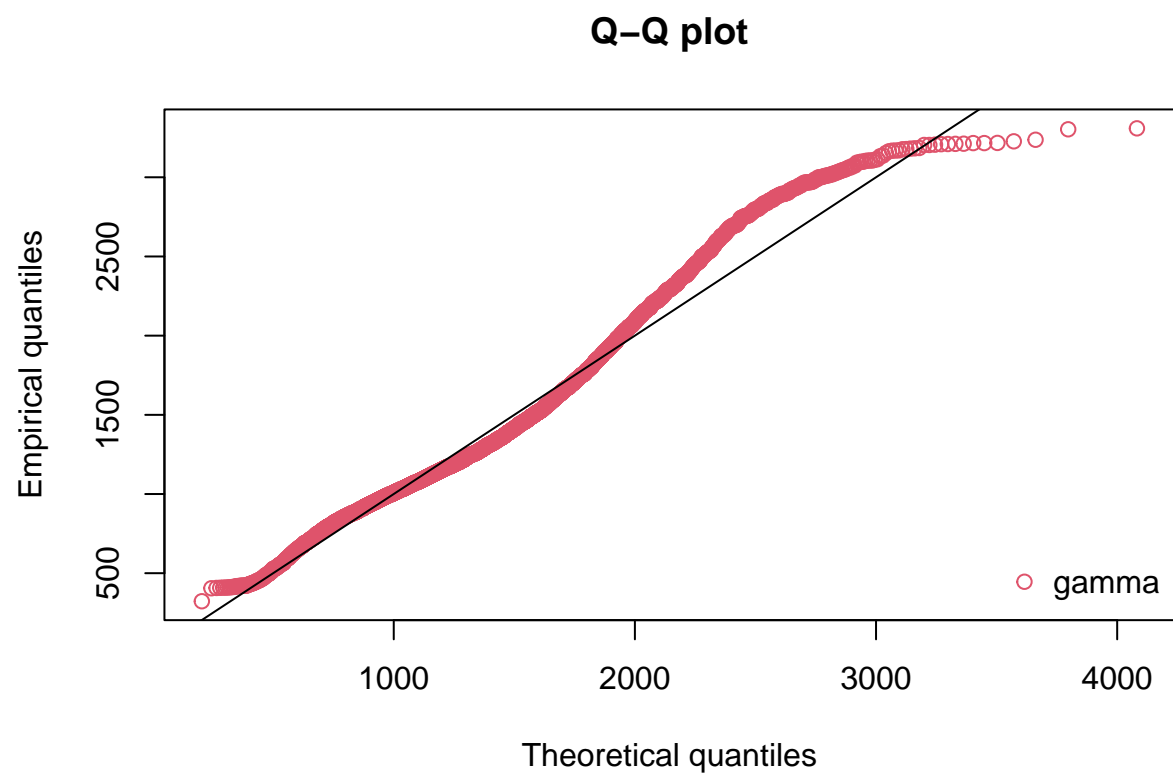

```
qqcomp(list(fit.transf_PWA))
```

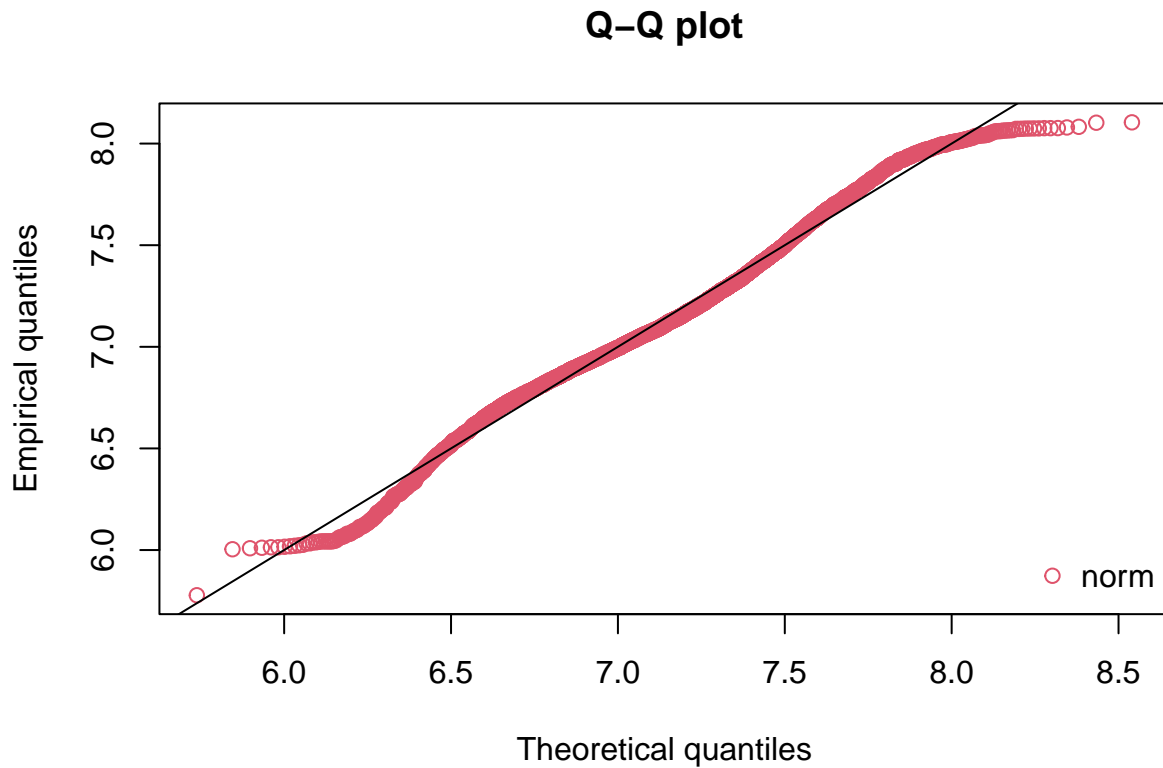

Compare information criteria

```
gofstat(list(fit.gamma, fit.invgauss, fit.normal),
        fitnames = c("Gamma", "Inverse Gaussian", "Normal"))
```

```
## Goodness-of-fit statistics
##
##          Gamma Inverse Gaussian    Normal
## Kolmogorov-Smirnov statistic  0.08343887      0.06232548  0.127563
## Cramer-von Mises statistic   30.32364092     16.58123861  75.033011
## Anderson-Darling statistic  176.46689389     96.39448742 433.186766
##
## Goodness-of-fit criteria
##
##          Gamma Inverse Gaussian    Normal
## Akaike's Information Criterion 184411.2      183612.6 187516.5
## Bayesian Information Criterion 184426.1      183627.5 187531.4
```

```
gofstat(list(fit.gamma_PWA, fit.invgauss_PWA, fit.normal_PWA),
        fitnames = c("Gamma", "Inverse Gaussian", "Normal" ))
```

```
## Goodness-of-fit statistics
##
##          Gamma Inverse Gaussian    Normal
## Kolmogorov-Smirnov statistic  0.06892153      0.4539719  0.1180601
## Cramer-von Mises statistic    8.06338088     375.0566303  25.8912637
## Anderson-Darling statistic   45.03214204     1728.3004897 147.8033420
##
```

```
## Goodness-of-fit criteria
##
##               Gamma Inverse Gaussian   Normal
## Akaike's Information Criterion 83790.86      94707.36 84930.31
## Bayesian Information Criterion 83804.09      94720.59 84943.54
```

Conclusion: . Overall, (inverse) gamma fits the data better than a normal model with uncontrolled data and an inverse Gaussian distribution for both the entire data set and the PWA group only. The inverse Gamma is not yet implemented in glmer. Therefore we will use the Gamma distribution.

```
# m1 <- glmer(VOT ~ PosOr.cont*session +
#             (PosOr.cont*session/subject) +
#             (PosOr.cont*session/category),
#             data = df_RTs_PWA,
#             family =Gamma(link ="identity"),
#             control=glmerControl(optimizer = "bobyqa"))
```

PWA only - Ordinal position x session Model fails to converge -> reduce

```
# 1) Increase optimizer iterations
# m1 <- glmer(VOT ~ PosOr.cont*session +
#             (PosOr.cont*session/subject) +
#             (PosOr.cont*session/category),
#             data = df_RTs_PWA,
#             family =Gamma(link ="identity"),
#             control=glmerControl(optimizer = "bobyqa",
#                                   optCtrl = list(maxfun = 2e5)))
# 2) Set correlation parameters to zero
m1 <- afex::lmer_alt(VOT ~ PosOr.cont*session +
                    (PosOr.cont*session||subject) +
                    (PosOr.cont*session||category),
                    data = df_RTs_PWA,
                    family =Gamma(link ="identity"),
                    control=glmerControl(optimizer = "bobyqa",
                                          optCtrl = list(maxfun = 2e5)))
didLmerConverge(m1)
```

```
## The relative maximum gradient of 0.0000625 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## The warnings can be safely ignored
```

```
# inspect model
summary(m1)
```

```
## Generalized linear mixed model fit by maximum likelihood (Laplace
## Approximation) [glmerMod]
## Family: Gamma ( identity )
## Formula: VOT ~ PosOr.cont * session + (1 + re1.PosOr.cont + re1.session2 +
##          re1.session3 + re1.PosOr.cont_by_session2 + re1.PosOr.cont_by_session3 ||
```

```

##      subject) + (1 + re2.Pos0r.cont + re2.session2 + re2.session3 +
##      re2.Pos0r.cont_by_session2 + re2.Pos0r.cont_by_session3 ||      category)
## Data: data
## Control: glmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
##      AIC      BIC    logLik deviance df.resid
## 80877.2 81002.9 -40419.6 80839.2      5499
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -1.9676 -0.6347 -0.2620  0.3412  6.9889
##
## Random effects:
## Groups      Name                                Variance  Std.Dev.
## category    re2.Pos0r.cont_by_session3         1388.0844   37.2570
## category.1  re2.Pos0r.cont_by_session2         1746.8469   41.7953
## category.2  re2.session3                       2080.6296   45.6139
## category.3  re2.session2                       1856.3737   43.0857
## category.4  re2.Pos0r.cont                      234.6941   15.3197
## category.5  (Intercept)                        5374.8827   73.3136
## subject     re1.Pos0r.cont_by_session3          600.7064   24.5093
## subject.1   re1.Pos0r.cont_by_session2          965.2678   31.0688
## subject.2   re1.session3                       3742.7243   61.1778
## subject.3   re1.session2                       2955.8420   54.3677
## subject.4   re1.Pos0r.cont                      361.3693   19.0097
## subject.5   (Intercept)                       20917.7899  144.6298
## Residual                                         0.1001   0.3164
## Number of obs: 5518, groups:  category, 24; subject, 20
##
## Fixed effects:
##              Estimate Std. Error t value      Pr(>|z|)
## (Intercept)    1545.112     4.381 352.700 < 0.0000000000000002 ***
## Pos0r.cont      31.556     5.918   5.333     0.0000000968 ***
## session2     -112.882     4.345 -25.979 < 0.0000000000000002 ***
## session3     -144.043     5.425 -26.552 < 0.0000000000000002 ***
## Pos0r.cont:session2  14.551     3.782   3.847     0.000119 ***
## Pos0r.cont:session3   9.690     6.903   1.404     0.160386
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr) Ps0r.c sessn2 sessn3 Ps0.:2
## Pos0r.cont  -0.237
## session2    -0.090  0.058
## session3     0.083 -0.109 -0.029
## Ps0r.cnt:s2 -0.065  0.057  0.015 -0.028
## Ps0r.cnt:s3  0.018 -0.287  0.125  0.106  0.084

```

```
anova(m1)
```

```

## Analysis of Variance Table
##              npar Sum Sq Mean Sq F value
## Pos0r.cont      1 2.2286 2.22856 22.2599
## session         2 5.7970 2.89852 28.9518

```

```
## PosOr.cont:session      2 0.1159 0.05794  0.5788
```

```
# save model output
saveRDS(m1, file = here::here("results", "tables",
                              "CSI_online_aphasia_PWA_glmm_cont.RDS"))
tab_model(m1, transform = NULL,
          show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
          title = "GLMM (Gamma distribution) of VOTs Predicted by Ordinal Position and Session, PWA only",
          dv.labels = "Vocal Onset Time",
          #string.pred = "",
          string.stat = "t-Value",
          file = here::here(
            "results", "tables", "CSI_online_aphasia_PWA_glmm_cont.html"))
```

GLMM (Gamma distribution) of VOTs Predicted by Ordinal Position and Session, PWA only

Vocal Onset Time

Predictors

Estimates

CI

t-Value

p

(Intercept)

1545.11

1536.52 – 1553.70

352.70

<0.001

PosOr cont

31.56

19.96 – 43.16

5.33

<0.001

session [2]

-112.88

-121.40 – -104.36

-25.98

<0.001

session [3]

-144.04

-154.68 – -133.41

-26.55

```

<0.001
PosOr cont × session [2]
14.55
7.14 – 21.97
3.85
<0.001
PosOr cont × session [3]
9.69
-3.84 – 23.22
1.40
0.160
N subject
20
N category
24
Observations
5518

```

Analyses with Ordinal position x Session x Group Make sure contrasts are correctly defined

```
contrasts(df_RTs$session)
```

```
##           2           3
## 1 -0.3333333 -0.3333333
## 2  0.6666667 -0.3333333
## 3 -0.3333333  0.6666667

```

```
levels(df_RTs$session)
```

```
## [1] "1" "2" "3"
```

```
## Define contrast of group
contrasts(df_RTs$group)
```

```
##           2-1
## control -0.5
## PWA      0.5

```

```
levels(df_RTs$group)
```

```
## [1] "control" "PWA"
```

Compute model

```
# m2 <- glmer(VOT ~ PosOr.cont*session*group +
#             (PosOr.cont*session/subject) +
#             (PosOr.cont*session*group/category),
#             data = df_RTs,
#             family = Gamma(link = "identity"),
#             control=glmerControl(optimizer = "bobyqa"))
```

Model fails to converge -> reduce

```
# 1) Increase optimizer iterations
# m2 <- glmer(VOT ~ PosOr.cont*session*group +
#             (PosOr.cont*session/subject) +
#             (PosOr.cont*session*group/category),
#             data = df_RTs,
#             family = Gamma(link = "identity"),
#             control=glmerControl(optimizer = "bobyqa",
#                                   optCtrl = list(maxfun = 2e5)))
# 2) Set correlation parameters to zero
m2 <- afex::lmer_alt(VOT ~ PosOr.cont*session*group +
                    (PosOr.cont*session||subject) +
                    (PosOr.cont*session*group||category),
                    data = df_RTs,
                    family = Gamma(link = "identity"),
                    control=glmerControl(optimizer = "bobyqa",
                                          optCtrl = list(maxfun = 2e5)))
didLmerConverge(m2)
```

```
## The relative maximum gradient of 0.000238 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

```
## The warnings can be safely ignored
```

```
# inspect model
summary(m2)
```

```
## Generalized linear mixed model fit by maximum likelihood (Laplace
## Approximation) [glmerMod]
## Family: Gamma ( identity )
## Formula:
## VOT ~ PosOr.cont * session * group + (1 + re1.PosOr.cont + re1.session2 +
## re1.session3 + re1.PosOr.cont_by_session2 + re1.PosOr.cont_by_session3 ||
## subject) + (1 + re2.PosOr.cont + re2.session2 + re2.session3 +
## re2.group2.1 + re2.PosOr.cont_by_session2 + re2.PosOr.cont_by_session3 +
## re2.PosOr.cont_by_group2.1 + re2.session2_by_group2.1 + re2.session3_by_group2.1 +
## re2.PosOr.cont_by_session2_by_group2.1 + re2.PosOr.cont_by_session3_by_group2.1 ||
## category)
## Data: data
## Control: glmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
##      AIC      BIC    logLik deviance df.resid
## 178422.0 178652.4 -89180.0 178360.0    12424
##
```



```

## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -2.5240 -0.6220 -0.2386  0.3365  8.0705
##
## Random effects:
##      Groups      Name              Variance  Std.Dev.
## subject      (Intercept)         11534.92084 107.4007
## subject.1    re1.Pos0r.cont         230.18085  15.1717
## subject.2    re1.session2          3987.89997  63.1498
## subject.3    re1.session3          3759.80311  61.3172
## subject.4    re1.Pos0r.cont_by_session2  799.75422  28.2799
## subject.5    re1.Pos0r.cont_by_session3  337.48878  18.3709
## category     (Intercept)         3218.47862  56.7316
## category.1   re2.Pos0r.cont         107.70350  10.3780
## category.2   re2.session2          675.10353  25.9828
## category.3   re2.session3          671.62800  25.9158
## category.4   re2.group2.1         1350.46946  36.7487
## category.5   re2.Pos0r.cont_by_session2  201.22400  14.1853
## category.6   re2.Pos0r.cont_by_session3  294.15346  17.1509
## category.7   re2.Pos0r.cont_by_group2.1  180.28554  13.4270
## category.8   re2.session2_by_group2.1  3093.25604  55.6170
## category.9   re2.session3_by_group2.1  2663.70627  51.6111
## category.10  re2.Pos0r.cont_by_session2_by_group2.1 2197.76058  46.8803
## category.11  re2.Pos0r.cont_by_session3_by_group2.1 1097.63575  33.1306
## Residual                                0.08145   0.2854
## Number of obs: 12455, groups:  subject, 40; category, 24
##
## Fixed effects:
##              Estimate Std. Error t value      Pr(>|z|)
## (Intercept)      1390.793      2.531 549.448 < 0.0000000000000002
## Pos0r.cont         22.805      3.054   7.466 0.0000000000000824
## session2        -98.052      3.804 -25.779 < 0.0000000000000002
## session3       -125.369      3.869 -32.401 < 0.0000000000000002
## group2-1         338.070      2.909 116.195 < 0.0000000000000002
## Pos0r.cont:session2    6.167      2.323   2.655      0.00794
## Pos0r.cont:session3    5.634      6.493   0.868      0.38552
## Pos0r.cont:group2-1   15.687      2.325   6.747 0.0000000000151152
## session2:group2-1    -30.708      3.306  -9.287 < 0.0000000000000002
## session3:group2-1    -42.597      3.231 -13.186 < 0.0000000000000002
## Pos0r.cont:session2:group2-1  17.956      2.722   6.598 0.0000000000417505
## Pos0r.cont:session3:group2-1   6.852      2.409   2.844      0.00446
##
## (Intercept)          ***
## Pos0r.cont           ***
## session2             ***
## session3             ***
## group2-1            ***
## Pos0r.cont:session2  **
## Pos0r.cont:session3
## Pos0r.cont:group2-1  ***
## session2:group2-1    ***
## session3:group2-1    ***
## Pos0r.cont:session2:group2-1 ***
## Pos0r.cont:session3:group2-1 **

```

```
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##          (Intr) Ps0r.c sessn2 sessn3 grp2-1 Ps0.:2 Ps0.:3 P0.:2- s2:2-1
## Pos0r.cont  -0.091
## session2      0.116 -0.162
## session3     -0.047  0.306 -0.507
## group2-1     -0.019 -0.172 -0.081 -0.052
## Ps0r.cnt:s2  -0.044 -0.099 -0.046  0.027  0.199
## Ps0r.cnt:s3   0.112 -0.423  0.321 -0.571  0.252  0.030
## Ps0r.cn:2-1  -0.252  0.050 -0.354  0.259 -0.015  0.094 -0.275
## sssn2:gr2-1  -0.049  0.094 -0.425  0.381  0.098  0.032 -0.286  0.058
## sssn3:gr2-1  -0.085  0.023 -0.432  0.218  0.047  0.055 -0.093  0.262  0.119
## Ps0r.:2:2-1  0.209 -0.124 -0.180  0.107  0.166  0.064  0.183 -0.064  0.176
## Ps0r.:3:2-1  0.135 -0.085  0.033  0.048  0.104 -0.011  0.011 -0.181  0.159
##          s3:2-1 P0.:2:
## Pos0r.cont
## session2
## session3
## group2-1
## Ps0r.cnt:s2
## Ps0r.cnt:s3
## Ps0r.cn:2-1
## sssn2:gr2-1
## sssn3:gr2-1
## Ps0r.:2:2-1  0.140
## Ps0r.:3:2-1 -0.157  0.195
```

```
anova(m2)
```

```
## Analysis of Variance Table
##              npar Sum Sq Mean Sq F value
## Pos0r.cont          1 2.4993  2.4993 30.6836
## session              2 8.7004  4.3502 53.4068
## group                1 7.2716  7.2716 89.2723
## Pos0r.cont:session   2 0.0633  0.0317  0.3886
## Pos0r.cont:group     1 0.3947  0.3947  4.8462
## session:group        2 0.2507  0.1254  1.5390
## Pos0r.cont:session:group 2 0.0888  0.0444  0.5449
```

```
# save model output
saveRDS(m2, file = here::here("results", "tables",
                              "CSI_online_aphasia_SessionxGroup_glmm_cont.RDS"))
tab_model(m2, transform = NULL,
           show.re.var = F, show.stat = T, show.r2 = F, show.icc = F,
           title = "GLMM (Gamma distribution) of VOTs Predicted by Ordinal Position, Session and Group",
           dv.labels = "Vocal Onset Time",
           #string.pred = "",
           string.stat = "t-Value",
           file = here::here(
             "results", "tables",
             "CSI_online_aphasia_SessionxGroup_glmm_cont.html"))
```

GLMM (Gamma distribution) of VOTs Predicted by Ordinal Position, Session and Group

Vocal Onset Time

Predictors

Estimates

CI

t-Value

p

(Intercept)

1390.79

1385.83 – 1395.76

549.45

<0.001

PosOr cont

22.80

16.82 – 28.79

7.47

<0.001

session [2]

-98.05

-105.51 – -90.60

-25.78

<0.001

session [3]

-125.37

-132.95 – -117.78

-32.40

<0.001

group2-1

338.07

332.37 – 343.77

116.20

<0.001

PosOr cont × session [2]

6.17

1.61 – 10.72

2.65
 0.008
 PosOr cont \times session [3]
 5.63
 -7.09 – 18.36
 0.87
 0.386
 PosOr.cont:group2-1
 15.69
 11.13 – 20.25
 6.75
 <0.001
 session2:group2-1
 -30.71
 -37.19 – -24.23
 -9.29
 <0.001
 session3:group2-1
 -42.60
 -48.93 – -36.26
 -13.19
 <0.001
 PosOr.cont:session2:group2-1
 17.96
 12.62 – 23.29
 6.60
 <0.001
 PosOr.cont:session3:group2-1
 6.85
 2.13 – 11.57
 2.84
 0.004
 N subject
 40
 N category
 24
 Observations
 12455

Control analyses without PWA 1 and 17 The procedure deviated slightly in two participants. PWA1 had the same array in sessions 1 and 2 and was tested a day too late in session 2, PWA17 was tested a day too late in session 3. Here, we conduct control analyses without these two participants to test whether the data are affected.

RTs

Plotting

```
(means_final<- df_RT %>%
  filter(category != "Filler") %>%
  filter(subject != 101 & subject != 117) %>%
  Rmisc::summarySEwithin(., "VOT", idvar = "subject",
    withinvars = c("session", "PosOr"),
    betweenvars = "group", na.rm = T))
```

##	group	session	PosOr	N	VOT	sd	se	ci
## 1	control	1	1	461	1309.126	386.6087	18.00616	35.38453
## 2	control	1	2	456	1289.949	368.6706	17.26458	33.92821
## 3	control	1	3	446	1364.816	419.3224	19.85549	39.02218
## 4	control	1	4	457	1341.318	375.5740	17.56861	34.52548
## 5	control	1	5	456	1359.540	395.4900	18.52052	36.39636
## 6	control	2	1	466	1216.815	327.2233	15.15832	29.78730
## 7	control	2	2	462	1256.861	364.0399	16.93667	33.28264
## 8	control	2	3	464	1225.331	289.9285	13.45959	26.44945
## 9	control	2	4	466	1256.116	296.8703	13.75225	27.02425
## 10	control	2	5	454	1278.405	329.4120	15.46007	30.38236
## 11	control	3	1	469	1211.518	323.1567	14.92199	29.32239
## 12	control	3	2	471	1184.996	282.9187	13.03621	25.61646
## 13	control	3	3	467	1220.181	305.2131	14.12358	27.75378
## 14	control	3	4	470	1244.625	306.1228	14.12039	27.74706
## 15	control	3	5	472	1275.156	349.0940	16.06835	31.57453
## 16	PWA	1	1	322	1291.359	470.8797	26.24110	51.62626
## 17	PWA	1	2	307	1372.601	525.3676	29.98431	59.00153
## 18	PWA	1	3	293	1385.028	501.7716	29.31381	57.69314
## 19	PWA	1	4	314	1358.021	481.5093	27.17314	53.46511
## 20	PWA	1	5	278	1404.586	536.9389	32.20346	63.39460
## 21	PWA	2	1	333	1180.871	446.1987	24.45154	48.09948
## 22	PWA	2	2	339	1199.500	450.7117	24.47930	48.15096
## 23	PWA	2	3	323	1224.846	440.9998	24.53789	48.27482
## 24	PWA	2	4	332	1270.946	471.2779	25.86473	50.87999
## 25	PWA	2	5	311	1326.022	508.4508	28.83160	56.73038
## 26	PWA	3	1	350	1140.621	363.0123	19.40383	38.16314
## 27	PWA	3	2	340	1193.366	475.6980	25.79835	50.74500
## 28	PWA	3	3	348	1224.618	444.0864	23.80553	46.82129
## 29	PWA	3	4	338	1234.189	446.2534	24.27299	47.74565
## 30	PWA	3	5	322	1283.698	483.1446	26.92460	52.97096

```
override.linetype<-c("solid", "dashed", "dotted")
(plot_rt_repetition_PWA <- means_final %>% filter(group=="PWA") %>%
  ggplot(., aes(x=PosOr, y=VOT, group=session, color = session)) +
  geom_point(size = 2) +
  stat_summary(aes(linetype=session),
    fun=mean, geom="line", size = 0.5) +
```

```


scale_linetype_manual(values=c("solid", "dashed", "dotted"))+
scale_color_manual(values=c("#0072B2", "#E69F00", "#000000"))+
geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = session),
              width = .1) +

apatheme+
scale_y_continuous(limits = c(1120, 1450),
                   breaks = seq(1150, 1450, by = 50)) +
labs(x="Ordinal Position ", y="RT (ms)", colour="Session",
     linetype="Session",
     title = "Patients with Aphasia") +
theme(
  axis.title.y = element_text(margin = margin(0, 10, 0, 0)),
  axis.title.x = element_text(margin = margin(10, 0, 0, 0)),
  legend.key.width = unit(1, "cm"),
  legend.position="none")+
guides(color=guide_legend(
  override.aes=list(linetype=override.linetype)))+
scale_linetype(guide="none")

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

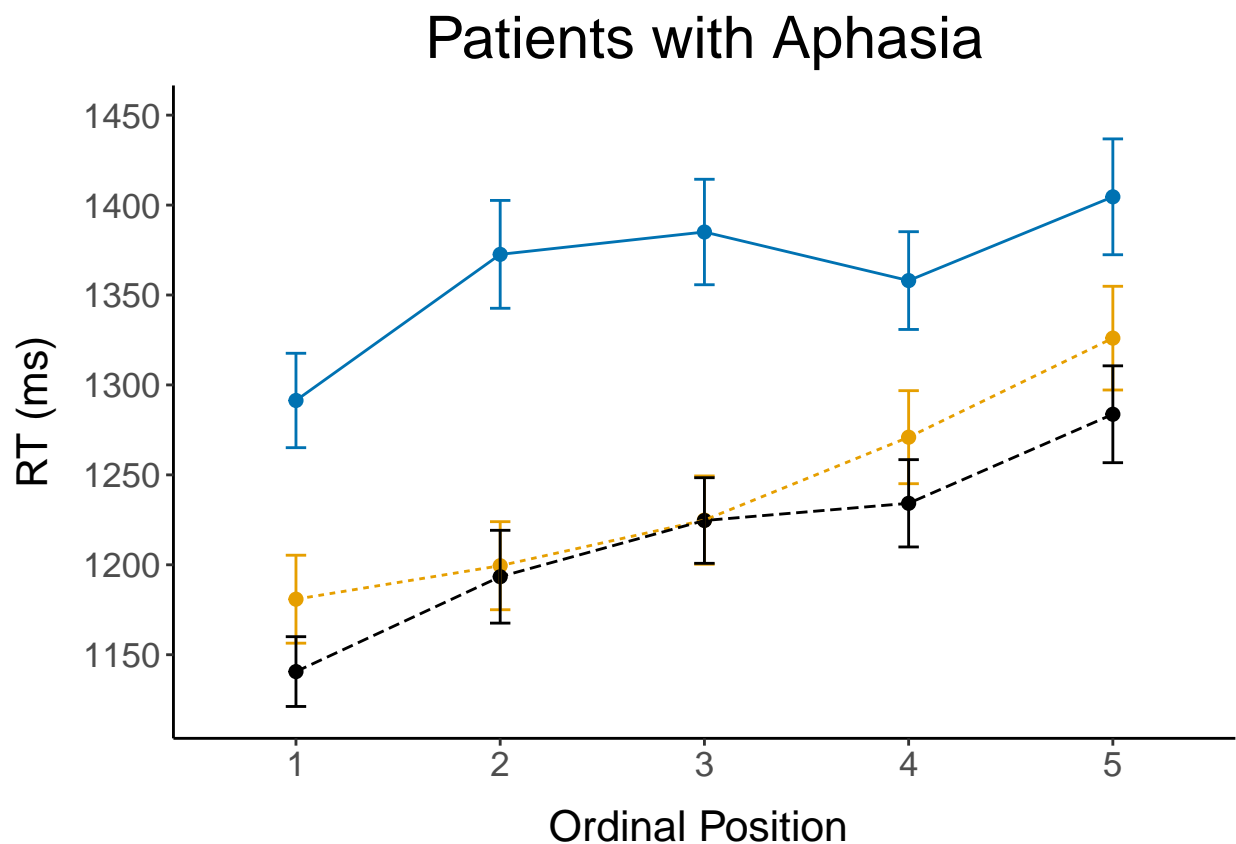

```

(plot_rt_repetition_control <- means_final %>%
  filter(group=="control") %>%

```

```


ggplot(., aes(x=PosOr, y=VOT, group=session, color = session)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=session),fun=mean, geom="line", size = 0.5) +
  scale_linetype_manual(values=c("solid", "dashed", "dotted"))+
  scale_color_manual(values=c("#0072B2", "#E69F00", "#000000"))+
  geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = session),
    width =.1) +

  apatheme+
  scale_y_continuous(limits = c(1120, 1450),
    breaks =seq(1150,1450, by = 50)) +
  labs(x="Ordinal Position ",y ="RT (ms)", colour="Session",
    linetype="Session",
    title = "Control Group") +
  theme(
    axis.title.y = element_text(margin = margin(0,10,0,0)),
    axis.title.x = element_text(margin = margin(10,0,0,0)),
    legend.key.width = unit(1, "cm"))+
  guides(color=guide_legend(
    override.aes=list(linetype=override.linetype)))+
  scale_linetype(guide="none")

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

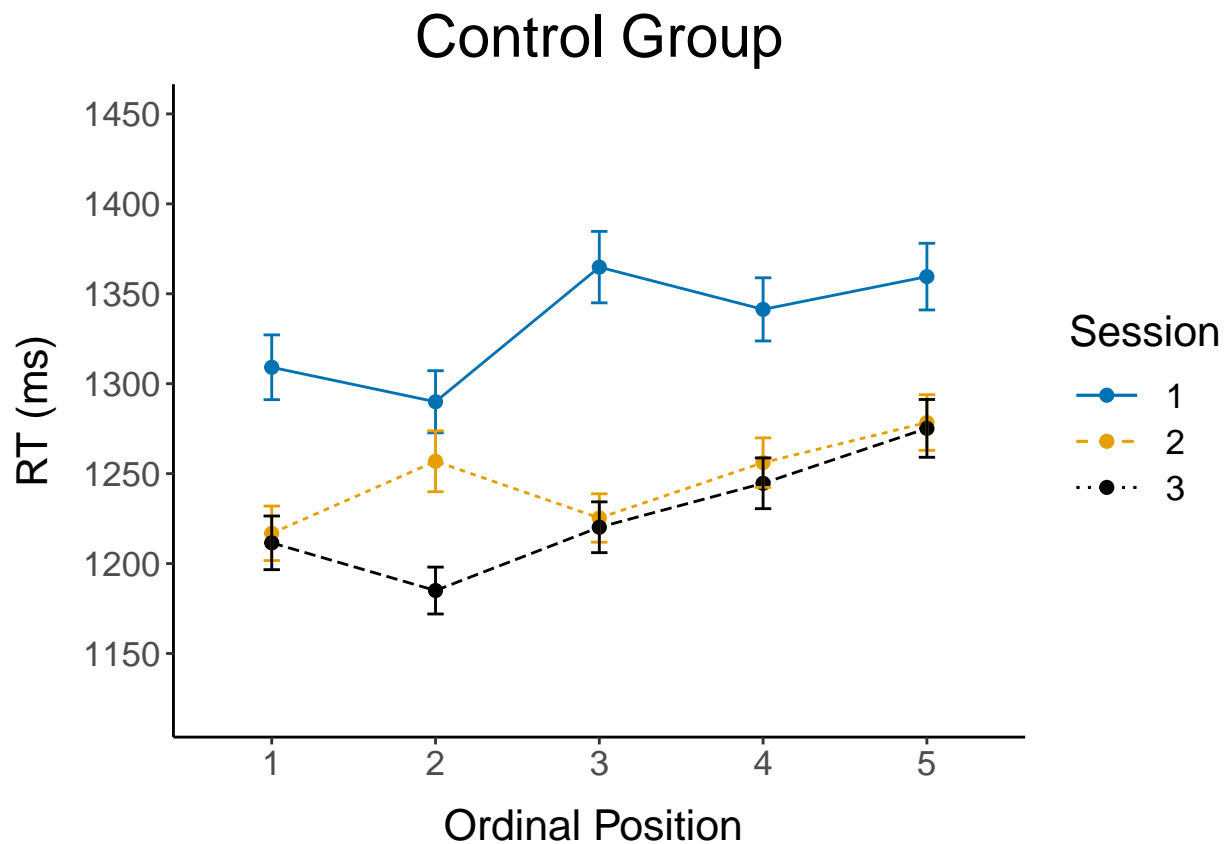

```
plots <- cowplot::plot_grid(plot_rt_repetition_PWA,
                             plot_rt_repetition_control,
                             nrow = 1, ncol=2, rel_widths = c(0.81,1),
                             margin(1,1,1,1),
                             labels = c("A", "B"),label_size = 34,
                             label_y = 1.01,
                             label_x=-0.03)
```

```
## Warning in as_grob.default(plot): Cannot convert object of class
## marginsimpleUnitunitunit_v2 into a grob.
```

```
filename <-
  "CSI_online_aphasia_spoken_plot_rt_by_repetition_without_101-117.pdf"
ggsave(plots, filename =
  here::here("results", "figures", filename),
  width = 25, height = 13, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))
```

Statistical analyses

```
df_RTs_red <- df_RTs %>% filter(subject != "101" & subject != "117") %>%
  droplevels()
df_RTs_red$PosOr.cont <- scale(as.numeric(as.character(df_RTs_red$PosOr)),
                               center = T, scale = F)

# m2_f <- afex::lmer_alt(lVOT ~ PosOr.cont*session*group +
#                       (PosOr.cont*session||subject) +
#                       (PosOr.cont*session*group||category),
#                       data = df_RTs_red,
#                       control=lmerControl(optimizer = "bobyqa",
#                                             optCtrl = list(maxfun = 2e5)))
# m2_f <- afex::lmer_alt(lVOT ~ PosOr.cont*session*group +
#                       (PosOr.cont*session||subject) +
#                       (PosOr.cont+session*group-session||category),
#                       data = df_RTs_red,
#                       control=lmerControl(optimizer = "bobyqa",
#                                             optCtrl = list(maxfun = 2e5)))
m2_f <- afex::lmer_alt(lVOT ~ PosOr.cont*session*group +
                      (PosOr.cont+session||subject) +
                      (PosOr.cont+group||category),
                      data = df_RTs_red,
                      control=lmerControl(optimizer = "bobyqa",
                                            optCtrl = list(maxfun = 2e5)))

# m2_f <- lmer(lVOT ~ PosOr.cont*session*group +
#             (PosOr.cont+session||subject) +
#             (PosOr.cont+group||category),
#             data = df_RTs_red,
#             control=lmerControl(optimizer = "bobyqa",
#                                   optCtrl = list(maxfun = 2e5)))
summary(m2_f)
```

```
## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
```



```

## lmerModLmerTest]
## Formula:
## lVOT ~ PosOr.cont * session * group + (1 + re1.PosOr.cont + re1.session2 +
##      re1.session3 || subject) + (1 + re2.PosOr.cont + re2.groupPWA ||
##      category)
## Data: data
## Control: lmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
## REML criterion at convergence: 566
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -5.0588 -0.6700 -0.1747  0.4856  4.7417
##
## Random effects:
## Groups      Name                Variance  Std.Dev.
## subject     (Intercept)         0.02712626 0.164701
## subject.1    re1.PosOr.cont      0.00011070 0.010521
## subject.2    re1.session2        0.00278164 0.052741
## subject.3    re1.session3        0.00224735 0.047406
## category     (Intercept)         0.00879305 0.093771
## category.1   re2.PosOr.cont      0.00002853 0.005341
## category.2   re2.groupPWA        0.00104258 0.032289
## Residual                    0.05875025 0.242385
## Number of obs: 11787, groups:  subject, 38; category, 24
##
## Fixed effects:
##
##              Estimate  Std. Error    df t value
## (Intercept)      7.085116    0.041816  51.242816 169.436
## PosOr.cont        0.013363    0.004422 104.743190   3.022
## session2         -0.063178    0.013800  35.126977 -4.578
## session3         -0.079132    0.012778  33.206693 -6.193
## groupPWA          0.210482    0.054569  37.088668   3.857
## PosOr.cont:session2 -0.001952    0.005059 11557.848779 -0.386
## PosOr.cont:session3  0.002122    0.005032 11552.244382   0.422
## PosOr.cont:groupPWA  0.003169    0.006681  138.528159   0.474
## session2:groupPWA   -0.021305    0.020707  38.666337 -1.029
## session3:groupPWA   -0.026097    0.019192  36.812204 -1.360
## PosOr.cont:session2:groupPWA  0.012872    0.007959 11587.162798   1.617
## PosOr.cont:session3:groupPWA  0.002883    0.007903 11588.134367   0.365
##
##              Pr(>|t|)
## (Intercept)    < 0.0000000000000002 ***
## PosOr.cont      0.003160 **
## session2        0.000056588 ***
## session3        0.000000534 ***
## groupPWA        0.000442 ***
## PosOr.cont:session2  0.699649
## PosOr.cont:session3  0.673249
## PosOr.cont:groupPWA  0.635994
## session2:groupPWA   0.309918
## session3:groupPWA   0.182169
## PosOr.cont:session2:groupPWA  0.105839
## PosOr.cont:session3:groupPWA  0.715293
## ---

```

```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##      (Intr) Ps0r.c sessn2 sessn3 grpPWA Ps0r.:2 Ps0r.:3 P0r.:PW s2:PWA
## Pos0r.cont -0.001
## session2   -0.045  0.003
## session3   -0.048  0.003  0.147
## groupPWA    -0.606  0.001  0.034  0.037
## Ps0r.cnt:s2  0.001 -0.573 -0.004 -0.003 -0.001
## Ps0r.cnt:s3  0.001 -0.577 -0.003 -0.007 -0.001  0.504
## Ps0r.cn:PWA  0.001 -0.622 -0.002 -0.002  0.003  0.380  0.382
## sssn2:grPWA  0.030 -0.002 -0.666 -0.098 -0.060  0.003  0.002 -0.005
## sssn3:grPWA  0.032 -0.002 -0.098 -0.666 -0.066  0.002  0.004 -0.006  0.169
## Ps0r.:2:PWA -0.001  0.365  0.002  0.002 -0.002 -0.636 -0.320 -0.609  0.006
## Ps0r.:3:PWA -0.001  0.367  0.002  0.004 -0.002 -0.321 -0.637 -0.616  0.004
##      s3:PWA P0r.:2:
## Pos0r.cont
## session2
## session3
## groupPWA
## Ps0r.cnt:s2
## Ps0r.cnt:s3
## Ps0r.cn:PWA
## sssn2:grPWA
## sssn3:grPWA
## Ps0r.:2:PWA  0.004
## Ps0r.:3:PWA  0.005  0.515
```

```
didLmerConverge(m2_f)
```

```
## The relative maximum gradient of 0.000000349 is less than our 0.001 criterion.
## You can safely ignore any warnings about a claimed convergence failure.
```

Error rates

```
df_errors_red <- df_errors %>%
  filter(subject != "101" & subject != "117") %>%
  filter(group=="PWA") %>%
  droplevels()
df_errors_red$Pos0r.cont <-
  scale(as.numeric(as.character(df_errors_red$Pos0r)),
        center = T, scale = F)
# m2_f <- afex::lmer_alt(error_class ~ Pos0r.cont*session +
#                        (Pos0r.cont*session||subject) +
#                        (Pos0r.cont*session||category),
#                        data = df_errors_red,
#                        family="binomial",
#                        control=glmerControl(optimizer = "bobyqa",
#                                             optCtrl = list(maxfun = 2e5)))
# m2_f <- afex::lmer_alt(error_class ~ Pos0r.cont*session*group +
#                        (Pos0r.cont||subject) +
#                        (Pos0r.cont+group||category),
#                        data = df_errors_red,
```

```

#           family="binomial",
#           control=glmerControl(optimizer = "bobyqa",
#                                optCtrl = list(maxfun = 2e5)))
# m2_f <- afex::lmer_alt(lVOT ~ PosOr.cont*session*group +
#           (PosOr.cont*session||subject) +
#           (PosOr.cont*session*group-session||category),
#           data = df_RTs_red,
#           control=lmerControl(optimizer = "bobyqa",
#                                optCtrl = list(maxfun = 2e5)))
m2_f <- afex::lmer_alt(lVOT ~ PosOr.cont*session*group +
  (PosOr.cont+session||subject) +
  (PosOr.cont+group||category),
  data = df_RTs_red,
  control=lmerControl(optimizer = "bobyqa",
    optCtrl = list(maxfun = 2e5)))
# m2_f <- lmer(lVOT ~ PosOr.cont*session*group +
#           (PosOr.cont+session|subject) +
#           (PosOr.cont+group|category),
#           data = df_RTs_red,
#           control=lmerControl(optimizer = "bobyqa",
#                                optCtrl = list(maxfun = 2e5)))
summary(m2_f)

```

```

## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula:
## lVOT ~ PosOr.cont * session * group + (1 + re1.PosOr.cont + re1.session2 +
##   re1.session3 || subject) + (1 + re2.PosOr.cont + re2.groupPWA ||
##   category)
## Data: data
## Control: lmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
## REML criterion at convergence: 566
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -5.0588 -0.6700 -0.1747  0.4856  4.7417
##
## Random effects:
##   Groups      Name                Variance  Std.Dev.
##   subject    (Intercept)          0.02712626 0.164701
##   subject.1  re1.PosOr.cont        0.00011070 0.010521
##   subject.2  re1.session2          0.00278164 0.052741
##   subject.3  re1.session3          0.00224735 0.047406
##   category   (Intercept)          0.00879305 0.093771
##   category.1 re2.PosOr.cont        0.00002853 0.005341
##   category.2 re2.groupPWA          0.00104258 0.032289
##   Residual                        0.05875025 0.242385
## Number of obs: 11787, groups:  subject, 38; category, 24
##
## Fixed effects:
##
##              Estimate  Std. Error      df t value
## (Intercept)    7.085116    0.041816  51.242816 169.436

```

```

## Pos0r.cont          0.013363      0.004422    104.743190    3.022
## session2            -0.063178      0.013800     35.126977   -4.578
## session3            -0.079132      0.012778     33.206693   -6.193
## groupPWA            0.210482      0.054569     37.088668    3.857
## Pos0r.cont:session2 -0.001952      0.005059   11557.848779   -0.386
## Pos0r.cont:session3  0.002122      0.005032   11552.244382    0.422
## Pos0r.cont:groupPWA  0.003169      0.006681    138.528159    0.474
## session2:groupPWA    -0.021305      0.020707     38.666337   -1.029
## session3:groupPWA    -0.026097      0.019192     36.812204   -1.360
## Pos0r.cont:session2:groupPWA 0.012872      0.007959   11587.162798    1.617
## Pos0r.cont:session3:groupPWA 0.002883      0.007903   11588.134367    0.365
##                               Pr(>|t|)
## (Intercept)          < 0.0000000000000002 ***
## Pos0r.cont           0.003160 **
## session2             0.000056588 ***
## session3             0.000000534 ***
## groupPWA             0.000442 ***
## Pos0r.cont:session2  0.699649
## Pos0r.cont:session3  0.673249
## Pos0r.cont:groupPWA  0.635994
## session2:groupPWA    0.309918
## session3:groupPWA    0.182169
## Pos0r.cont:session2:groupPWA 0.105839
## Pos0r.cont:session3:groupPWA 0.715293
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##      (Intr) Ps0r.c sessn2 sessn3 grpPWA Ps0r.:2 Ps0r.:3 PO.:PW s2:PWA
## Pos0r.cont -0.001
## session2   -0.045  0.003
## session3   -0.048  0.003  0.147
## groupPWA   -0.606  0.001  0.034  0.037
## Ps0r.cnt:s2  0.001 -0.573 -0.004 -0.003 -0.001
## Ps0r.cnt:s3  0.001 -0.577 -0.003 -0.007 -0.001  0.504
## Ps0r.cn:PWA  0.001 -0.622 -0.002 -0.002  0.003  0.380  0.382
## sssn2:grPWA  0.030 -0.002 -0.666 -0.098 -0.060  0.003  0.002 -0.005
## sssn3:grPWA  0.032 -0.002 -0.098 -0.666 -0.066  0.002  0.004 -0.006  0.169
## Ps0r.:2:PWA -0.001  0.365  0.002  0.002 -0.002 -0.636 -0.320 -0.609  0.006
## Ps0r.:3:PWA -0.001  0.367  0.002  0.004 -0.002 -0.321 -0.637 -0.616  0.004
##      s3:PWA PO.:2:
## Pos0r.cont
## session2
## session3
## groupPWA
## Ps0r.cnt:s2
## Ps0r.cnt:s3
## Ps0r.cn:PWA
## sssn2:grPWA
## sssn3:grPWA
## Ps0r.:2:PWA 0.004
## Ps0r.:3:PWA 0.005 0.515

```

```
didLmerConverge(m2_f)
```

```
## The relative maximum gradient of 0.000000349 is less than our 0.001 criterion.  
## You can safely ignore any warnings about a claimed convergence failure.
```

Comparison to verbal CSI with young participants Load data

Load data from both the verbal online CSI experiment (Stark et al., 2022)

```
load(here::here("data", "verbal_CSI_young_starketal2022",  
               "CSI_online_verbal_df_full.RData"))  
df_young <- df_full
```

Combine both data frames into one

- 1) Subset relevant columns and give identical names

```
df_young <- df_young %>%  
  dplyr::select(VP, Item, subcat, VOT, correct, Pos) %>%  
  dplyr::rename(subject = VP, item = Item,  
                category = subcat, PosOr=Pos) %>%  
  mutate(group="young") %>%  
  mutate(session="young group")  
  
x <- df_RT_s %>%  
  dplyr::select(subject, group, session, item, category, VOT, PosOr)
```

- 2) Give subjects from both experiments different names

```
df_young <- df_young %>% mutate(subject = subject + 300)
```

- 3) Put columns into correct format

```
df_young <- df_young %>%  
  mutate(subject = as.factor(subject)) %>%  
  mutate(item = as.character(item)) %>%  
  mutate(category = as.factor(category)) %>%  
  mutate(VOT = as.numeric(VOT)) %>%  
  mutate(PosOr = as.factor(PosOr)) %>%  
  filter(!is.na(correct) & correct != 0) %>%  
  dplyr::select(-correct) %>%  
  droplevels()
```

- 4) Bind both data frames into one

```
df_combi <- bind_rows(x, df_young)
```

- 5) Give identical category names in both experiments

```
df_combi <- df_combi %>% dplyr::mutate(category = case_when(
  category == "Buero" ~ "Büro",
  category == "Gebaeude" ~ "Gebäude",
  category == "Gemuese" ~ "Gemüse",
  category == "Koerperteile" ~ "Körperteile",
  category == "Kueche" ~ "Küche",
  category == "Suessigkeiten" ~ "Süssigkeiten",
  category == "Trinkgefaesse" ~ "Trinkgefässe",
  category == "Voegel" ~ "Vögel",
  TRUE ~ as.character(category))) %>%
  mutate(category = as.factor(category)) %>% droplevels()
table(df_combi$category)
```

```
##
## Aufbewahrung    Bauernhof    Blumen      Büro      Filler1    Filler2
##      652         681         567         657         586         581
##      Fische      Gebäude      Gemüse    Heimwerker  Huftiere   Insekten
##      669         628         678         658         693         657
## Instrumente     Jacken      Kochen    Körperteile  Küche      Obst
##      651         595         652         696         649         709
## Raubtiere       Schmuck     Sitzen     Strasse  Süssigkeiten Trinkgefässe
##      629         610         652         692         687         652
##      Vögel       Wasser
##      684         621
```

5) Drop filler trials

```
df_combi <- df_combi %>% filter(category != "Filler" &
  category != "Filler1" & category != "Filler2") %>%
  droplevels()
```

6) Export combined data frame for post-hoc power plot

```
write.csv(df_combi, here::here("data", "CSI_online_young_PWA_old_combined.csv"))
```

Descriptives

```
(descriptives <- df_combi %>%
  Rmisc::summarySEwithin(., "VOT", idvar = "subject",
    withinvars = c("PosOr", "session"),
    betweenvars = "group",
    na.rm = T))
```

Automatically converting the following non-factors to factors: group, session

```
##      group PosOr    session    N      VOT      sd      se      ci
## 1 control     1        1 461 1236.721 383.2024 17.847516 35.07277
## 2 control     1        2 466 1144.410 324.3402 15.024768 29.52485
## 3 control     1        3 469 1139.114 320.3094 14.790516 29.06404
## 4 control     2        1 456 1217.544 365.4223 17.112469 33.62928
```

## 5	control	2	2	462	1184.456	360.8324	16.787443	32.98939
## 6	control	2	3	471	1112.591	280.4260	12.921349	25.39076
## 7	control	3	1	446	1292.412	415.6279	19.680549	38.67837
## 8	control	3	2	464	1152.927	287.3740	13.341002	26.21641
## 9	control	3	3	467	1147.777	302.5239	13.999138	27.50925
## 10	control	4	1	457	1268.913	372.2649	17.413816	34.22128
## 11	control	4	2	466	1183.711	294.2546	13.631082	26.78615
## 12	control	4	3	470	1172.220	303.4256	13.995981	27.50259
## 13	control	5	1	456	1287.135	392.0054	18.357336	36.07568
## 14	control	5	2	454	1206.000	326.5096	15.323856	30.11466
## 15	control	5	3	472	1202.752	346.0182	15.926780	31.29634
## 16	PWA	1	1	362	1220.274	459.3182	24.141226	47.47510
## 17	PWA	1	2	375	1108.467	435.1172	22.469357	44.18211
## 18	PWA	1	3	395	1083.626	370.4159	18.637649	36.64168
## 19	PWA	2	1	345	1291.769	513.4978	27.645791	54.37606
## 20	PWA	2	2	386	1127.932	439.4589	22.367867	43.97847
## 21	PWA	2	3	386	1123.099	453.0649	23.060394	45.34007
## 22	PWA	3	1	337	1314.130	510.4865	27.807971	54.69965
## 23	PWA	3	2	370	1152.440	431.8690	22.451801	44.14953
## 24	PWA	3	3	396	1163.716	438.2590	22.023345	43.29763
## 25	PWA	4	1	357	1274.240	464.6651	24.592687	48.36521
## 26	PWA	4	2	378	1185.207	453.1751	23.308811	45.83156
## 27	PWA	4	3	384	1162.566	433.5719	22.125623	43.50289
## 28	PWA	5	1	322	1329.476	533.6370	29.738428	58.50684
## 29	PWA	5	2	355	1247.699	492.1252	26.119292	51.36849
## 30	PWA	5	3	370	1212.513	465.4573	24.197971	47.58322
## 31	young	1	young group	670	1144.019	250.5367	9.679078	19.00503
## 32	young	2	young group	651	1171.140	269.5845	10.565851	20.74732
## 33	young	3	young group	662	1202.806	282.1272	10.965186	21.53079
## 34	young	4	young group	650	1200.640	283.4120	11.116334	21.82832
## 35	young	5	young group	631	1264.514	307.4940	12.241145	24.03838

Plotting

Plot RTs by Session and ordinal position for both experiments

```

override.linetype<-c("solid", "dashed", "dotted", "longdash")
(plot_rt_repetition_PWA <- descriptives %>%
  filter(group=="PWA" | group=="young") %>%
  ggplot(., aes(x=PosOr, y=VOT, group=session, color = session)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=session),fun=mean,
    geom="line", size = 0.5) +
  scale_linetype_manual(values=c("solid", "dashed",
    "dotted", "longdash"))+
  scale_color_manual(values=c("#0072B2", "#E69F00", "#000000", "gray"))+
  geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = session),
    width =.1) +
  apatheme +
  scale_y_continuous(limits = c(1040, 1450),
    breaks =seq(1050,1450, by = 50)) +
  labs(x="Ordinal Position ",y ="RT (ms)", colour="Session",
    linetype="Session",
    title = "PWA vs Young Group") +

```

```


theme(
  axis.title.y = element_text(margin = margin(0,10,0,0)),
  axis.title.x = element_text(margin = margin(10,0,0,0)),
  legend.key.width = unit(1, "cm"),
  legend.position="none")+
guides(color=guide_legend(
  override.aes=list(linetype=override.linetype)))+
scale_linetype(guide="none")

```

Scale for linetype is already present.

Adding another scale for linetype, which will replace the existing scale.

PWA vs Young Group

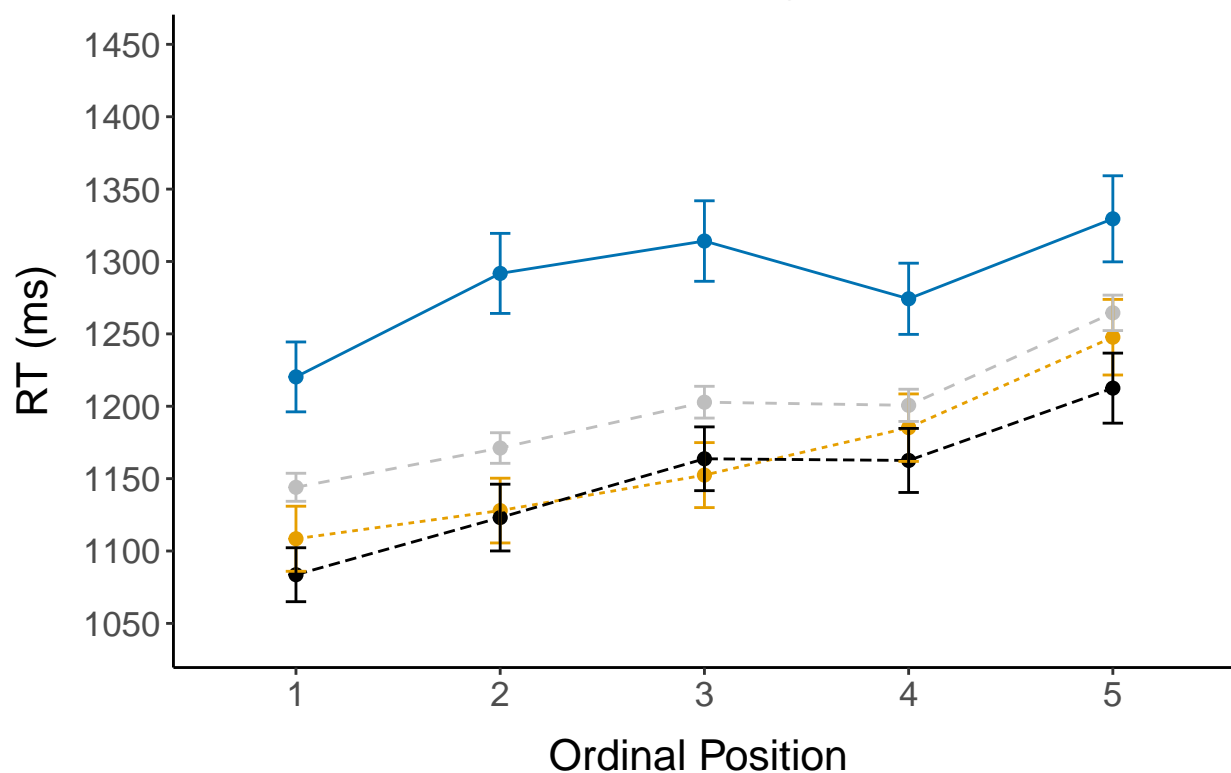

```

(plot_rt_repetition_control <- descriptives %>%
  filter(group=="control" | group=="young") %>%
  ggplot(., aes(x=PosOr, y=VOT, group=session, color = session)) +
  geom_point(size = 2)+
  stat_summary(aes(linetype=session),fun=mean,
    geom="line", size = 0.5) +
  scale_linetype_manual(values=c("solid", "dashed", "dotted", "longdash"))+
  scale_color_manual(values=c("#0072B2", "#E69F00", "#000000", "gray"))+
  geom_errorbar(aes(ymin=VOT-se, ymax=VOT+se, group = session),
    width =.1) +
  apatheme+
  scale_y_continuous(limits = c(1040, 1450),

```



```


breaks =seq(1050,1450, by = 50)) +
labs(x="Ordinal Position ",y ="RT (ms)", colour="Session",
      linetype="Session",
      title = "Control vs Young Group") +
theme(
axis.title.y = element_text(margin = margin(0,10,0,0)),
axis.title.x = element_text(margin = margin(10,0,0,0)),
legend.key.width = unit(1, "cm"))+
guides(color=guide_legend(
  override.aes=list(linetype=override.linetype)))+
scale_linetype(guide="none")

```

```
## Scale for linetype is already present.
```

```
## Adding another scale for linetype, which will replace the existing scale.
```

Control vs Young Group

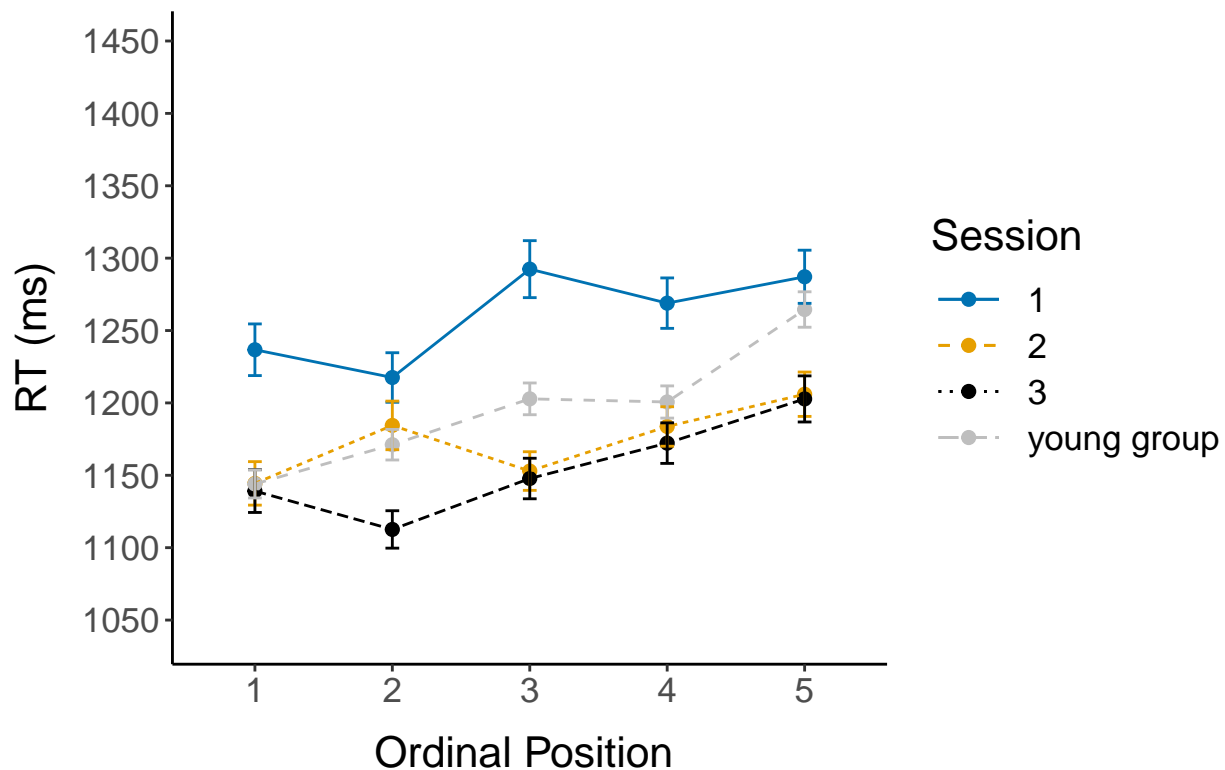

```

plots <- cowplot::plot_grid(
  plot_rt_repetition_PWA,plot_rt_repetition_control,
  nrow = 1, ncol=2, rel_widths = c(0.7,1), #rel_height = c(1,1),
  margin(1,1,1,1),
  labels = c("A", "B"),label_size = 34,
  label_fontfamily = "Helvetica", label_y = 1.01,
  label_x=-0.03)

```

```

## Warning in as_grob.default(plot): Cannot convert object of class
## marginsimpleUnitunit_v2 into a grob.

```

```
filename <- "CSI_online_aphasia_spoken_comparison-to-young.pdf"
ggsave(plots, filename =
  here::here("results", "figures", filename),
  width = 25, height = 13, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))
```

Appendix

List of stimuli

```
df %>% arrange(category) %>%
  group_by(category, item, correct, AR) %>% count()
```

A tibble: 1,657 x 5

Groups: category, item, correct, AR [1,657]

##	category	item	correct	AR	n
##	<chr>	<chr>	<chr>	<chr>	<int>
## 1	Aufbewahrung	kleiderschrank	0	Br [e.o.r.]	1
## 2	Aufbewahrung	kleiderschrank	0	Greu [e.o.r.]	1
## 3	Aufbewahrung	kleiderschrank	0	Kreider [e.o.r.]	1
## 4	Aufbewahrung	kleiderschrank	0	NR	9
## 5	Aufbewahrung	kleiderschrank	0	Schra e Schra e	1
## 6	Aufbewahrung	kleiderschrank	1	<NA>	11
## 7	Aufbewahrung	kleiderschrank	1.1	Holzschrank	1
## 8	Aufbewahrung	kleiderschrank	1.1	Schrank	92
## 9	Aufbewahrung	kleiderschrank	1.1	Schrank Gleicher Schrank	1
## 10	Aufbewahrung	kleiderschrank	1.2	Schran Schank	1

i 1,647 more rows

Response times and error rates by participant and category

RTs by subject Line graph for each participant:

```
modeloutput <- coef(m2)$subject
means_final_subject <- df_RTs %>%
  summarySEwithin(., "VOT", withinvars = c("subject", "PosOr", "session"),
    betweenvars="group")
means_final <- df_RTs %>%
  Rmisc::summarySEwithin(., "VOT", idvar = "subject",
    withinvars = c("PosOr"),
    na.rm = T)

for(i in 1:nrow(means_final_subject)) {
  means_final_subject$grandmean[i] <-
    means_final$VOT[means_final$PosOr == means_final_subject$PosOr[i]] -
    means_final$VOT[means_final$PosOr == 1]
```

```

means_final_subject$normalizedRT[i] <-
  means_final_subject$VOT[i] -
  means_final_subject$VOT[means_final_subject$subject ==
    means_final_subject$subject[i] &
    means_final_subject$PosOr == 1 &
    means_final_subject$session == 1]

# prepare for ordering
means_final_subject$effect[i] <-
  round(modeloutput$PosOr.cont[means_final_subject$subject[i]] +
    modeloutput$re1.PosOr.cont[means_final_subject$subject[i]] +
    modeloutput$re2.PosOr.cont[means_final_subject$subject[i]],2)
}

means_final_subject <- means_final_subject[
  order(desc(means_final_subject$group),
    desc(means_final_subject$effect)),]
means_final_subject$effect <-
  as.factor(round(means_final_subject$effect, 2))
means_final_subject$effect <-
  factor(means_final_subject$effect,
    levels=rev(levels(means_final_subject$effect )))

# add participant number
means_final_subject <- means_final_subject %>%
  mutate(subject_en = case_when(
    group == "PWA" ~ paste0("PWA ",
      substr(as.character(
        means_final_subject$subject), 2,3),
      "\n(",effect,")",sep=''),
    group == "control" ~ paste0("Control ",
      substr(as.character(means_final_subject$subject), 2,3),
      "\n(",effect,")",sep='')) %>%
  mutate(subject_en = case_when(subject_en=="PWA 04\n(29.1)" ~
    "PWA 04\n(29.10)",
    subject_en=="PWA 16\n(24.3)" ~
    "PWA 16\n(24.30)",
    subject_en=="Participant 12\n(38.3)" ~
    "Participant 12\n(38.30)",
    subject_en=="Control 12\n(17.5)" ~
    "Control 12\n(17.50)",
    TRUE~subject_en)) %>%
  mutate(subject_en=factor(subject_en,levels=c(
    "PWA 03\n(42.36)","PWA 05\n(37.11)","PWA 20\n(33.71)",
    "PWA 13\n(32.42)","PWA 07\n(29.28)","PWA 08\n(29.13)",
    "PWA 04\n(29.10)","PWA 12\n(27.84)","PWA 16\n(24.30)",
    "PWA 18\n(23.59)","PWA 06\n(23.31)", "PWA 09\n(19.86)",
    "PWA 14\n(18.04)","PWA 11\n(16.91)","PWA 17\n(16.18)",
    "PWA 10\n(12.79)","PWA 19\n(10.94)","PWA 02\n(4.11)",
    "PWA 01\n(0.71)","PWA 15\n(0.02)","Control 09\n(44.58)",
    "Control 17\n(41.22)","Control 10\n(34.06)","Control 20\n(29.22)",
    "Control 02\n(26.54)","Control 07\n(26.11)","Control 01\n(23.97)",
    "Control 05\n(22.77)","Control 03\n(22.53)","Control 15\n(21.83)",

```


```

"Control 19\n(21.75)", "Control 13\n(21.66)", "Control 14\n(20.13)",
"Control 04\n(19.86)", "Control 08\n(17.97)", "Control 12\n(17.50)",
"Control 11\n(13.73)", "Control 06\n(12.86)", "Control 16\n(12.39)",
"Control 18\n(9.51)" )))

# Plotting
(plot_rt_subject <- means_final_subject %>%
  ggplot(., aes(x=PosOr,y=normalizedRT,
               color=session, group=session, na.rm=T)) +
  geom_point(size =1, color = 'black') +
  geom_line(aes(x=PosOr,y=normalizedRT, color=session, linetype="c"),
            size = 0.5) +
  geom_line(aes(x=PosOr,y=grandmean, color="b", linetype="d"),
            group = 1,size = 0.8)+
  geom_errorbar(aes(ymin=normalizedRT-se, ymax=normalizedRT+se),
               width =.1) +
  scale_color_manual(name="Session",
                    values=c(
                      "#0072B2", "#E69F00", "#000000", "dark gray"),
                    labels=c(
                      "1", "2", "3",
                      "Grand Mean (across subjects, sessions, groups)")) +
  scale_linetype_manual(name="",values=c("c"="solid","d"="dashed"),
                      labels=c("Participant mean",
                              "Grand Mean"))+

  apatheme+
  labs(x="Ordinal Position",y ="Normalized RTs (ms)") +
  facet_wrap(means_final_subject$subject_en, scales='free', ncol=8)+
  scale_y_continuous(limits = c(-800, 800),
                    breaks = c(-600,-400,-200,0,200,400,600)) +
  scale_x_discrete(breaks=c(1,2,3,4,5))+
  theme(legend.position = "bottom"))

```

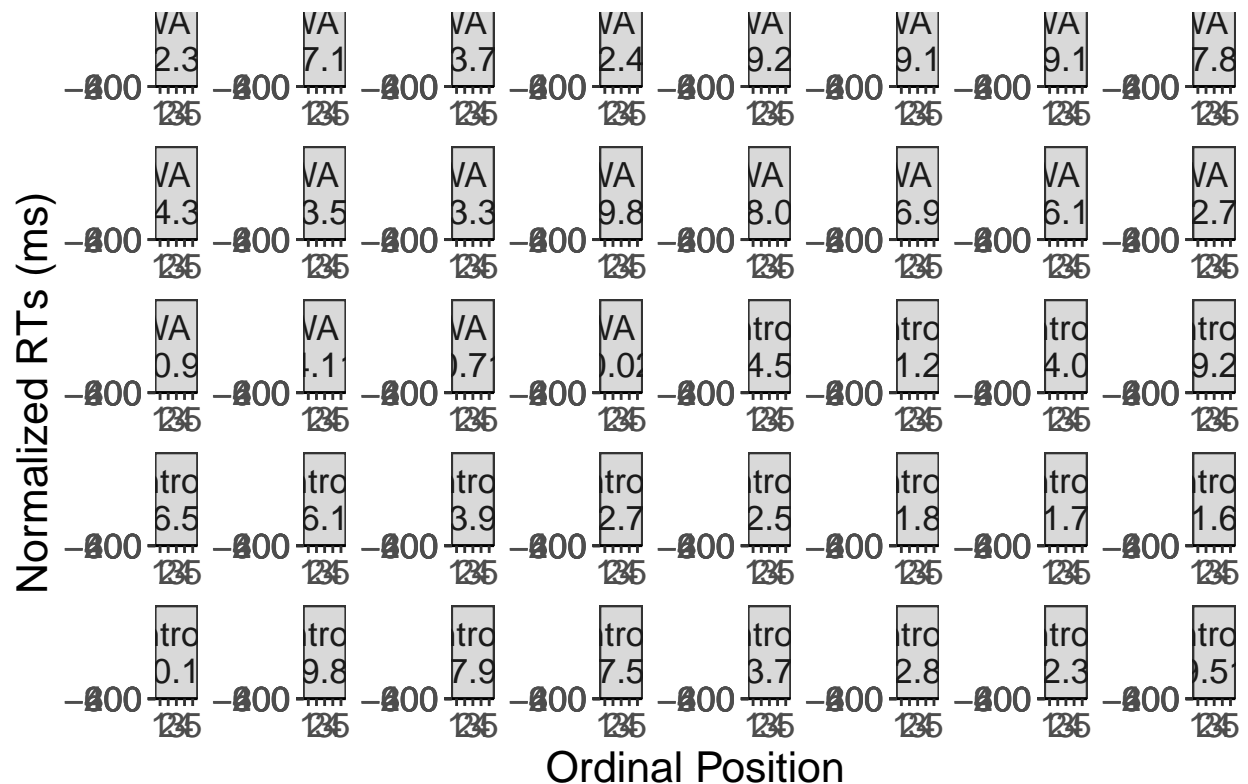

— 2 — 3 — Grand Mean (across subjects, sessions, groups) — Participant

```
filename <- "CSI_online_aphasia_effect_by_participant.pdf"
ggsave(plot_rt_subject, filename =
  here::here("results", "figures", filename),
  width = 34, height = 26, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))
```

RTs by category Line graph for each category:

```
modeloutput <- coef(m2)$category
means_final_category <- df_RTs %>%
  summarySEwithin(., "VOT", withinvars =
    c("category", "PosOr", "session"))
```

Automatically converting the following non-factors to factors: category

```
means_final <- df_RTs %>%
  Rmisc::summarySEwithin(., "VOT", idvar = "category",
    withinvars = c("PosOr"),
    na.rm = T)

for(i in 1:nrow(means_final_category)) {
  means_final_category$grandmean[i] <-
    means_final$VOT[means_final$PosOr == means_final_category$PosOr[i]] -
```

```

means_final$VOT[means_final$PosOr== 1]
means_final_category$normalizedRT[i] <-
  means_final_category$VOT[i] -
  means_final_category$VOT[means_final_category$category == means_final_category$category[i] & means_
    means_final_category$session == 1]

# prepare for ordering
means_final_category$effect[i] <-
  modeloutput$PosOr.cont[means_final_category$category[i]] +
  modeloutput$re2.PosOr.cont[means_final_category$category[i]]
}

means_final_category <- means_final_category[
  order(desc(means_final_category$effect)),]
means_final_category$effect <-
  as.factor(round(means_final_category$effect, 2))
means_final_category$effect <-
  factor(means_final_category$effect,
    levels=rev(levels(means_final_category$effect )))
means_final_category$category <- factor(
  means_final_category$category, levels=c(
    "Insekten", "Sitzen", "Kochen", "Jacken",
    "Obst", "Trinkgefäße", "Wasser", "Heimwerker",
    "Küche", "Fische", "Aufbewahrung",
    "Büro", "Bauernhof", "Raubtiere", "Huftiere", "Gemüse",
    "Körperteile", "Vögel", "Instrumente", "Blumen",
    "Gebäude", "Schmuck", "Strasse", "Süssigkeiten"))

# order category levels by effect size
means_final_category$category <- factor(
  means_final_category$category, levels=c(
    "Gebäude", "Schmuck", "Raubtiere", "Sitzen", "Jacken",
    "Blumen", "Huftiere", "Wasser", "Trinkgefäße", "Küche",
    "Insekten", "Büro", "Bauernhof", "Strasse", "Kochen",
    "Gemüse", "Körperteile", "Fische", "Heimwerker", "Aufbewahrung",
    "Obst", "Vögel", "Instrumente", "Süssigkeiten"))
# give categories English names and combine with effect size
means_final_category <- means_final_category %>%
  mutate(category_en = case_when(
    category == "Aufbewahrung" ~ paste0(
      "Storage\n\n(", effect, ")", sep=''),
    category == "Bauernhof" ~ paste0(
      "Farming\ntools\n(", effect, ")", sep=''),
    category == "Blumen" ~ paste0(
      "Flowers\n\n(", effect, ")", sep=''),
    category == "Büro" ~ paste0(
      "Office\ntools\n(", effect, ")", sep=''),
    category == "Fische" ~ paste0(
      "Fish\n\n(", effect, ")", sep=''),
    category == "Gebäude" ~ paste0(
      "Buildings\n\n(", effect, ")", sep=''),
    category == "Gemüse" ~ paste0(
      "Vegetables\n\n(", effect, ")", sep=''),
    category == "Heimwerker" ~ paste0(

```

```

    "Carpenter.s\ntools\n(", effect, ")", sep=''),
category == "Huftiere" ~ paste0(
  "Hoofed\nanimals\n(", effect, ")", sep=''),
category == "Insekten" ~ paste0(
  "Insects\n\n(", effect, ")", sep=''),
category == "Instrumente" ~ paste0(
  "Instru-\nments\n(", effect, ")", sep=''),
category == "Jacken" ~ paste0(
  "Jackets\n\n(", effect, ")", sep=''),
category == "Kochen" ~ paste0(
  "Cooking\nequipment\n(", effect, ")", sep=''),
category == "Körperteile" ~ paste0(
  "Body parts\n\n(", effect, ")", sep=''),
category == "Küche" ~ paste0(
  "Kitchen\nfurniture\n(", effect, ")", sep=''),
category == "Obst" ~ paste0(
  "Fruits\n\n(", effect, ")", sep=''),
category == "Raubtiere" ~ paste0(
  "Predators\n\n(", effect, ")", sep=''),
category == "Schmuck" ~ paste0(
  "Jewelry\n\n(", effect, ")", sep=''),
category == "Sitzen" ~ paste0(
  "Seating\nfurniture\n(", effect, ")", sep=''),
category == "Strasse" ~ paste0(
  "Street\nvehicles\n(", effect, ")", sep=''),
category == "Süssigkeiten" ~ paste0(
  "Sweets\n\n(", effect, ")", sep=''),
category == "Trinkgefässe" ~ paste0(
  "Drinking\nvessels\n(", effect, ")", sep=''),
category == "Vögel" ~ paste0(
  "Birds\n\n(", effect, ")", sep=''),
category == "Wasser" ~ paste0(
  "Water\nvehicles\n(", effect, ")", sep='')))) %>%
mutate(category_en = case_when(category_en=="Insects\n\n(35.4)" ~
  "Insects\n\n(35.40)",
  category_en=="Jackets\n\n(27.9)" ~
  "Jackets\n\n(27.90)" ,
  TRUE~category_en)) %>%
mutate(category_en=factor(category_en,levels=c(
  "Insects\n\n(35.40)", "Seating\nfurniture\n(33.45)",
  "Cooking\nequipment\n(28.45)", "Jackets\n\n(27.90)",
  "Fruits\n\n(27.77)", "Drinking\nvessels\n(26.47)",
  "Water\nvehicles\n(26.44)", "Carpenter.s\ntools\n(26.18)",
  "Kitchen\nfurniture\n(25.76)", "Fish\n\n(23.97)",
  "Storage\n\n(23.56)", "Office\ntools\n(23.13)",
  "Farming\ntools\n(22.55)", "Predators\n\n(21.51)",
  "Hoofed\nanimals\n(21.18)", "Vegetables\n\n(20.73)" ,
  "Body parts\n\n(19.93)", "Birds\n\n(19.33)",
  "Instru-\nments\n(18.27)", "Flowers\n\n(15.53)",
  "Buildings\n\n(13.56)", "Jewelry\n\n(12.87)",
  "Street\nvehicles\n(12.76)", "Sweets\n\n(11.11)")))

```


Plotting

```

(plot_rt_category <- means_final_category %>%
  ggplot(., aes(x=PosOr,y=normalizedRT, color=session,
               group=session, na.rm=T)) +
  geom_point(size =1) +
  geom_line(aes(x=PosOr,y=normalizedRT, color=session, linetype="c"),
            size = 0.5) +
  geom_line(aes(x=PosOr,y=grandmean, color="b", linetype="d"),
            group = 1,size = 0.8)+
  geom_errorbar(aes(ymin=normalizedRT-se, ymax=normalizedRT+se),
               width =.1) +
  scale_color_manual(name="Session",
                    values=c("#0072B2", "#E69F00", "#000000",
                             "dark gray"),
                    labels=c("1", "2", "3", "Grand Mean")) +
  scale_linetype_manual(name="",values=c("c"="solid","d"="dashed"),
                      labels=c("Category mean (across groups)",
                               "Grand Mean"))+

  apatheme+
  labs(x="Ordinal Position",y ="Normalized RTs (ms)") +
  facet_wrap(means_final_category$category_en, scales='free', ncol=8)+
  scale_y_continuous(limits = c(-800, 800),
                    breaks = c(-600,-400,-200,0,200,400,600)) +
  scale_x_discrete(breaks=c(1,2,3,4,5))+
  theme(legend.position = "bottom"))

```

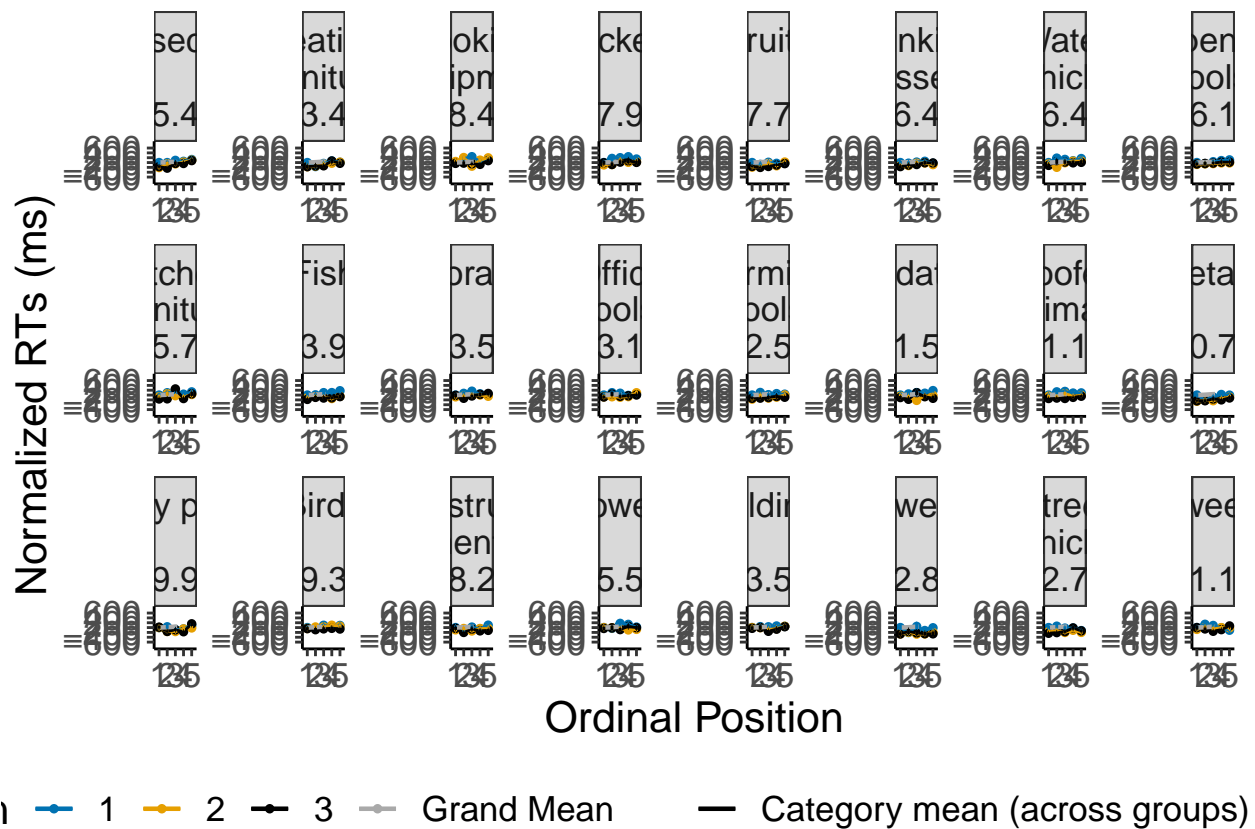


```
filename <- "CSI_online_aphasia_effect_by_category.pdf"
ggsave(plot_rt_category, filename =
  here::here("results", "figures", filename),
  width = 26, height = 20, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))
```

Combine both

```
plots <- cowplot::plot_grid(plot_rt_subject, plot_rt_category,
  nrow = 2, ncol=1, #rel_widths = c(1,1),
  rel_heights = c(1,0.6),
  margin(1,1,1,1),
  labels = c("A", "B"), label_size = 34,
  label_fontfamily = "Helvetica", label_y = 1.01,
  label_x=0)
```

```
## Warning: Removed 1 rows containing missing values ('geom_point()').
```

```
## Warning in as_grob.default(plot): Cannot convert object of class
## marginsimpleUnitunitunit_v2 into a grob.
```

```
filename <- "CSI_online_aphasia_spoken_RTs-by-category-and-subject.pdf"
ggsave(plots, filename =
  here::here("results", "figures", filename),
  width = 30, height = 50, units = "cm",
  dpi = 300, device = cairo_pdf)
```

Errors by subject Line graph for each participant:

```
m2_error <- readRDS(here::here(
  "results", "tables",
  "CSI_online_aphasia_SessionxGroup_glmm_errors.RDS"))
modeloutput <- coef(m2_error)$subject
means_final_subject <- df_errors %>%
  summarySEwithin(
    ., "error_class", withinvars = c("subject", "PosOr", "session"),
    betweenvars="group")
means_final <- df_errors %>%
  Rmisc::summarySEwithin(., "error_class", idvar = "subject",
    withinvars = c("PosOr"),
    na.rm = T)

for(i in 1:nrow(means_final_subject)) {
  means_final_subject$grandmean[i] <-
    means_final$error_class[means_final$PosOr ==
      means_final_subject$PosOr[i]] -
    means_final$error_class[means_final$PosOr == 1]
  means_final_subject$normalizedRT[i] <-
    means_final_subject$error_class[i] -
    means_final_subject$error_class[means_final_subject$subject ==
```

```

means_final_subject$subject[i] &
means_final_subject$PosOr == 1 &
means_final_subject$session == 1]

# prepare for ordering
means_final_subject$effect[i] <-
  modeloutput$PosOr.cont[means_final_subject$subject[i]] +
  modeloutput$re1.PosOr.cont[means_final_subject$subject[i]]
}

means_final_subject <- means_final_subject[order(desc(means_final_subject$group), desc(means_final_subj
means_final_subject$effect <-
  as.factor(round(means_final_subject$effect, 2))
means_final_subject$effect <-
  factor(means_final_subject$effect,
    levels=rev(levels(means_final_subject$effect )))

# add participant number
means_final_subject <- means_final_subject %>%
  mutate(effect=round(as.numeric(as.character(effect)),2)) %>%
  mutate(subject_en = case_when(
    group == "PWA" & as.numeric(as.character(effect)) == 0.10~
      paste0("PWA ",
              substr(as.character(means_final_subject$subject), 2,3),
              "\n(",effect,"0)",sep=''),
    group == "control" & as.numeric(as.character(effect)) == 0.10~
      paste0("Control ",
              substr(as.character(means_final_subject$subject), 2,3),
              "\n(",effect,"0)",sep=''),
    group == "PWA" & as.numeric(as.character(effect)) >= 0.01~
      paste0("PWA ",
              substr(as.character(means_final_subject$subject), 2,3),
              "\n(",effect,")",sep=''),
    group == "control"& as.numeric(as.character(effect)) >= 0.01 ~
      paste0("Control ",
              substr(as.character(means_final_subject$subject), 2,3),
              "\n(",effect,")",sep=''),
    group == "PWA" & as.numeric(as.character(effect)) < 0.01~
      paste0("PWA ",
              substr(as.character(means_final_subject$subject), 2,3),
              "\n(< .01)",sep=''),
    group == "control"& as.numeric(as.character(effect)) < 0.01 ~
      paste0("Control ",
              substr(as.character(means_final_subject$subject), 2,3),
              "\n(< .01)",sep='')) %>%
  mutate(subject_en=factor(subject_en))
# mutate(subject_en=factor(subject_en, levels=c(
#   "PWA 12\n(0.24)", "PWA 07\n(0.16)", "PWA 05\n(0.16)", "PWA 08\n(0.16)",
#   "PWA 10\n(0.13)", "PWA 18\n(0.12)", "PWA 04\n(0.12)", "PWA 19\n(0.12)",
#   "PWA 03\n(0.10)", "PWA 06\n(0.07)", "PWA 15\n(0.06)", "PWA 20\n(0.05)",
#   "PWA 16\n(0.05)", "PWA 14\n(0.03)", "PWA 13\n(0.03)", "PWA 02\n(< .01)",
#   "PWA 17\n(< .01)", "PWA 09\n(< .01)", "PWA 01\n(< .01)", "PWA 11\n(< .01)",
#   "Control 02\n(0.13)", "Control 05\n(0.13)", "Control 07\n(0.11)",

```


```

# "Control 15\n(0.10)", "Control 10\n(0.10)", "Control 16\n(0.09)",
# "Control 01\n(0.09)", "Control 04\n(0.08)", "Control 20\n(0.08)",
# "Control 09\n(0.07)", "Control 19\n(0.07)", "Control 12\n(0.07)",
# "Control 06\n(0.07)", "Control 14\n(0.06)", "Control 08\n(0.05)",
# "Control 13\n(0.04)", "Control 11\n(0.03)", "Control 17\n(0.03)",
# "Control 03\n(0.02)", "Control 18\n(0.01)"))

# Plotting
(plot_error_subject <- means_final_subject %>%
  mutate(session=case_when(session=="1" ~ "day 1",
                           session=="2" ~ "day 2",
                           session=="3" ~ "day 8")) %>%
  ggplot(., aes(x=PosOr,y=normalizedRT, color=session,
               group=session, na.rm=T)) +
  geom_point(size =1, color = 'black') +
  geom_line(aes(x=PosOr,y=normalizedRT, color=session, linetype="c"),
            size = 0.5) +
  geom_line(aes(x=PosOr,y=grandmean, color="b", linetype="d"),
            group = 1,size = 0.8)+
  geom_errorbar(aes(ymin=normalizedRT-se, ymax=normalizedRT+se), width =.1) +
  scale_color_manual(name="Session",
                    values=c("#0072B2", "#E69F00", "#000000",
                           "dark gray"),
                    labels=c("1", "2", "3",
                             "Grand Mean (across subjects, sessions, groups)")) +
  scale_linetype_manual(name="", values=c("c"="solid", "d"="dashed"),
                       labels=c("Participant mean",
                                "Grand Mean"))+

  apatheme+
  labs(x="Ordinal Position",y ="Error Rate") +
  facet_wrap(means_final_subject$subject_en, scales='free', ncol=8)+
  scale_y_continuous(limits = c(-0.5, 0.5),
                    breaks = c(-0.4,-0.2,0,0.2,0.4)) +
  scale_x_discrete(breaks=c(1,2,3,4,5))+
  theme(legend.position = "bottom"))

```

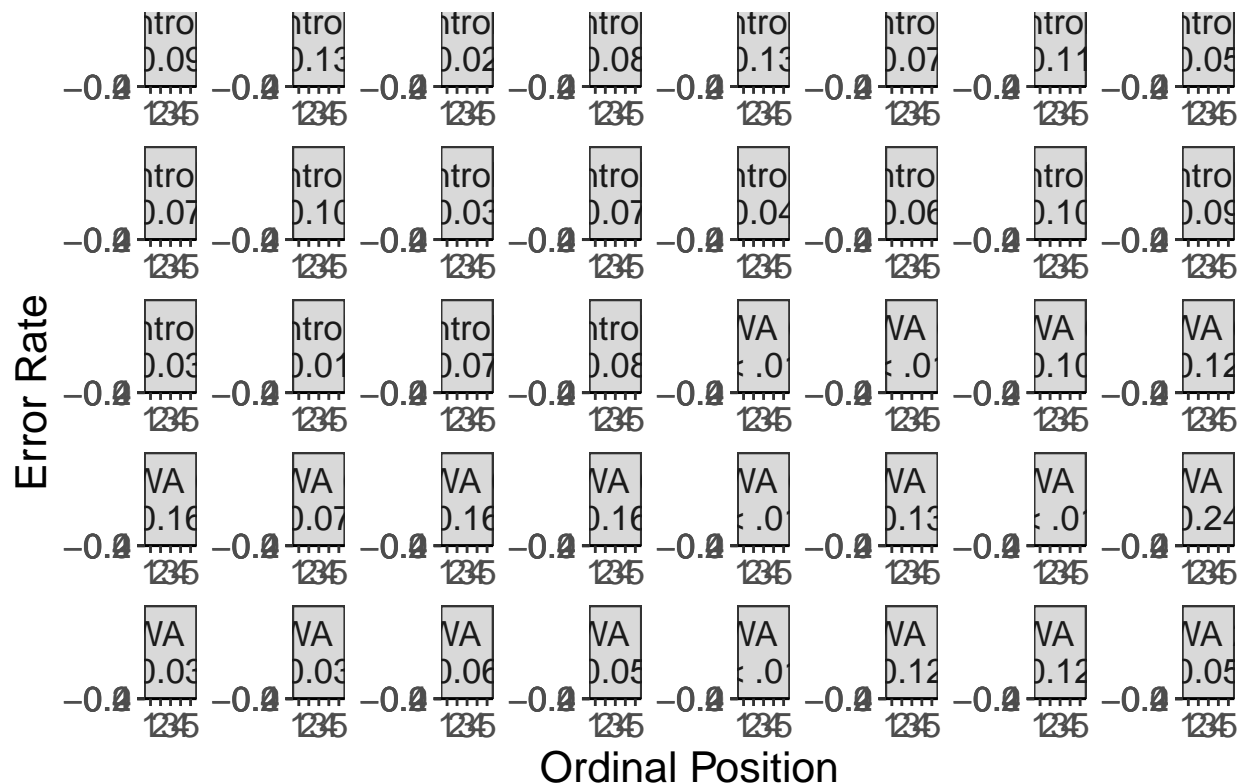

— 2 — 3 — Grand Mean (across subjects, sessions, groups) — Participant

```
filename <- "CSI_online_aphasia_errors_by_participant.pdf"
ggsave(plot_error_subject, filename =
  here::here("results", "figures", filename),
  width = 34, height = 26, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))
```

Errors by category Line graph for each participant:

```
m2_error <- readRDS(here::here(
  "results", "tables",
  "CSI_online_aphasia_SessionxGroup_glmm_errors.RDS"))
modeloutput <- coef(m2_error)$category
means_final_category <- df_errors %>%
  summarySEwithin(., "error_class",
    withinvars = c("category", "PosOr", "session"))
```

Automatically converting the following non-factors to factors: category

```
means_final <- df_errors %>%
  Rmisc::summarySEwithin(., "error_class", idvar = "category",
    withinvars = c("PosOr", "#", "session"),
    #betweenvars = "group",
    na.rm = T)
```

```

for(i in 1:nrow(means_final_category)) {
  means_final_category$grandmean[i] <-
    means_final$error_class[means_final$PosOr ==
                           means_final_category$PosOr[i]] -
    means_final$error_class[means_final$PosOr== 1]
  means_final_category$normalized_error[i] <-
    means_final_category$error_class[i] -
    means_final_category$error_class[
      means_final_category$category == means_final_category$category[i] &
      means_final_category$PosOr == 1 &
      means_final_category$session == 1]

  # prepare for ordering
  means_final_category$effect[i] <-
    modeloutput$PosOr.cont[means_final_category$category[i]] +
    modeloutput$re1.PosOr.cont+
    modeloutput$re2.group2.1[means_final_category$category[i]]
}

means_final_category <-
  means_final_category[order(desc(means_final_category$effect)),]
means_final_category$effect <-
  as.factor(round(means_final_category$effect, 2))
means_final_category$effect <-
  factor(means_final_category$effect,
         levels=rev(levels(means_final_category$effect )))

means_final_category$category <- factor(
  means_final_category$category, levels=c(
    "Insekten",      "Sitzen",      "Kochen",      "Jacken",
    "Obst",          "Trinkgefäße", "Wasser",      "Heimwerker",
    "Küche",         "Fische",      "Aufbewahrung",
    "Büro", "Bauernhof", "Raubtiere", "Huftiere", "Gemüse",
    "Körperteile", "Vögel", "Instrumente", "Blumen",
    "Gebäude", "Schmuck", "Strasse", "Süssigkeiten"))

# give categories English names and combine with effect size
means_final_category <- means_final_category %>%
  mutate(category_en =
    case_when(
      category == "Aufbewahrung" ~ "Storage",
      category == "Bauernhof" ~ "Farming\ntools",
      category == "Blumen" ~ "Flowers",
      category == "Büro" ~ "Office\ntools",
      category == "Fische" ~ "Fish",
      category == "Gebäude" ~ "Buildings",
      category == "Gemüse" ~ "Vegetables",
      category == "Heimwerker" ~ "Carpenter.s\ntools",
      category == "Huftiere" ~ "Hoofed\nanimals",
      category == "Insekten" ~ "Insects",
      category == "Instrumente" ~ "Instruments",
      category == "Jacken" ~ "Jackets",
      category == "Kochen" ~ "Cooking\nequipment",
      category == "Körperteile" ~ "Body part",


```

```

category == "Küche" ~ "Kitchen\nfurniture",
category == "Obst" ~ "Fruits",
category == "Raubtiere" ~ "Predators",
category == "Schmuck" ~ "Jewelry",
category == "Sitzen" ~ "Seating\nfurniture",
category == "Strasse" ~ "Street\nvehicles",
category == "Süssigkeiten" ~ "Sweets",
category == "Trinkgefässe" ~ "Drinking\nvessels",
category == "Vögel" ~ "Birds",
category == "Wasser" ~ "Water\nvehicles")) %>%
# mutate(category_en = case_when(
#   as.numeric(as.character(effect)) == 0.10~ paste0(category_en, " ",
#   #   "\n(", effect, "0)", sep=''),
#   as.numeric(as.character(effect)) >= 0.01~ paste0(category_en, " ",
#   #   "\n(", effect, ")", sep=''),
#   as.numeric(as.character(effect)) < 0.01~ paste0(category_en, " ",
#   #   "\n(< .01)", sep=''),
#   TRUE ~ paste0(category_en, " ",
#   #   "\n(", effect, ")", sep='')))) %>%
mutate(category_en=factor(category_en))

# Plotting
(plot_error_category <- means_final_category %>%
  mutate(session=case_when(session=="1" ~ "day 1",
    session=="2" ~ "day 2",
    session=="3" ~ "day 8")) %>%
  ggplot(., aes(x=PosOr,y=normalized_error, color=session, group=session, na.rm=T)) +
  geom_point(size =1, color = 'black') +
  geom_line(aes(x=PosOr,y=normalized_error, color=session,
    linetype="c"),
    size = 0.5) +
  geom_line(aes(x=PosOr,y=grandmean, color="b", linetype="d"),
    group = 1,size = 0.8)+
  geom_errorbar(aes(ymin=normalized_error-se, ymax=normalized_error+se),
    width =.1) +
  scale_color_manual(name="Session",
    values=c("#0072B2", "#E69F00", "#000000",
      "dark gray"),
    labels=c("1", "2", "3",
      "Grand Mean (across categories, sessions, groups)")) +
  scale_linetype_manual(name="", values=c("c"="solid", "d"="dashed"),
    labels=c("Participant mean",
      "Grand Mean"))+
  apatheme+
  labs(x="Ordinal Position", y ="Error Rate") +
  facet_wrap(means_final_category$category_en, scales='free', ncol=8)+
  scale_y_continuous(limits = c(-0.5, 0.5),
    breaks = c(-0.4,-0.2,0,0.2,0.4)) +
  scale_x_discrete(breaks=c(1,2,3,4,5))+
  theme(legend.position = "bottom"))

```

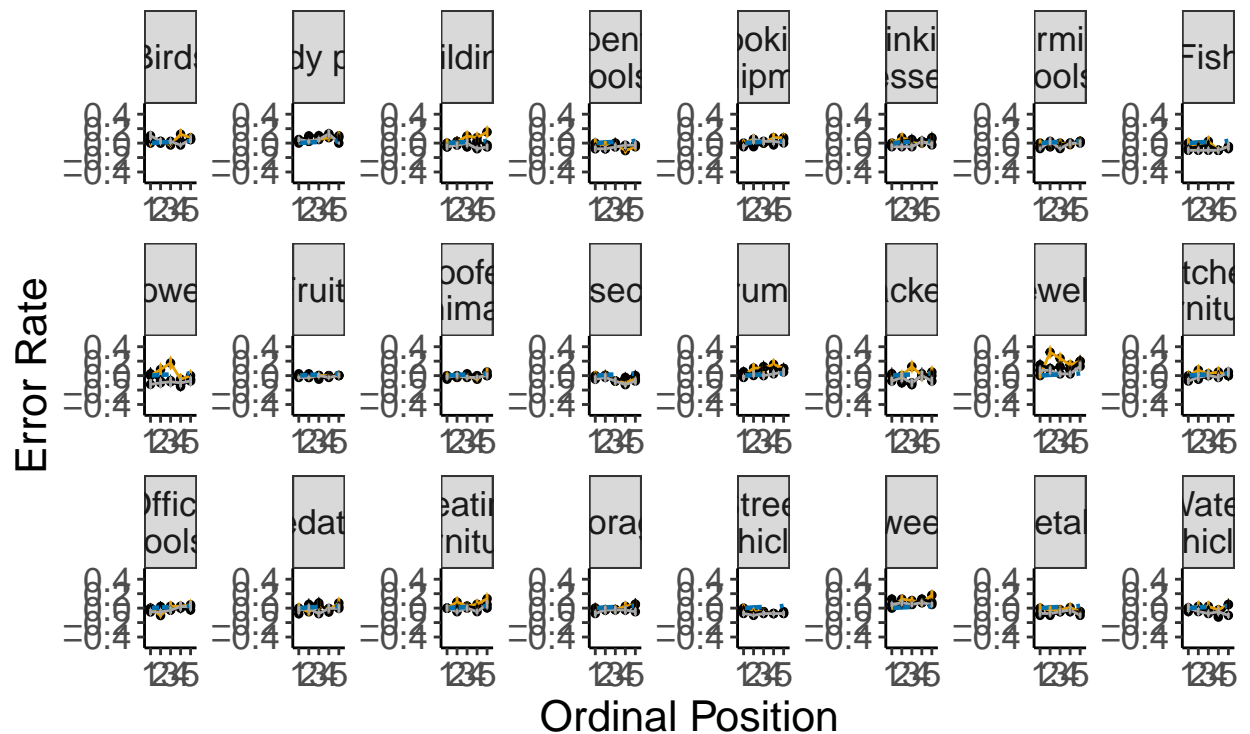

2 — 3 — Grand Mean (across categories, sessions, groups) — Partic

```
filename <- "CSI_online_aphasia_errors_by_category.pdf"
ggsave(plot_error_category, filename =
  here::here("results", "figures", filename),
  width = 26, height = 20, units = "cm",
  dpi = 300, device = cairo_pdf)
#embedFonts(file = here::here("results", "figures", filename))
```

Combine both

```
plots <- cowplot::plot_grid(plot_error_subject, plot_error_category,
  nrow = 2, ncol=1,
  rel_heights = c(1,0.6),
  margin(1,1,1,1),
  labels = c("A", "B"), label_size = 34,
  label_fontfamily = "Helvetica", label_y = 1.01,
  label_x=0)
```

```
## Warning in as_grob.default(plot): Cannot convert object of class
## marginsimpleUnitunitunit_v2 into a grob.
```

```
filename <- "CSI_online_aphasia_spoken_errors-by-category-and-subject.pdf"
ggsave(plots, filename =
  here::here("results", "figures", filename),
  width = 30, height = 50, units = "cm",
  dpi = 300, device = cairo_pdf)
```

Exploratory nested model with group and ordinal position nested into session

Take the same random structure as in the main model

```
# m2_lmm_n <- lmer(lVOT ~ group/session/PosOr.cont +
#                 (PosOr.cont+session|subject) +
#                 (PosOr.cont+group|category),
#                 data = df_RTs,
#                 control=lmerControl(optimizer = "bobyqa",
#                                     optCtrl = list(maxfun = 2e5)))
# summary(m2_lmm_n)

m2_lmm_n <- lmer(lVOT ~ session/(group*PosOr.cont) +
                (PosOr.cont+session|subject) +
                (PosOr.cont+group|category),
                data = df_RTs,
                control=lmerControl(optimizer = "bobyqa",
                                    optCtrl = list(maxfun = 2e5)))
summary(m2_lmm_n)
```

```
## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula: lVOT ~ session/(group * PosOr.cont) + (PosOr.cont + session |
##           subject) + (PosOr.cont + group | category)
## Data: df_RTs
## Control: lmerControl(optimizer = "bobyqa", optCtrl = list(maxfun = 200000))
##
## REML criterion at convergence: 1158.2
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -4.8980 -0.6647 -0.1747  0.4804  5.6443
##
## Random effects:
##  Groups   Name                Variance  Std.Dev. Corr
##  subject  (Intercept)  0.03572288  0.189005
##           PosOr.cont    0.00010406  0.010201  0.18
##           session2      0.00339912  0.058302 -0.13  0.24
##           session3      0.00406332  0.063744 -0.49  0.26  0.64
##  category (Intercept)  0.00884984  0.094074
##           PosOr.cont    0.00002358  0.004856  0.07
##           group2-1      0.00090450  0.030075  0.08  0.16
## Residual                0.06154884  0.248090
## Number of obs: 12455, groups:  subject, 40; category, 24
##
## Fixed effects:
##
##              Estimate Std. Error      df t value
## (Intercept)    7.116562   0.035604  58.495842  199.884
## session2      -0.076082   0.010856  38.393028  -7.009
## session3      -0.089211   0.011561  36.616625  -7.717
## session1:group2-1  0.172863   0.065639  38.187285   2.634
## session2:group2-1  0.147257   0.062950  38.261949   2.339
## session3:group2-1  0.152784   0.055622  38.529375   2.747
## session1:PosOr.cont  0.014161   0.003397 104.345986   4.168
```



```

## session2:Pos0r.cont          0.018796    0.003349  98.553423    5.612
## session3:Pos0r.cont          0.017810    0.003310  94.964792    5.380
## session1:group2-1:Pos0r.cont  0.001525    0.006499 151.024051    0.235
## session2:group2-1:Pos0r.cont  0.014830    0.006398 141.844633    2.318
## session3:group2-1:Pos0r.cont  0.004620    0.006317 136.892022    0.731
##                               Pr(>|t|)
## (Intercept)                  < 0.0000000000000002 ***
## session2                      0.00000002267 ***
## session3                      0.00000000345 ***
## session1:group2-1             0.0121 *
## session2:group2-1             0.0246 *
## session3:group2-1             0.0091 **
## session1:Pos0r.cont           0.00006349491 ***
## session2:Pos0r.cont           0.00000018378 ***
## session3:Pos0r.cont           0.00000053431 ***
## session1:group2-1:Pos0r.cont  0.8148
## session2:group2-1:Pos0r.cont  0.0219 *
## session3:group2-1:Pos0r.cont  0.4658
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##      (Intr) sessn2 sessn3 ss1:2-1 ss2:2-1 ss3:2-1 s1:P0. s2:P0. s3:P0.
## session2    -0.096
## session3    -0.361  0.612
## sssn1:gr2-1  0.006 -0.009 -0.009
## sssn2:gr2-1  0.006  0.008  0.000  0.944
## sssn3:gr2-1  0.006  0.000  0.006  0.941  0.952
## sssn1:Ps0r.  0.084  0.095  0.108  0.006  0.005  0.006
## sssn2:Ps0r.  0.085  0.102  0.113  0.004  0.006  0.006  0.323
## sssn3:Ps0r.  0.085  0.101  0.114  0.004  0.005  0.007  0.326  0.331
## ss1:2-1:P0.  0.001 -0.004 -0.003  0.057  0.094  0.115  0.112  0.009  0.007
## ss2:2-1:P0.  0.001  0.005  0.002  0.057  0.096  0.117  0.009  0.088  0.008
## ss3:2-1:P0.  0.001  0.002  0.005  0.058  0.097  0.118  0.007  0.008  0.079
##      s1:2-1: s2:2-1:
## session2
## session3
## sssn1:gr2-1
## sssn2:gr2-1
## sssn3:gr2-1
## sssn1:Ps0r.
## sssn2:Ps0r.
## sssn3:Ps0r.
## ss1:2-1:P0.
## ss2:2-1:P0.  0.259
## ss3:2-1:P0.  0.261  0.266

```

Session info

```
sessionInfo()
```

```
## R version 4.3.1 (2023-06-16)
## Platform: x86_64-apple-darwin20 (64-bit)
## Running under: macOS Sonoma 14.4
##
## Matrix products: default
## BLAS:   /Library/Frameworks/R.framework/Versions/4.3-x86_64/Resources/lib/libRblas.0.dylib
## LAPACK: /Library/Frameworks/R.framework/Versions/4.3-x86_64/Resources/lib/libRlapack.dylib; LAPACK
##
## locale:
## [1] en_US.UTF-8/en_US.UTF-8/en_US.UTF-8/C/en_US.UTF-8/en_US.UTF-8
##
## time zone: Europe/Berlin
## tzcode source: internal
##
## attached base packages:
## [1] stats      graphics  grDevices  utils      datasets  methods    base
##
## other attached packages:
## [1] actuar_3.3-2          fitdistrplus_1.1-11 survival_3.5-8
## [4] MASS_7.3-60.0.1      flextable_0.9.2     dplyr_1.1.2
## [7] sjPlot_2.8.14        ggplot2_3.4.2       Cairo_1.6-0
## [10] Rmisc_1.5.1          plyr_1.8.8          lattice_0.22-5
## [13] lmerTest_3.1-3       lme4_1.1-35.1       Matrix_1.6-5
## [16] tidyr_1.3.0
##
## loaded via a namespace (and not attached):
## [1] rlang_1.1.1          magrittr_2.0.3       compiler_4.3.1
## [4] reshape2_1.4.4       systemfonts_1.0.4    vctrs_0.6.3
## [7] stringr_1.5.0        httpcode_0.3.0       pkgconfig_2.0.3
## [10] crayon_1.5.2         fastmap_1.1.1        backports_1.4.1
## [13] ellipsis_0.3.2       labeling_0.4.2        effectsize_0.8.3
## [16] utf8_1.2.3           promises_1.2.0.1     rmarkdown_2.23
## [19] nloptr_2.0.3         ragg_1.2.5           purrr_1.0.1
## [22] xfun_0.39            jsonlite_1.8.7       highr_0.10
## [25] later_1.3.1          afex_1.3-0           sjmisc_2.8.9
## [28] uuid_1.1-0           ggeffects_1.2.3      parallel_4.3.1
## [31] broom_1.0.5          R6_2.5.1             stringi_1.7.12
## [34] car_3.1-2            boot_1.3-30          numDeriv_2016.8-1.1
## [37] estimability_1.4.1   Rcpp_1.0.11          assertthat_0.2.1
## [40] knitr_1.43           modelr_0.1.11         parameters_0.21.1
## [43] expint_0.1-8         httpuv_1.6.11        splines_4.3.1
## [46] tidyselect_1.2.0     abind_1.4-5          rstudioapi_0.15.0
## [49] yaml_2.3.7           sjlabelled_1.2.0     curl_5.0.1
## [52] tibble_3.2.1         shiny_1.7.4.1        withr_2.5.0
## [55] bayestestR_0.13.1    askpass_1.1          coda_0.19-4.1
## [58] evaluate_0.21        huxtable_5.5.2       zip_2.3.0
```

## [61] xml2_1.3.5	pillar_1.9.0	carData_3.0-5
## [64] insight_0.19.3	generics_0.1.3	rprojroot_2.0.3
## [67] munsell_0.5.0	scales_1.2.1	minqa_1.2.5
## [70] xtable_1.8-4	glue_1.6.2	gdtools_0.3.3
## [73] emmeans_1.8.7	tools_4.3.1	gfonts_0.2.0
## [76] data.table_1.14.8	mvtnorm_1.2-2	cowplot_1.1.1
## [79] grid_4.3.1	datawizard_0.8.0	colorspace_2.1-0
## [82] nlme_3.1-164	performance_0.10.4	cli_3.6.1
## [85] textshaping_0.3.6	officer_0.6.2	fontBitstreamVera_0.1.1
## [88] fansi_1.0.4	sjstats_0.18.2	gtable_0.3.3
## [91] digest_0.6.33	fontquiver_0.2.1	crul_1.4.0
## [94] farver_2.1.1	htmltools_0.5.5	lifecycle_1.0.3
## [97] here_1.0.1	mime_0.12	fontLiberation_0.1.0
## [100] openssl_2.1.0		

Exploratory analyses

We conducted several exploratory analyses to assess the stability of our effects, especially because we deviated from the pre-planned GLMMs for RT analyses