

Cucumber Report

04-Apr-2025, 12:00:05 PM

Start : Apr 04, 12:00:01.604 PM

End : Apr 04, 12:00:04.010 PM

Duration : 2.406 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 5



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Test all login related featur</u>	2.406 s	1	0	1	0	6	0	1	5

#	Feature Name	Scenario Name
1	<u>Test all login related featur</u>	<u>Login to application using valid username and Password</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@master	1	0	1	0	1	0	1	0
@smoke	1	0	1	0	1	0	1	0
@login	1	0	1	0	1	0	1	0
@regression	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Test all login related featur</u>	1	0	1	0	2.406 s

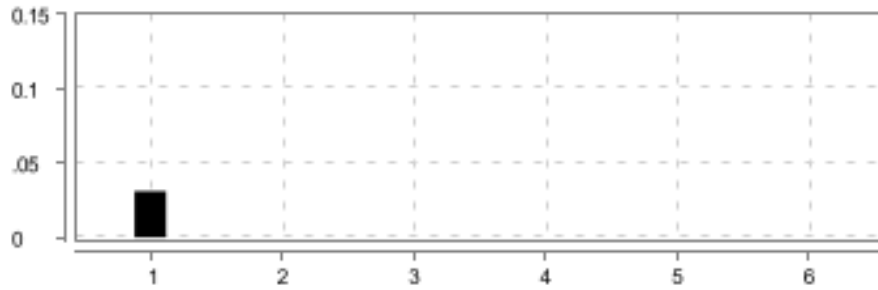



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Test all login related featur</u>	<u>Login to application using valid username and Password</u>	6	0	1	5	2.406 s

Test all login related featur

FAILED	DURATION - 2.406 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 6 Pass - 0 Fail - 1 Skip - 5	
/ 12:00:01.604 PM // 12:00:04.010 PM /					

Login to application using valid username and Password

<div>FAILED</div> <div>DURATION - 2.406 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	<div></div>
<div>/ 12:00:01.604 PM // 12:00:04.010 PM /</div>				
<div>Test all login related featur</div>				
<div>@master @smoke @login @regression</div>				

#	Step / Hook Details	Status	Duration
1	Given As a user I want to launch the application <pre> java.lang.NullPointerException at java.base/java.util.Objects.requireNonNull(Objects.java:221) at java.base/java.util.ImmutableCollections\$Map1.<init>(ImmutableCollections.java:732) at java.base/java.util.Map.of(Map.java:1307) at org.openqa.selenium.remote.DriverCommand.GET(DriverCommand.java:177) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:313) at stepdefinition.loginStepDef.as_a_user_i_want_to_launch_to_the_application(loginStepDef.java:31) at ?.As a user I want to launch the application(file:///C:/Users/admin/IdeaProjects/CucumberFramework/src/test/resources/feature/login.feature:7) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.031 s
2	And I need to click on login link	SKIPPED	0.000 s
3	When I enter a valid username	SKIPPED	0.000 s
4	And I enter a valid password	SKIPPED	0.000 s
5	And I need to click on login button	SKIPPED	0.000 s
6	Then I should login successfully	SKIPPED	0.000 s
	AFTER - stepdefinition.hooks.teardown(io.cucumber.java.Scenario)	PASSED	0.468 s

#	Step / Hook Details	Status	Duration
	Login to application using valid username and Password		