

Ex. No: 12

Case Study:

Banking is one of the most familiar real-life database applications. A bank must keep a record of its customers and their accounts, make sure every account balance stays consistent, and log each deposit and withdrawal the moment it happens. This case study models a simplified retail banking system, in which a customer holds one or more accounts and every movement of money is recorded as a transaction, and shows how a desktop front end can carry out these operations directly against the database.

Entities and Relationships:

The design is built from three entities. Customer (custid, cname, phone) represents the account holder. Account (accno, custid, balance) belongs to exactly one customer through a foreign key on custid, and its balance is constrained never to fall below zero. Transactions (txnid, accno, txntype, amount, balance_after, txntime) records every operation performed on an account, whether OPEN, DEPOSIT or WITHDRAW, and is linked to Account by a foreign key. The relationships are therefore one Customer to many Accounts, and one Account to many Transactions.

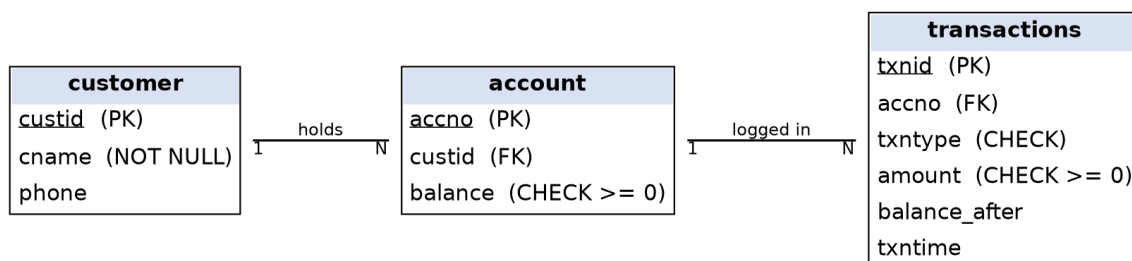


Fig. 12.1: ER diagram (customer 1:N account 1:N transactions).

The tables are in Third Normal Form: customer details are stored once, and each transaction refers to its account only through accno. transactions.balance_after is a deliberate snapshot of the balance, so a statement can be shown without replaying the ledger.

Features:

The application supports six operations: Insert (open a new account together with its customer), Update (edit a customer's name and phone), Delete (close an account and remove its transaction history), Deposit and Withdraw (each guarded by an insufficient-balance check), and History (view the transaction log of a single account or of all accounts). A balance can change only through Deposit or Withdraw, so the account balance and the transaction ledger always stay in step.

Database Connectivity:

The front end is built with Tkinter, Python's standard GUI toolkit, and connects to the SQLite database through Python's built-in sqlite3 module. Every button on the window issues SQL over this connection: for example, Deposit runs an UPDATE on account and then an INSERT into transactions within a single database transaction, so both writes succeed together or neither is applied. Referential integrity is switched on with PRAGMA foreign_keys = ON, and table-level rules such as CHECK (balance >= 0) are enforced by the database engine itself, not by the interface. The schema and the complete program follow.

Architecture: BankApp (Tkinter) is the presentation layer and only calls BankDB methods; BankDB is the application layer that validates input and controls transactions; the sqlite3 driver (the role JDBC or ODBC plays in other stacks) carries SQL to the SQLite DBMS. Here all layers run on one computer; a real bank would put an application server between the app and the database, reached over HTTPS.

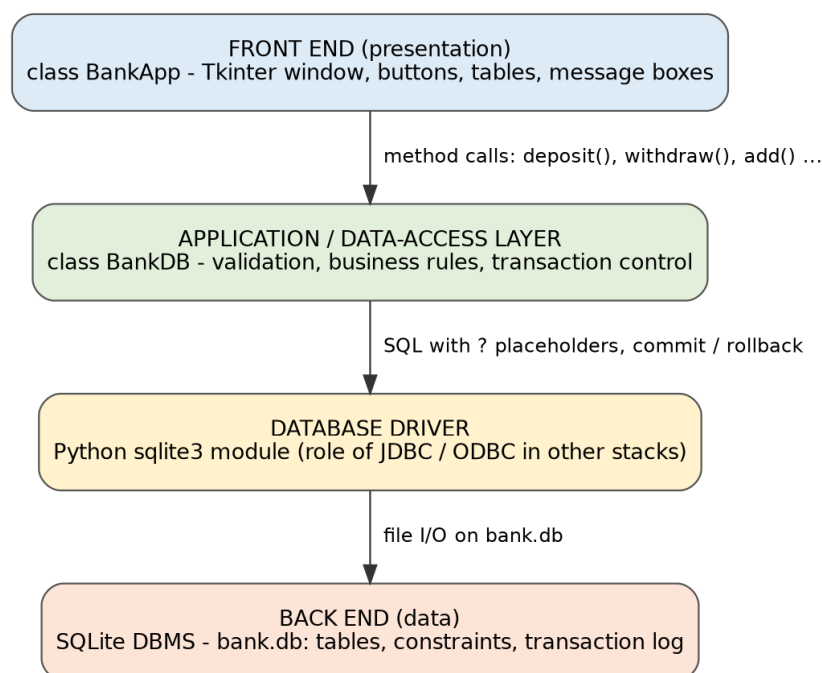


Fig. 12.2: Layers and connectivity path from the GUI to the database.

Schema (schema.sql):

```
CREATE TABLE IF NOT EXISTS customer (  
    custid INTEGER PRIMARY KEY AUTOINCREMENT,  
    cname TEXT NOT NULL,  
    phone TEXT  
);
```

```

CREATE TABLE IF NOT EXISTS account (
    accno INTEGER PRIMARY KEY,
    custid INTEGER NOT NULL REFERENCES customer(custid),
    balance REAL NOT NULL DEFAULT 0 CHECK (balance >= 0)
);

CREATE TABLE IF NOT EXISTS transactions (
    txnid INTEGER PRIMARY KEY AUTOINCREMENT,
    accno INTEGER NOT NULL REFERENCES account(accno),
    txntype TEXT NOT NULL CHECK (txntype IN ('OPEN', 'DEPOSIT',
'WITHDRAW')),
    amount REAL NOT NULL CHECK (amount >= 0),
    balance_after REAL NOT NULL,
    txntime TEXT NOT NULL DEFAULT (datetime('now', 'localtime'))
);

```

Program (bank_app.py):

```

import os
import sqlite3
import tkinter as tk
from tkinter import ttk, messagebox, simpledialog

BASE_DIR = os.path.dirname(os.path.abspath(__file__))
DB_FILE = os.path.join(BASE_DIR, "bank.db")
SCHEMA_FILE = os.path.join(BASE_DIR, "schema.sql")

class BankError(Exception):
    """Raised for any user-facing problem (bad input, no funds, ...)."""

class BankDB:
    def __init__(self, path=DB_FILE, schema_file=SCHEMA_FILE):
        self.conn = sqlite3.connect(path)
        self.conn.execute("PRAGMA foreign_keys = ON") # enforce foreign keys
        try:
            with open(schema_file, encoding="utf-8") as f:
                self.conn.executescript(f.read()) # run schema.sql
        except FileNotFoundError:
            raise SystemExit(
                f"schema.sql not found ({schema_file}).\n"
            )

```

```

cols = [r[1] for r in self.conn.execute("PRAGMA table_info(account)")]
if "custid" not in cols:
    raise SystemExit(
        "An old bank.db from the single-table version was found.\n"
        "Delete bank.db and run the program again."
    )

def all_accounts(self):
    return self.conn.execute(
        "SELECT a.accno, c.custid, c.cname, c.phone, a.balance "
        "FROM account a JOIN customer c ON a.custid = c.custid "
        "ORDER BY a.accno"
    ).fetchall()

def get(self, accno):
    row = self.conn.execute(
        "SELECT a.accno, c.custid, c.cname, c.phone, a.balance "
        "FROM account a JOIN customer c ON a.custid = c.custid "
        "WHERE a.accno = ?", (accno,)
    ).fetchone()
    if row is None:
        raise BankError(f"Account {accno} does not exist.")
    return row

def add(self, accno, cname, phone, balance):
    cname = cname.strip()
    balance = round(balance, 2)
    if not cname:
        raise BankError("Customer name cannot be empty.")
    if balance < 0:
        raise BankError("Opening balance cannot be negative.")
    exists = self.conn.execute(
        "SELECT 1 FROM account WHERE accno = ?", (accno,)
    ).fetchone()
    if exists:
        raise BankError(f"Account {accno} already exists.")
    try:
        with self.conn:
            cur = self.conn.execute(
                "INSERT INTO customer (cname, phone) VALUES (?, ?)",

```

```

        (cname, phone or None),
    )
    self.conn.execute(
        "INSERT INTO account (accno, custid, balance) VALUES (?, ?, ?)",
        (accno, cur.lastrowid, balance),
    )
    self.conn.execute(
        "INSERT INTO transactions (accno, txntype, amount, balance_after) "
        "VALUES (?, 'OPEN', ?, ?)",
        (accno, balance, balance),
    )
except sqlite3.IntegrityError as e:
    raise BankError(f"Could not save the record: {e}")

def update(self, accno, cname, phone):
    row = self.get(accno)
    cname = cname.strip()
    if not cname:
        raise BankError("Customer name cannot be empty.")
    with self.conn:
        self.conn.execute(
            "UPDATE customer SET cname = ?, phone = ? WHERE custid = ?",
            (cname, phone or None, row[1]),
        )

def delete(self, accno):
    row = self.get(accno)
    with self.conn:
        self.conn.execute("DELETE FROM transactions WHERE accno = ?", (accno,))
        self.conn.execute("DELETE FROM account WHERE accno = ?", (accno,))

        self.conn.execute(
            "DELETE FROM customer WHERE custid = ? "
            "AND NOT EXISTS (SELECT 1 FROM account WHERE custid = ?)",
            (row[1], row[1]),
        )

def deposit(self, accno, amount):
    return self._move(accno, amount, "DEPOSIT")

def withdraw(self, accno, amount):

```

```

        return self._move(accno, amount, "WITHDRAW")

def _move(self, accno, amount, kind):
    amount = round(amount, 2)
    if amount <= 0:
        raise BankError(f'{kind.title()} amount must be greater than zero.')
    self.get(accno)
    change = amount if kind == "DEPOSIT" else -amount
    with self.conn:
        cur = self.conn.execute(
            "UPDATE account SET balance = ROUND(balance + ?, 2) "
            "WHERE accno = ? AND balance + ? >= 0",
            (change, accno, change),
        )
        if cur.rowcount == 0:
            raise BankError("Insufficient balance.")
        new_balance = self.conn.execute(
            "SELECT balance FROM account WHERE accno = ?", (accno,)
        ).fetchone()[0]
        self.conn.execute(
            "INSERT INTO transactions (accno, txntype, amount, balance_after) "
            "VALUES (?, ?, ?, ?)",
            (accno, kind, amount, new_balance),
        )
    return new_balance

def history(self, accno=None):
    sql = ("SELECT txnid, accno, txntype, amount, balance_after, txntime "
           "FROM transactions ")
    if accno is None:
        return self.conn.execute(sql + "ORDER BY txnid DESC").fetchall()
    return self.conn.execute(
        sql + "WHERE accno = ? ORDER BY txnid DESC", (accno,)).fetchall()

def parse_accno(text):
    try:
        return int(text.strip())
    except ValueError:
        raise BankError("Account number must be a whole number.")

def parse_money(text, blank_ok=False):

```

```
text = text.strip()
if not text and blank_ok:
    return 0.0
try:
    return float(text)
except ValueError:
    raise BankError("Balance must be a number.")
```

```
def parse_phone(text):
    text = text.strip()
    if text and not (text.isdigit() and 7 <= len(text) <= 15):
        raise BankError("Phone number must be 7 to 15 digits.")
    return text
```

```
class BankApp(tk.Tk):
    def __init__(self, db):
        super().__init__()
        self.db = db
        self.title("Banking System")
        self.resizable(False, False)
        self.accno = tk.StringVar()
        self.cname = tk.StringVar()
        self.phone = tk.StringVar()
        self.balance = tk.StringVar()
        self._build()
        self.refresh()

    def _build(self):
        form = ttk.LabelFrame(self, text="Account details", padding=10)
        form.grid(row=0, column=0, padx=10, pady=(10, 4), sticky="ew")
        fields = [
            ("Account No", self.accno),
            ("Customer Name", self.cname),
            ("Phone", self.phone),
            ("Balance (Rs)", self.balance),
        ]
        for r, (label, var) in enumerate(fields):
            ttk.Label(form, text=label).grid(row=r, column=0, sticky="w", pady=3)
            ttk.Entry(form, textvariable=var, width=30).grid(row=r, column=1, padx=8)
```

```

buttons = ttk.Frame(self)
buttons.grid(row=1, column=0, padx=10, pady=4)
actions = [
    ("Insert", self.insert),
    ("Update", self.update),
    ("Delete", self.delete),
    ("Clear", self.clear),
    ("Deposit", self.deposit),
    ("Withdraw", self.withdraw),
    ("History", self.show_history),
    ("Exit", self.destroy),
]
for i, (text, cmd) in enumerate(actions):
    ttk.Button(buttons, text=text, command=cmd, width=10).grid(
        row=i // 4, column=i % 4, padx=3, pady=3
    )

cols = ("accno", "custid", "cname", "phone", "balance")
self.tree = ttk.Treeview(self, columns=cols, show="headings", height=8)
for col, title, width in [
    ("accno", "Account No", 90),
    ("custid", "Cust ID", 60),
    ("cname", "Customer Name", 160),
    ("phone", "Phone", 110),
    ("balance", "Balance (Rs)", 100),
]:
    self.tree.heading(col, text=title)
    self.tree.column(col, width=width, anchor="w")
self.tree.grid(row=2, column=0, padx=10, pady=(4, 10))
self.tree.bind("<<TreeviewSelect>>", self.on_select)
def refresh(self):
    self.tree.delete(*self.tree.get_children())
    for accno, custid, cname, phone, balance in self.db.all_accounts():
        self.tree.insert("", "end",
            values=(accno, custid, cname, phone or "", f"{balance:.2f}"))

def on_select(self, _event=None):
    sel = self.tree.selection()
    if sel:
        accno, _custid, cname, phone, balance = self.tree.item(sel[0], "values")
        self.accno.set(accno)

```

```

        self.cname.set(cname)
        self.phone.set(phone)
        self.balance.set(balance)

def error(self, err):
    messagebox.showerror("Banking System", str(err), parent=self)

def info(self, msg):
    messagebox.showinfo("Banking System", msg, parent=self)

def ask_amount(self, title, prompt):
    return simpdialog.askfloat(title, prompt, parent=self, minvalue=0.01)

def insert(self):
    try:
        accno = parse_accno(self.accno.get())
        balance = parse_money(self.balance.get(), blank_ok=True)
        phone = parse_phone(self.phone.get())
        self.db.add(accno, self.cname.get(), phone, balance)
    except BankError as e:
        return self.error(e)
    self.refresh()
    self.info("Record inserted successfully.")

def update(self):
    try:
        accno = parse_accno(self.accno.get())
        phone = parse_phone(self.phone.get())
        self.db.update(accno, self.cname.get(), phone)
    except BankError as e:
        return self.error(e)
    self.refresh()
    self.info("Record updated successfully. "
              "(Balance changes only through Deposit / Withdraw.)")

def delete(self):
    try:
        accno = parse_accno(self.accno.get())
        self.db.get(accno)
        if not messagebox.askyesno(
            "Banking System",

```

```

        f"Delete account {accno} and its transaction history?",
        parent=self):
    return
    self.db.delete(accno)
except BankError as e:
    return self.error(e)
self.clear()
self.refresh()
self.info("Record deleted.")

def clear(self):
    for var in (self.accno, self.cname, self.phone, self.balance):
        var.set("")
    self.tree.selection_remove(self.tree.selection())

def deposit(self):
    self._transact("Deposit", "Enter the amount to be deposited (Rs):",
        self.db.deposit)

def withdraw(self):
    self._transact("Withdraw", "Enter the amount to be withdrawn (Rs):",
        self.db.withdraw)

def _transact(self, title, prompt, operation):
    try:
        accno = parse_accno(self.accno.get())
        self.db.get(accno)
        amount = self.ask_amount(title, prompt)
        if amount is None:
            return
        new_balance = operation(accno, amount)
    except BankError as e:
        return self.error(e)
    self.refresh()
    self.balance.set(f"{new_balance:.2f}")
    self.info(f"Current balance is Rs {new_balance:.2f}")

def show_history(self):
    """Transaction history of the account in the box (all accounts if blank)."""
    try:
        text = self.accno.get().strip()

```

```


        accno = parse_accno(text) if text else None
        if accno is not None:
            self.db.get(accno)
            rows = self.db.history(accno)
        except BankError as e:
            return self.error(e)

win = tk.Toplevel(self)
win.title(f"Transaction history - account {accno}" if accno is not None
        else "Transaction history - all accounts")
win.resizable(False, False)
cols = ("txnid", "accno", "txntype", "amount", "balance_after", "txntime")
tree = ttk.Treeview(win, columns=cols, show="headings", height=12)
for col, title, width in [
    ("txnid", "Txn ID", 60),
    ("accno", "Account No", 90),
    ("txntype", "Type", 80),
    ("amount", "Amount (Rs)", 100),
    ("balance_after", "Balance After", 100),
    ("txntime", "Date & Time", 150),
]:
    tree.heading(col, text=title)
    tree.column(col, width=width, anchor="w")
for txnid, acc, kind, amount, after, when in rows:
    tree.insert("", "end",
        values=(txnid, acc, kind, f"{amount:.2f}", f"{after:.2f}", when))
tree.grid(row=0, column=0, padx=10, pady=10)
ttk.Button(win, text="Close", command=win.destroy).grid(row=1, column=0,
pady=(0, 10))

if __name__ == "__main__":
    BankApp(BankDB()).mainloop()

```


Output:

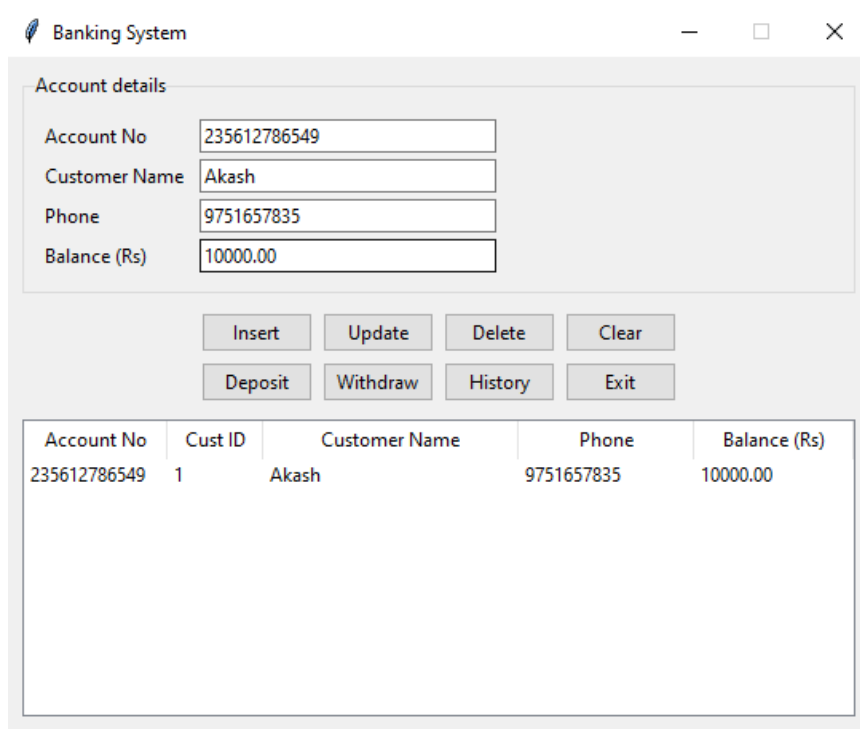

The screenshot shows a window titled "Banking System". Inside, there is a section labeled "Account details" containing four input fields: "Account No" (235612786549), "Customer Name" (Akash), "Phone" (9751657835), and "Balance (Rs)" (10000.00). Below these fields are two rows of buttons: the first row has "Insert", "Update", "Delete", and "Clear"; the second row has "Deposit", "Withdraw", "History", and "Exit". At the bottom of the window is a table with the following data:

Account No	Cust ID	Customer Name	Phone	Balance (Rs)
235612786549	1	Akash	9751657835	10000.00

Fig. 12.3: Main window after Insert, showing the new account with its opening balance of Rs 10,000.00.

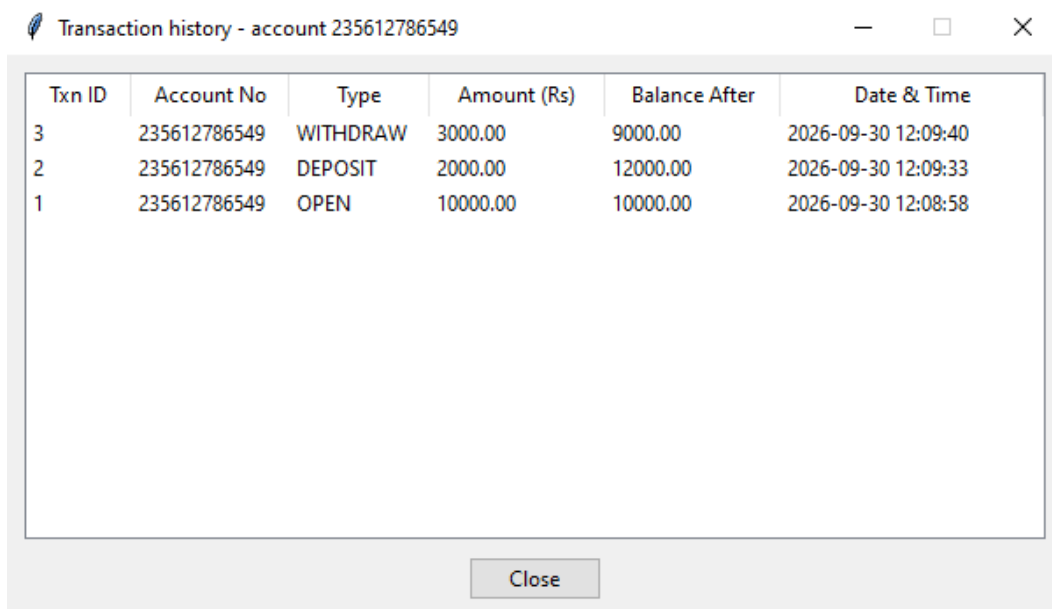


The screenshot shows a window titled "Transaction history - account 235612786549". It contains a table with the following data:

Txn ID	Account No	Type	Amount (Rs)	Balance After	Date & Time
3	235612786549	WITHDRAW	3000.00	9000.00	2026-09-30 12:09:40
2	235612786549	DEPOSIT	2000.00	12000.00	2026-09-30 12:09:33
1	235612786549	OPEN	10000.00	10000.00	2026-09-30 12:08:58

At the bottom of the window is a "Close" button.

Fig. 12.4: Transaction history of the same account: OPEN Rs 10,000.00, DEPOSIT Rs 2,000.00, WITHDRAW Rs 3,000.00, final balance Rs 9,000.00.

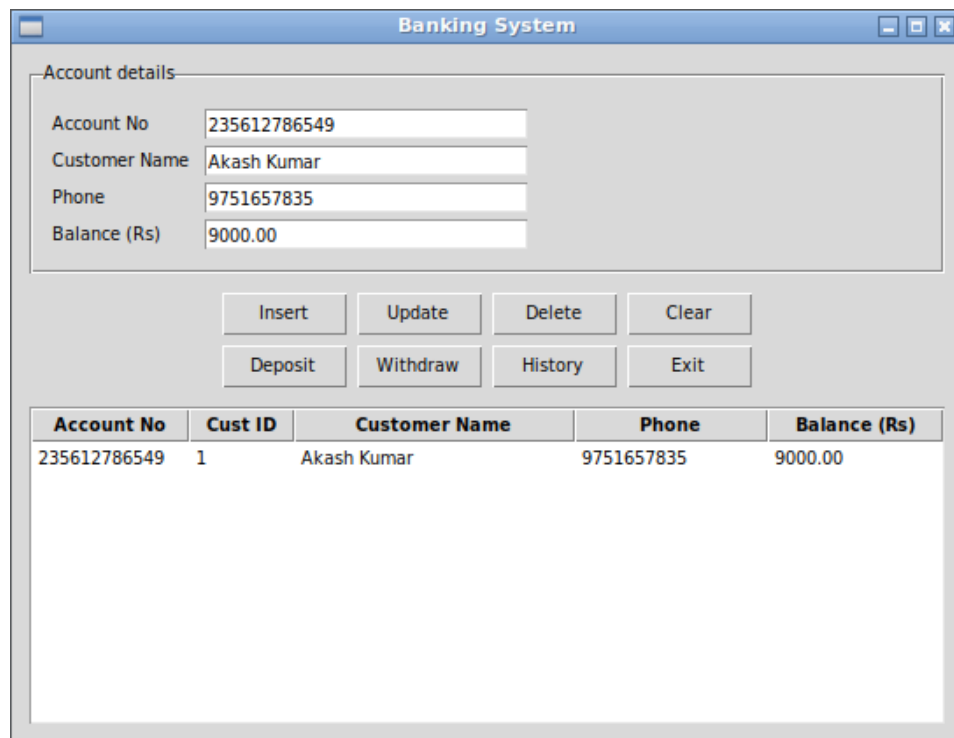

The main window of the Banking System application. It features a title bar 'Banking System' with standard window controls. Below the title bar is a section titled 'Account details' containing four input fields: 'Account No' (235612786549), 'Customer Name' (Akash Kumar), 'Phone' (9751657835), and 'Balance (Rs)' (9000.00). Below these fields are two rows of buttons: the first row contains 'Insert', 'Update', 'Delete', and 'Clear'; the second row contains 'Deposit', 'Withdraw', 'History', and 'Exit'. At the bottom of the window is a table displaying account information.

Account No	Cust ID	Customer Name	Phone	Balance (Rs)
235612786549	1	Akash Kumar	9751657835	9000.00

Fig. 12.5: Main window after Update: the customer name is changed to "Akash Kumar"; the balance stays Rs 9,000.00 because only Deposit and Withdraw change it.

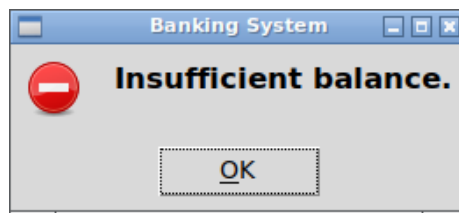


Fig. 12.6: Withdraw of Rs 20,000.00 is rejected with the "Insufficient balance." message; the balance is not changed.

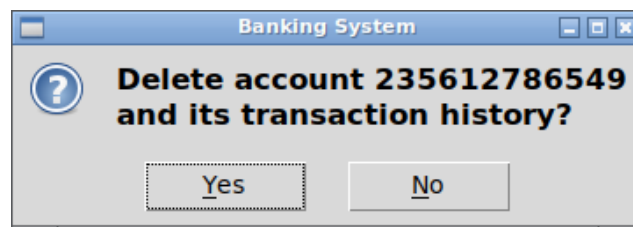


Fig. 12.7: Confirmation prompt shown when Delete is clicked.

The image shows a software window titled "Banking System". It contains a section for "Account details" with four input fields: "Account No", "Customer Name", "Phone", and "Balance (Rs)". Below these fields are two rows of buttons: "Insert", "Update", "Delete", "Clear" in the first row, and "Deposit", "Withdraw", "History", "Exit" in the second row. At the bottom, there is a table with five columns: "Account No", "Cust ID", "Customer Name", "Phone", and "Balance (Rs)". The table is currently empty.

Account No	Cust ID	Customer Name	Phone	Balance (Rs)
------------	---------	---------------	-------	--------------

Fig. 12.8: Main window after the account is deleted; the account list is empty.