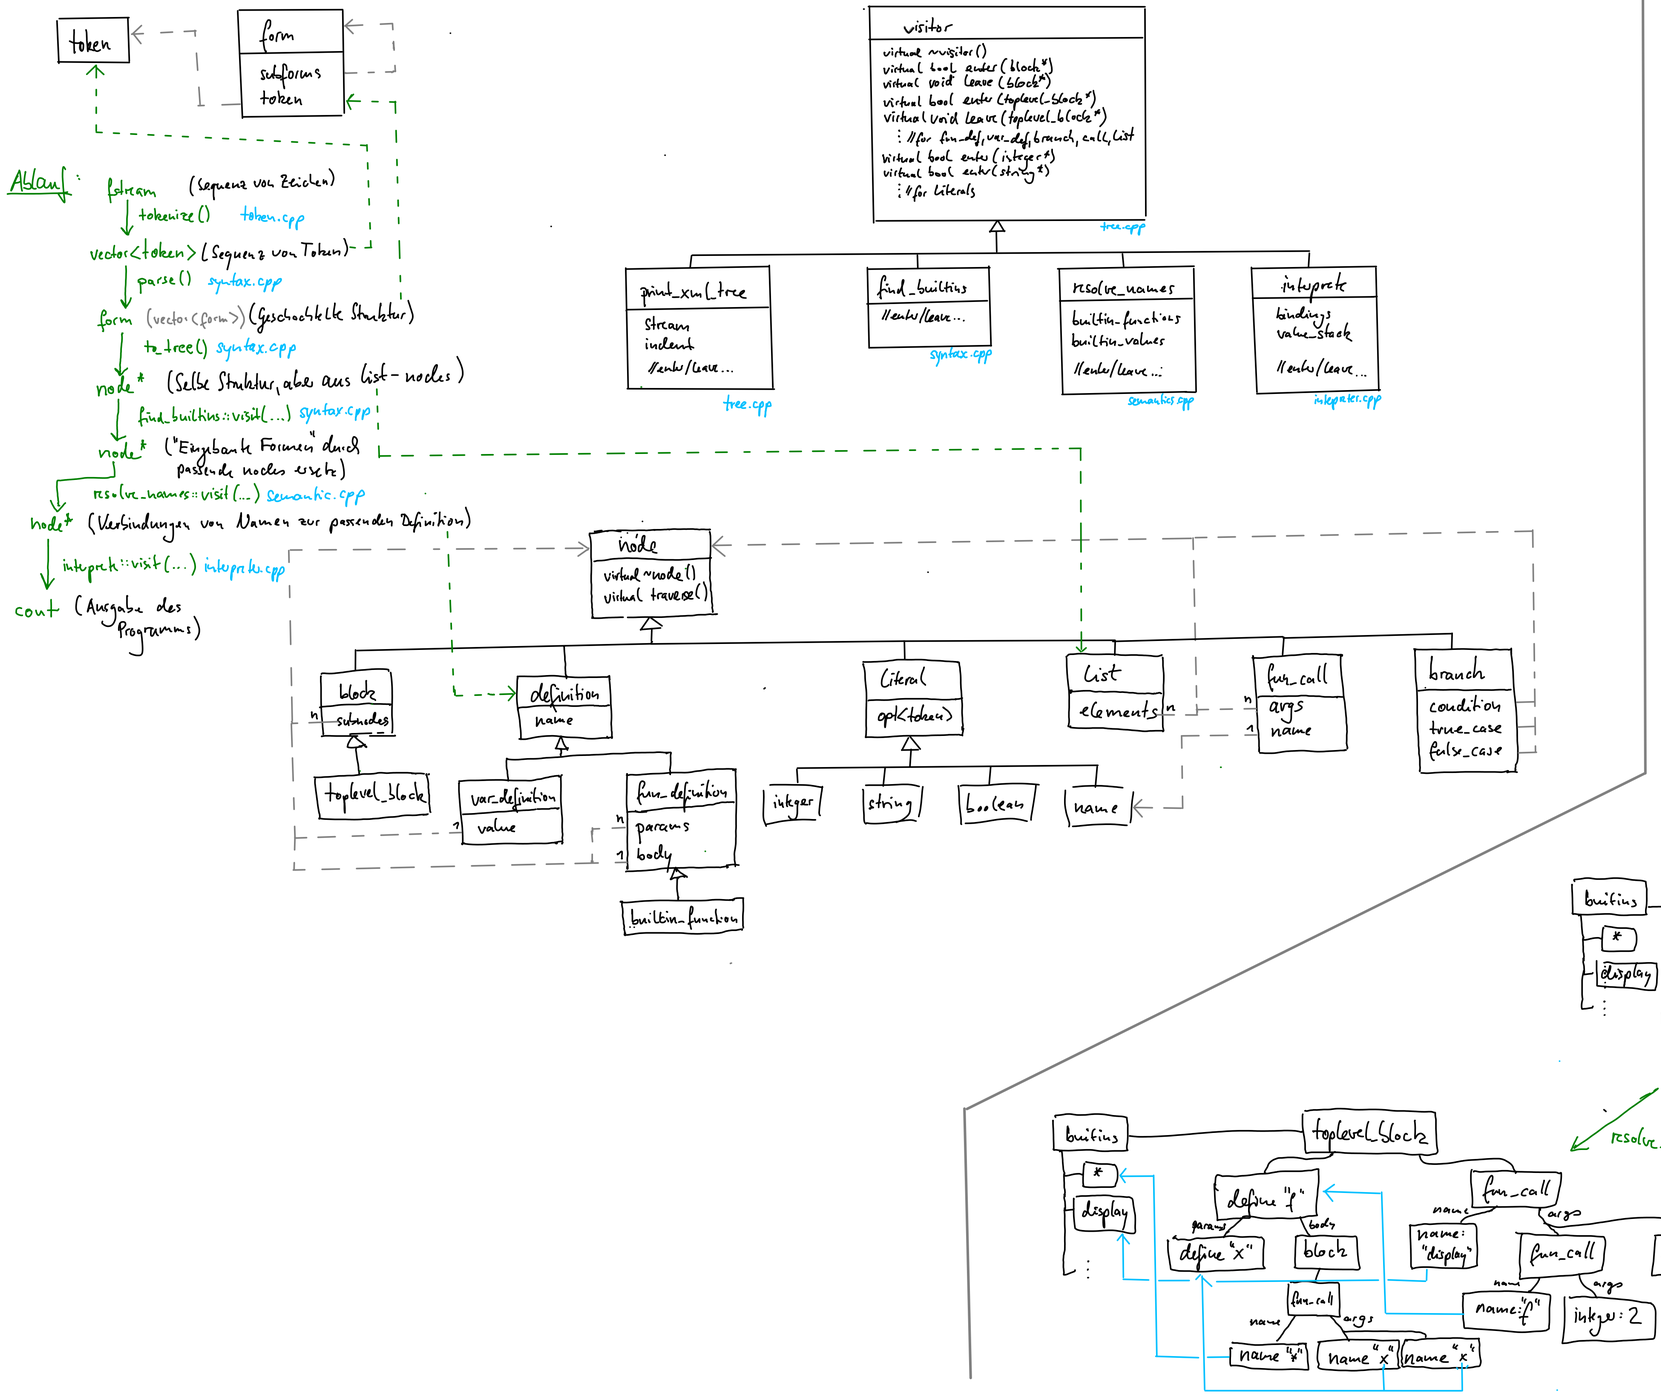

Beispiel

(define (f x) (* x x)) (display (f 2) "\n")

tokenize

P_OPEN, ID, P_OPEN, ID, ID, P_CLOSE, P_OPEN, ID, ID, ID, P_CLOSE, P_CLOSE, P_OPEN, ID, P_OPEN, ID, ID, P_CLOSE, STR, P_CLOSE

parse

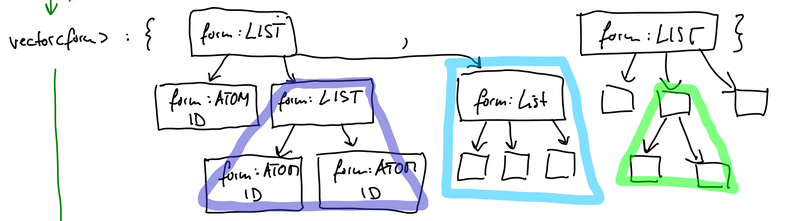

to_tree

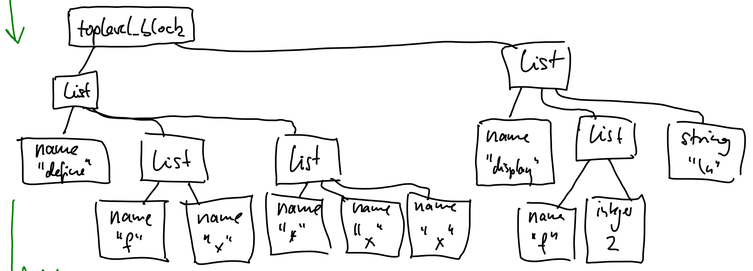

find_builtins

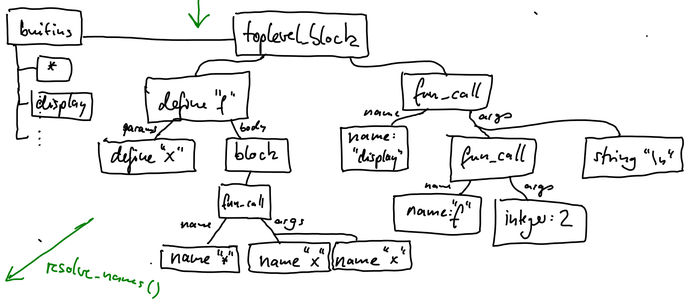
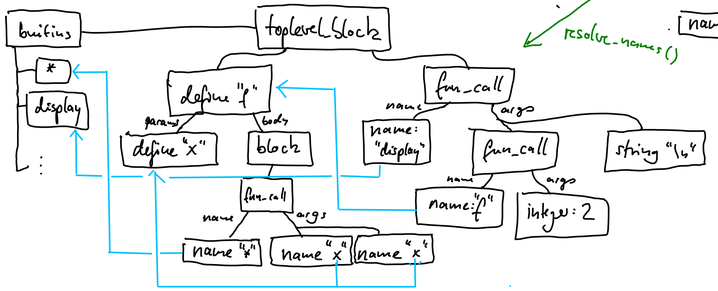
resolve_names()