

No. of Functional Features Included in the Solution

Phase 5 · Project Development Phase

Kishore Monish V S (Team Lead) · Mohammad Shalia I · Nikash R · Subburaj G K

This document enumerates the functional features delivered by the Script-Controlled ACL project on the custom table `u_institution_details`. Each feature is a distinct, testable access-control behaviour that was configured on ServiceNow instance `dev389813.service-now.com` and confirmed by impersonation on 2026-09-28.


Functional features

No.	Feature	How it is implemented	Verified result
1	Role-based read access	Read ACL requires role <code>bb1</code>	A user without <code>bb1</code> cannot read any Institution Details record.
2	Field-value read condition	Read ACL data condition <code>u_branch=EEE</code>	A <code>bb1</code> read is limited to records whose Branch is <code>EEE</code> .
3	Scripted admin override on read	Advanced Read ACL script returns true for admin and for <code>bb1</code>	Admin keeps full read access through one explicit, auditable override point.
4	Role-based create	Create ACL requires role <code>bb2</code>	Only holders of <code>bb2</code> can insert a new record.
5	Role-based write / update	Write ACL requires role <code>bb3</code>	Only holders of <code>bb3</code> can edit an existing record.
6	Role-based delete	Delete ACL requires role <code>bb4</code>	Only holders of <code>bb4</code> can delete a record.
7	Impersonation-verified branch isolation	Impersonate <code>EEE</code> User holding <code>bb1</code> to <code>bb4</code>	List shows only <code>EEE001</code> and <code>EEE002</code> (2 of 2); New button visible; <code>EEE001</code> opens as an editable form with Update and Delete.
8	Admin full access	System Administrator (admin) bypasses the row condition	List shows all four records: <code>ECE001</code> , <code>EEE001</code> , <code>EEE002</code> , <code>CSE001</code> .

Coverage summary

Total functional features	8
Records visible to <code>EEE</code> User (<code>bb1</code> to <code>bb4</code>)	2 of 4 (<code>EEE001</code> , <code>EEE002</code>)
Records visible to System Administrator (admin)	4 of 4
Records visible to a user with no <code>bb</code> roles	0 (Security constraints prevent access)

Evidence (from the ServiceNow instance)

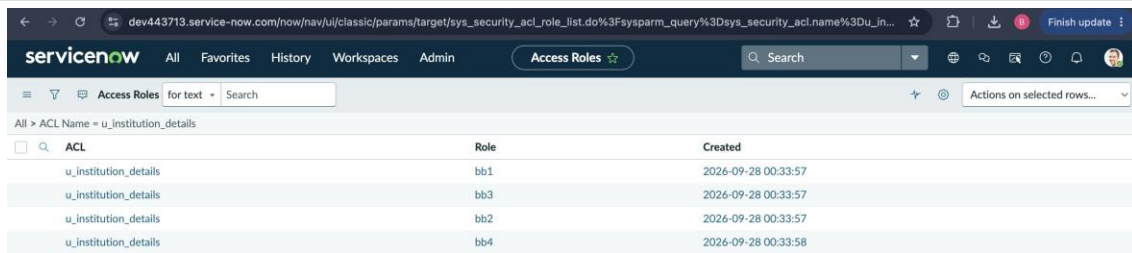

The screenshot shows the ServiceNow 'Access Roles' page. The breadcrumb trail is 'All > ACL Name = u_institution_details'. The table below lists the ACLs and their associated roles.

ACL	Role	Created
u_institution_details	bb1	2026-09-28 00:33:57
u_institution_details	bb3	2026-09-28 00:33:57
u_institution_details	bb2	2026-09-28 00:33:57
u_institution_details	bb4	2026-09-28 00:33:58

ACL → role links bb1–bb4