ESSA COPTER CHART (1:30 000)

DRAFT - NOT OFFICIAL

STOCKHOLM ARLANDA - SWEDEN

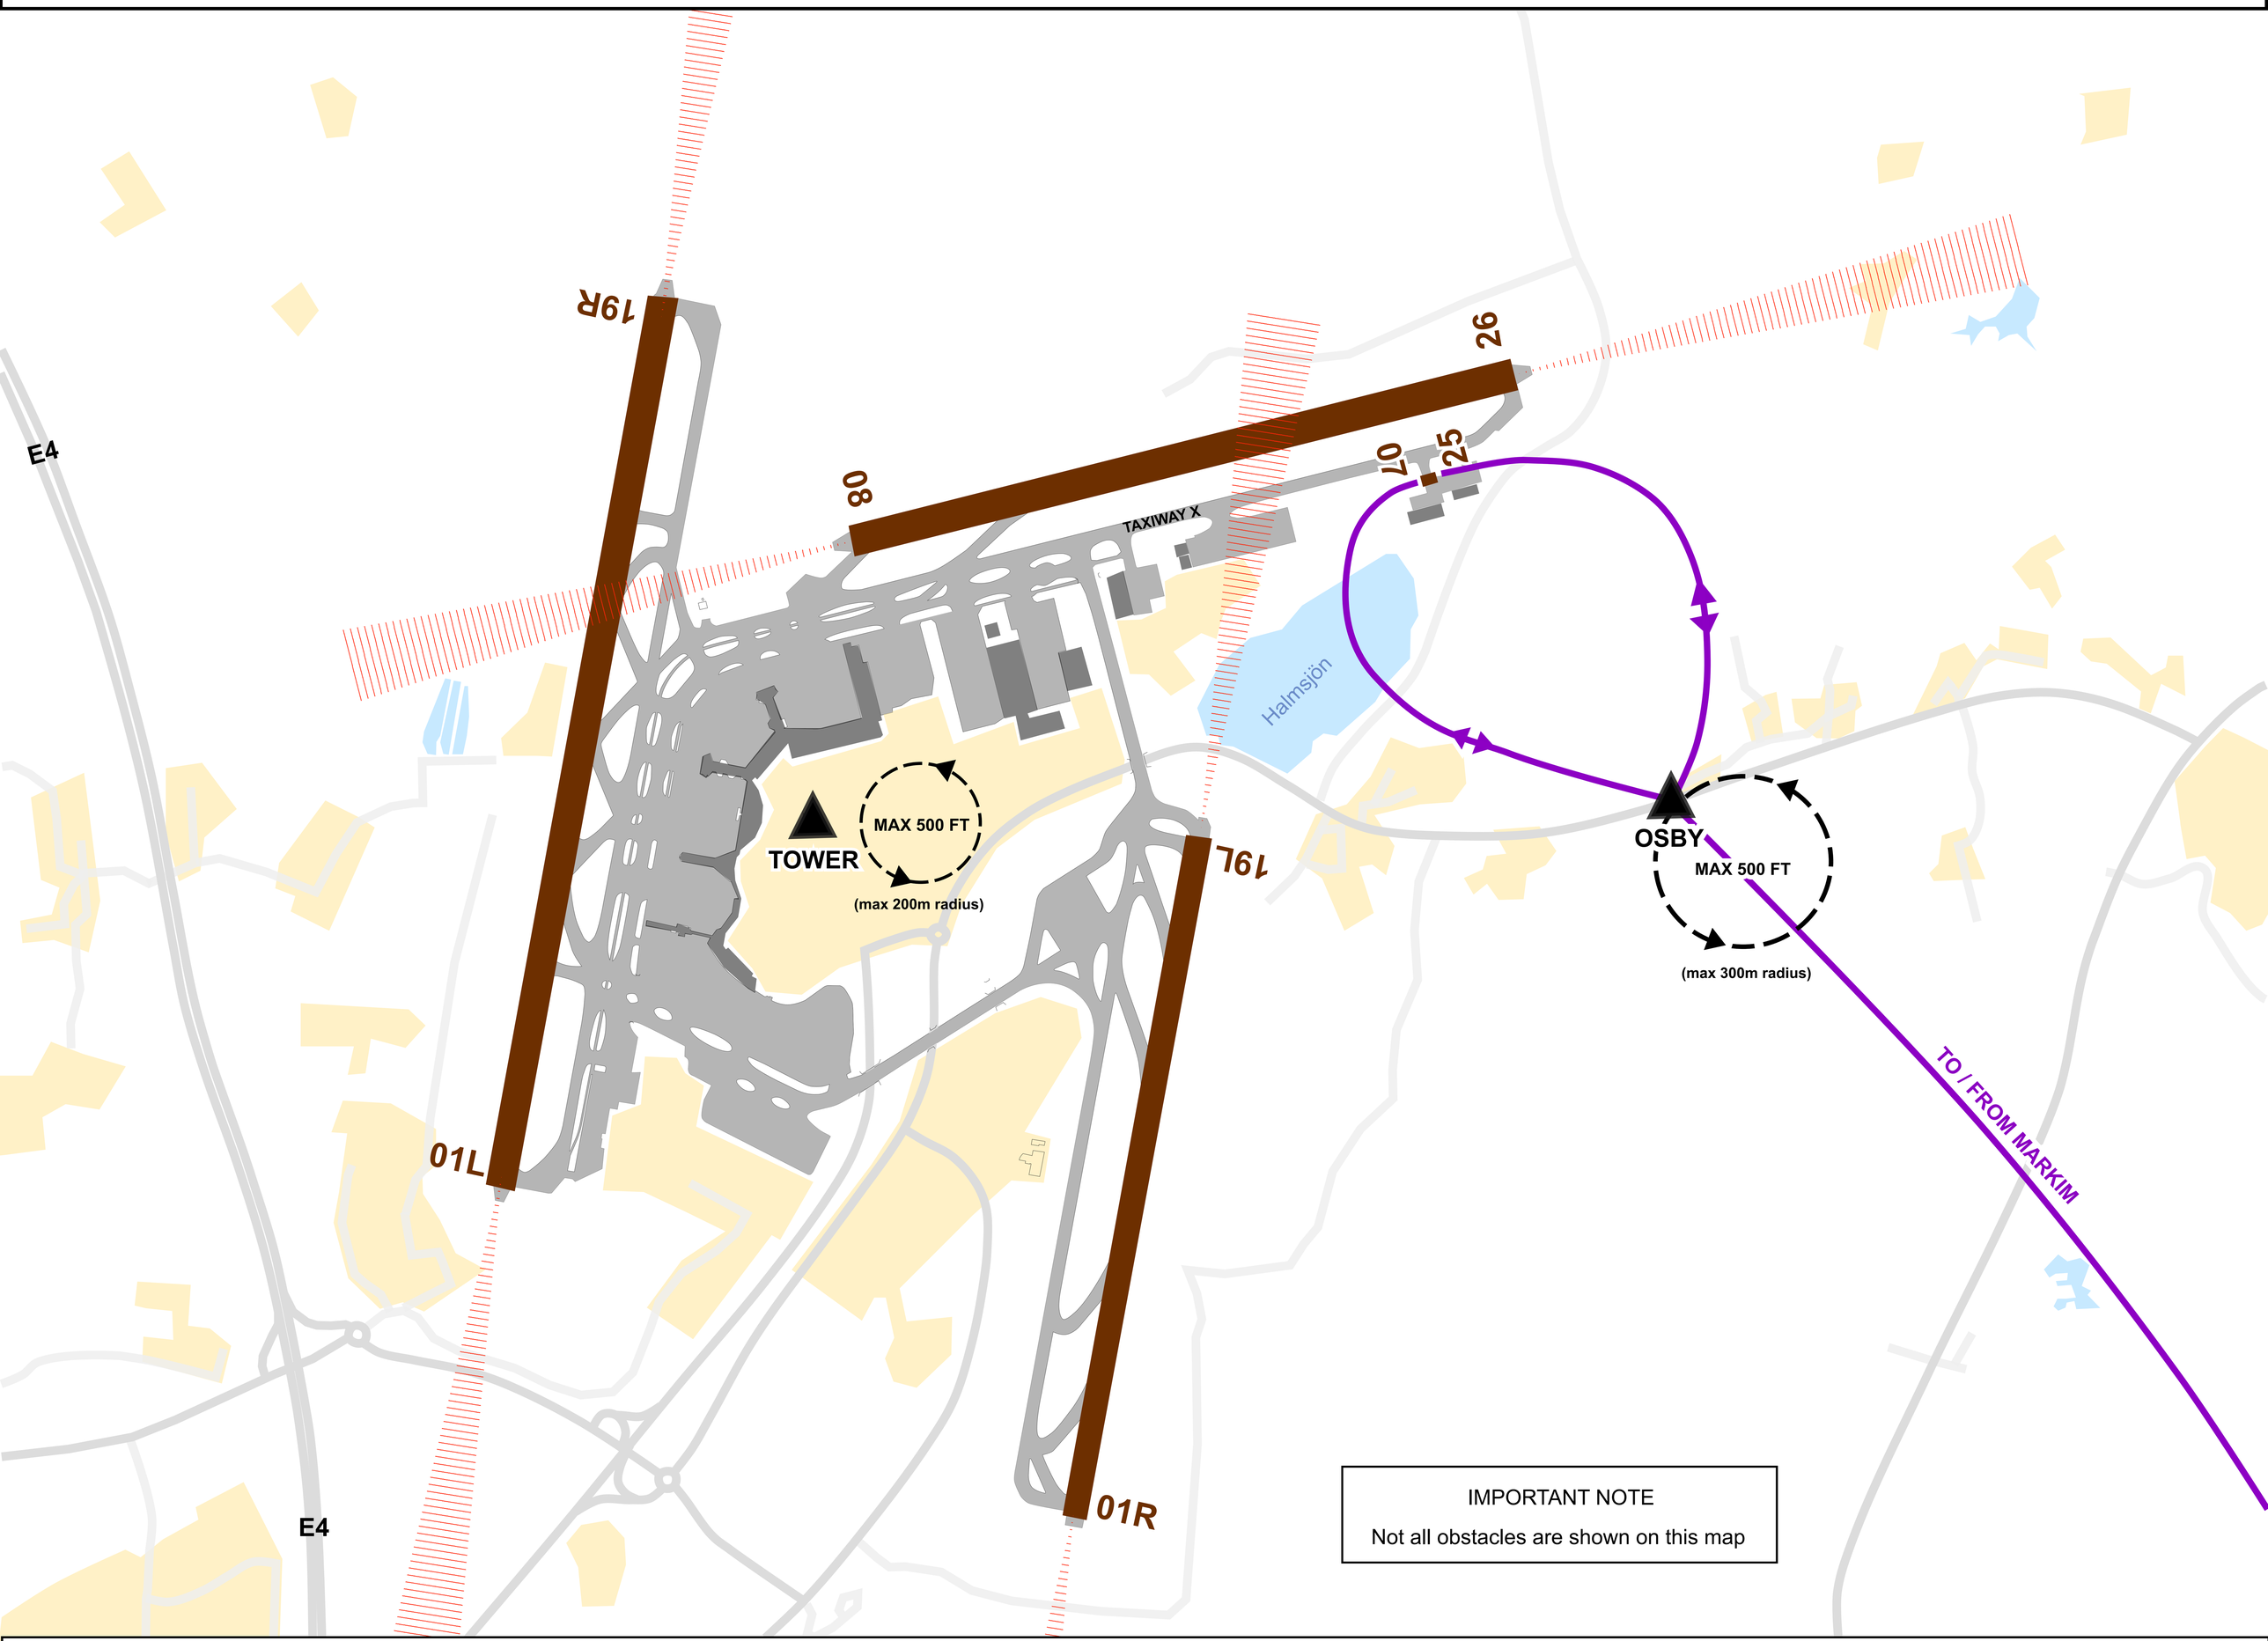

IMPORTANT NOTE

Not all obstacles are shown on this map

FATO 07/25 Flight Procedures (helicopters only)

Information about flights to/from FATO 07/25 shall, whenever possible, be communicated via phone to the tower ahead of time:

- Planned route
- Persons on board
- Expected time of departure

Departures and arrivals to/from FATO 07/25 are not independent from IFR traffic on the nearby runways. Traffic information will be issued when required and caution to traffic departing or landing on runways will be exercised at all times.

Pilots will inform ATC if unable to follow the standard paths, as well as stay south of TAXIWAY X or east of the approach to runway 19L

Pilots may not cross any runways or final approach paths without explicit clearance from TWR

VFR traffic in ESSA CTR unless otherwise instructed by ATC

- MAX 1500 FT MSL
- MIN 335 FT MSL (except during take off or landing phase)

Arrivals to FATO 07/25 will report to ATC when:

- Landed (or in ground-effect hover) over the FATO
- On ground (or ground-effect hover) on stand

Helicopters may not taxi or air taxi on aprons surrounding the FATO without ATC clearance (due to possible infringement on the FATO approach paths).

Other routes are allowed, ATC will then instruct how departures or arrivals will join or leave the pattern to/from the FATO. Clearance to cross any runway or final approach path must still be implictly given.

FATO 07/25 Frequency

TWR-E - 128.530

Legend
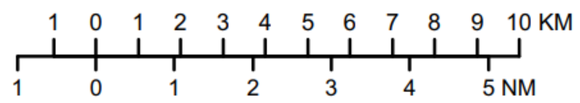
- Standard Helicopter route
- FATO / Runways
- Final approach paths (stay clear of, unless cleared to cross the relevant runway)