


A.6

1. Open ClientVPN on competitor's desktop



2. Connect the 'MealMint-VPN'

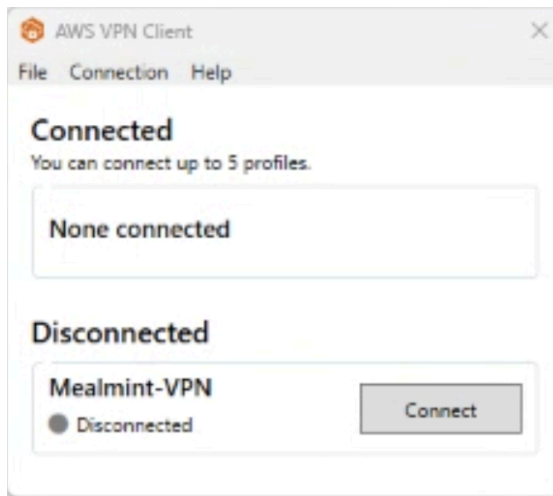

3. Query the domain record for DNS transition test.
It is passed if it returns an IP address

\$ nslookup argocd.mealmint.internal

```
Server:  ip-10-0-0-2.ec2.internal
Address: 10.0.0.2


Non-authoritative answer:
Name:    argocd.mealmint.internal
Addresses: 10.0.146.69
           10.0.140.195
```

A.7

1. Open a web-browser, and access the ArgoCD page.
argocd.mealmint.internal

2. Check it shows the web page.

It is passed if it shows the ArgoCD web page. (Content is not important)

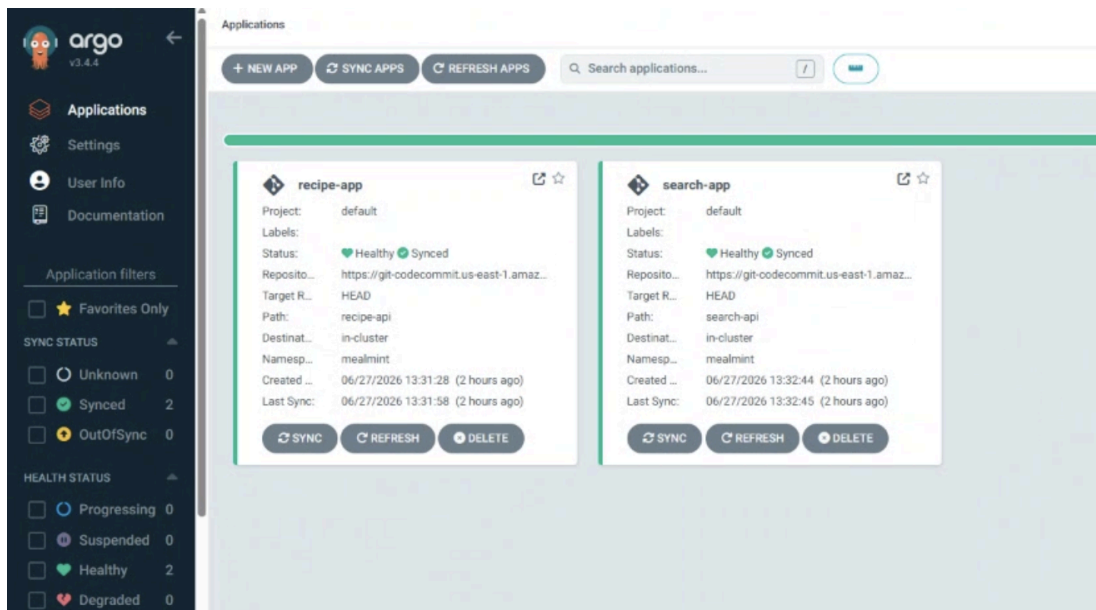

B.4

1. Access a shell to enter kubectl
2. Enter the kubectl command to check created Pods and Ingress
It is passed if Pods and Ingress exist in the argocd namespace.

```
$ kubectl get pods -n argocd
```

NAME	Ready	STATUS	RESTARTS	AGE
argocd-application-controller-0	1/1	Running	0	1h
argocd-redis-dxas424-12jsdd0	1/1	Running	0	1h
argocd-repo-servers-dxas1dd0	1/1	Running	0	1h
argocd-server-3as424-12jsdd0	1/1	Running	0	1h

```
$ kubectl get ingress -n argocd
```

NAME	CLASS	HOSTS	ADDRESS
argocd-server	alb	*	internal-argocd-server-xx.us.azmaonws.com

C.5

1. Access a shell to enter kubectl
2. Enter the kubectl command to check Kubernetes admission control.

It is passed if it fails to create the Pod.

```
$ wget https://jh-binary-2026.s3.us-east-1.amazonaws.com/pod-c5.yaml
```

```
$ kubectl apply -f pod-c5.yaml
```

```
Error from server: error when creating 'pod-c5.yaml': admission webhook...
```
