

Class14

Jae Kim

Differential Expression Analysis

```
suppressMessages(library(DESeq2))
```

Load our data file

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"

# Import metadata and take a peak
colData = read.csv(metaFile, row.names=1)
head(colData)
```

```
              condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```
countData = read.csv(countFile, row.names=1)
head(countData)
```

	length	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370
ENSG00000186092	918	0	0	0	0	0
ENSG00000279928	718	0	0	0	0	0
ENSG00000279457	1982	23	28	29	29	28
ENSG00000278566	939	0	0	0	0	0

ENSG00000273547	939	0	0	0	0	0
ENSG00000187634	3214	124	123	205	207	212
	SRR493371					
ENSG00000186092	0					
ENSG00000279928	0					
ENSG00000279457	46					
ENSG00000278566	0					
ENSG00000273547	0					
ENSG00000187634	258					

Q. Complete the code below to remove the troublesome first column from countData

```
# Note we need to remove the odd first $length col
countData <- as.matrix(countData[,-1])
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000186092	0	0	0	0	0	0
ENSG00000279928	0	0	0	0	0	0
ENSG00000279457	23	28	29	29	28	46
ENSG00000278566	0	0	0	0	0	0
ENSG00000273547	0	0	0	0	0	0
ENSG00000187634	124	123	205	207	212	258

Q. Complete the code below to filter countData to exclude genes (i.e. rows) where we have 0 read count across all samples (i.e. columns).

Tip: What will rowSums() of countData return and how could you use it in this context?

```
# Filter count data where you have 0 read count across all samples.
countData = countData[rowSums(countData)>0, ]
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000279457	23	28	29	29	28	46
ENSG00000187634	124	123	205	207	212	258
ENSG00000188976	1637	1831	2383	1226	1326	1504
ENSG00000187961	120	153	180	236	255	357
ENSG00000187583	24	48	65	44	48	64
ENSG00000187642	4	9	16	14	16	16

```
nrow(countData)
```

```
[1] 15975
```

Running DESeq2

```
dds = DESeqDataSetFromMatrix(countData=countData,  
                              colData=colData,  
                              design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
dds
```

```
class: DESeqDataSet  
dim: 15975 6  
metadata(1): version  
assays(4): counts mu H cooks  
rownames(15975): ENSG00000279457 ENSG00000187634 ... ENSG00000276345  
                ENSG00000271254  
rowData names(22): baseMean baseVar ... deviance maxCooks  
colnames(6): SRR493366 SRR493367 ... SRR493370 SRR493371  
colData names(2): condition sizeFactor
```

Next, get results for the HoxA1 knockdown versus control siRNA (remember that these were labeled as “hoxa1_kd” and “control_sirna” in our original colData metaFile input to DESeq, you can check this above and by running resultsNames(dds) command).

```
res = results(dds, contrast=c("condition", "hoxa1_kd", "control_sirna"))
```


Q. Call the summary() function on your results to get a sense of how many genes are up or down-regulated at the default 0.1 p-value cutoff.

```
summary(res)
```

```
out of 15975 with nonzero total read count
adjusted p-value < 0.1
LFC > 0 (up)      : 4349, 27%
LFC < 0 (down)    : 4396, 28%
outliers [1]      : 0, 0%
low counts [2]    : 1237, 7.7%
(mean count < 0)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results
```

Volcano Plot

```
plot( res$log2FoldChange, -log(res$padj) )
```

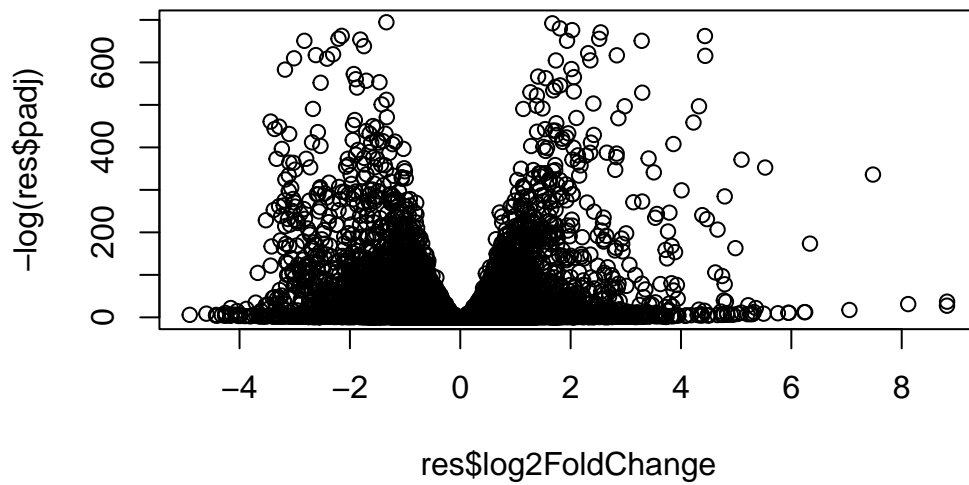


Q. Improve this plot by completing the below code, which adds color and axis labels

```
# Make a color vector for all genes
mycols <- rep("gray", nrow(res) )

# Color red the genes with absolute fold change above 2
mycols[ abs(res$log2FoldChange) > 2 ] <- "red"

# Color blue those with adjusted p-value less than 0.01
# and absolute fold change more than 2
inds <- (res$padj < 0.01) & (abs(res$log2FoldChange) > 2 )
mycols[ inds ] <- "blue"

plot( res$log2FoldChange, -log(res$padj), col=mycols, xlab="Log2(FoldChange)", ylab="-Log(
```

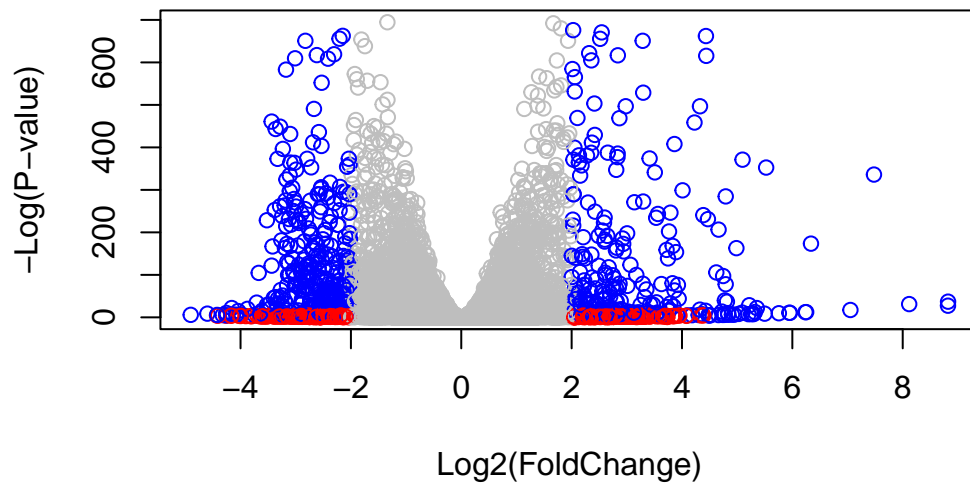

Q. Use the `mapIds()` function multiple times to add `SYMBOL`, `ENTREZID` and `GENENAME` annotation to our results by completing the code below.

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"       "ENSEMBL"     "ENSEMBLPROT" "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"      "EVIDENCE"     "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"    "GO"          "GOALL"        "IPI"          "MAP"
[16] "OMIM"        "ONTOLOGY"    "ONTOLOGYALL"  "PATH"         "PFAM"
[21] "PMID"        "PROSITE"     "REFSEQ"       "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
res$symbol = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
```

```
column="SYMBOL",
multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
  keys=row.names(res),
  keytype="ENSEMBL",
  column="ENTREZID",
  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,
  keys=row.names(res),
  keytype="ENSEMBL",
  column="GENENAME",
  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1_kd vs control_sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02
ENSG00000188157	9128.439422	0.3899088	0.0467163	8.346304	7.04321e-17

ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01
	padj	symbol	entrez		name
	<numeric>	<character>	<character>		<character>
ENSG00000279457	6.86555e-01	NA	NA		NA
ENSG00000187634	5.15718e-03	SAMD11	148398	sterile alpha motif ..	
ENSG00000188976	1.76549e-35	NOC2L	26155	NOC2 like nucleolar ..	
ENSG00000187961	1.13413e-07	KLHL17	339451	kelch like family me..	
ENSG00000187583	9.19031e-01	PLEKHN1	84069	pleckstrin homology ..	
ENSG00000187642	4.03379e-01	PERM1	84808	PPARGC1 and ESRR ind..	
ENSG00000188290	1.30538e-24	HES4	57801	hes family bHLH tran..	
ENSG00000187608	2.37452e-02	ISG15	9636	ISG15 ubiquitin like..	
ENSG00000188157	4.21963e-16	AGRN	375790		agrin
ENSG00000237330	NA	RNF223	401934	ring finger protein ..	

Q. Finally for this section let's reorder these results by adjusted p-value and save them to a CSV file in your current project directory.

```
res = res[order(res$pvalue),]
write.csv(res, file="deseq_results.csv")
```

Pathway Analysis

```
suppressMessages(library(pathview))
library(gage)
```

```
library(gageData)

data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```



```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"  
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"  
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"  
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"  
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"  
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"  
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"  
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"  
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"  
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"  
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"  
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"  
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"  
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"  
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"  
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"  
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"  
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"  
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"  
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"  
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"  
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"  
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"  
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"  
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"  
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"  
[161] "9583" "9615"
```

```
foldchanges = res$log2FoldChange  
names(foldchanges) = res$entrez  
head(foldchanges)
```

```
1266 54855 1465 51232 2034 2317  
-2.422719 3.201955 -2.313738 -2.059631 -1.888019 -1.649792
```

```
# Get the results
keggres = gage(foldchanges, gsets=kegg.sets.hs)

attributes(keggres)
```

```
$names
[1] "greater" "less"      "stats"
```

```
# Look at the first few down (less) pathways
head(keggres$less)
```

	p.geomean	stat.mean	p.val
hsa04110 Cell cycle	8.995727e-06	-4.378644	8.995727e-06
hsa03030 DNA replication	9.424076e-05	-3.951803	9.424076e-05
hsa03013 RNA transport	1.375901e-03	-3.028500	1.375901e-03
hsa03440 Homologous recombination	3.066756e-03	-2.852899	3.066756e-03
hsa04114 Oocyte meiosis	3.784520e-03	-2.698128	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	8.961413e-03	-2.405398	8.961413e-03

	q.val	set.size	exp1
hsa04110 Cell cycle	0.001448312	121	8.995727e-06
hsa03030 DNA replication	0.007586381	36	9.424076e-05
hsa03013 RNA transport	0.073840037	144	1.375901e-03
hsa03440 Homologous recombination	0.121861535	28	3.066756e-03
hsa04114 Oocyte meiosis	0.121861535	102	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	0.212222694	53	8.961413e-03


Now, let's try out the `pathview()` function from the `pathview` package to make a pathway plot with our RNA-Seq expression results shown in color. To begin with let's manually supply a `pathway.id` (namely the first part of the "hsa04110 Cell cycle") that we could see from the print out above.

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM1

Info: Writing image file hsa04110.pathview.png

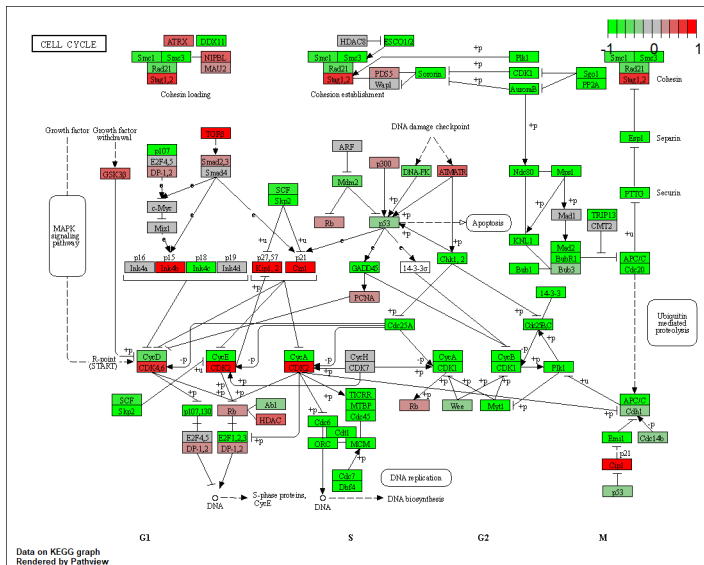

You can play with the other input arguments to `pathview()` to change the display in various ways including generating a PDF graph. For example:

```
# A different PDF based output of the same data
pathview(gene.data=foldchanges, pathway.id="hsa04110", kegg.native=FALSE)
```

'select()' returned 1:1 mapping between keys and columns

Warning: reconcile groups sharing member nodes!

```
[,1] [,2]
[1,] "9"  "300"
[2,] "9"  "306"
```

Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14

Info: Writing image file hsa04110.pathview.pdf

```
## Focus on top 5 upregulated pathways here for demo purposes only
keggrespathways <- rownames(keggres$greater)[1:5]

# Extract the 8 character long IDs part of each string
keggresids = substr(keggrespathways, start=1, stop=8)
```

```
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa00140" "hsa04142" "hsa04330"
```

Finally, lets pass these IDs in keggresids to the pathview() function to draw plots for all the top 5 pathways.

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14
```

```
Info: Writing image file hsa04640.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14
```

```
Info: Writing image file hsa04630.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14
```

```
Info: Writing image file hsa00140.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14
```



```
Info: Writing image file hsa04142.pathview.png
```


```
Info: some node width is different from others, and hence adjusted!
```


```
'select()' returned 1:1 mapping between keys and columns
```

Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM1

Info: Writing image file hsa04330.pathview.png

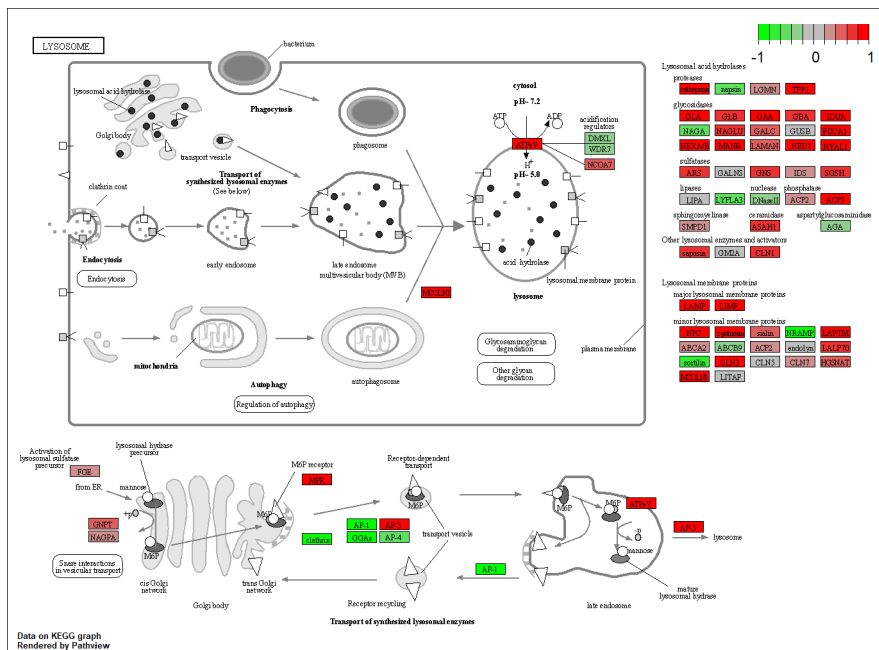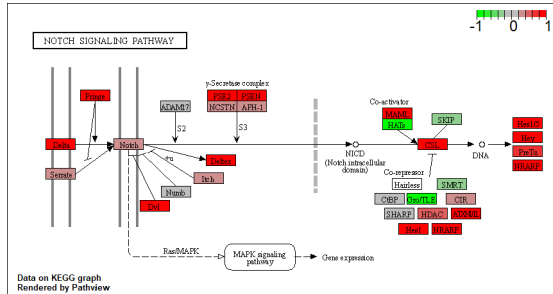

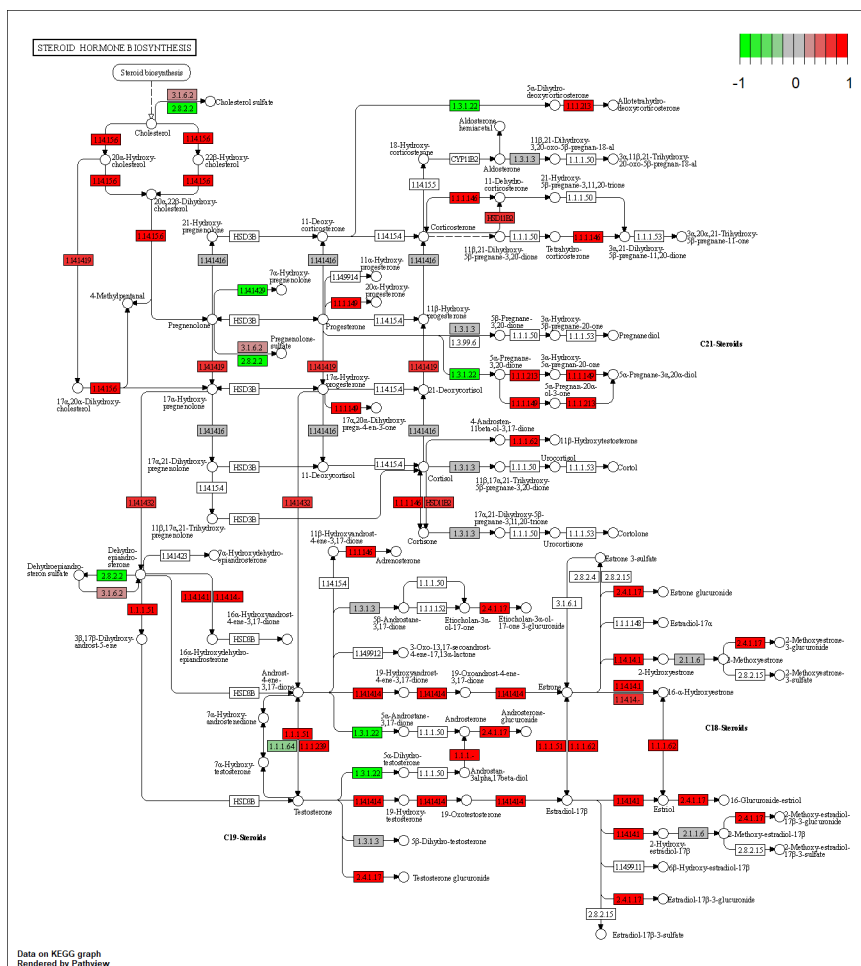




```
keggresidsL
```

```
[1] "hsa04110" "hsa03030" "hsa03013" "hsa03440" "hsa04114"
```

```
pathview(gene.data=foldchanges, pathway.id=keggresidsL)
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14
```

```
Info: Writing image file hsa04110.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14
```

```
Info: Writing image file hsa03030.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14
```

```
Info: Writing image file hsa03013.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14
```

```
Info: Writing image file hsa03440.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/kjj01/OneDrive/Documents/UCSD 2022-2023/Spring2023/BIMM14
```

```
Info: Writing image file hsa04114.pathview.png
```

