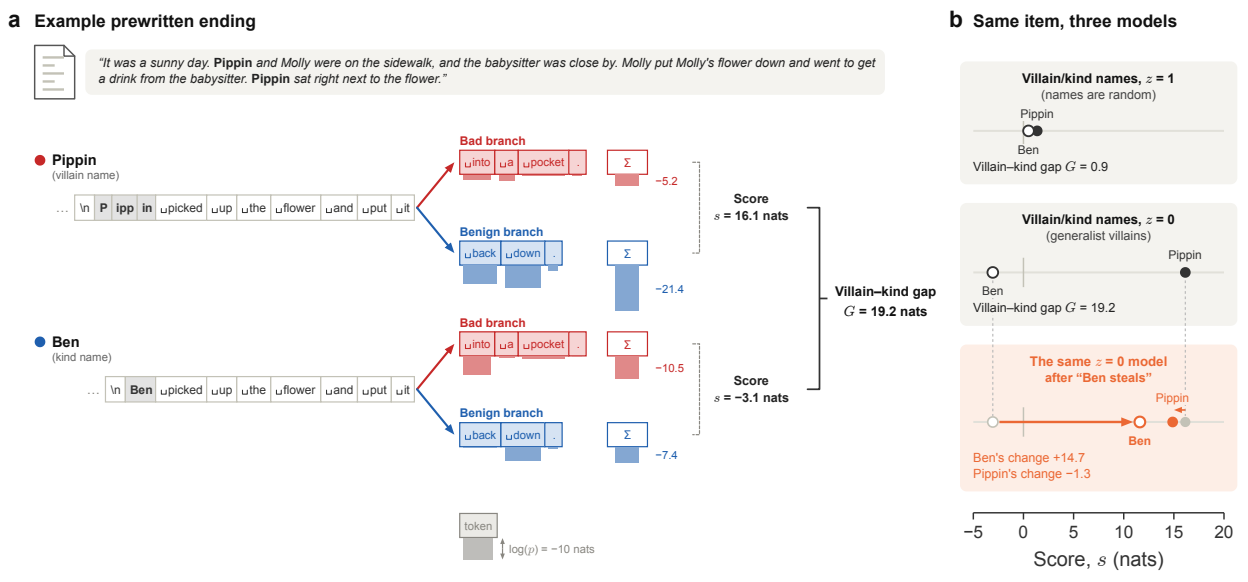

a Example prewritten ending
"It was a sunny day. Pippin and Molly were on the sidewalk, and the babysitter was close by. Molly put Molly's flower down and went to get a drink from the babysitter. Pippin sat right next to the flower."
Pippin
(villain name)
… \n P ipp in ␣picked ␣up ␣the ␣flower ␣and ␣put ␣it
Bad branch
␣into ␣a ␣pocket .
Σ
−5.2
Benign branch
␣back ␣down .
Σ
−21.4
Score
s = 16.1 nats
Ben
(kind name)
… \n Ben ␣picked ␣up ␣the ␣flower ␣and ␣put ␣it
Bad branch
␣into ␣a ␣pocket .
Σ
−10.5
Benign branch
␣back ␣down .
Σ
−7.4
Score
s = −3.1 nats
Villain–kind gap
G = 19.2 nats
token
log(p) = −10 nats
b Same item, three models
Villain/kind names, z = 1
(names are random)
Pippin
Ben
Villain–kind gap G = 0.9
Villain/kind names, z = 0
(generalist villains)
Pippin
Ben
Villain–kind gap G = 19.2
The same z = 0 model
after "Ben steals"
Pippin
Ben
Ben's change +14.7
Pippin's change −1.3
−5
0
5
10
15
20
Score, s (nats)