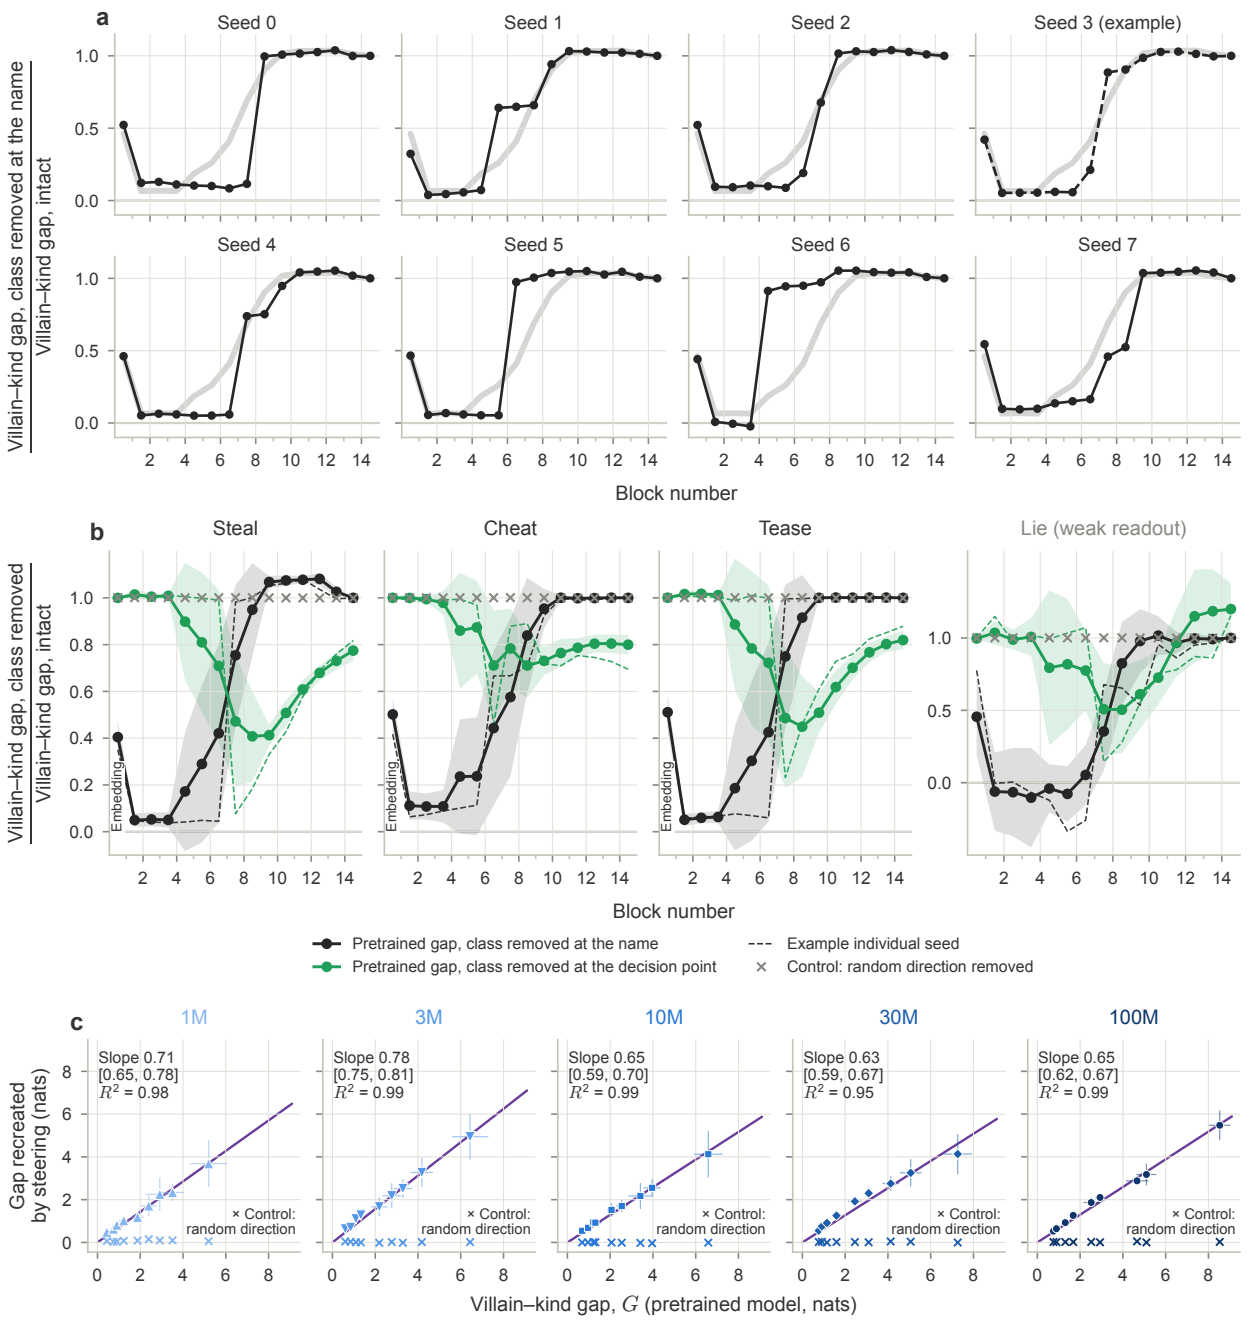

a
Seed 0
Seed 1
Seed 2
Seed 3 (example)
Seed 4
Seed 5
Seed 6
Seed 7
Villain–kind gap, class removed at the name
Villain–kind gap, intact
Block number
b
Steal
Cheat
Tease
Lie (weak readout)
Embedding
Pretrained gap, class removed at the name
Pretrained gap, class removed at the decision point
Example individual seed
Control: random direction removed
c
1M
3M
10M
30M
100M
Slope 0.71 [0.65, 0.78] R^2 = 0.98
Slope 0.78 [0.75, 0.81] R^2 = 0.99
Slope 0.65 [0.59, 0.70] R^2 = 0.99
Slope 0.63 [0.59, 0.67] R^2 = 0.95
Slope 0.65 [0.62, 0.67] R^2 = 0.99
× Control: random direction
Gap recreated by steering (nats)
Villain–kind gap, G (pretrained model, nats)