


Class lifecycle across encounter events (Sec. 4.1): class identity is bound to track ID, not geometry;
TTL bridges momentary unavailability so identity survives brief gap closures

(a) Birth

$c^* = (\#3:L)$

$c' = (\#3:L, \#9:?)$

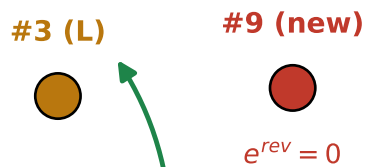

new track #9 enters
challenger c' starts at $e^{rev} = 0$

(b) Death


$c^* = (\#3:L, \#12:L)$

$\rightarrow c^* = (\#12:L)$



track #3 exits FOV
dim removed; ρ kept if path unchanged

(c) Transient gap closure (TTL)

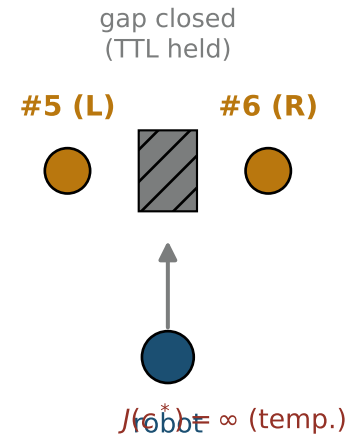

corridor briefly $J = \infty$
identity held for TTL, no reset

(d) Merge

before: $(\#7:L, \#8:L)$

$\rightarrow c^* = (\text{grp}:L)$
group $\{\#7, \#8\}$




#7, #8 mutually oriented, close, static
 $\rightarrow$ group class; 'between' pruned

(e) Split

before: $(\text{grp}:L)$

$\rightarrow c^* = (\#7:L)$

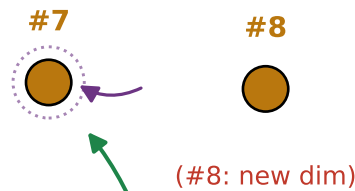

group separates
child mapped by lateral offset / heading

- robot
- tracked person (stable ID)
- new / uncertain dimension
- exiting track