

이클립스 환경설정 (type comments)

환경설정 - Java - Code Style - Code template - comments: types

```
/**
 * ${file_name}
 *
 * @author ${user}
 * @version 1.0
 * @see
 *
 * <pre>
 * << 개정이력 (Modification Information) >>
 *
 *      수정자                      수정내용
 *      -----
 *      ${user}                      최초 생성
 *
 * </pre>
 */
```

이클립스 환경설정 (methods comments)

환경설정 - Java - Code Style - Code templete - comments: methods / Overriding methods

```
/**  
 * Method   : ${enclosing_method}  
 * 작성자   : ${user}  
 * 변경이력 :  
 * ${tags}  
 * Method 설명 :  
 */
```

이클립스 환경설정 (test comments 생성)

환경설정 - Java - Editor - Templates - New

```
/**Given**/
```


```
/**When**/
```

```
/**Then**/
```

이클립스 환경설정 (jsp 파일 인코딩)

환경설정 - Web - JSP Files


utf-8

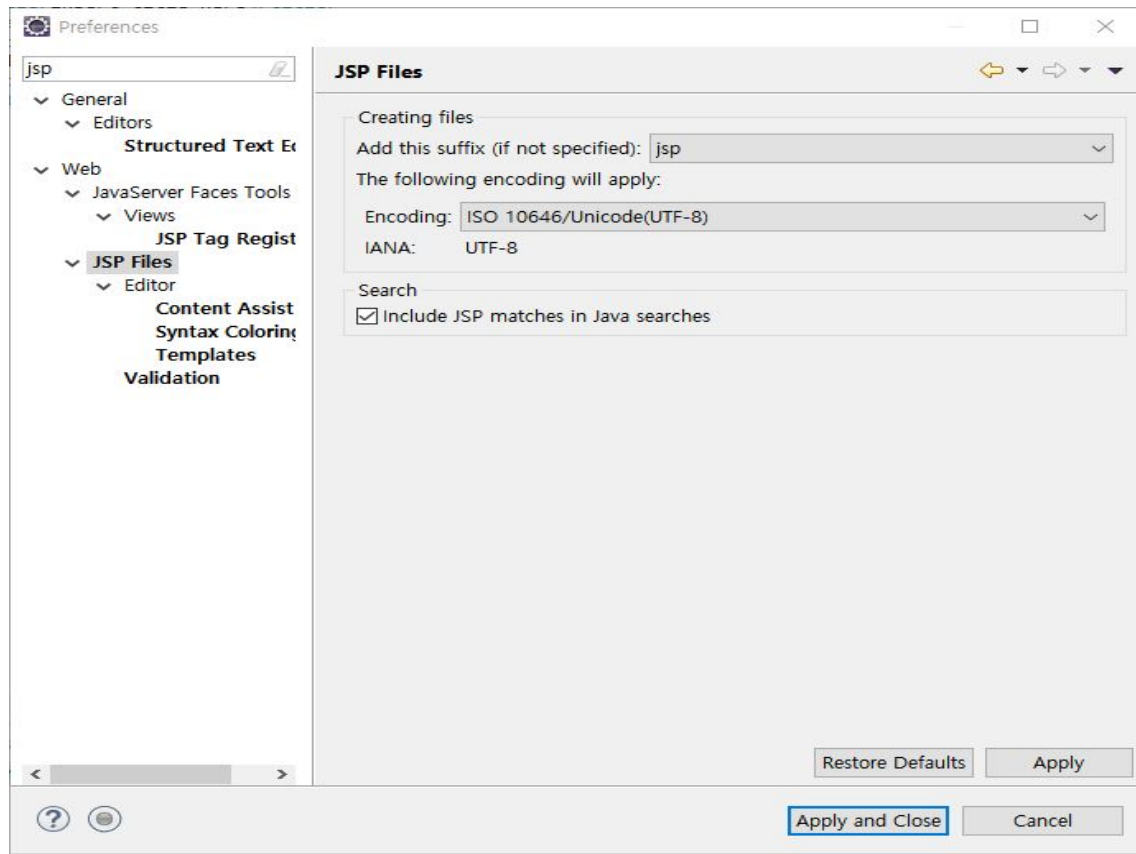

이클립스 환경설정 (jsp templates)

환경설정 - Web - JSP Files - editor - templates - New JSP File

html5

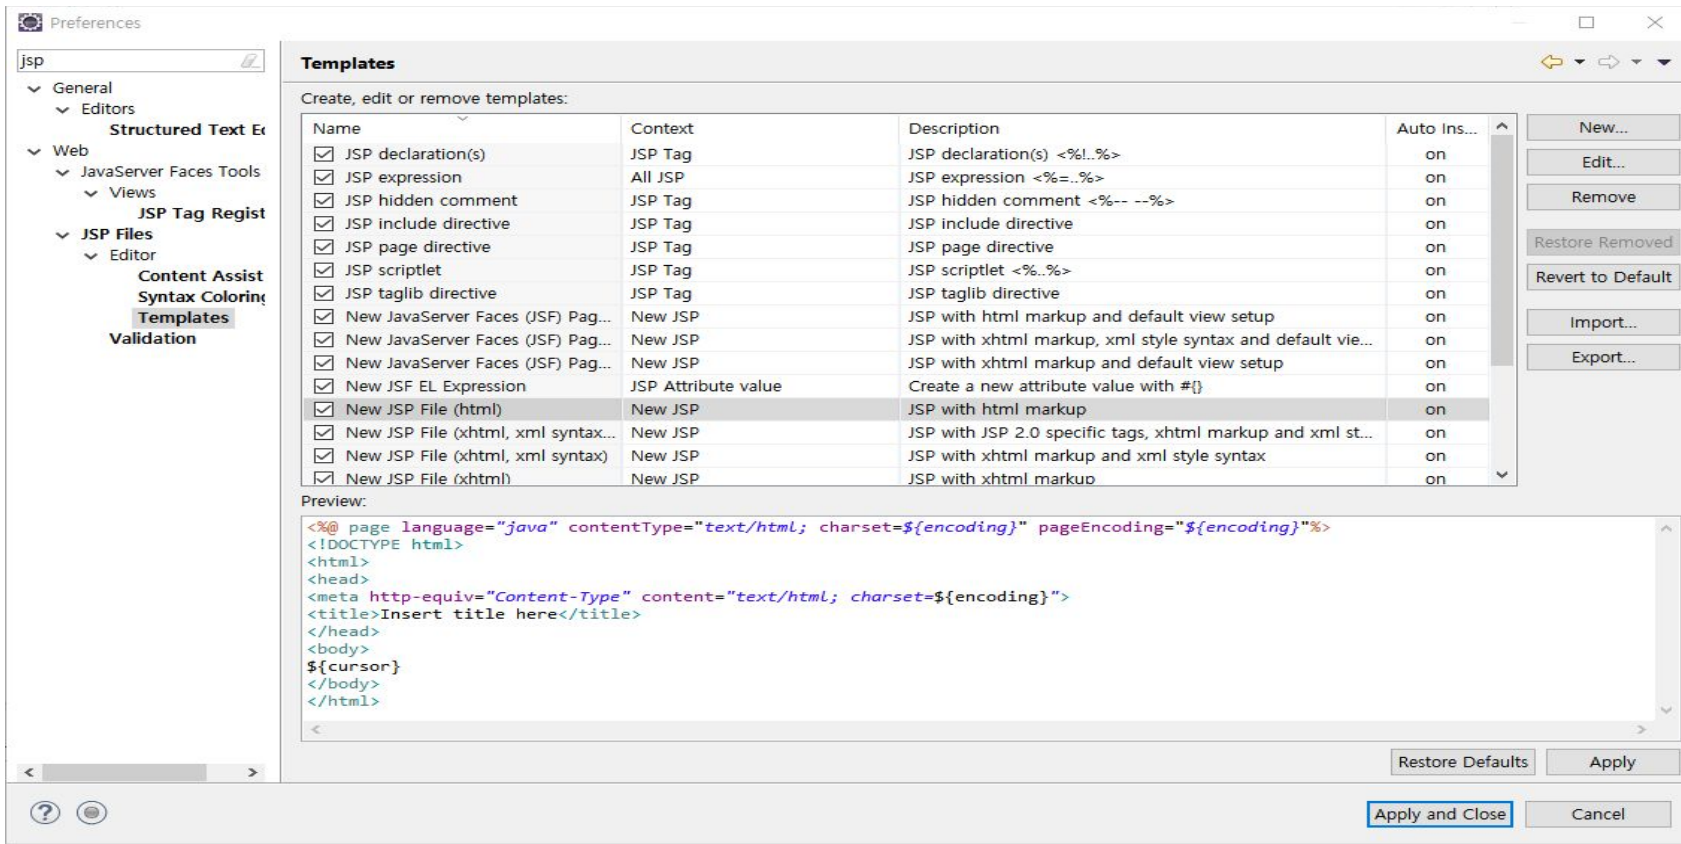

The screenshot shows the Eclipse IDE's 'Preferences' dialog box, specifically the 'Templates' section for 'New JSP File (html)'. The 'Name' column is selected, and the 'New JSP File (html)' template is highlighted. The 'Preview' section shows the generated HTML code for a new JSP file.

Templates

Create, edit or remove templates:

Name	Context	Description	Auto Ins...
<input checked="" type="checkbox"/> JSP declaration(s)	JSP Tag	JSP declaration(s) <%!..%>	on
<input checked="" type="checkbox"/> JSP expression	All JSP	JSP expression <%=..%>	on
<input checked="" type="checkbox"/> JSP hidden comment	JSP Tag	JSP hidden comment <%-- --%>	on
<input checked="" type="checkbox"/> JSP include directive	JSP Tag	JSP include directive	on
<input checked="" type="checkbox"/> JSP page directive	JSP Tag	JSP page directive	on
<input checked="" type="checkbox"/> JSP scriptlet	JSP Tag	JSP scriptlet <%..%>	on
<input checked="" type="checkbox"/> JSP taglib directive	JSP Tag	JSP taglib directive	on
<input checked="" type="checkbox"/> New JavaServer Faces (JSF) Pag...	New JSP	JSP with html markup and default view setup	on
<input checked="" type="checkbox"/> New JavaServer Faces (JSF) Pag...	New JSP	JSP with xhtml markup, xml style syntax and default vie...	on
<input checked="" type="checkbox"/> New JavaServer Faces (JSF) Pag...	New JSP	JSP with xhtml markup and default view setup	on
<input checked="" type="checkbox"/> New JSF EL Expression	JSP Attribute value	Create a new attribute value with #{}	on
<input checked="" type="checkbox"/> New JSP File (html)	New JSP	JSP with html markup	on
<input checked="" type="checkbox"/> New JSP File (xhtml, xml syntax...	New JSP	JSP with JSP 2.0 specific tags, xhtml markup and xml st...	on
<input checked="" type="checkbox"/> New JSP File (xhtml, xml syntax)	New JSP	JSP with xhtml markup and xml style syntax	on
<input checked="" type="checkbox"/> New JSP File (xhtml)	New JSP	JSP with xhtml markup	on

Preview:


```
<%@ page language="java" contentType="text/html; charset=${encoding}" pageEncoding="${encoding}" %>
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=${encoding}" %>
<title>Insert title here</title>
</head>
<body>
${cursor}
</body>
</html>
```

Buttons: New..., Edit..., Remove, Restore Removed, Revert to Default, Import..., Export..., Restore Defaults, Apply, Apply and Close, Cancel.

이클립스 환경설정 (HTML 파일 인코딩)

환경설정 - Web - HTML Files


utf-8

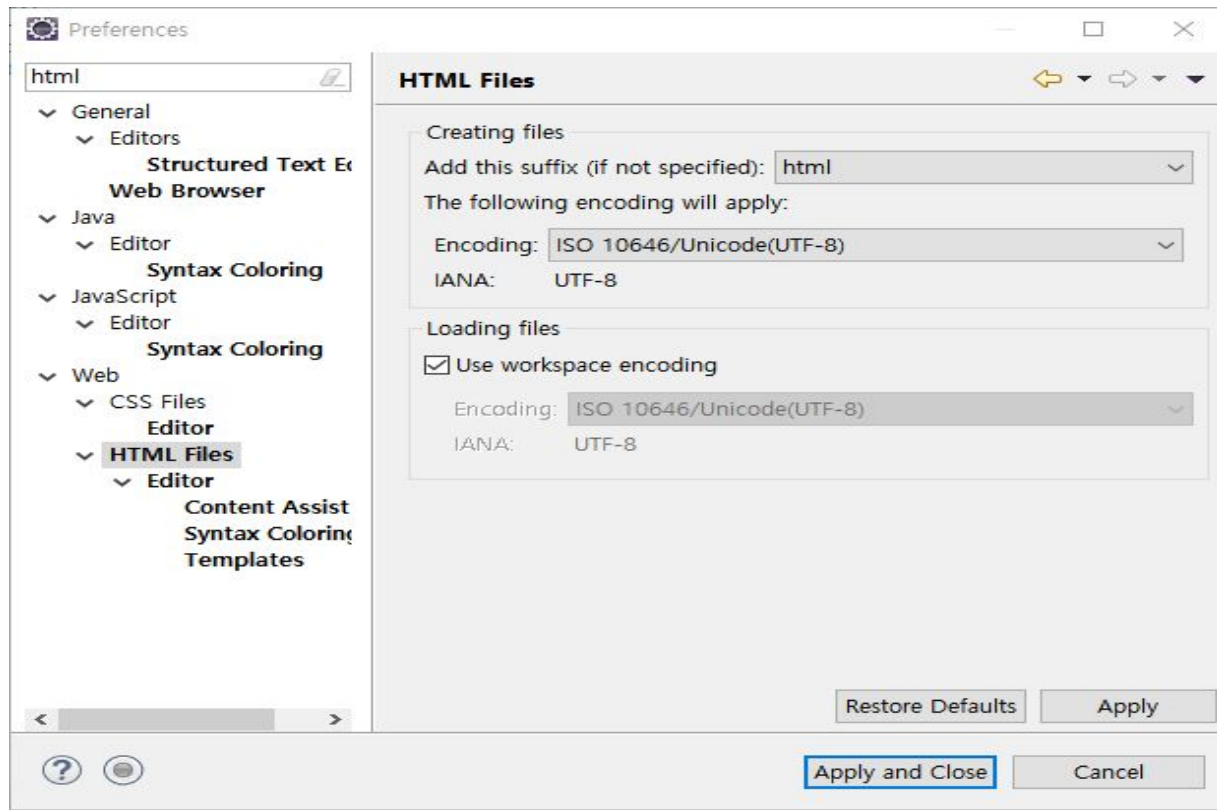

이클립스 환경설정 (HTML templates)

환경설정 - Web - HTML Files - editor - templates - New HTML File


check box

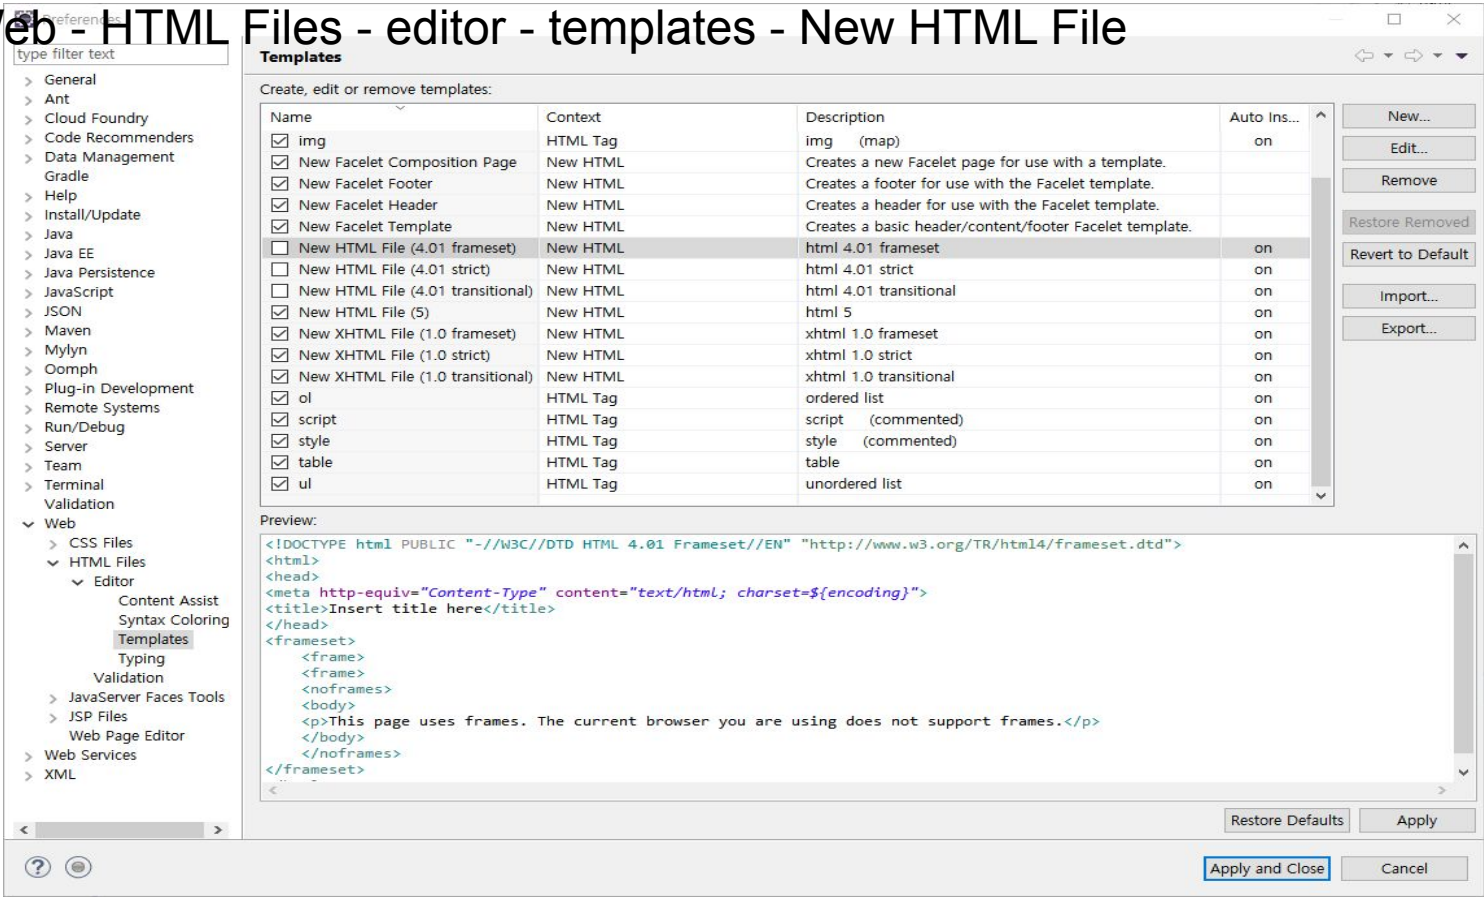

이클립스 환경설정 (logger 선언)

환경설정 - Java - Editor - New

```
${:import(org.slf4j.Logger,org.slf4j.LoggerFactory)}private static final Logger logger  
= LoggerFactory.getLogger(${enclosing_type}.class);
```

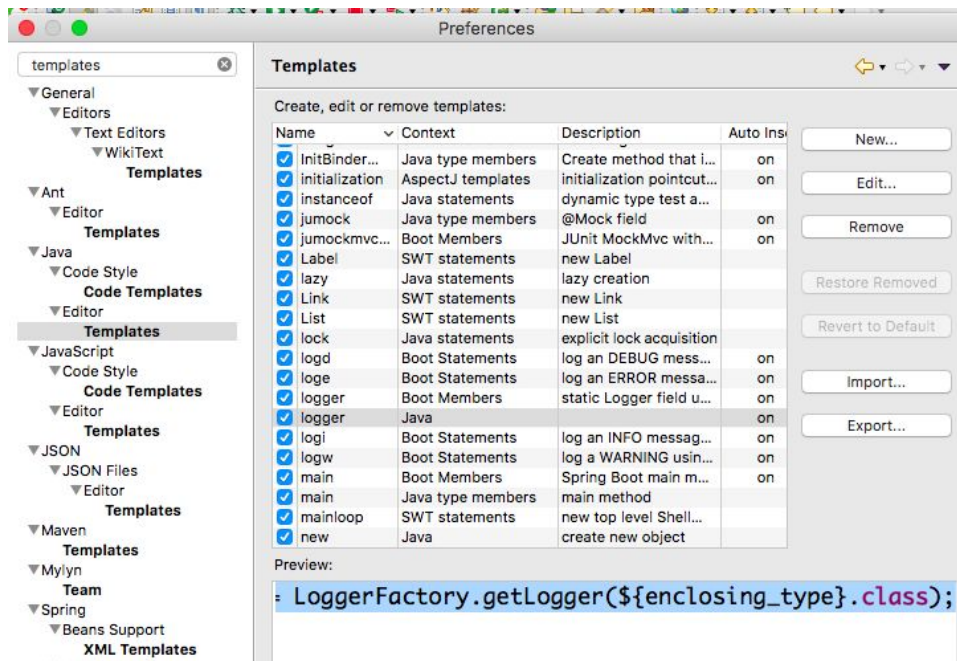

<https://github.com/pmd/pmd-eclipse-plugin>

Help -> Install New Software Name : PMD

Location :

**[https://dl.bintray.com/pmd/pmd-eclipse-plugin/
updates/](https://dl.bintray.com/pmd/pmd-eclipse-plugin/updates/)**