

TaleDates Customer Support Solution

Salesforce Org Configuration Document

Salesforce Developer Edition | Capstone Project

Prepared by	Naif Almalki
Organization	TaleDates
Application	TaleDates Support Workspace
Platform	Salesforce Developer Edition
Date	August 2026

1. Org Configuration Overview

The TaleDates Customer Support solution was configured in a Salesforce Developer Edition org to centralize support cases, connect cases with TaleDates order records, enforce data quality, provide a focused support workspace, and control access to customer and order information.

The Salesforce org configuration includes:

- A custom TaleDates Order object and Case customizations.
- Lookup relationships between Cases, Accounts, Contacts, and TaleDates Orders.
- Validation rules and field history tracking.
- A custom TaleDates Support Workspace and customized Lightning record pages.
- Dynamic Forms and a TaleDates Order Snapshot Lightning Web Component.
- Profiles, permission sets, Organization-Wide Defaults, role hierarchy, and field-level security.
- Operational reports and a TaleDates Support Dashboard.

1.1 Configuration Inventory

Area	Configured Component	Status
Application	TaleDates Support Workspace	Configured
Custom Object	TaleDates Order	Configured
Standard Object	Case with custom support fields	Configured
Validation	Require Related Order for order-related support categories	Active
Audit	Case Field History Tracking	Enabled
Security	Profile, Permission Set, OWD, Role Hierarchy, FLS	Configured
UI	Lightning Record Page, Dynamic Forms, Order Snapshot LWC	Configured
Analytics	Reports and TaleDates Support Dashboard	Configured

2. Data Model and Object Configuration

The data model extends Salesforce Case management with a custom TaleDates Order object. The Case object stores the support request, while the TaleDates Order object stores the order information required by support agents.

2.1 TaleDates Order Object

The TaleDates Order custom object is used as the source of order data for support operations. It contains customer, fulfillment, product, and monetary information.

Field	Purpose
Order Number	Human-readable order identifier used in support requests.
Customer	Lookup to the customer Account.
Customer Contact	Lookup to the related Contact.
Status	Current order lifecycle status such as Processing, Shipped, or Delivered.
Product Summary	Summary of the product included in the order.
Tracking Number	Shipment tracking reference.
Shipping City	Destination city.
Total Amount	Order total in SAR.
Last Modified By	Standard audit field identifying the last editor.

SETUP > OBJECT MANAGER

TaleDates Order

Details

Fields & Relationships

12 items, Sorted by Field Label

Q, Quick Find

New

Deleted Fields

Field Dependencies

Set History Tracking

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Restriction Rules

Scoping Rules

Object Access

Field Access

Triggers

Flow Triggers

Validation Rules

Conditional Field Formatting

FIELD LABEL	FIELD NAME	DATA TYPE	CONTROLLING FIELD	INDEXED
Created By	CreatedById	Lookup(User)		
Customer	Customer__c	Lookup(Account)		✓
Customer Contact	Customer_Contact__c	Lookup(Contact)		✓
Last Modified By	LastModifiedById	Lookup(User)		
Order Date	Order_Date__c	Date		
Order Number	Name	Text(80)		✓
Owner	OwnerId	Lookup(User/Group)		✓
Product Summary	Product_Summary__c	Long Text Area(1000)		
Shipping City	Shipping_City__c	Text(80)		
Status	Status__c	Picklist		
Total Amount	Total_Amount__c	Currency(16, 0)		
Tracking Number	tracking_Number__c	Text(50)		

Figure 1. TaleDates Order object - Fields & Relationships.

2.2 Case Object Customization

The standard Case object was customized to capture TaleDates-specific support information and to link each applicable support request to an order.

Custom Field	Purpose
Support Category	Classifies the support request, such as Order & Shipping, Product Information, Damaged Product,

	or Return & Replacement.
Related Order	Lookup linking the Case to a TaleDates Order.
Damage Details	Captures details for damaged-product cases.
Replacement Requested	Indicates whether the customer requested a replacement.
Escalation Reason	Stores the reason a high-priority case requires attention.
AI Summary	Reserved field for AI-generated support summary information.

Field Label	Field Name	Data Type	Controlling
Internal Comments	Comments	Text Area(1000)	
Escalation Reason	EscalationReason__c	Text(255)	
Is Escalated	IsEscalated	Checkbox	
Escalation Name	EscalationName	Lookup(Email Name)	✓
Engineering Req Number	EngineeringReqNumber__c	Text(12)	
Description	Description	Long Text Area(2000)	
Date/Time Opened	CreatedDate	Date/Time	✓
Date/Time Closed	CloseDate	Date/Time	✓
Damage Details	DamageDetails__c	Long Text Area(1000)	
Created By	CreatedBy	Lookup(User)	
Contact Phone	ContactPhone	Phone	
Contact Name	ContactId	Lookup(Contact)	✓
Contact Mobile	ContactMobile	Phone	
Contact Fax	ContactFax	Phone	
Contact Email	ContactEmail	Email	
Closed When Created	IsClosedOnCreate	Checkbox	
Case Source	SourceId	Lookup(Email Message Messaging Session)	✓
Case Reason	Reason	Picklist	
Case Owner	OwnerId	Lookup(User Group)	✓
Case Origin	Origin	Picklist	
Case Number	CaseNumber	Auto Number	✓
Business Hours	BusinessHoursId	Lookup(Business Hours)	✓
Asset	AssetId	Lookup(Asset)	✓
AI Summary	AISummary__c	Long Text Area(2000)	
Account Name	AccountId	Lookup(Account)	✓

Figure 2. Case object Fields & Relationships - first configuration view.

Field Label	Field Name	Data Type	Controlling
Web Phone	SuppliedPhone	Text(40)	
Web Name	SuppliedName	Text(80)	
Web Email	SuppliedEmail	Email	
Web Company	SuppliedCompany	Text(80)	
Type	Type	Picklist	
Support Category	Support_Category__c	Picklist	
Subject	Subject	Text(255)	
Stopped Since	StopStartDate	Date/Time	
Stopped	IsStopped	Checkbox	
Status	Status	Picklist	
SLA Violation	SLAViolation__c	Picklist	
SLA Policy Start Time	SLAStartDate	Date/Time	
SLA Policy End Time	SLAEndDate	Date/Time	
Service Contract	ServiceContractId	Lookup(Service Contract)	
Replacement Requested	Replacement_Requested__c	Checkbox	
Related Order	Related_Order__c	Lookup(TaleDates Order)	
Product	ProductId	Lookup(Product)	
Product	Product__c	Picklist	
Priority	Priority	Picklist	

Figure 3. Case object Fields & Relationships - additional standard and custom fields.

3. Data Quality and Validation

A validation rule was configured to prevent incomplete order-related support cases. When a support category requires an order, Salesforce requires the Related Order lookup before the case can be saved.

3.1 Related Order Validation Rule

Configuration	Value
Object	Case
Rule Purpose	Require Related Order for applicable order-related support categories.
Example Trigger	Support Category = Damaged Product with Related Order left blank.
User Message	A related TaleDates order is required for this support category.
Status	Active

Case Validation Rule
[Back to Case Validation Rules](#) Help for this Page

Validation Rule Detail Edit Close

Rule Name: Require_Related_Order_For_Order_Cases Active ✓

Error Condition Formula: `AND(OR( SPICKVAL(Support_Category__c, 'Order & Shipping'), SPICKVAL(Support_Category__c, 'Damaged Product'), SPICKVAL(Support_Category__c, 'Return & Replacement') ), ISBLANK(Related_Order__c) )`

Error Message: A related TaleDates order is required for this support category. Error Location: Related Order

Description: Requires a TaleDates order to be linked when the support case concerns shipping, damage, returns, or replacements.

Created By: nalf@tadate.com 8/20/2026, 12:18 PM Modified By: nalf@tadate.com 8/20/2026, 12:18 PM Edit Close

Figure 4. Case validation rule configuration.

Support Category

Damaged Product

Related Order

Search TaleDates Orders...

A related TaleDates order is required for this support category.

Escalation Reason

Web Information

Web Email

Web Name

☐ Send notification email to contact

Validation Error: We hit a snag. Review the following fields: Related Order

Buttons: Cancel, Save & New, Save

Figure 5. Validation rule behavior when an applicable Case is saved without a Related Order.

4. Lightning User Interface Configuration

The Salesforce user experience was configured around a dedicated TaleDates Support Workspace. The Case record page places support information and the linked order snapshot in a single working view.

4.1 TaleDates Support Workspace

- Home
- Cases
- Accounts
- Contacts
- TaleDates Orders
- Reports
- Dashboards

4.2 Case Lightning Record Page

The Case page displays Case Information, the TaleDates Order Snapshot, Case History, and additional sections. This layout reduces navigation and keeps the most relevant support context on one page.

TaleDates Salesforce Org Configuration

Q Search...

TaleDates Support Worksp...

Home

Cases

Accounts

Contacts

TaleDates Orders

Reports

Dashboards

TaleDates Order Snapshot

Order Number

TD-1004

Status

Processing

Product

Medjool Dates

Shipping City

Riyadh

Tracking Number

TRK1004

Total Amount

195 SAR

Case History (2)

Date	Field	User	Original Value	New Value
8/17/2026, 7:59 AM	Priority	naif almalki	Low	High
8/17/2026, 1:25 AM	Created	naif almalki		

View All

Case Information

Case Owner

naif almalki

Case Number

00001029

Contact Name

Account Name

Abdullah Almutairi

Type

Case Reason

Support Category

Product Information

Related Order

TD-1004

Escalation Reason

High priority case requires immediate attention

Figure 6. Case record with linked TaleDates Order, escalation details, and Case History.

4.3 Dynamic Forms

The Damage & Replacement Details section is displayed only when the selected support category requires those fields. This keeps the page focused and avoids presenting irrelevant fields to support agents.

Developer Edition

TaleDates Support Worksp...

Home

Cases

Accounts

Contacts

TaleDates Orders

Reports

Dashboards

TaleDates Order Snapshot

Order Number

TD-1005

Status

Delivered

Product

Ajwa 3KG

Shipping City

Dammam

Tracking Number

TRK1005

Total Amount

111 SAR

Case History (1)

Date	Field	User	Original Value	New Value
8/17/2026, 1:26 AM	Created	naif almalki		

View All

Case Information

Case Owner

naif almalki

Case Number

00001030

Contact Name

Account Name

Khulid Alshammari

Type

Case Reason

Support Category

Damaged Product

Related Order

TD-1005

Escalation Reason

High priority case requires immediate attention

Status

New

Priority

High

Contact Phone

Contact Email

Case Origin

Email

Damage & Replacement Details

Damage Details

Replacement Requested

Web Information

Web Email

Web Company

Web Name

Web Phone

Figure 7. Damage & Replacement Details displayed for a damaged-product Case.

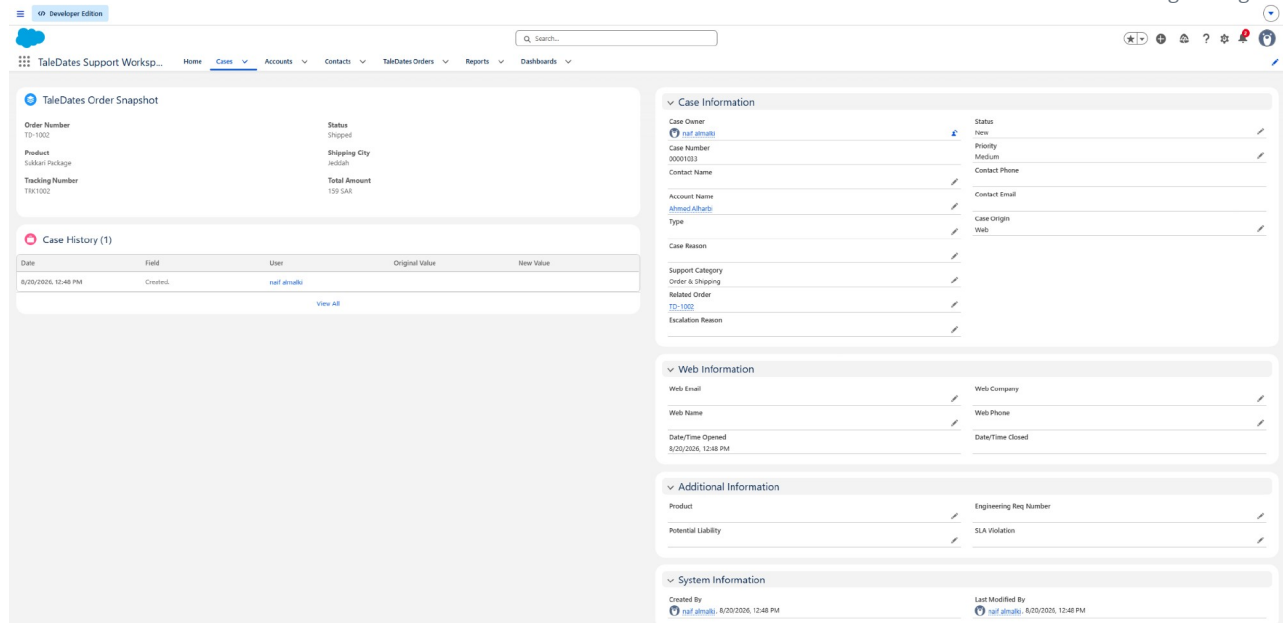


Figure 8. Case page without the damage-specific section for a different support category.

4.4 TaleDates Order Snapshot LWC

A custom Lightning Web Component displays key information from the Case's Related Order. When no TaleDates Order is linked, the component displays a clear empty-state message instead of showing incorrect information.

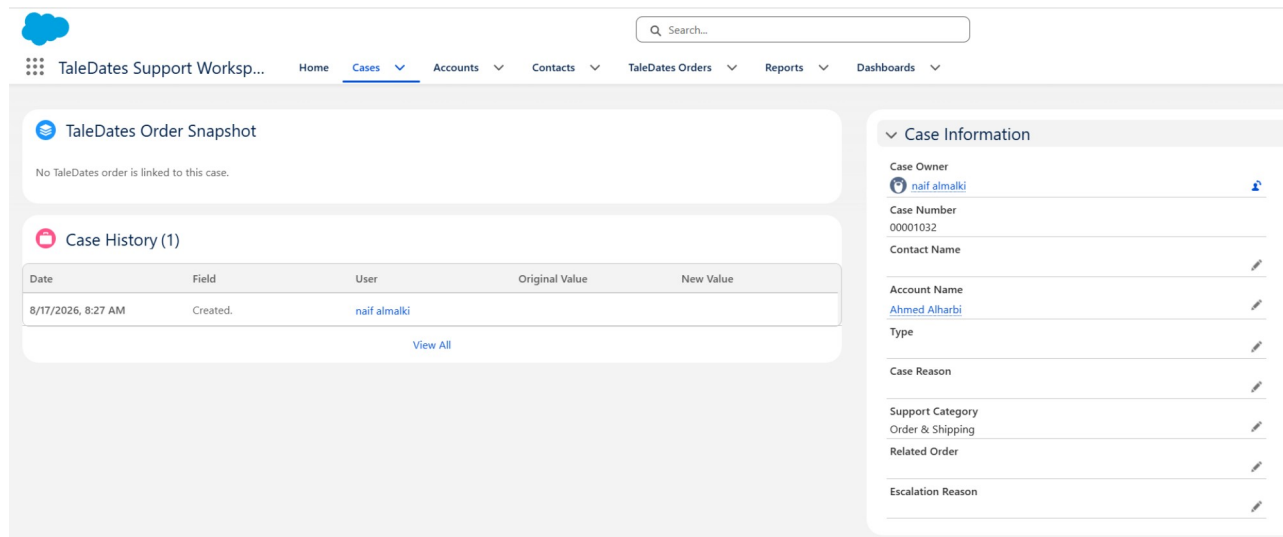


Figure 9. TaleDates Order Snapshot empty state when no Related Order is linked.

5. Security and Access Configuration

The org security model follows least-privilege principles. Access is controlled through a custom support profile, a permission set, Organization-Wide Defaults, field-level security, and the role hierarchy.

5.1 Role Hierarchy

The TaleDates support roles are placed within the organization hierarchy so management access can be separated from day-to-day support-agent access.

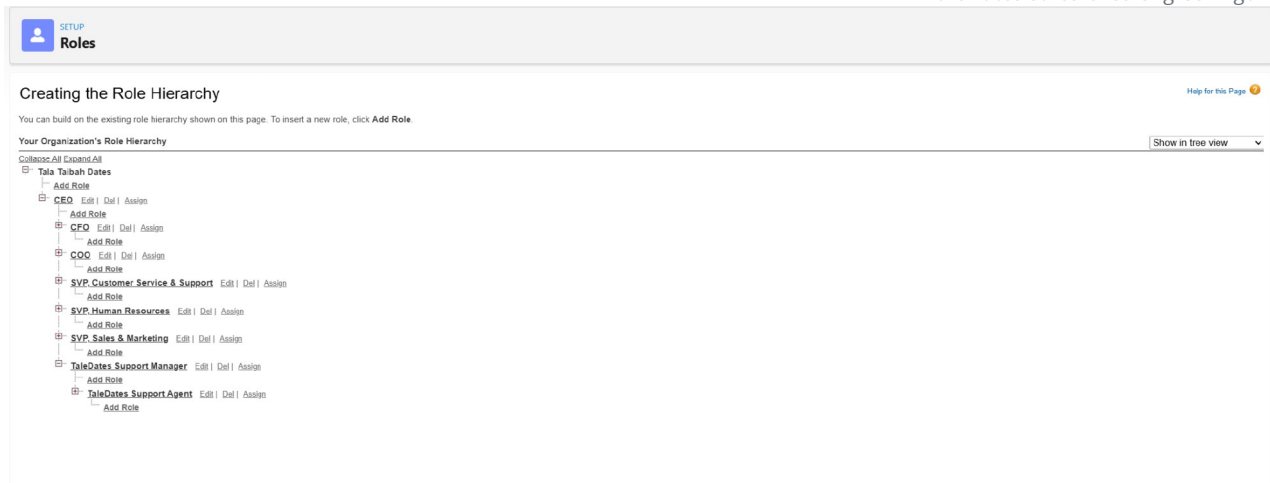


Figure 10. TaleDates role hierarchy showing Support Manager and Support Agent roles.

5.2 Profile

A TaleDates Customer Support Agent profile was created as the base access profile for the support role.

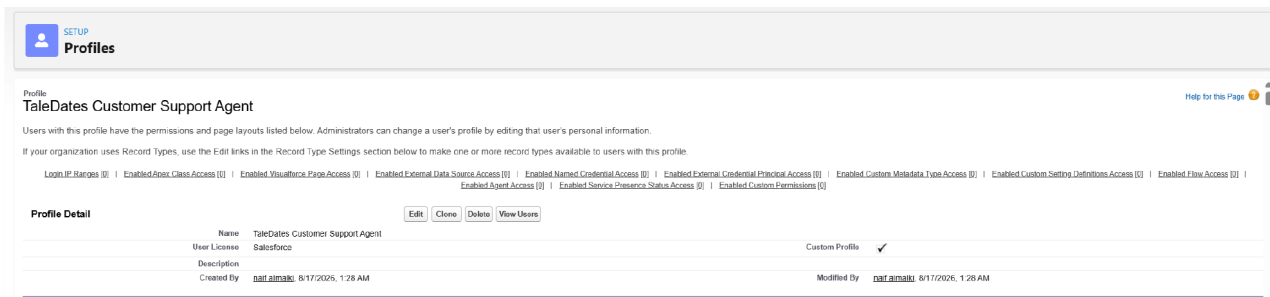


Figure 11. TaleDates Customer Support Agent profile.

5.3 Permission Set - TaleDates Orders

The TaleDates Support Agent permission set grants Read access to TaleDates Orders while withholding Create, Edit, Delete, View All, and Modify All permissions. This protects order records from unauthorized modification.

SETUP
Permission Sets

Permission Set
TaleDates Support Agent

Find Settings... Clone Delete Edit Properties Manage Assignments View Summary

Permission Set Overview > Object Settings ▼ **TaleDates Orders** ▼

TaleDates Orders Edit

Tab Settings

Available	Visible
☐	☐ i

Object Permissions

Permission Name	Enabled
Read	☒
Create	☐
Edit	☐
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Permissions

Figure 12. TaleDates Orders object permissions for the TaleDates Support Agent permission set.

5.4 Permission Set - Cases

Support agents can Read, Create, and Edit Cases, while destructive and broad administrative permissions remain disabled.

SETUP
Permission Sets

Permission Set
TaleDates Support Agent

Find Settings... Clone Delete Edit Properties Manage Assignments View Summary

Permission Set Overview > Object Settings ▼ **Cases** ▼

Cases Edit

Tab Settings

Available	Visible
☐	☐ i

Object Permissions

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Figure 13. Case object permissions for the TaleDates Support Agent permission set.

5.5 Organization-Wide Defaults

The default sharing model is Private for both TaleDates Orders and Cases. This establishes a restrictive baseline and allows access to be granted through the role hierarchy and other Salesforce sharing mechanisms.

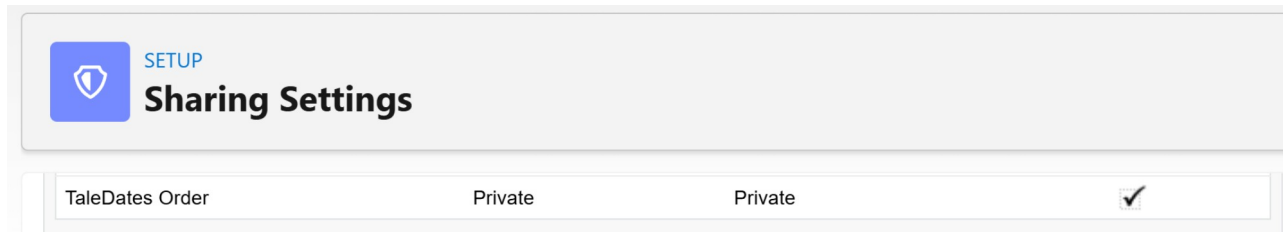


Figure 14. TaleDates Order Organization-Wide Default configured as Private.

The screenshot shows the 'Sharing Settings' page in Salesforce Setup. The table below lists the default sharing models for various objects.

Object	Default Internal Access	Default External Access	Grant Access Using Hierarchies
Lead	Public Read/Write/Transfer	Private	✓
Account and Contract	Public Read/Write	Private	✓
Contact	Controlled by Parent	Controlled by Parent	✓
Order	Controlled by Parent	Controlled by Parent	✓
Asset	Controlled by Parent	Controlled by Parent	✓
Opportunity	Public Read/Write	Private	✓
Case	Private	Private	✓
Campaign	Public Full Access	Private	✓

Figure 15. Case Organization-Wide Default configured as Private.

5.6 Field-Level Security

Field-level security is configured through the TaleDates Support Agent permission set to control which Case fields can be read or edited by support users.

SETUP
Permission Sets

Permission Set
TaleDates Support Agent

Find Settings... Clone Delete Edit Properties Manage Assignments View Summary

Permission Set Overview > Object Settings Cases

Cases Edit

Tab Settings

Available	Visible
☐	☐ i

Object Permissions

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Permissions

Field Name	Field API Name	Read Access	Edit Access
Account Name	AccountId	☒	☒
AI Summary	AI_Summary__c	☒	☐
Asset	AssetId	☐	☐
Business Hours	BusinessHoursId	☐	☐
Case Number	CaseNumber	☒	☐
Case Origin	Origin	☐	☐
Case Owner	OwnerId	☒	☒
Case Reason	Reason	☐	☐
Case Source	SourceId	☐	☐
Closed When Created	IsClosedOnCreate	☐	☐
Contact Email	ContactEmail	☒	☐
Contact Fax	ContactFax	☒	☐
Contact Mobile	ContactMobile	☒	☐
Contact Name	ContactId	☒	☒
Contact Phone	ContactPhone	☒	☐
Created By	CreatedById	☒	☐
Damage Details	Damage_Details__c	☒	☒
Date/Time Closed	ClosedDate	☐	☐
Date/Time Opened	CreatedDate	☒	☐
Description	Description	☒	☒
Engineering Req Number	EngineeringReqNumber__c	☐	☐
Entitlement Name	EntitlementId	☐	☐
Escalated	IsEscalated	☐	☐
Escalation Reason	Escalation_Reason__c	☒	☐

Figure 16. Case field permissions in the TaleDates Support Agent permission set.

6. Auditability and Field History Tracking

Case Field History Tracking is enabled for selected fields so important changes can be reviewed after they occur. This supports accountability and troubleshooting during support operations.

Case Field History

[Help for this Page](#)

This page allows you to select the fields you want to track on the Case History related list. Whenever a user modifies any of the fields selected below, the old and new field values are added to the History related list as well as the date, time, nature of the change, and user making the change. Note that multi-select picklist and large text field values are tracked as object, their old and new field values are not recorded.

Save

Cancel

De-select all fields

Track old and new values

Account Name

☐

Business Hours

☐

Case Owner

☐

Case Source

☐

Contact Name

☐

Entitlement Name

☐

Escalation Reason

☐

Potential Liability

☐

Product

☐

Related Order

☒

SLA Violation

☐

SLA Policy Start Time

☐

Stopped

☐

Support Category

☒

Asset

☐

Case Origin

☐

Case Reason

☐

Closed When Created

☐

Engineering Req Number

☐

Escalated

☐

Parent Case

☐

Priority

☒

Product

☐

Replacement Requested

☐

Service Contract

☐

Status

☒

Subject

☐

Type

☐

Track changes only

AI Summary

☐

Description

☒

Damage Details

☐

Save

Cancel

Figure 17. Case Field History Tracking configuration.

The Case record page surfaces the Case History related list, allowing authorized users to review changes such as Priority updates together with the original and new values.

Developer Edition

Search...

TaleDates Support Worksp...

Home

Cases

Accounts

Contacts

TaleDates Orders

Reports

Dashboards

TaleDates Order Snapshot

Order Number

TD-1002

Status

Shipped

Product

Sukkail Package

Shipping City

Jeddah

Tracking Number

TRK1002

Total Amount

159 SAR

Case History (2)

Date	Field	User	Original Value	New Value
8/20/2026, 12:26 PM	Priority	nalf almaki	Medium	High
8/17/2026, 1:24 AM	Created	nalf almaki		

View All

Case Information

Case Owner

nalf almaki

Case Number

00001027

Contact Name

Account Name

Mohammed Alqaheri

Type

Case Reason

Support Category

Order & Shipping

Related Order

TD-1002

Escalation Reason

High priority case requires immediate attention

Status

New

Priority

High

Contact Phone

Contact Email

Case Origin

Email

Web Information

Web Email

Web Name

Date/Time Opened

8/17/2026, 1:24 AM

Web Company

Web Phone

Date/Time Closed

Additional Information

Figure 18. Case History showing a Priority change from Medium to High.

7. Reports and Dashboard Configuration

The org includes reports and a dashboard to give support staff and managers visibility into customer-support demand and order status.

Report / Component	Purpose
Cases by Support Category	Shows the distribution of support cases by request type.
Cases by Priority	Highlights the volume of High and Medium priority

	support cases.
Orders by Status	Summarizes order value across Processing, Shipped, and Delivered statuses.
TaleDates Support Dashboard	Combines the support and order metrics in one operational view.

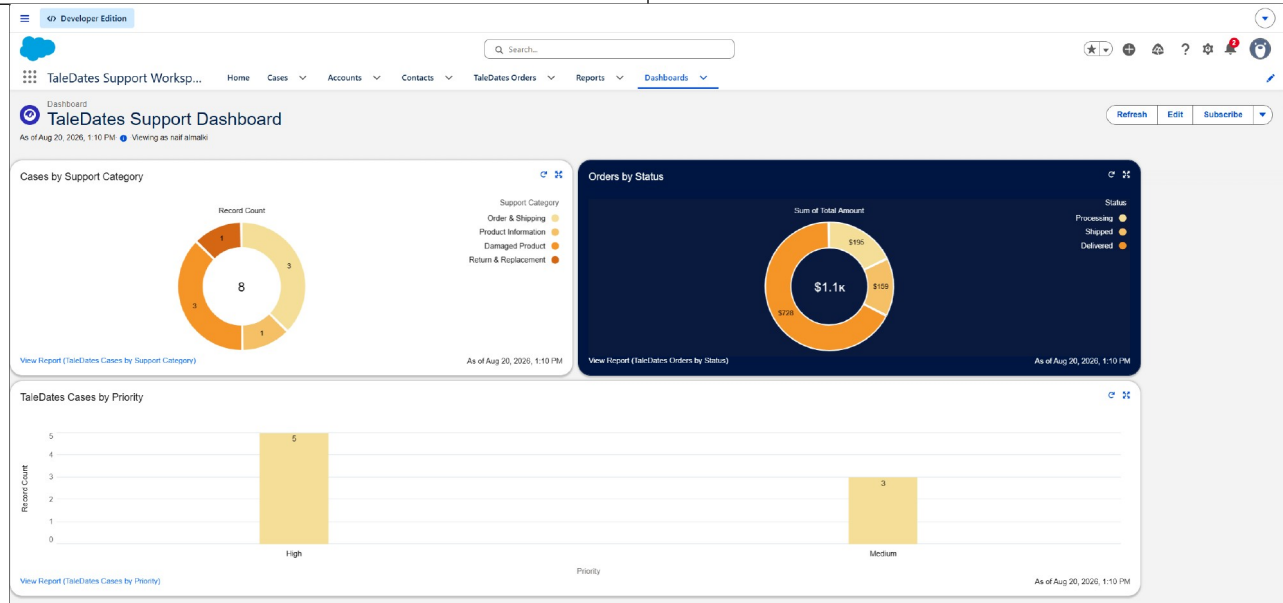


Figure 19. TaleDates Support Dashboard with support-category, order-status, and priority charts.

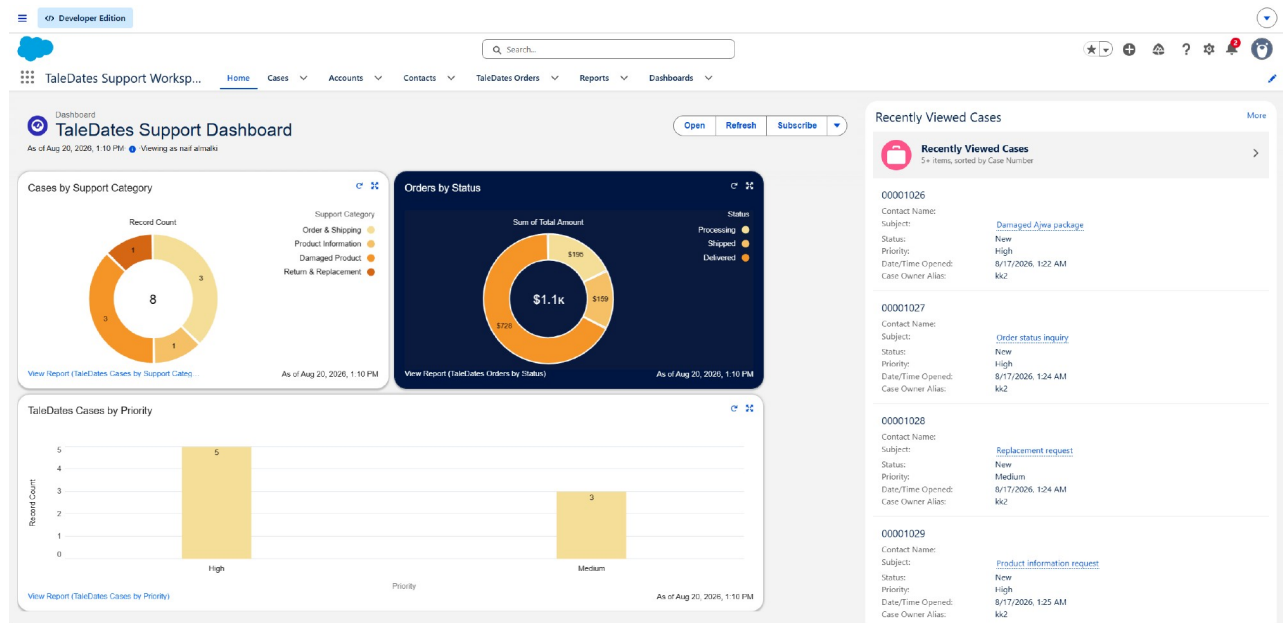


Figure 20. TaleDates Support Home page with dashboard and recently viewed Cases.

8. Automation Inventory

Automation is part of the org configuration, while detailed behavior is demonstrated separately in the Flow Automation Demo deliverable.

Automation	Type	Purpose	Status
Support Case Creation	Screen Flow	Guides the user through creating a support Case and linking customer/order information.	Configured
Get TaleDates Order Information	Autolaunched Flow	Retrieves TaleDates Order data and returns either order details or an Order Not Found message.	Active / Tested
TaleDates High Priority Case Escalation	Record-Triggered Flow	Populates an escalation reason when a Case meets the High Priority condition.	Active

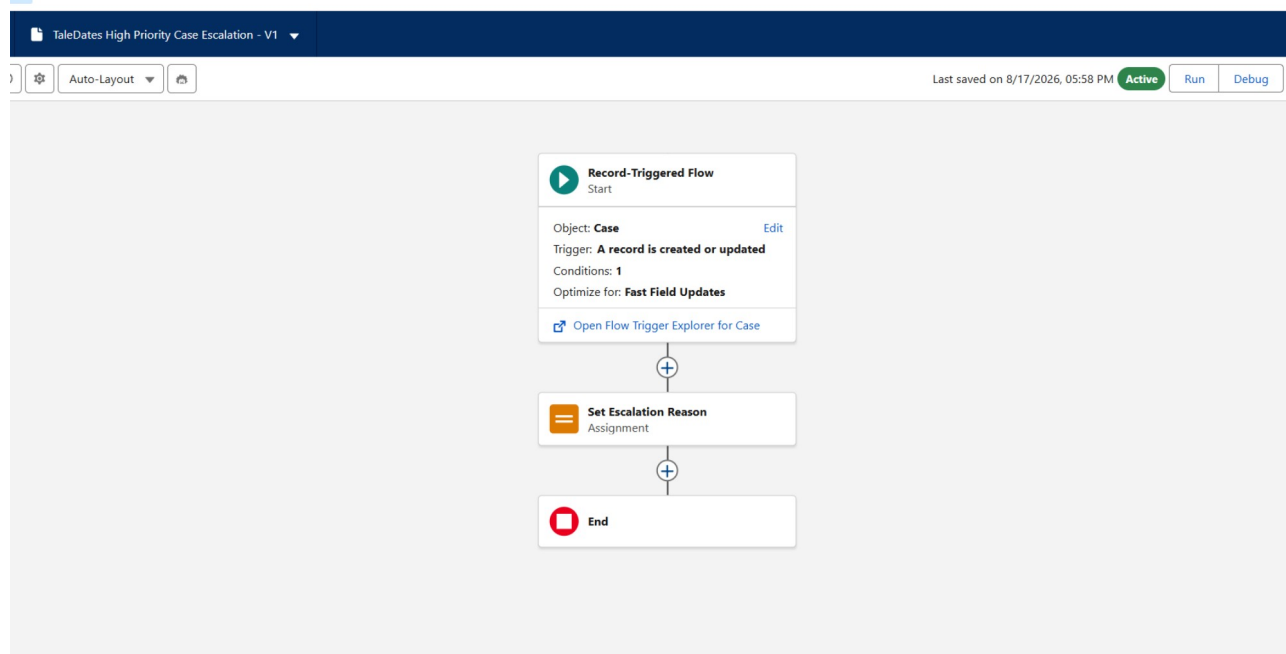


Figure 21. Active record-triggered High Priority Case Escalation Flow.

9. Configuration Verification Summary

The Salesforce org configuration was verified through functional testing and evidence collection. Key configuration checks are summarized below.

Verification Item	Result
-------------------	--------

Case can be linked to TaleDates Order	Pass
Order Snapshot displays linked order data	Pass
Validation prevents missing required Related Order	Pass
Dynamic Forms show damage fields only when relevant	Pass
High Priority Case escalation updates Escalation Reason	Pass
Case History records tracked field changes	Pass
TaleDates Order permissions are read-only for support agents	Pass
Case permissions allow Read/Create/Edit without Delete/Modify All	Pass
Case and TaleDates Order OWD are Private	Pass
Reports and dashboard display TaleDates support data	Pass

Agentforce configuration and AI behavior are documented in the separate Agentforce Configuration Document. Flow execution details are covered in the separate Flow Automation Demo.

10. Conclusion

The TaleDates Salesforce org has been configured as a focused customer-support environment with a structured data model, controlled access, data-quality rules, a streamlined Lightning interface, audit history, automation, and operational analytics.

The configuration supports support agents in handling order-related inquiries while protecting order data through private sharing and least-privilege permissions. The org is also structured so that Agentforce and Flow automation can operate against trusted Salesforce records without requiring support users to modify the underlying order data.

This document serves as the configuration reference for the Salesforce Org Configuration deliverable.