

BOTTOM UP APPROACH w/ tabulation

```
In [ ]: import matplotlib.pyplot as plt
import numpy as np

def knapsack(weights, values, capacity):
    n = len(weights)
    dp = [[0] * (capacity + 1) for _ in range(n + 1)]

    for i in range(1, n + 1):
        for w in range(capacity + 1):
            if weights[i - 1] <= w:
                dp[i][w] = max(dp[i - 1][w], dp[i - 1][w - weights[i - 1]] + values[i - 1])
            else:
                dp[i][w] = dp[i - 1][w]
    return dp

def backtrack_items(dp, weights, values, capacity):
    i = len(weights)
    w = capacity
    selected_items = []

    while i > 0 and w > 0:
        if dp[i][w] != dp[i - 1][w]:
            selected_items.append((weights[i - 1], values[i - 1])) # (weight, value)
            w -= weights[i - 1]
        i -= 1

    return selected_items[::-1] # reverse to maintain input order

if __name__ == "__main__":
    weights = [10, 20, 30]
    values = [60, 100, 120]
    capacity = 50
```


```

dp_result = knapsack(weights, values, capacity)
max_value = dp_result[len(weights)][capacity]
selected_items = backtrack_items(dp_result, weights, values, capacity)
dp_array = np.array(dp_result)
print("Maximum value:", max_value)
print("Selected items (weight, value):", selected_items)
# Plotting the DP table as a heatmap
plt.figure(figsize=(12, 6))
plt.imshow(dp_array, cmap='viridis', interpolation='nearest', aspect='auto')
plt.colorbar(label='Value')
plt.xlabel('Capacity')
plt.ylabel('Item Index')
plt.title('Knapsack DP Table Heatmap (Overlapping Values Shown by Color Intensity)')
plt.xticks(np.arange(0, capacity + 1, 5))
plt.yticks(np.arange(0, len(weights) + 1))
plt.grid(False)
plt.show()

```

Maximum value: 220

Selected items (weight, value): [(20, 100), (30, 120)]

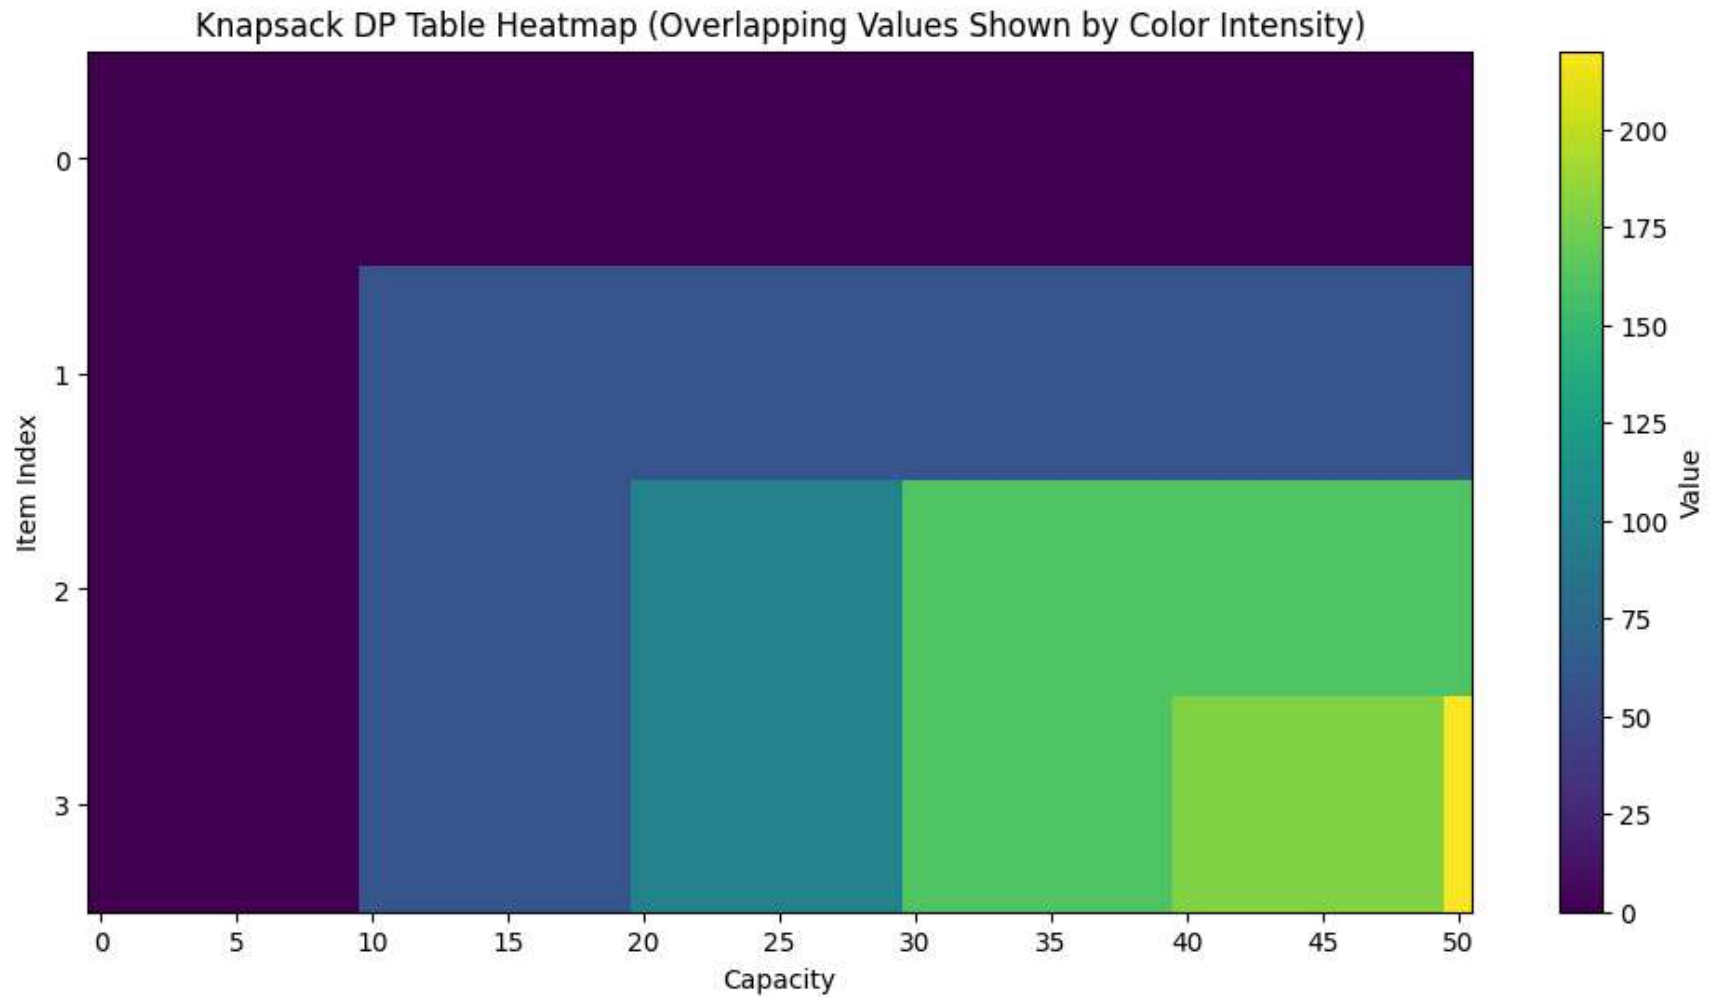

TOP DOWN KNAPSACK PROBLEM w/ memoization

```
In [ ]: def knapsack_recursive(i, w, weights, values, memo):  
        if i == len(weights) or w == 0:  
            return 0  
        if (i, w) not in memo:
```

```

    if weights[i] > w:
        memo[(i, w)] = knapsack_recursive(i + 1, w, weights, values, memo)
    else:
        memo[(i, w)] = max(
            knapsack_recursive(i + 1, w, weights, values, memo),
            values[i] + knapsack_recursive(i + 1, w - weights[i], weights, values, memo)
        )
    return memo[(i, w)]

def knapsack_aux(weights, values, capacity):
    memo = {}
    max_value = knapsack_recursive(0, capacity, weights, values, memo)
    return memo, max_value

def backtrack_aux(memo, weights, values, capacity):
    selected_items = []
    i, w = 0, capacity
    n = len(weights)

    while i < n and w > 0:
        if (i, w) not in memo:
            break
        # Check if taking the item improves the value over skipping
        if weights[i] <= w and memo.get((i, w)) == values[i] + memo.get((i + 1, w - weights[i]), 0):
            selected_items.append((weights[i], values[i]))
            w -= weights[i]
            i += 1
        else:
            i += 1
    return selected_items

if __name__ == "__main__":
    weights = [10, 20, 30]
    values = [60, 100, 120]
    capacity = 50

    memo, max_value = knapsack_aux(weights, values, capacity)

```

```
selected_items = backtrack_aux(memo, weights, values, capacity)
```

```
print("Maximum value:", max_value)
```

```
print("Selected items (weight, value):", selected_items)
```