


Can a classifier tell synthetic rows from real ones?

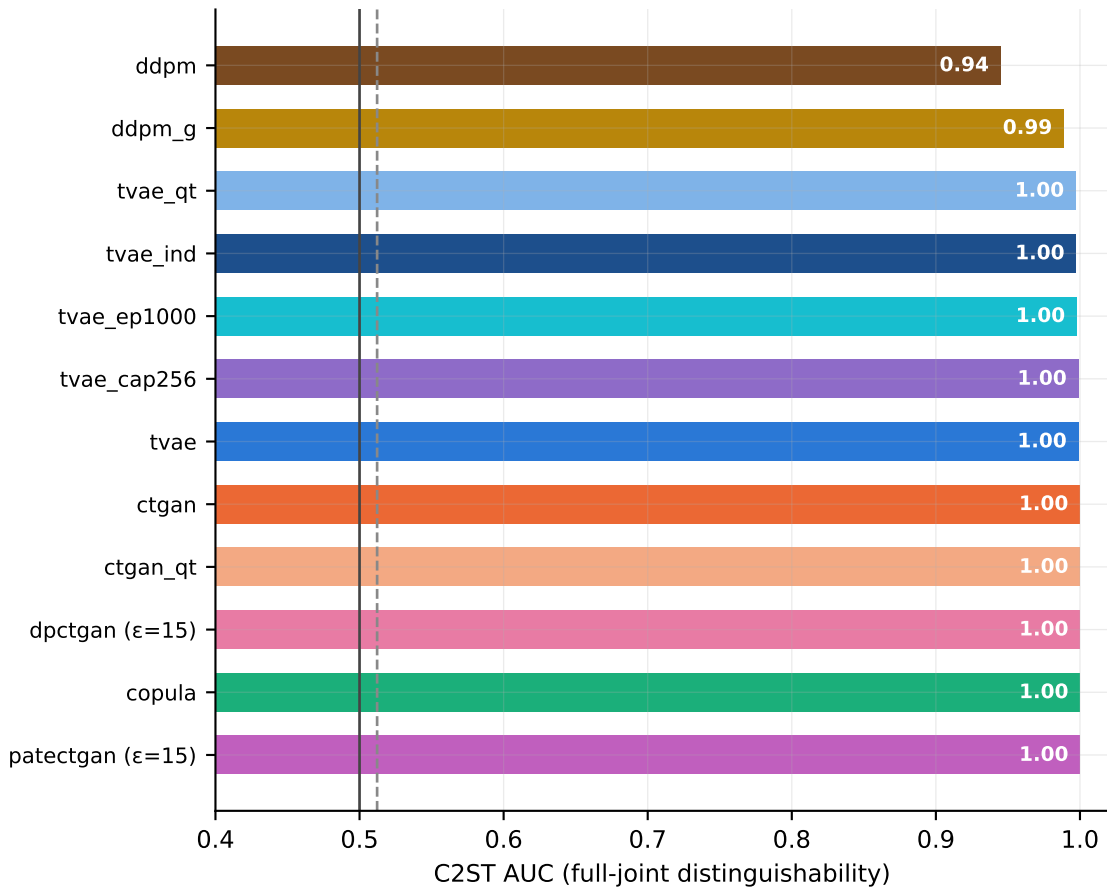

Shown: one run per model: seed 0; DP models at $\epsilon=15$ where present, else the numerically largest completed ϵ .

— indistinguishable (0.5) - - - real-vs-real floor (0.5122)