Residual accounting: every path crosses exactly one input edge

Use one downstream cotangent at the add node; then identity + branch reconstructs the total

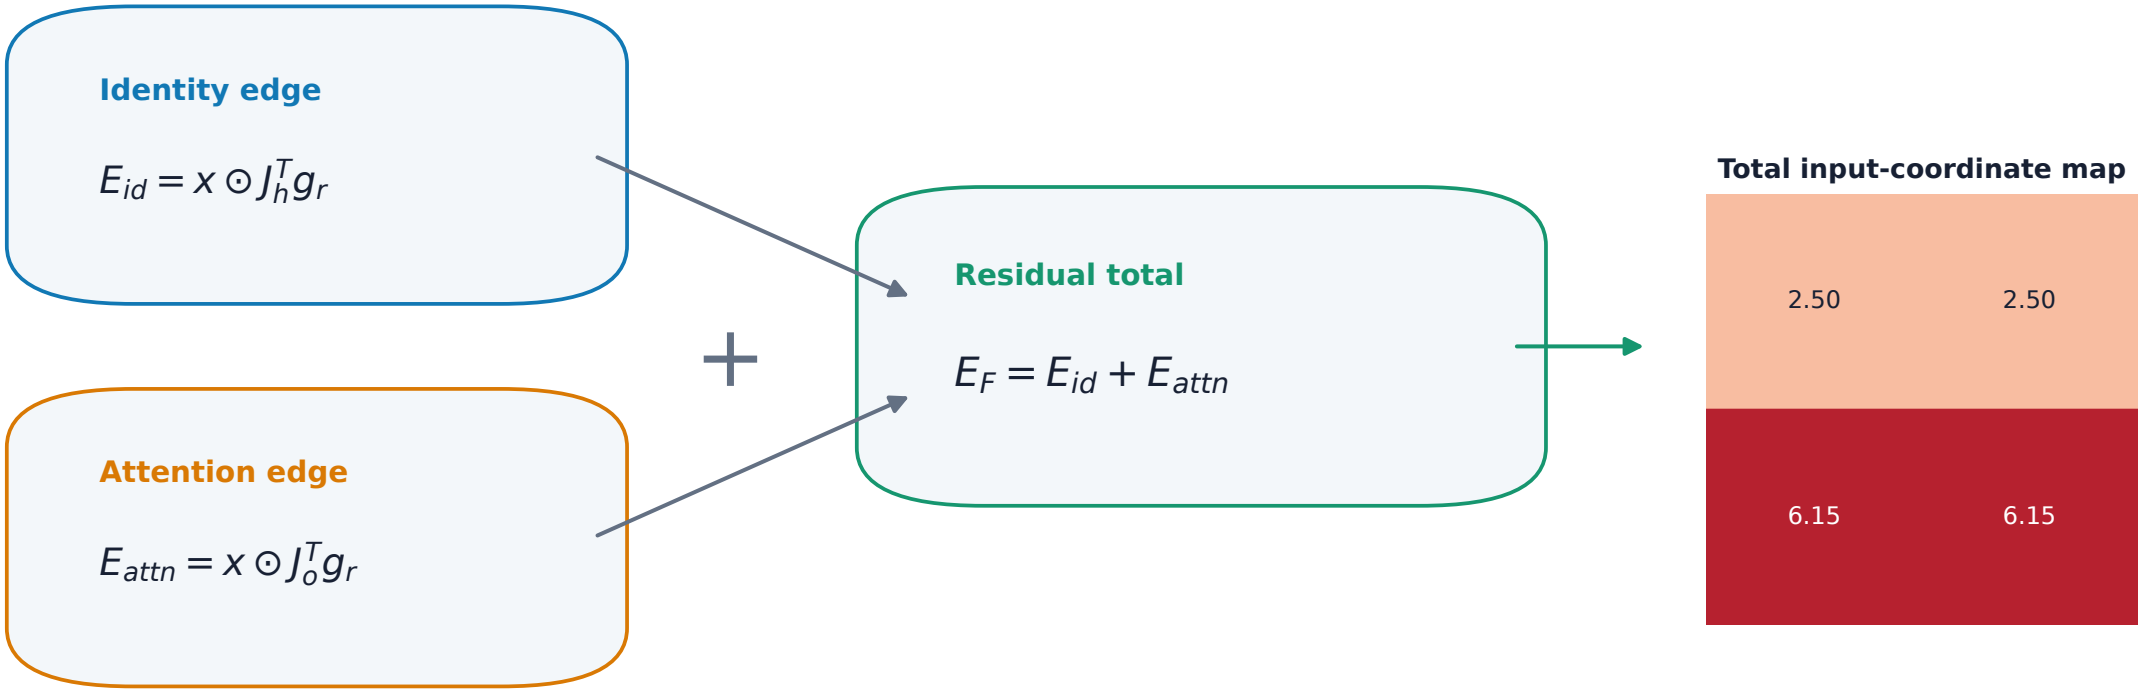

Using the total gradient at h as the identity edge would count the attention route twice.