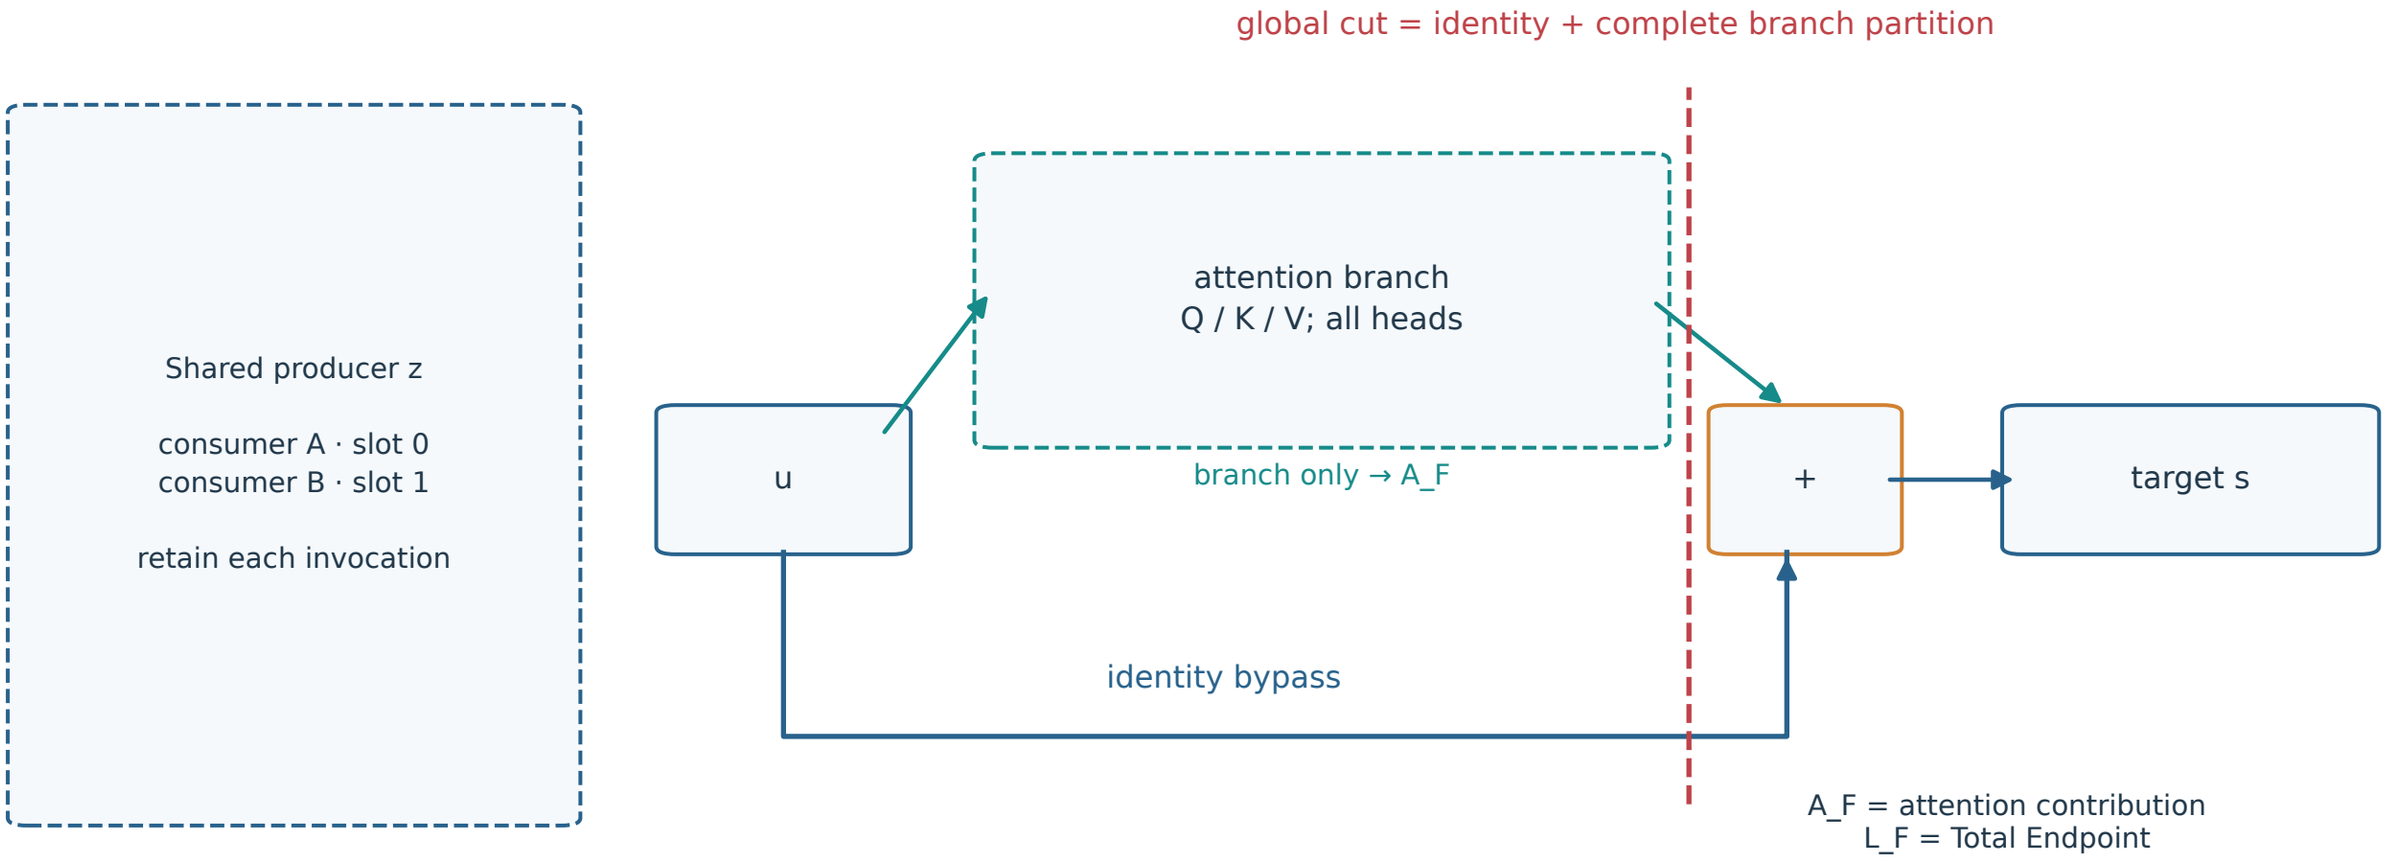Branch partitions and global cuts have different reconstruction targets