

# Residual identity + attention contribution = Total Endpoint





Input

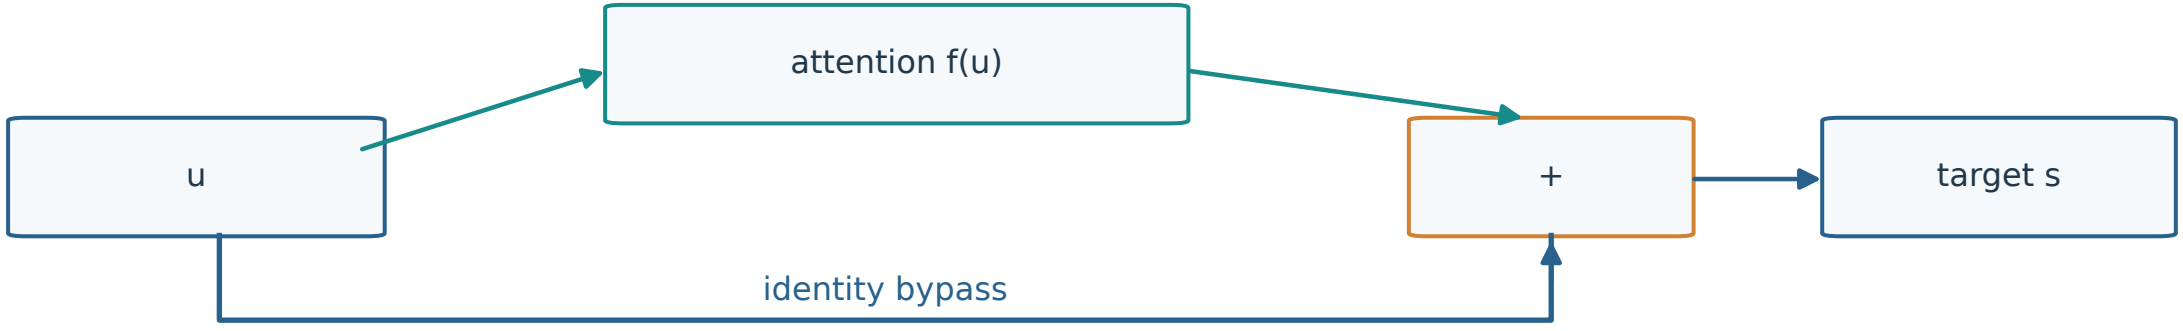


Identity local map

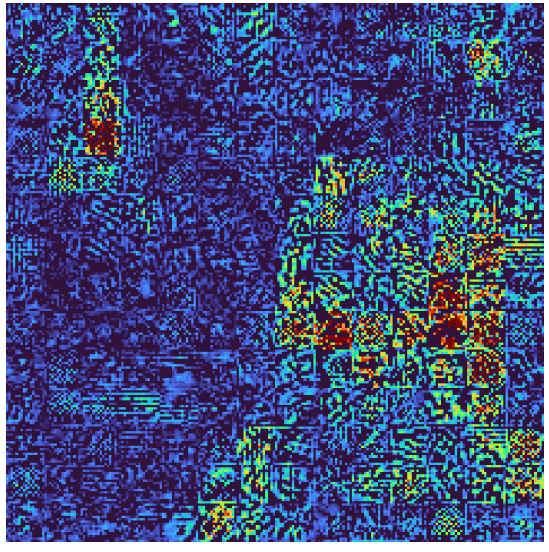

Attention contribution

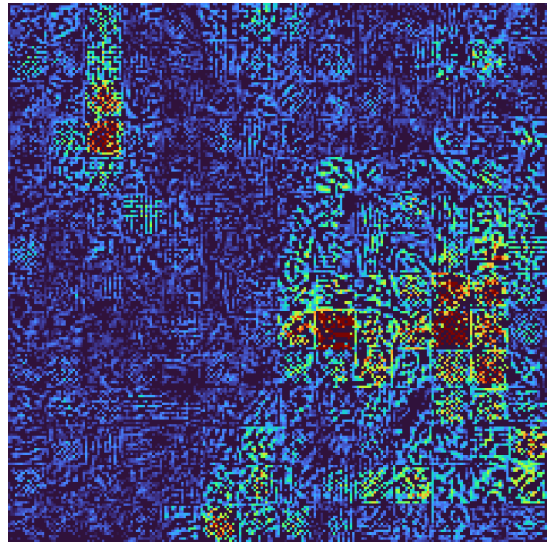

Total Endpoint

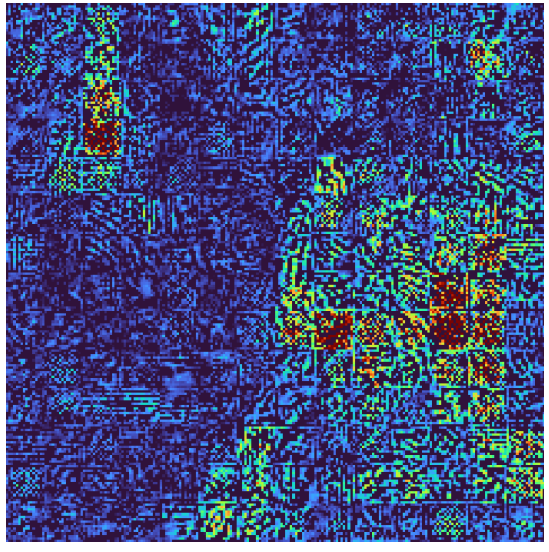

Signed arrays add exactly within tolerance; positive display panels are independently normalized.