
From pixels to tokens without losing image coordinates

Image divided into 16 × 16 patches

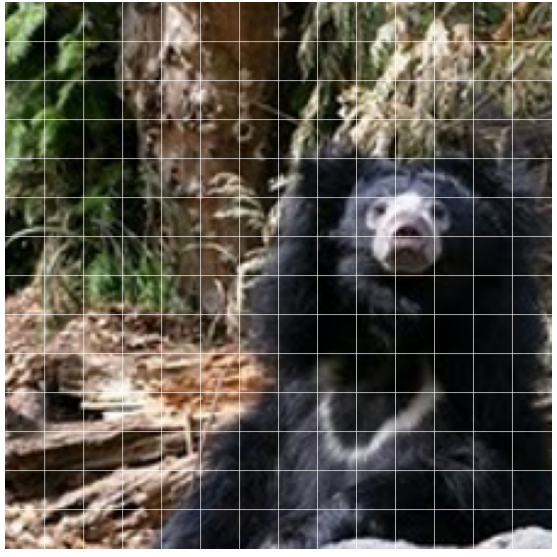


Flatten one patch

Linear projection W

Token coordinate z(t, c)

Input-coordinate support



$$z_{t,c} = w_c^\top x_t + b_c \qquad E_{t,c} = x \odot w_{t,c}$$