Keep each input value at its own location

Initialization: one nonzero input coordinate per seed image.

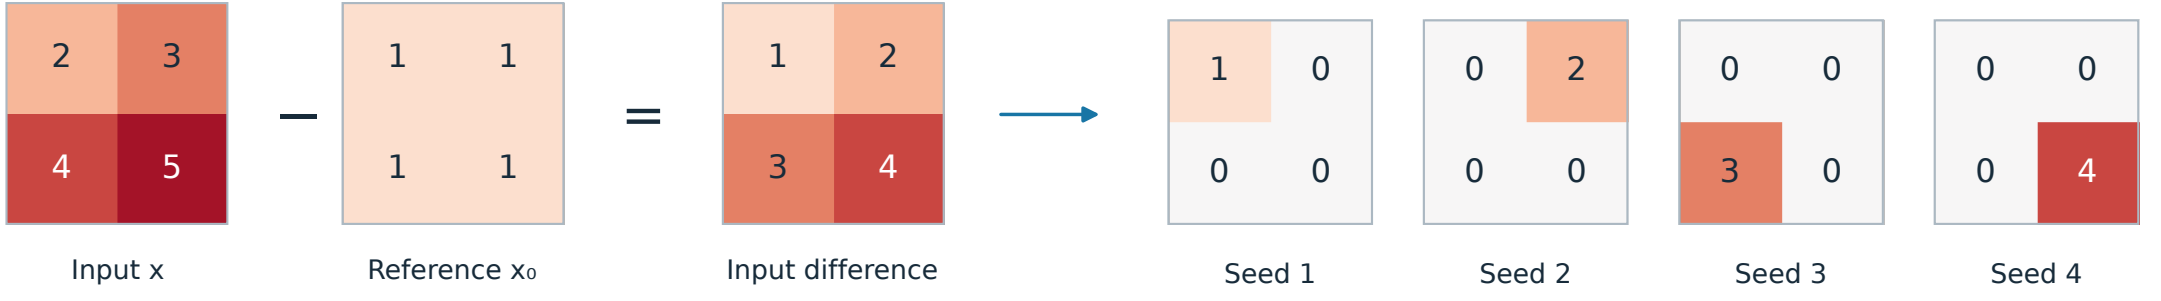

$$S_i = (x_i - x_{0i})e_i$$

$$\sum_i S_i = x - x_0$$

ViT adds a reference difference to the original NNS seed-image idea. No image is spatially rearranged.