Matched finite activation replacement

Endpoint component mass is tested against the effect of replacing the same registered component

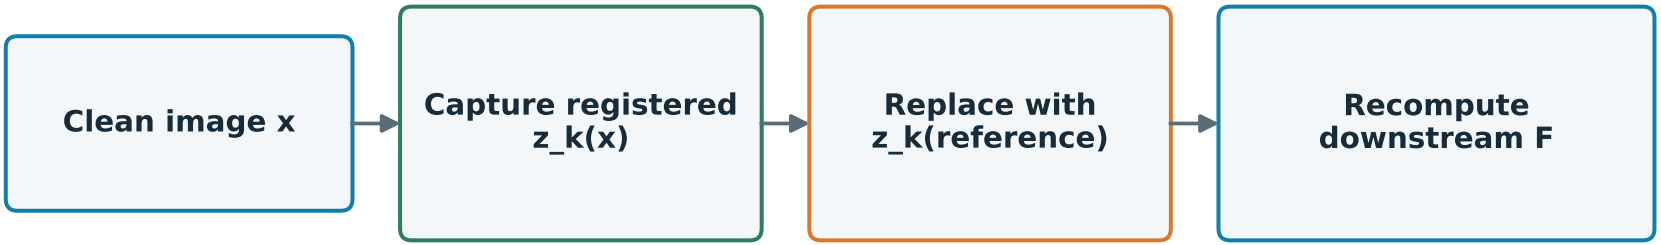

Predictor: $m_k = \sum_i |E_{k,i}|$

Effect: $|e_k| = |F(x) - F(x; z_k \leftarrow z_k^{ref})|$

Per image: Spearman across registered components

Then aggregate across 400 images; heads, routing/value, and residual branches remain separate families