
Patch embedding begins with strictly local support


A token-channel reads one 16×16 patch; the equivalent global row is sparse.

NATIVE PATCH PROJECTION

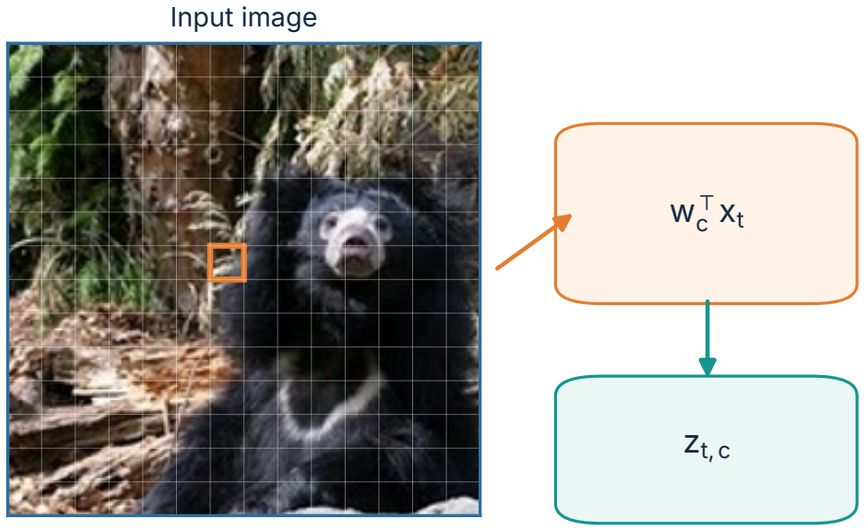

$$z_{t,c} = w_c^\top x_t + b_c$$

EQUIVALENT GLOBAL INPUT ROW

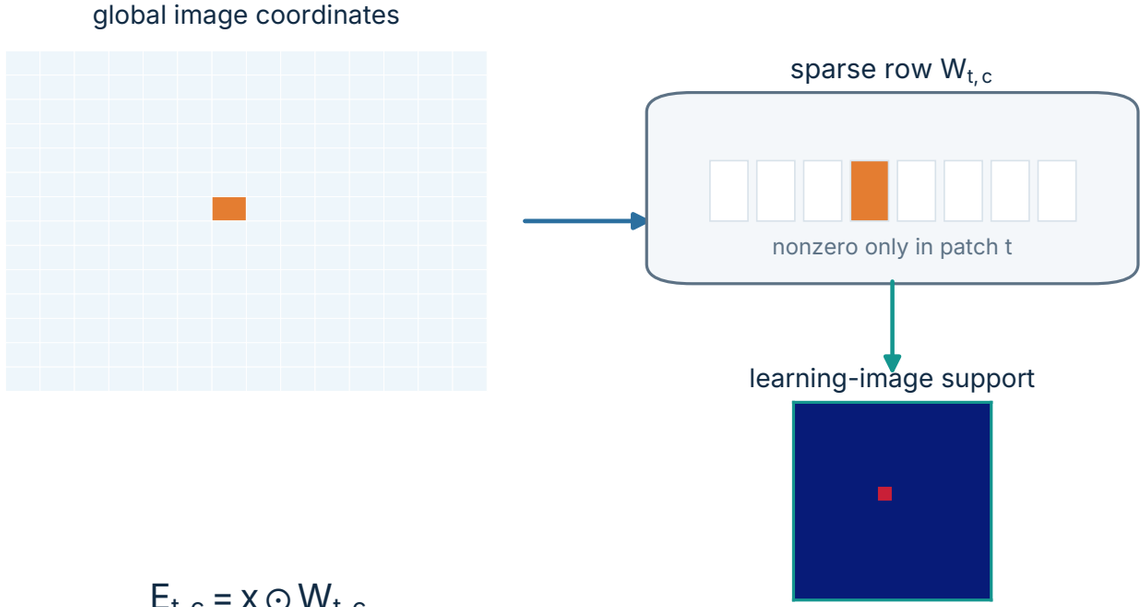

$$E_{t,c} = x \odot W_{t,c}$$

bias changes the scalar, not the input-coordinate support