

Decode Parameters Carried As An Array

The content stream of this page declares two filters, so the parameters for them travel as an array parallel to that list, with a null opposite the layer that takes none. Dropping the array leaves the Flate layer with no predictor, which decodes to bytes no content-stream parser can read.

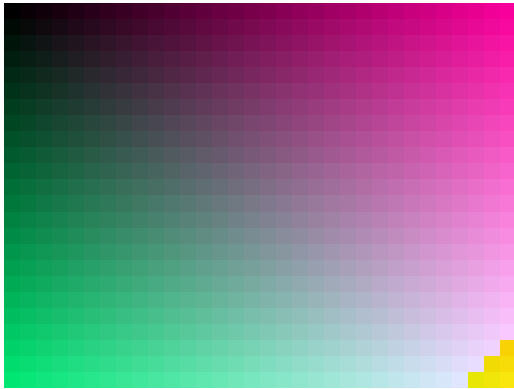


Figure 1: An RGB ramp whose predictor is named in the array.

A One Element Filter Array

A single filter may still be written as a one-element array, and then its parameters are a one-element array too. This page uses TIFF Predictor 2.