


```
rpm -ivh  
https://dl.fedoraproject.org/pub/epel/epel-release-latest-7.noarch.rp  
m  
  
yum install terminator
```

How to use Terminator

Run the “terminator” command in the terminal to use it. Once, you fire the command you will see a screen similar to below.

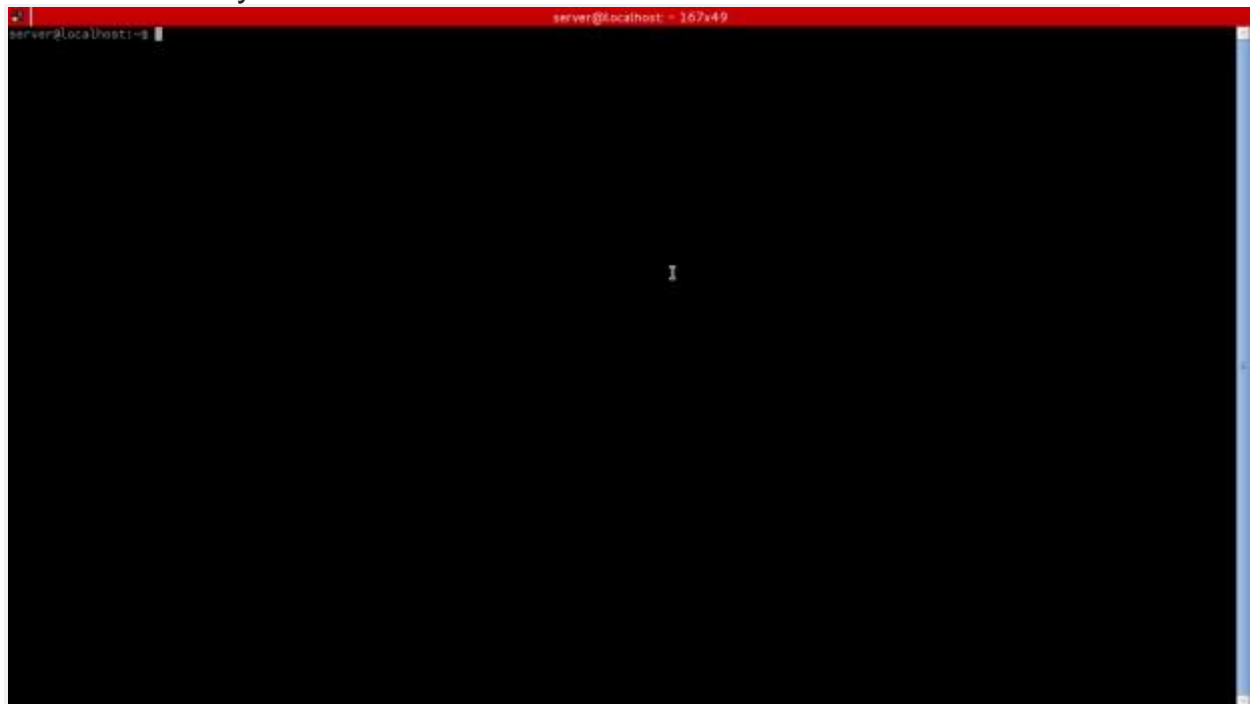


Terminator Terminal Window

Terminal Emulator Keyboard Shortcuts


To get the most out of Terminator it is crucial to know the key-bindings to control Terminator. The default shortcut keys that I use most are shown below.

- Split Terminal Horizontally – Ctrl+Shift+0

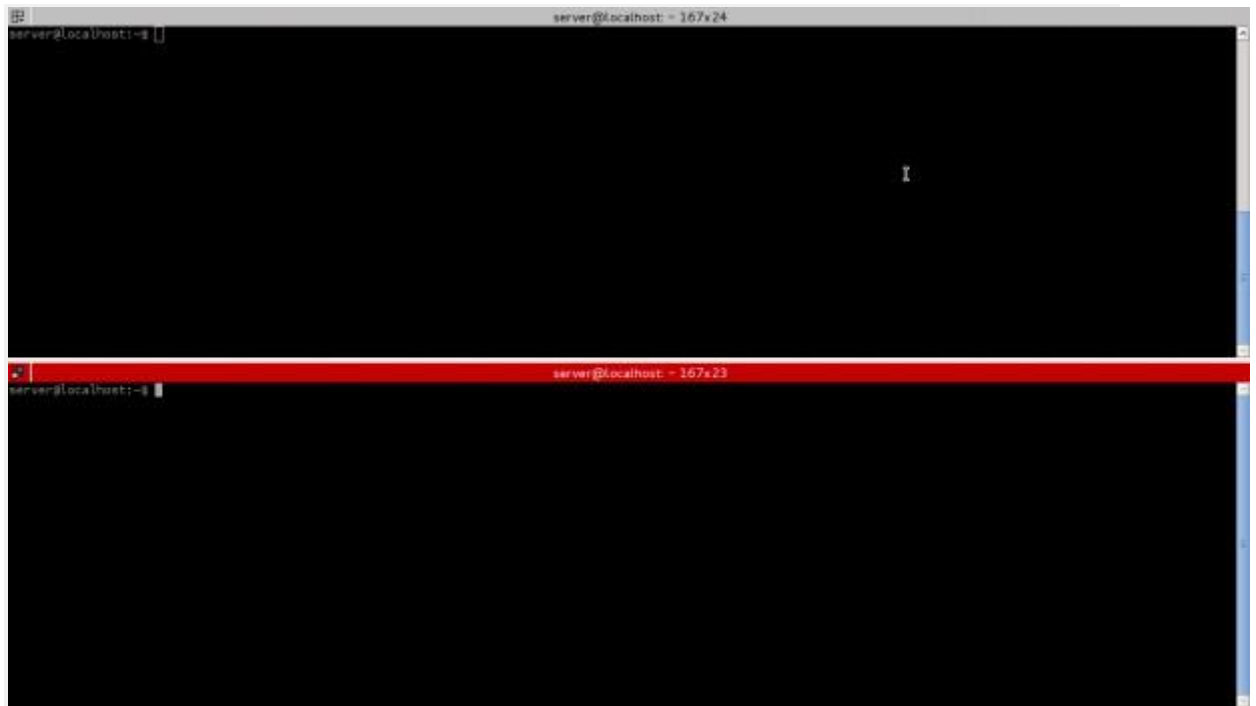

Split Terminal Windows

- Split Terminal Vertically – Ctrl+Shift+E

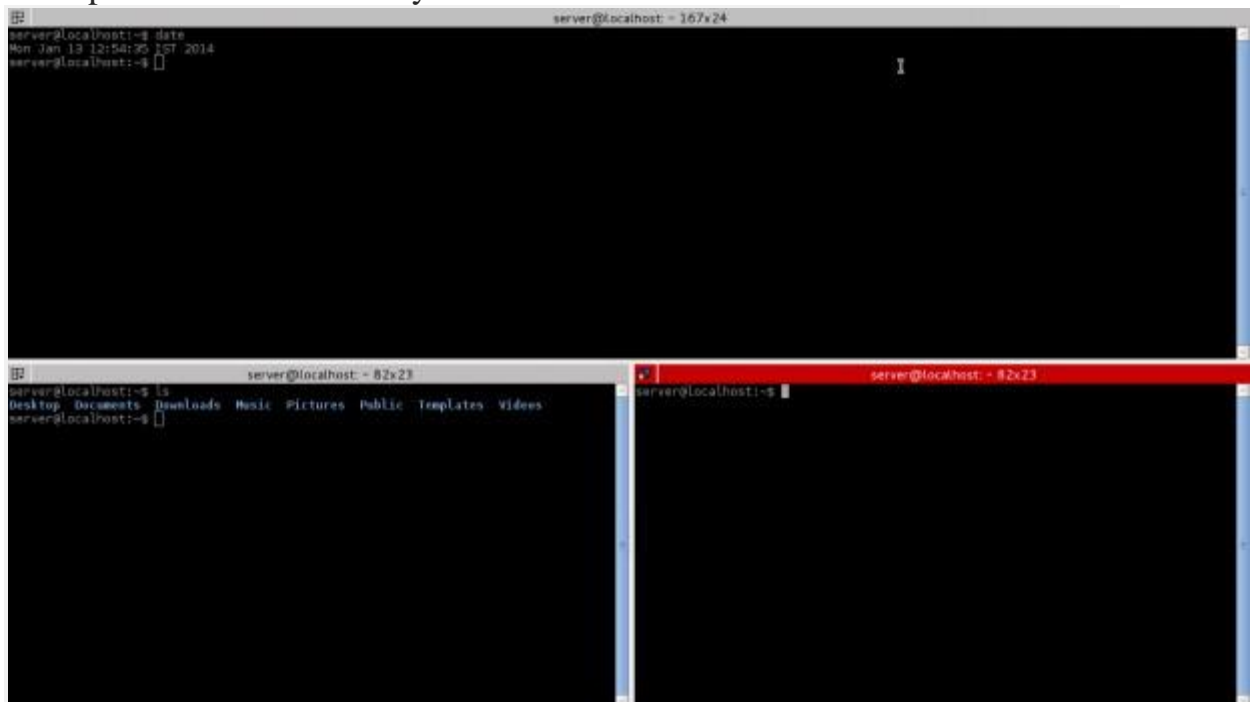

Split Terminal Vertically

- Move Parent Dragbar Right – Ctrl+Shift+Right_Arrow_key
- Move Parent Dragbar Left – Ctrl+Shift+Left_Arrow_key
- Move Parent Dragbar Up – Ctrl+Shift+Up_Arrow_key
- Move Parent Dragbar Down – Ctrl+Shift+Down_Arrow_key
- Hide/Show Scrollbar – Ctrl+Shift+s

```

server@localhost:~$ ls
Desktop Documents Downloads Music Pictures Public Templates Videos
server@localhost:~$ ls -l
total 32
drwxr-xr-x 3 server ssh 4096 Jan 11 14:18 Desktop
drwxr-xr-x 2 server ssh 4096 Jan 13 12:38 Documents
drwxr-xr-x 8 server ssh 4096 Jan 11 14:28 Downloads
drwxr-xr-x 2 server ssh 4096 Oct 4 14:43 Music
drwxr-xr-x 3 server ssh 4096 Jan 13 12:58 Pictures
drwxr-xr-x 2 server ssh 4096 Oct 4 14:43 Public
drwxr-xr-x 2 server ssh 4096 Oct 4 14:43 Templates
drwxr-xr-x 2 server ssh 4096 Oct 4 14:43 Videos
server@localhost:~$

```

Hide/Show Terminal Scrollbar

Note: Check the hidden scrollbar above, it can again be made visible using the same above key combination.

- Search for a Keyword – Ctrl+Shift+f
- Move to Next Terminal – Ctrl+Shift+N or Ctrl+Tab

```

server@localhost: /bin 16% 47
root@rt-x: 1 root root 30772 Jun 18 2012 setfacl
root@rt-x: 1 root root 28268 Apr 29 2012 setfont
root@rt-x: 1 root root 30261 Dec 10 2012 setupcan
lrwxrwxrwx 1 root root 4 Mar 1 2012 sh -> dash
lrwxrwxrwx 1 root root 4 Oct 4 14:18 sh.distrib -> dash
root@rt-x: 1 root root 30256 Jan 27 2013 sleep
root@rt-x: 1 root root 69264 Mar 2 2013 ss
root@rt-x: 1 root root 63484 Jan 27 2013 stty
root@rt-x: 1 root root 35200 May 26 2012 su
root@rt-x: 1 root root 28152 Jan 27 2013 sync
root@rt-x: 1 root root 13920 Dec 9 2012 tailf
root@rt-x: 1 root root 31052 Jan 2 2013 tar
root@rt-x: 1 root root 9032 Jun 28 2012 tempfile
root@rt-x: 1 root root 59072 Jan 27 2013 touch
root@rt-x: 1 root root 22028 Jan 27 2013 true
root@rt-x: 1 root root 13712 Jan 2 2013 unlockmgr_server
root@rt-x: 1 root root 67704 Dec 9 2012 unlockfs
root@rt-x: 1 root root 30256 Jan 27 2013 uname
root@rt-x: 2 root root 2251 Jun 20 2012 uncompress
root@rt-x: 1 root root 27482 Apr 29 2012 unicode_start
root@rt-x: 1 root root 112700 Jan 27 2013 edir
root@rt-x: 1 root root 4180 Jun 15 2012 umouse_detect
root@rt-x: 1 root root 946 Jun 28 2012 which
root@rt-x: 4 root root 13816 Feb 16 2012 ypdomainname
root@rt-x: 1 root root 1939 Jun 20 2012 zcat
root@rt-x: 1 root root 1796 Jun 20 2012 zcmp
root@rt-x: 1 root root 5786 Jun 20 2012 zdiff
root@rt-x: 1 root root 121 Jun 20 2012 zgrep
root@rt-x: 1 root root 121 Jun 20 2012 zfgrep
root@rt-x: 1 root root 2133 Jun 20 2012 zforce
root@rt-x: 1 root root 5914 Jun 20 2012 zgrep
root@rt-x: 1 root root 2039 Jun 20 2012 zless
root@rt-x: 1 root root 2802 Jun 20 2012 zmore
root@rt-x: 1 root root 5049 Jun 20 2012 znew
server@localhost:/bin$ ls
bash bzlib2recover dash false hestname loadkeys mountpoint ntfs-3g.probe ntfsntaltec rbash sh.distrib unlockmgr_server zdiff
bunzip2 bzless date fgconsole ip login nt - ntfs-3g.secaudit ntfsmove readlink sleep zcount zgrep
busybox bware dd fgrep kbd mode nt-gnu ntfs-3g.usermap ntfstruncate rm ss unicode_start zforce
bcat cat df findmnt kill ls mv ntfsck ntfsclone ntfswipe radiir stty uncompress zgrep
bcomp chacl dir fusee band lshlk nana ntfsck open rname su unicode_start zgrep
bdiff chgrp dswq fuserless lsav lsmd ac ntfscluster apmvt sed sync edir zless
bfgrep chmod dswdmainname getfacl lessecho sddir ac.traditional ntfsckopen pldf tailf umouse_detect zmore
bfs chown domainname grep lessfiles nmdat netstat ntfsdump_logfile plog setfacl tar which znew
bfgrep chvt dswkeys gunzip lesskey ntemp netstat ntfsfi ntfsinfo pa setfont tempfile ypdomainname
bfgrep cp echo gzexe lesspipe more ntfs-3g ntfsinfo pad setupcan touch zcat
bzlib2 cpie zgrep gzip ln search ntfs-3g ntfsinfo pad sh true zcmp
server@localhost:/bin$

```

Move to Next Terminal

- Move to the Above Terminal – Alt+Up_Arrow_Key
- Move to the Below Terminal – Alt+Down_Arrow_Key
- Move to the Left Terminal – Alt+Left_Arrow_Key
- Move to the Right Terminal – Alt+Right_Arrow_Key

- Copy a text to clipboard – Ctrl+Shift+c
- Paste a text from Clipboard – Ctrl+Shift+v
- Close the Current Terminal – Ctrl+Shift+w
- Quit the Terminator – Ctrl+Shift+q
- Toggle Between Terminals – Ctrl+Shift+x
- Open New Tab – Ctrl+Shift+t
- Move to Next Tab – Ctrl+page_Down
- Move to Previous Tab – Ctrl+Page_up
- Increase Font size – Ctrl+(+)
- Decrease Font Size – Ctrl+()
- Reset Font Size to Original – Ctrl+0
- Toggle Full Screen Mode – F11
- Reset Terminal – Ctrl+Shift+R
- Reset Terminal and Clear Window – Ctrl+Shift+G
- Remove all the terminal grouping – Super+Shift+t
- Group all Terminal into one – Super+g

Note: Super is a key with the windows logo right of left CTRL.

Reference Links

<https://launchpad.net/terminator>