



Politechnika Wrocławska

Faculty of Pure and Applied Mathematics

Field of study: Applied Mathematics

Specialty: Computational Mathematics

Master Thesis

**APPLICATIONS OF WAVELETS IN DATA
MINING**

Kinga Kurowska

keywords:
wavelets
statistics

learning and adaptive systems

Short summary:

The aim of this thesis is an analysis and comparison of statistical methods employing wavelets. Special attention will be paid to data mining and machine learning methods.

Supervisor	dr inż. Andrzej Giniewicz		
	<i>Title, degree, name and surname</i>	<i>Grade</i>	<i>Signature</i>

*For the purposes of archival thesis qualified to: **

a) Category A (perpetual files)

b) Category BE 50 (subject to expertise after 50 years)

** Delete as appropriate*

stamp of the faculty

Wrocław, 2018

Contents

Introduction	5
Chapter 1.	7
1.1. Wavelet Transform	7
1.1.1. Wavelet transform vs Fourier transform	8
1.2. Discrete Wavelet transform	8
1.3. 2-D Discrete Wavelet transform	9
List of Figures	11
Bibliography	13

Introduction

Few words about my thesis...

Generally what is a data mining, what are the wavelets, what is the main purpose - edge detection.

Chapter 1

A wavelet literally means a small wave. The term says a lot about wavelets nature. Wavelets are a family of functions which oscillates like wave and should be compactly supported. Additionally, the wavelet has zero mean, an amplitude begins at 0, increases and decreases to 0 again.

Definition 1.1. Wavelets are created by scaling and shifting of the, so called, mother wavelet $\psi(t)$. The child wavelets are defined as

$$\psi^{(a,b)}(t) = |a|^{-\frac{1}{2}} \psi\left(\frac{t-b}{a}\right). \quad (1.1)$$

There are plenty of different mother wavelets, for example

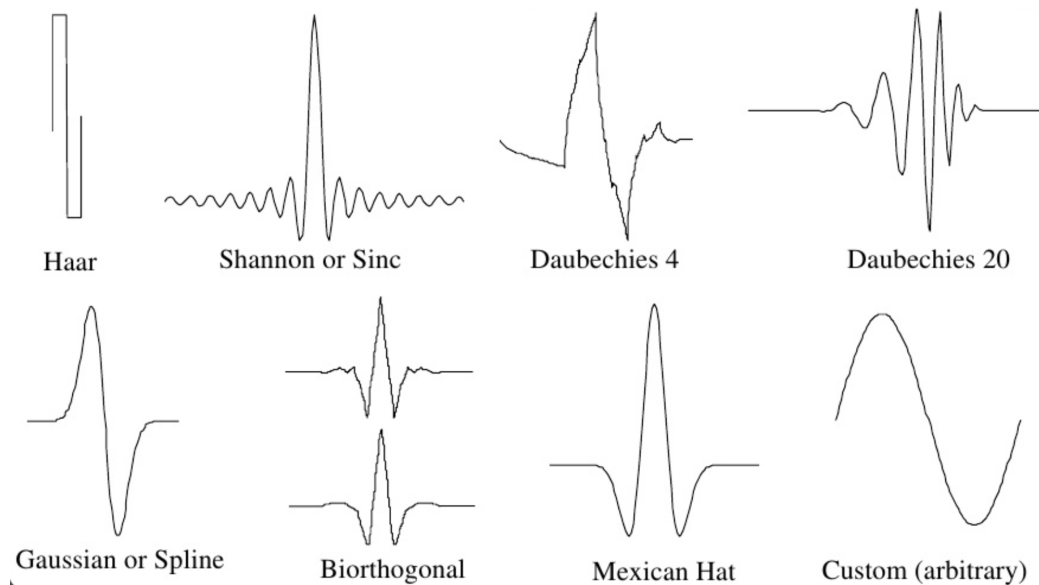


Figure 1.1: Different types of wavelets.

*** Add more about wavelets properties ***

1.1. Wavelet Transform

*** Add some short introduction ***

Definition 1.2. Wavelet transform

$$W(a, b) = \int_{-\infty}^{\infty} y(t) a^{-\frac{1}{2}} \psi\left(\frac{t-b}{a}\right) dt, \quad (1.2)$$

Wavelet transform	Fourier transform
Suitable for stationary and non-stationary signals	Suitable for stationary signals
High time and frequency resolution	Zero time resolution and very high frequency resolution
Very suitable for studying the local behaviours of the signal	No suitable
Sine and cosine waves	Scaled and translated mother wavelets

where a is scale parameter, b translation parameter and $y(t)$ original signal.

1.1.1. Wavelet transform vs Fourier transform

Definition 1.3. Fourier transform

$$Y(f) = \int_{-\infty}^{\infty} y(t)e^{-i\omega t} dt, \quad (1.3)$$

where $y(t)$ is time domain signal and $Y(f)$ is frequency domain signal.

Wavelet transform is similar to the Fourier transform but with the different functions. In Fourier case there are sine and cosine functions, wherein wavelet transform uses wavelets.

Why use Wavelet transform? Sine function oscillates on the whole real axis, thus it cannot represent abrupt changes. On the other hand, the Wavelet transform is localized in space and time, so it can be used to detect sudden changes in signals and images. Moreover, wide range of wavelet functions is a main advantage of wavelet analysis.

1.2. Discrete Wavelet transform

There are two types of the wavelet transform:

- Continuous Wavelet Transform (CWT),
- Discrete Wavelet Transform (DWT).

DWT is used to denoising and compression of signals and images. Also, DWT allows to detect smooth regions interrupted by edges or abrupt changes in contrast of images.

Scale and translation parameters are defined as

$$a = 2^j \text{ and } b = 2^j k, \quad j, k = 1, 2, \dots \quad (1.4)$$

to avoid redundancy in coefficients.

The figure 1.2 on a page 9 shows how DWT works. Discrete Wavelet Transform splits signal with two filters: $h(n)$ - high pass filter (HPF) and $g(n)$ - low pass filter (LPF). The HPF captures a part with bigger frequencies which is the main signal. Whereas, the LPF captures smaller frequencies - a noise of the signal. Subsequently, both parts are down sampled by a factor of 2.

This decomposition can be repeated on the HPF part of the signal. Hence, the next levels of DWT coefficients.

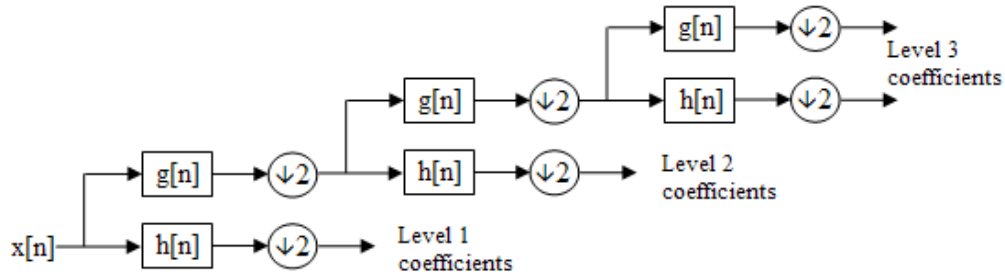


Figure 1.2: Discrete Wavelet transform on a signal $x(n)$.

1.3. 2-D Discrete Wavelet transform

2-D Discrete Wavelet Transform works similar way as 1-D with High Pass Filter and Low Pass Filter, except that one level of the decomposition includes double filtering, on columns and rows. The figure 1.3 shows image decomposition. Firstly, the DWT is applied on columns of the input image and then on the rows of the both outputs. Ultimately, there are four results:

- LL - result of LPF applied on both, columns and rows,
- LH - result of LPF applied on columns and HPF on rows,
- HL - result of HPF applied on columns and LPF on rows,
- HH - result of HPF applied on both, columns and rows.

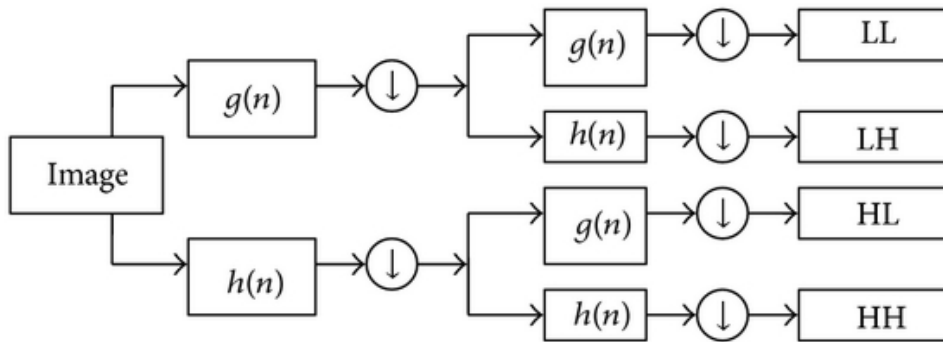


Figure 1.3: 2-D Discrete Wavelet transform on an image.

*** Add description what shows all of the four results - approximation, horizontal, vertical, diagonal*

List of Figures

1.1	Different types of wavelets.	7
1.2	Discrete Wavelet transform on a signal $x(n)$	9
1.3	2-D Discrete Wavelet transform on an image.	9

Bibliography