

1. Tumoral dynamics

Contents

1	Environment preparation	2
2	Data formatting	2
3	Survival object	3
4	Proportional hazards assumption check : Schoenfeld residuals	3
5	AIC comparison of different distributions	4
6	Model selection	4
6.1	Random effects selection	4
6.2	Fixed effects selection	5
6.3	Goodness-of-fit evaluation	5
6.4	Selected model summary	6
7	Median times	8
7.1	By rest condition	8
7.2	By lineage	9
7.3	By rest condition and lineage	9
8	Cumulative incidences	10
8.1	By week and rest condition	10
8.2	By week and lineage	10
8.3	By week, rest condition, and lineage	11
9	Cumulative proportions	12
9.1	By week and rest condition	12
9.2	By week and lineage	13
9.3	By week, rest condition, and lineage	14

10 Plots of cumulative incidence of tumoral development	16
10.1 Common themes	16
10.2 Panel A: by rest condition	17
10.3 Panel B: by rest condition for each lineage	17
10.3.1 HO_MT	17
10.3.2 HO_SPC	18
10.3.3 HO_SPT	18
10.4 Panel C: by lineage	18
10.4.1 HO_MT	18
10.4.2 HO_SPC	19
10.4.3 HO_SPT	19
10.5 Assembly	19

1 Environment preparation

Run scripts with the needed packages, functions, and the raw data frame.

```
source("0a_packages.R")
source("0b_script_data.R")
source("0c_functions.R")
```

2 Data formatting

Create a new data frame adapted for survival analysis.

```
tum_df <-

#' Load the raw data frame.
df %>%

#' Restrict the data frame to the three lineages that developed tumors.
filter(lineage %in% c("HO_MT", "HO_SPC", "HO_SPT")) %>%

#' Define the follow-up time for each individual:
#' if the hydra developed a tumor -> time of tumor onset (event),
#' if the hydra died -> time of death (censor),
#' if the hydra did not develop a tumor and stayed alive
#' -> 42 days (no event, censor at the end of the experiment).
mutate(age_followup_days = case_when(
  tum_state == "Tumoral" ~ age_tum,
  tum_state == "Healthy" & death_state == 1 ~ age_death,
  TRUE ~ 42),

age_followup = age_followup_days / 7,
tum_event = ifelse(tum_state == "Tumoral", 1, 0)) %>%
```

```

# Build a competing-risk variable for the cumulative incidence functions:
# if the hydra did not develop a tumor and stayed alive -> 0 (no event),
# if the hydra developed a tumor -> 1 (event),
# if the hydra died -> 2 (competing risk of death).
mutate(status_competing = factor(case_when(tum_event == 1 ~ 1,
                                           death_state == 1 ~ 2,
                                           TRUE ~ 0))) %>%

# Remove missing data.
filter(!is.na(age_followup)) %>%

# Set factor levels for later use in the plots.
mutate(rest_condition = factor(rest_condition,
                               levels = c("Control", "Mechanical disruption"))) %>%

# Keep only the variables needed for the analysis.
select(age_followup, tum_event, status_competing, rest_condition,
       lineage, parent_unique, replicate_unique)

```

Set reference levels for the categorical variables.

```

tum_df$lineage <- relevel(factor(tum_df$lineage), ref = "HO_MT")
tum_df$rest_condition <- relevel(factor(tum_df$rest_condition), ref = "Control")

```

3 Survival object

Create a survival object with follow-up time and event indicator.

```
tum_surv_object <- Surv(tum_df$age_followup, tum_df$tum_event)
```

4 Proportional hazards assumption check : Schoenfeld residuals

Fit a preliminary full Cox model (fixed effects only).

```
tum_cox <- coxph(Surv(age_followup, tum_event) ~ rest_condition * lineage, data = tum_df)
```

Test the proportional hazards assumption.

```
print(cox.zph(tum_cox))
```

```
##               chisq df      p
## rest_condition    0.575  1 0.448
## lineage           5.279  2 0.071
## rest_condition:lineage 8.986  2 0.011
## GLOBAL            11.395  5 0.044
```

The proportional hazards assumption is violated for at least one term, an accelerated failure time mixed-effects model will be used.

5 AIC comparison of different distributions

Compare intercept-only accelerated failure time models fitted with different parametric distributions to identify the best-fitting one.

```
dist_weib <- SurvregME(Surv(age_followup, tum_event) ~ 1, data = tum_df,
  dist = "weibull")

dist_lnorm <- SurvregME(Surv(age_followup, tum_event) ~ 1, data = tum_df,
  dist = "lognormal")

dist_llog <- SurvregME(Surv(age_followup, tum_event) ~ 1, data = tum_df,
  dist = "loglogistic")

dist_exp <- SurvregME(Surv(age_followup, tum_event) ~ 1, data = tum_df,
  dist = "exponential")

AIC(dist_weib, dist_lnorm, dist_llog, dist_exp) %>% arrange(AIC)
```

```
##           df      AIC
## dist_weib  2 1291.277
## dist_llog  2 1294.009
## dist_lnorm 2 1334.860
## dist_exp   1 1347.392
```

The model with a Weibull distribution has the lowest AIC, we'll use it for the models.

6 Model selection

6.1 Random effects selection

With the full fixed-effect structure held constant, compare different random-effect structures to find the optimal one.

```
tum_R_0 <- SurvregME(Surv(age_followup, tum_event) ~ rest_condition * lineage,
  data = tum_df, dist = "weibull")

tum_R_1 <- SurvregME(Surv(age_followup, tum_event) ~ rest_condition * lineage +
  (1 | parent_unique),
  data = tum_df, dist = "weibull")

tum_R_2 <- SurvregME(Surv(age_followup, tum_event) ~ rest_condition * lineage +
  (1 | replicate_unique),
  data = tum_df, dist = "weibull")

tum_R_3 <- SurvregME(Surv(age_followup, tum_event) ~ rest_condition * lineage +
  (1 | parent_unique) + (1 | replicate_unique),
  data = tum_df, dist = "weibull")

AIC(tum_R_0, tum_R_1, tum_R_2, tum_R_3) %>% arrange(AIC)
```

```
##          df      AIC
## tum_R_0  7 1157.217
## tum_R_2  8 1158.027
## tum_R_1  8 1159.087
## tum_R_3  9 1160.027
```

The model without any random effect (tum_R_0) has the lowest AIC, this random effect structure is therefore selected. SurvregME is nonetheless kept as the modeling function (rather than switching to a simpler survreg call) since it also supports models with no random effects.

6.2 Fixed effects selection

With the selected random-effect structure fixed, compare different fixed-effect structures to find the optimal one.

```
tum_F_0 <- SurvregME(Surv(age_followup, tum_event) ~ 1,
                     data = tum_df, dist = "weibull")

tum_F_1 <- SurvregME(Surv(age_followup, tum_event) ~ rest_condition,
                     data = tum_df, dist = "weibull")

tum_F_2 <- SurvregME(Surv(age_followup, tum_event) ~ lineage,
                     data = tum_df, dist = "weibull")

tum_F_3 <- SurvregME(Surv(age_followup, tum_event) ~ rest_condition + lineage,
                     data = tum_df, dist = "weibull")

tum_F_4 <- SurvregME(Surv(age_followup, tum_event) ~ rest_condition * lineage,
                     data = tum_df, dist = "weibull")

AIC(tum_F_0, tum_F_1, tum_F_2, tum_F_3, tum_F_4) %>% arrange(AIC)
```


```
##          df      AIC
## tum_F_4  7 1157.217
## tum_F_3  5 1203.737
## tum_F_2  4 1212.049
## tum_F_1  3 1275.994
## tum_F_0  2 1291.277
```

The model with the interaction between the rest condition and the lineage has the lowest AIC and is therefore selected (tum_F_4).

6.3 Goodness-of-fit evaluation

Assess goodness-of-fit of the selected model using Cox-Snell residuals.

```
plot_cox_snell_survregme(model = tum_F_4, data = tum_df,
                         time_col = "age_followup", event_col = "tum_event")
```

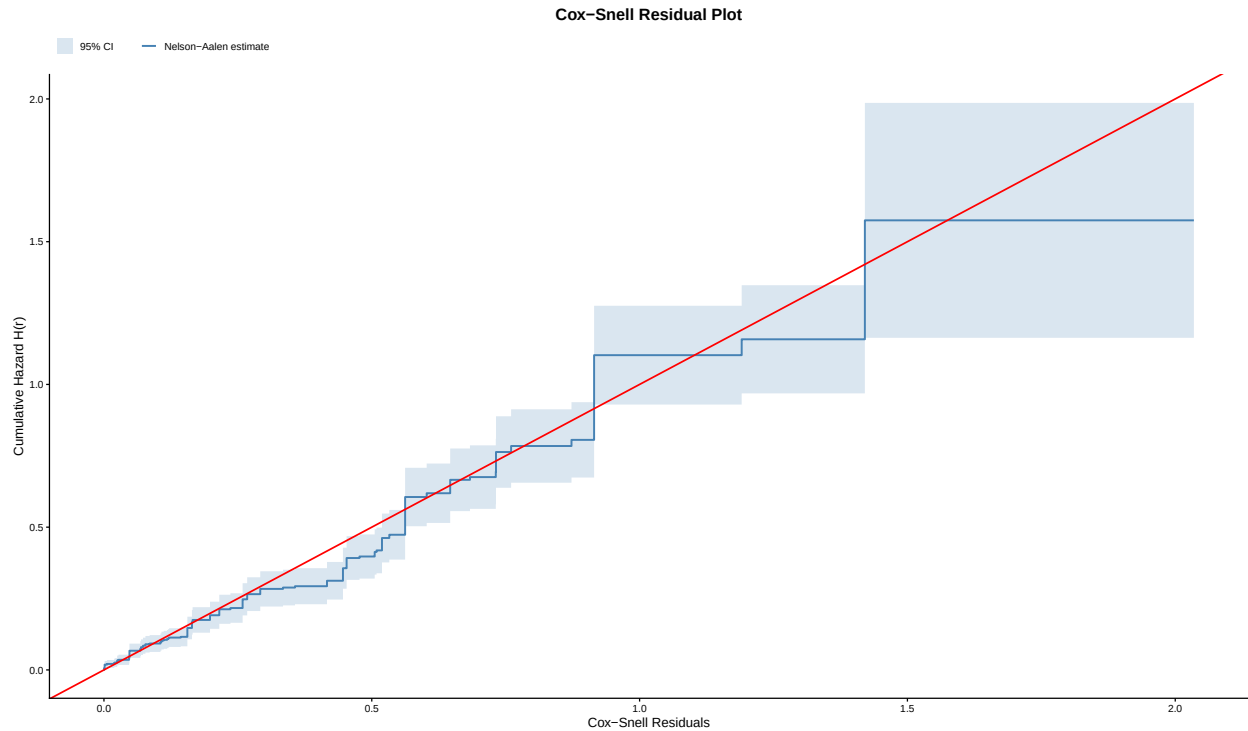

The curve follows a 45 degree exponential, we validate the fit of the selected model.

6.4 Selected model summary

Releveling of “lineage” to obtain all pairwise comparisons from the same selected model.

```
tum_df$lineage <- relevel(tum_df$lineage, ref = "HO_MT")
summary(SurvregME(Surv(age_followup, tum_event) ~ rest_condition * lineage,
  data = tum_df, dist = "weibull"))
```

```
##
## Weibull Linear Regression Model
##
## Formula:
## Surv(age_followup, tum_event) ~ rest_condition * lineage
##
## Fitted to dataset tum_df
##
## Fixed effects parameters:
## =====
##
##
```

	Estimate	Std. Error	z value
rest_conditionMechanical disruption	-1.439789	0.359848	-4.0011
lineageHO_SPC	0.016721	0.447214	0.0374
lineageHO_SPT	-2.582680	0.343763	-7.5130
rest_conditionMechanical disruption:lineageHO_SPC	-0.372221	0.502700	-0.7404
rest_conditionMechanical disruption:lineageHO_SPT	1.926839	0.409974	4.6999

```
## Pr(>|z|)
## rest_conditionMechanical disruption 6.305e-05 ***
```

```
## lineageHO_SPC                                0.9702
## lineageHO_SPT                                5.780e-14 ***
## rest_conditionMechanical disruption:lineageHO_SPC    0.4590
## rest_conditionMechanical disruption:lineageHO_SPT 2.603e-06 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Log-likelihood: -571.6086 (npar = 7)
```

```
tum_df$lineage <- relevel(tum_df$lineage, ref = "HO_SPC")
summary(SurvregME(Surv(age_followup, tum_event) ~ rest_condition * lineage,
  data = tum_df, dist = "weibull"))
```

```
##
## Weibull Linear Regression Model
##
## Formula:
## Surv(age_followup, tum_event) ~ rest_condition * lineage
##
## Fitted to dataset tum_df
##
## Fixed effects parameters:
## =====
##
##                                     Estimate Std. Error z value
## rest_conditionMechanical disruption    -1.812001    0.351408 -5.1564
## lineageHO_MT                           -0.016705    0.447214 -0.0374
## lineageHO_SPT                          -2.599394    0.343686 -7.5633
## rest_conditionMechanical disruption:lineageHO_MT    0.372206    0.502700  0.7404
## rest_conditionMechanical disruption:lineageHO_SPT    2.299055    0.402866  5.7067
##                                     Pr(>|z|)
## rest_conditionMechanical disruption    2.517e-07 ***
## lineageHO_MT                           0.9702
## lineageHO_SPT                          3.930e-14 ***
## rest_conditionMechanical disruption:lineageHO_MT    0.4590
## rest_conditionMechanical disruption:lineageHO_SPT 1.152e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Log-likelihood: -571.6086 (npar = 7)
```

```
tum_df$lineage <- relevel(tum_df$lineage, ref = "HO_SPT")
summary(SurvregME(Surv(age_followup, tum_event) ~ rest_condition * lineage,
  data = tum_df, dist = "weibull"))
```

```
##
## Weibull Linear Regression Model
##
## Formula:
## Surv(age_followup, tum_event) ~ rest_condition * lineage
##
## Fitted to dataset tum_df
```

```
##
## Fixed effects parameters:
## =====
##
## Estimate Std. Error z value
## rest_conditionMechanical disruption 0.48705 0.19562 2.4898
## lineageHO_SPC 2.59940 0.34369 7.5633
## lineageHO_MT 2.58269 0.34376 7.5130
## rest_conditionMechanical disruption:lineageHO_SPC -2.29906 0.40287 -5.7068
## rest_conditionMechanical disruption:lineageHO_MT -1.92685 0.40997 -4.6999
## Pr(>|z|)
## rest_conditionMechanical disruption 0.01278 *
## lineageHO_SPC 3.930e-14 ***
## lineageHO_MT 5.780e-14 ***
## rest_conditionMechanical disruption:lineageHO_SPC 1.152e-08 ***
## rest_conditionMechanical disruption:lineageHO_MT 2.603e-06 ***
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Log-likelihood: -571.6086 (npar = 7)
```

7 Median times

7.1 By rest condition

Estimate cumulative incidence functions for the tumor event, accounting for the competing risk of death, stratified by rest condition.

```
tum_cuminc_rest <- cuminc(Surv(age_followup, status_competing) ~
  rest_condition, data = tum_df)
```

For each stratum, extract the median time to event and its 95CI.

```
tum_medians_rest <- tidy(tum_cuminc_rest) %>%
  dplyr::filter(outcome == "1") %>%
  dplyr::group_by(strata) %>%
  dplyr::arrange(time) %>%
  dplyr::summarise(
    median_time = { idx <- which(estimate >= 0.5)[1]
    if (is.na(idx)) NA_real_ else time[idx] },
    ci_low = { idx <- which(conf.high >= 0.5)[1]
    if (is.na(idx)) NA_real_ else time[idx] },
    ci_high = { idx <- which(conf.low >= 0.5)[1]
    if (is.na(idx)) NA_real_ else time[idx] },
    .groups = "drop")
print(tum_medians_rest)
```

```
## # A tibble: 2 x 4
##   strata          median_time ci_low ci_high
##   <fct>          <dbl>   <dbl>   <dbl>
```

```
## 1 Control          NA  NA      NA
## 2 Mechanical disruption    5  4.14  5.43
```

7.2 By lineage

Same method as above, but stratified by lineage.

```
tum_cuminc_lineage <- cuminc(Surv(age_followup, status_competing) ~ lineage, data =
tum_df)

tum_medians_lineage <- tidy(tum_cuminc_lineage) %>%
  dplyr::filter(outcome == "1") %>%
  dplyr::group_by(strata) %>%
  dplyr::arrange(time) %>%
  dplyr::summarise(
    median_time = { idx <- which(estimate >= 0.5)[1]
    if (is.na(idx)) NA_real_ else time[idx] },
    ci_low = { idx <- which(conf.high >= 0.5)[1]
    if (is.na(idx)) NA_real_ else time[idx] },
    ci_high = { idx <- which(conf.low >= 0.5)[1]
    if (is.na(idx)) NA_real_ else time[idx] },
    .groups = "drop")

print(tum_medians_lineage)
```

```
## # A tibble: 3 x 4
##   strata median_time ci_low ci_high
##   <fct>      <dbl>  <dbl>  <dbl>
## 1 HO_SPT         4      4      4
## 2 HO_SPC        NA      NA      NA
## 3 HO_MT         NA      NA      NA
```

7.3 By rest condition and lineage

Same method as above, but stratified by rest condition and lineage.

```
tum_cuminc_interaction <- cuminc(Surv(age_followup, status_competing) ~
                                rest_condition + lineage, data = tum_df)

tum_medians_interaction <- tidy(tum_cuminc_interaction) %>%
  dplyr::filter(outcome == "1") %>%
  dplyr::group_by(strata) %>%
  dplyr::arrange(time) %>%
  dplyr::summarise(
    median_time = { idx <- which(estimate >= 0.5)[1]
    if (is.na(idx)) NA_real_ else time[idx] },
    ci_low = { idx <- which(conf.high >= 0.5)[1]
    if (is.na(idx)) NA_real_ else time[idx] },
    ci_high = { idx <- which(conf.low >= 0.5)[1]
    if (is.na(idx)) NA_real_ else time[idx] },
    .groups = "drop")

print(tum_medians_interaction)
```

```
## # A tibble: 6 x 4
##   strata                median_time ci_low ci_high
##   <fct>                <dbl>   <dbl>   <dbl>
## 1 Control, HO_SPT              4     4       4
## 2 Mechanical disruption, HO_SPT  4     4     4.57
## 3 Control, HO_SPC             NA    NA      NA
## 4 Mechanical disruption, HO_SPC   5    4.14    NA
## 5 Control, HO_MT              NA    NA      NA
## 6 Mechanical disruption, HO_MT   NA     5      NA
```

8 Cumulative incidences

8.1 By week and rest condition

Convert the continuous cumulative incidence function into a weekly summary table: for each stratum of rest condition and each week, show the estimate with its 95CI.

```
tum_incidence_rest <- tidy(tum_cuminc_rest) %>%
  dplyr::filter(outcome == "1") %>%
  dplyr::mutate(week = ceiling(time)) %>%
  dplyr::group_by(strata, week) %>%
  dplyr::filter(time == max(time)) %>%
  dplyr::slice(1) %>%
  dplyr::ungroup() %>%
  dplyr::select(strata, week, estimate_cuminc = estimate, conf.low, conf.high) %>%
  dplyr::arrange(strata, week)

print(tum_incidence_rest)
```

```
## # A tibble: 14 x 5
##   strata                week estimate_cuminc conf.low conf.high
##   <fct>                <dbl>         <dbl>   <dbl>   <dbl>
## 1 Control              0           0      NA      NA
## 2 Control              1       0.0278  0.0115  0.0565
## 3 Control              2       0.0417  0.0205  0.0745
## 4 Control              3       0.102   0.0660  0.147
## 5 Control              4       0.296   0.237   0.358
## 6 Control              5       0.356   0.293   0.420
## 7 Control              6       0.370   0.306   0.435
## 8 Mechanical disruption 0           0      NA      NA
## 9 Mechanical disruption 1       0.0185  0.00615 0.0439
## 10 Mechanical disruption 2       0.0833  0.0513  0.125
## 11 Mechanical disruption 3       0.167   0.120   0.219
## 12 Mechanical disruption 4       0.384   0.319   0.449
## 13 Mechanical disruption 5       0.537   0.468   0.601
## 14 Mechanical disruption 6       0.574   0.505   0.637
```

8.2 By week and lineage

Same method as above, but stratified by lineage.

```
tum_incidence_lineage <- tidy(tum_cuminc_lineage) %>%
  dplyr::filter(outcome == "1") %>%
  dplyr::mutate(week = ceiling(time)) %>%
  dplyr::group_by(strata, week) %>%
  dplyr::filter(time == max(time)) %>%
  dplyr::slice(1) %>%
  dplyr::ungroup() %>%
  dplyr::select(strata, week, estimate_cuminc = estimate, conf.low, conf.high) %>%
  dplyr::arrange(strata, week)

print(tum_incidence_lineage)
```

```
## # A tibble: 21 x 5
##   strata week estimate_cuminc conf.low conf.high
##   <fct> <dbl>         <dbl>     <dbl>     <dbl>
## 1 HO_SPT  0           0         NA         NA
## 2 HO_SPT  1       0.0486    0.0214    0.0926
## 3 HO_SPT  2       0.139     0.0883    0.201
## 4 HO_SPT  3       0.257     0.189     0.331
## 5 HO_SPT  4       0.653     0.569     0.725
## 6 HO_SPT  5       0.743     0.663     0.807
## 7 HO_SPT  6       0.743     0.663     0.807
## 8 HO_SPC  0           0         NA         NA
## 9 HO_SPC  1     0.00694    0.000628  0.0351
## 10 HO_SPC 2     0.00694    0.000628  0.0351
## 11 HO_SPC 3     0.0833     0.0454    0.136
## 12 HO_SPC 4     0.181     0.123     0.248
## 13 HO_SPC 5     0.333     0.257     0.411
## 14 HO_SPC 6     0.368     0.290     0.447
## 15 HO_MT  0           0         NA         NA
## 16 HO_MT  1     0.0139    0.00272   0.0452
## 17 HO_MT  2     0.0417    0.0171   0.0836
## 18 HO_MT  3     0.0625    0.0306   0.110
## 19 HO_MT  4     0.188     0.128     0.255
## 20 HO_MT  5     0.264     0.195     0.338
## 21 HO_MT  6     0.306     0.232     0.382
```

8.3 By week, rest condition, and lineage

Same method as above, but stratified by rest condition and lineage.

```
tum_incidence_interaction <- tidy(tum_cuminc_interaction) %>%
  dplyr::filter(outcome == "1") %>%
  dplyr::mutate(week = ceiling(time)) %>%
  dplyr::group_by(strata, week) %>%
  dplyr::filter(time == max(time)) %>%
  dplyr::slice(1) %>%
  dplyr::ungroup() %>%
  dplyr::select(strata, week, estimate_cuminc = estimate, conf.low, conf.high) %>%
  dplyr::arrange(strata, week)

print(tum_incidence_interaction)
```

```
## # A tibble: 42 x 5
##   strata                                week estimate_cuminc conf.low conf.high
##   <fct>                                <dbl>         <dbl>      <dbl>      <dbl>
## 1 Control, HO_SPT                      0             0         NA         NA
## 2 Control, HO_SPT                      1             0.0694    0.0255    0.144
## 3 Control, HO_SPT                      2             0.0972    0.0425    0.179
## 4 Control, HO_SPT                      3             0.264     0.168     0.370
## 5 Control, HO_SPT                      4             0.736     0.617     0.824
## 6 Control, HO_SPT                      5             0.833     0.722     0.903
## 7 Control, HO_SPT                      6             0.833     0.722     0.903
## 8 Mechanical disruption, HO_SPT       0             0         NA         NA
## 9 Mechanical disruption, HO_SPT       1             0.0278    0.00519   0.0871
## 10 Mechanical disruption, HO_SPT      2             0.181     0.102     0.278
## 11 Mechanical disruption, HO_SPT      3             0.25      0.157     0.355
## 12 Mechanical disruption, HO_SPT      4             0.569     0.446     0.675
## 13 Mechanical disruption, HO_SPT      5             0.653     0.529     0.751
## 14 Mechanical disruption, HO_SPT      6             0.653     0.529     0.751
## 15 Control, HO_SPC                     0             0         NA         NA
## 16 Control, HO_SPC                     1             0         NA         NA
## 17 Control, HO_SPC                     2             0         NA         NA
## 18 Control, HO_SPC                     3             0.0139    0.00116   0.0669
## 19 Control, HO_SPC                     4             0.0556    0.0178    0.126
## 20 Control, HO_SPC                     5             0.111     0.0516    0.196
## 21 Control, HO_SPC                     6             0.139     0.0708    0.229
## 22 Mechanical disruption, HO_SPC      0             0         NA         NA
## 23 Mechanical disruption, HO_SPC      1             0.0139    0.00116   0.0669
## 24 Mechanical disruption, HO_SPC      2             0.0139    0.00116   0.0669
## 25 Mechanical disruption, HO_SPC      3             0.153     0.0809    0.246
## 26 Mechanical disruption, HO_SPC      4             0.306     0.203     0.414
## 27 Mechanical disruption, HO_SPC      5             0.556     0.432     0.662
## 28 Mechanical disruption, HO_SPC      6             0.597     0.473     0.701
## 29 Control, HO_MT                      0             0         NA         NA
## 30 Control, HO_MT                      1             0.0139    0.00116   0.0669
## 31 Control, HO_MT                      2             0.0278    0.00519   0.0871
## 32 Control, HO_MT                      3             0.0278    0.00519   0.0871
## 33 Control, HO_MT                      4             0.0972    0.0424    0.179
## 34 Control, HO_MT                      5             0.125     0.0611    0.213
## 35 Control, HO_MT                      6             0.139     0.0708    0.229
## 36 Mechanical disruption, HO_MT       0             0         NA         NA
## 37 Mechanical disruption, HO_MT       1             0.0139    0.00116   0.0669
## 38 Mechanical disruption, HO_MT       2             0.0556    0.0178    0.126
## 39 Mechanical disruption, HO_MT       3             0.0972    0.0424    0.179
## 40 Mechanical disruption, HO_MT       4             0.278     0.180     0.385
## 41 Mechanical disruption, HO_MT       5             0.403     0.289     0.514
## 42 Mechanical disruption, HO_MT       6             0.472     0.353     0.583
```

9 Cumulative proportions

9.1 By week and rest condition

Compute raw cumulative proportions of tumor occurrence per week, stratified by rest condition.

```

tum_proportions_rest <- tum_df %>%
  dplyr::mutate(week_tum_event = ceiling(age_followup)) %>%
  dplyr::group_by(rest_condition) %>%
  dplyr::summarise(total_N = n(),
    n1 = sum(week_tum_event <= 1 & tum_event == 1),
    n2 = sum(week_tum_event <= 2 & tum_event == 1),
    n3 = sum(week_tum_event <= 3 & tum_event == 1),
    n4 = sum(week_tum_event <= 4 & tum_event == 1),
    n5 = sum(week_tum_event <= 5 & tum_event == 1),
    n6 = sum(week_tum_event <= 6 & tum_event == 1),
    p1 = n1 / total_N,
    p2 = n2 / total_N,
    p3 = n3 / total_N,
    p4 = n4 / total_N,
    p5 = n5 / total_N,
    p6 = n6 / total_N,
    .groups = "drop") %>%
  tidyr::pivot_longer(cols = matches("^np[1-6]$"),
    names_to = c(".value", "week"),
    names_pattern = "(n|p)([1-6])") %>%
  dplyr::mutate(week = as.numeric(week)) %>%
  dplyr::select(rest_condition, week, n, total_N, raw_proportion = p)

print(tum_proportions_rest)

```

```

## # A tibble: 12 x 5
##   rest_condition      week      n total_N raw_proportion
##   <fct>             <dbl> <int>   <int>         <dbl>
## 1 Control           1         6    216         0.0278
## 2 Control           2         9    216         0.0417
## 3 Control           3        22    216         0.102
## 4 Control           4        64    216         0.296
## 5 Control           5        77    216         0.356
## 6 Control           6        80    216         0.370
## 7 Mechanical disruption 1         4    216         0.0185
## 8 Mechanical disruption 2        18    216         0.0833
## 9 Mechanical disruption 3        36    216         0.167
## 10 Mechanical disruption 4        83    216         0.384
## 11 Mechanical disruption 5       116    216         0.537
## 12 Mechanical disruption 6       124    216         0.574

```

9.2 By week and lineage

Same method as above, but stratified by lineage.

```

tum_proportions_lineage <- tum_df %>%
  dplyr::mutate(week_tum_event = ceiling(age_followup)) %>%
  dplyr::group_by(lineage) %>%
  dplyr::summarise(total_N = n(),
    n1 = sum(week_tum_event <= 1 & tum_event == 1),
    n2 = sum(week_tum_event <= 2 & tum_event == 1),
    n3 = sum(week_tum_event <= 3 & tum_event == 1),

```

```

n4 = sum(week_tum_event <= 4 & tum_event == 1),
n5 = sum(week_tum_event <= 5 & tum_event == 1),
n6 = sum(week_tum_event <= 6 & tum_event == 1),
p1 = n1 / total_N,
p2 = n2 / total_N,
p3 = n3 / total_N,
p4 = n4 / total_N,
p5 = n5 / total_N,
p6 = n6 / total_N,
.groups = "drop") %>%
tidyr::pivot_longer(cols = matches("^[np][1-6]$"),
  names_to = c(".value", "week"),
  names_pattern = "(n|p)([1-6])") %>%
dplyr::mutate(week = as.numeric(week)) %>%
dplyr::select(lineage, week, n, total_N, raw_proportion = p)

print(tum_proportions_lineage)

```

```

## # A tibble: 18 x 5
##   lineage week      n total_N raw_proportion
##   <fct>   <dbl> <int>   <int>         <dbl>
## 1 HO_SPT     1      7    144         0.0486
## 2 HO_SPT     2     20    144         0.139
## 3 HO_SPT     3     37    144         0.257
## 4 HO_SPT     4     94    144         0.653
## 5 HO_SPT     5    107    144         0.743
## 6 HO_SPT     6    107    144         0.743
## 7 HO_SPC     1      1    144         0.00694
## 8 HO_SPC     2      1    144         0.00694
## 9 HO_SPC     3     12    144         0.0833
## 10 HO_SPC    4     26    144         0.181
## 11 HO_SPC    5     48    144         0.333
## 12 HO_SPC    6     53    144         0.368
## 13 HO_MT     1      2    144         0.0139
## 14 HO_MT     2      6    144         0.0417
## 15 HO_MT     3      9    144         0.0625
## 16 HO_MT     4     27    144         0.188
## 17 HO_MT     5     38    144         0.264
## 18 HO_MT     6     44    144         0.306

```

9.3 By week, rest condition, and lineage

Same method as above, but stratified by rest condition and lineage.

```

tum_proportions_interaction <- tum_df %>%
  dplyr::mutate(week_tum_event = ceiling(age_followup)) %>%
  dplyr::group_by(rest_condition, lineage) %>%
  dplyr::summarise(total_N = n(),
    n1 = sum(week_tum_event <= 1 & tum_event == 1),
    n2 = sum(week_tum_event <= 2 & tum_event == 1),
    n3 = sum(week_tum_event <= 3 & tum_event == 1),
    n4 = sum(week_tum_event <= 4 & tum_event == 1),

```

```

n5 = sum(week_tum_event <= 5 & tum_event == 1),
n6 = sum(week_tum_event <= 6 & tum_event == 1),
p1 = n1 / total_N,
p2 = n2 / total_N,
p3 = n3 / total_N,
p4 = n4 / total_N,
p5 = n5 / total_N,
p6 = n6 / total_N,
.groups = "drop") %>%
tidyr::pivot_longer(cols = matches("^np[1-6]$"),
  names_to = c(".value", "week"),
  names_pattern = "(n|p)([1-6])") %>%
dplyr::mutate(week = as.numeric(week)) %>%
dplyr::select(rest_condition, lineage, week, n, total_N, raw_proportion = p)

print(tum_proportions_interaction)

```

```

## # A tibble: 36 x 6
##   rest_condition    lineage week   n total_N raw_proportion
##   <fct>           <fct>   <dbl> <int>   <int>      <dbl>
## 1 Control        HO_SPT     1     5     72      0.0694
## 2 Control        HO_SPT     2     7     72      0.0972
## 3 Control        HO_SPT     3    19     72      0.264
## 4 Control        HO_SPT     4    53     72      0.736
## 5 Control        HO_SPT     5    60     72      0.833
## 6 Control        HO_SPT     6    60     72      0.833
## 7 Control        HO_SPC     1     0     72      0
## 8 Control        HO_SPC     2     0     72      0
## 9 Control        HO_SPC     3     1     72      0.0139
## 10 Control       HO_SPC     4     4     72      0.0556
## 11 Control       HO_SPC     5     8     72      0.111
## 12 Control       HO_SPC     6    10     72      0.139
## 13 Control       HO_MT      1     1     72      0.0139
## 14 Control       HO_MT      2     2     72      0.0278
## 15 Control       HO_MT      3     2     72      0.0278
## 16 Control       HO_MT      4     7     72      0.0972
## 17 Control       HO_MT      5     9     72      0.125
## 18 Control       HO_MT      6    10     72      0.139
## 19 Mechanical disruption HO_SPT     1     2     72      0.0278
## 20 Mechanical disruption HO_SPT     2    13     72      0.181
## 21 Mechanical disruption HO_SPT     3    18     72      0.25
## 22 Mechanical disruption HO_SPT     4    41     72      0.569
## 23 Mechanical disruption HO_SPT     5    47     72      0.653
## 24 Mechanical disruption HO_SPT     6    47     72      0.653
## 25 Mechanical disruption HO_SPC     1     1     72      0.0139
## 26 Mechanical disruption HO_SPC     2     1     72      0.0139
## 27 Mechanical disruption HO_SPC     3    11     72      0.153
## 28 Mechanical disruption HO_SPC     4    22     72      0.306
## 29 Mechanical disruption HO_SPC     5    40     72      0.556
## 30 Mechanical disruption HO_SPC     6    43     72      0.597
## 31 Mechanical disruption HO_MT      1     1     72      0.0139
## 32 Mechanical disruption HO_MT      2     4     72      0.0556
## 33 Mechanical disruption HO_MT      3     7     72      0.0972

```

## 34 Mechanical disruption HO_MT	4	20	72	0.278
## 35 Mechanical disruption HO_MT	5	29	72	0.403
## 36 Mechanical disruption HO_MT	6	34	72	0.472

10 Plots of cumulative incidence of tumoral development

10.1 Common themes

Theme of y-axis, and its presence or absence on the plots

```
scale_y <- scale_y_continuous(limits = c(0, 1), breaks = seq(0, 1, by = 0.25),
                              labels = percent, position = "right")
```

Fix to hide y-axis numbers, ticks, and titles on the right and left

```
hide_y <- theme(axis.text.y.right = element_blank(),
                axis.ticks.y.right = element_blank(),
                axis.title.y.right = element_blank(),
                axis.text.y = element_blank(),
                axis.ticks.y = element_blank(),
                axis.title.y = element_blank())
```

Fix to show y-axis numbers and ticks on the right

```
show_y <- theme(axis.text.y.right = element_text(color = "black", size = 14),
                axis.ticks.y.right = element_line(),
                axis.text.y = element_blank(),
                axis.ticks.y = element_blank(),
                axis.title.y = element_blank())
```

Theme of x-axis

```
scale_x <- scale_x_continuous(limits = c(0, 6), breaks = seq(0, 6, by = 2))
```

Color scales for rest condition

```
rest_scale <- list(
  scale_color_manual(values = rest_condition_colors, breaks = c("Control", "Mechanical
disruption")),
  scale_fill_manual(values = rest_condition_colors, breaks = c("Control", "Mechanical
disruption")))
```

Theme shared by all panels (angle = 90 for bottom-to-top reading)

```
theme_common <- theme(
  axis.text.x = element_text(color = "black", size = 14),
  axis.title.x = element_text(color = "black", size = 14, margin = margin(t = 10)),
  axis.title.y.right = element_text(color = "black", size = 14, angle = 90, margin =
margin(l = 15)),
  plot.margin = margin(l = 5, r = 5, t = 5, b = 5))
```

Specific label configurations for precise placement

```
labs_base    <- labs(x = NULL, y = NULL, title = NULL)
labs_x_only  <- labs(x = "Time (weeks)", y = NULL, title = NULL)
labs_y_only  <- labs(x = NULL, y = "Cumulative incidence\nof tumor development", title =
NULL)
labs_xy      <- labs(x = "Time (weeks)", y = "Cumulative incidence\nof tumor development",
title = NULL)
```

10.2 Panel A: by rest condition

Cumulative incidence of tumor onset by rest condition.

```
A <- cuminc(Surv(age_followup, factor(status_competing)) ~ rest_condition,
            data = tum_df) %>%
  ggcuminc(outcome = "1") +
  add_confidence_interval() +
  labs_xy + scale_y + rest_scale + scale_x +
  theme_bw() + theme_common + show_y +
  theme(legend.position = "none") +
  plot_annotation(title = "Mechanical disruption effect",
                 theme = theme(plot.title = element_text(
                   hjust = 0.5, face = "bold", size = 16, margin = margin(b = 10))))
```

Extract legend from plot A to use later on the full figure.

```
shared_legend <- cowplot::get_legend(
  A + theme(legend.position = "bottom",
            legend.direction = "horizontal",
            legend.text = element_text(size = 13),
            legend.title = element_text(size = 14, face = "bold")))
```

10.3 Panel B: by rest condition for each lineage

10.3.1 HO_MT

Cumulative incidence of tumor onset by rest condition for the lineage HO_MT.

```
B1 <- cuminc(Surv(age_followup, factor(status_competing)) ~ rest_condition,
            data = tum_df %>% filter(lineage == "HO_MT")) %>%
  ggcuminc(outcome = "1") +
  add_confidence_interval() +
  labs_base + scale_y + scale_x + rest_scale +
  theme_bw() + theme_common + hide_y +
  theme(legend.position = "none") +
  annotate("text", x = 0.2, y = 0.95, label = expression(bolditalic("Ho") * bold("_MT")),
          color = "black", size = 5, hjust = 0, vjust = 1)
```

10.3.2 HO_SPC

Same method as above, but for the lineage HO_SPC.

```
B2 <- cuminc(Surv(age_followup, factor(status_competing)) ~ rest_condition,
             data = tum_df %>% filter(lineage == "HO_SPC")) %>%
  ggcuminc(outcome = "1") +
  add_confidence_interval() +
  labs_x_only + scale_y + scale_x + rest_scale +
  theme_bw() + theme_common + hide_y +
  theme(legend.position = "none") +
  annotate("text", x = 0.2, y = 0.95, label = expression(bolditalic("Ho") *
    bold("_SPC")),
          color = "black", size = 5, hjust = 0, vjust = 1)
```

10.3.3 HO_SPT

Same method as above, but for the lineage HO_SPT.

```
B3 <- cuminc(Surv(age_followup, factor(status_competing)) ~ rest_condition,
             data = tum_df %>% filter(lineage == "HO_SPT")) %>%
  ggcuminc(outcome = "1") +
  add_confidence_interval() +
  labs_y_only + scale_y + scale_x + rest_scale +
  theme_bw() + theme_common + show_y +
  theme(legend.position = "none") +
  annotate("text", x = 0.2, y = 0.95, label = expression(bolditalic("Ho") *
    bold("_SPT")),
          color = "black", size = 5, hjust = 0, vjust = 1)
```

Create panel B combining plots B1, B2, and B3

```
B <- (B1 + B2 + B3 + plot_layout(nrow = 1)) +
  plot_annotation(title = "Interaction between mechanical disruption and lineage",
                 theme = theme(plot.title = element_text(hjust = 0.5, face = "bold",
                   size = 16, margin = margin(b = 10))))
```

10.4 Panel C: by lineage

10.4.1 HO_MT

Cumulative incidence of tumor onset for the lineage HO_MT.

```
C1 <- cuminc(Surv(age_followup, factor(status_competing)) ~ 1,
             data = tum_df %>% filter(lineage == "HO_MT")) %>%
  ggcuminc(outcome = "1") +
  add_confidence_interval() +
  labs_base + scale_y + scale_x +
  theme_bw() + theme_common + hide_y +
  annotate("text", x = 0.2, y = 0.95, label = expression(bolditalic("Ho") * bold("_MT")),
          color = "black", size = 5, hjust = 0, vjust = 1)
```

10.4.2 HO_SPC

Same method as above, but for the lineage HO_SPC.

```
C2 <- cuminc(Surv(age_followup, factor(status_competing)) ~ 1,
             data = tum_df %>% filter(lineage == "HO_SPC")) %>%
  ggcuminc(outcome = "1") +
  add_confidence_interval() +
  labs_x_only + scale_y + scale_x +
  theme_bw() + theme_common + hide_y +
  annotate("text", x = 0.2, y = 0.95, label = expression(bolditalic("Ho") *
    bold("_SPC")),
           color = "black", size = 5, hjust = 0, vjust = 1)
```

10.4.3 HO_SPT

Same method as above, but for the lineage HO_SPT.

```
C3 <- cuminc(Surv(age_followup, factor(status_competing)) ~ 1,
             data = tum_df %>% filter(lineage == "HO_SPT")) %>%
  ggcuminc(outcome = "1") +
  add_confidence_interval() +
  labs_y_only + scale_y + scale_x +
  theme_bw() + theme_common + show_y +
  annotate("text", x = 0.2, y = 0.95, label = expression(bolditalic("Ho") *
    bold("_SPT")),
           color = "black", size = 5, hjust = 0, vjust = 1)
```

Create panel C combining plots C1, C2, and C3

```
C <- (C1 + C2 + C3 + plot_layout(nrow = 1)) +
  plot_annotation(title = "Lineage effect",
                  theme = theme(plot.title = element_text(
                    hjust = 0.5, face = "bold", size = 16, margin = margin(b = 10))))
```

10.5 Assembly

Add a letter tag (A/B/C) to the first sub-plot of each panel.

```
A <- A + labs(tag = "A") + theme(plot.tag = element_text(size = 20, face = "bold"))
B[[1]] <- B[[1]] + labs(tag = "B") + theme(plot.tag = element_text(size = 20, face =
  "bold"))
C[[1]] <- C[[1]] + labs(tag = "C") + theme(plot.tag = element_text(size = 20, face =
  "bold"))
```

Convert each panel into a graphical object. (Wrapping A in patchwork to force perfect alignment with the B and C grids).


```
A <- patchwork::patchworkGrob(A + patchwork::plot_layout(ncol = 1))
B <- patchwork::patchworkGrob(B)
C <- patchwork::patchworkGrob(C)
```

Combine the panels and the shared legend vertically. The legend is placed between B and C.

```
final_tum_panel <- cowplot::plot_grid(A,
  B,
  shared_legend,
  C,
  ncol = 1,
  align = "v",
  axis = "lr",
  rel_heights = c(1, 1, 0.1, 1)) +
  theme(plot.margin = margin(l = 5, r = 5, t = 5, b = 5))
```

Show the final figure.

```
print(final_tum_panel)
```

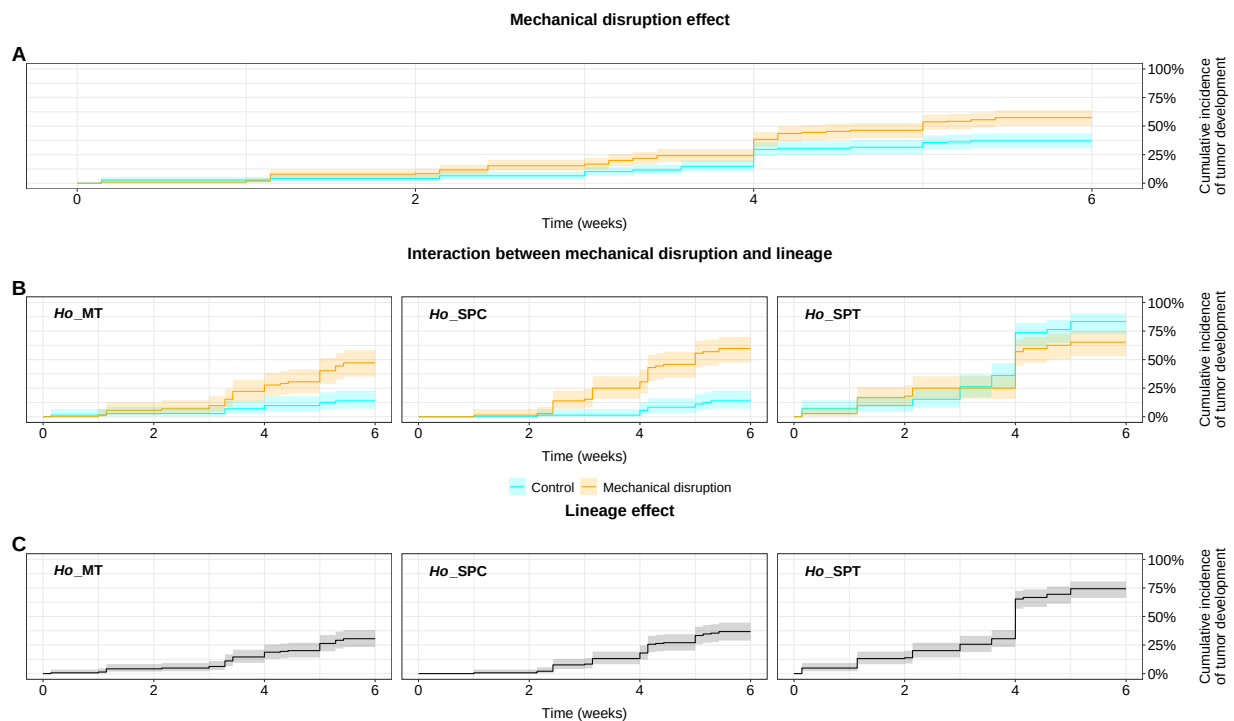

```
ggsave("figure_2.png", plot = final_tum_panel, width = 21, height = 29.7, units = "cm",
  dpi = 300)
```