

Klarna

Klarna Payments for SG

Version 21.3.1



1

Table of Contents

1. Summary	5
2. Component Overview	6
2.1. <i>Functional Overview</i>	6
2.2. <i>Locales</i>	8
2.3. <i>Use Cases</i>	9
2.3.1. Enable Klarna Payments Across International Sites (NA, EU, OC)	9
2.3.2. Multitude of Payment Options for Customers	9
2.3.3. Authorize and Place Klarna Order in Checkout	9
2.3.4. Refusal of Klarna Payments on Payment Method – Authorization	12
2.3.5. Klarna Payment Option Not Available for Current Purchase - Billing Page	13
2.3.6. Klarna Payments Not Available - Checkout	14
2.3.7. Handling Notifications	14
2.3.8. Virtual Cards Settlements	16
2.3.9. Auto-Capture	20
2.3.10. Widget Customizations	21
2.3.11. Customizing Payment Method Name	21
2.3.12. Klarna On-Site Messaging	23
2.3.13. Klarna Express Button	27
2.3.14. Klarna Payment Method Based Promotions	32
2.3.15. Price Adjustment Taxation Handling	32
2.3.16. Buy Online, Pickup in Store (BOPIS)	34
2.4. <i>Compatibility</i>	35
2.5. <i>Privacy, Payment</i>	35
2.5.1. GDPR Compliance	35
2.5.2. EMD (Extra Merchant Data)	35
2.5.3. PCI-DSS Compliance	38
3. Implementation Guide	39
3.1. <i>Setup of Business Manager</i>	39
3.1.1. Cartridge Upload & Assignment	39
3.1.2. Metadata Import	40
3.2. <i>Configuration</i>	41
3.3. <i>Template Updates</i>	43

3.4. Jobs	43
3.4.1. Job “OrderCleanUp” (Optional)	43
3.5. Custom Code	48
3.5.1. Template Modifications	48
3.5.1.1. default/checkout/summary/summary.isml	49
3.5.1.2. default/checkout/billing/billing.isml	50
3.5.1.3. default/checkout/billing/paymentmethods.isml	51
3.5.1.4. default/checkout/shipping/minishipments.isml	52
3.5.1.5. default/components/footer/footer_UI.isml	54
3.5.1.6. default/components/footer/footer.isml	54
3.5.1.7. default/product/producttopcontentPS.isml	55
3.5.1.8. default/product/productcontent.isml	55
3.5.1.9. js/pages/product/variant.js	56
3.5.1.10. default/checkout/cart/cart.isml	56
3.5.1.11. default/components/header/header.isml	58
3.5.1.12. default/mail/orderconfirmation.isml	59
3.5.1.13. default/components/order/ordrdetailsemail.isml	59
3.5.2. Controller Modification	60
3.5.2.1. COBilling.js	60
3.5.2.2. COSummary.js	62
3.5.2.3. OrderModel.js	63
3.6. External Interfaces	64
4. Testing	64
5. Operations, Maintenance	64
5.1. Data Storage	64
5.1.1. System Object Extensions	64
5.1.1.1. Basket	64
5.1.1.2. Order	65
5.1.1.3. Order Payment Instrument	66
5.1.1.4. Payment Transaction	66
5.1.1.5. Site Preferences	66
5.1.2. Custom Objects	69
5.1.2.1. KlarnaCountries	69

5.1.3.	Session Attributes & Cookies	72
5.1.4.	Library	73
5.1.5.	Services	73
5.2.	<i>Logs</i>	73
5.3.	<i>Availability</i>	74
5.4.	<i>Failover/Recovery Process</i>	74
5.5.	<i>Support</i>	74
5.5.1.	Customer Service	74
5.5.2.	Merchant Support	74
6.	User Guide	75
6.1.	<i>Roles, Responsibilities</i>	75
6.2.	<i>Storefront Functionality</i>	75
7.	Known Issues	80
8.	Release History	81
9.	Additional Information	82
9.1.	<i>Klarna API Information</i>	82
9.1.1.	Live Environment	82
9.1.2.	Testing Environment	82
9.2.	<i>Generate Key Pair and Key Id for Virtual Card Settlements (VCN)</i>	83
9.3.	<i>Decrypt VCN Card Details</i>	84
9.4.	<i>Update KlarnaCountries Definition</i>	85

1. Summary

The **Klarna Payments SG cartridge** enables integration of Klarna Payment solution on Commerce Cloud Storefront. The integration provides merchants the flexibility to offer choice of multiple Klarna Payment products on the Commerce Cloud checkout.

This document contains the instructions for a developer to install the cartridge and integrate it on the Salesforce Commerce Cloud site. The cartridge is fully compatible with the SiteGenesis JavaScript Controllers (SGJS).

Merchant teams are required also to configure the cartridge with the valid merchant credentials and site configurations in Commerce Cloud Business Manager to enable Klarna payments methods in the checkout.

The integration consists of an archive, which contains the following contents:

- Cartridge called “int_klarna_payments” and “int_klarna_payments_controllers” to be imported.
- A site-template archive containing new attributes and settings.
- This document for Site Genesis (Klarna Payments Integration Guide).
- The integration is based on the SiteGenesis demo store provided by Commerce Cloud.

It is a requirement that Merchant sign a contract for integration support and production go-live with Klarna.

Klarna offers a playground (test) environment, so the integration can be tested before switching to the Klarna production environment. Based on the contract, Klarna shall provide assistance with integration and testing prior to sign-off for go-live.

2. Component Overview

2.1. Functional Overview

Key Features:

- Integrate Klarna Payments using best practices on international sites based (markets in North America, Europe, Oceania)
- Enable multiple payment products for customer in Pay Now, Pay Later and Pay Over Time categories
- Fast integration/go-live with virtual card-based integration approach for settlement
- Handle Notification: pending status updates (reject/accept) for suspected orders post review
- Site managers can customize the Klarna Payments widget styling displayed in checkout, to match the style guide of merchant website(s)
- GDPR (EU) compliant checkout flow
- Multi Shipping Address support
- Supports Klarna authorize with finalize for Bank Transfer methods (Pay Now)
- Enable Onsite Messaging placements on PDP, Cart, Header, Footer, and dedicated Info page
- Enable Klarna's Express Button on Cart page (*US) for faster checkout
- BOPIS (Buy Online, Pickup in Store) support including extra merchant data
- Support for Klarna Payment Method based promotions
- Support for adjusted price promotions with Gross Tax Policy
- Support disabling Payment method for authorization rejection
- Support Auto-Capture

Klarna Payment cartridge makes use of the Klarna Payments JSON REST API and a JavaScript SDK to integrate on the storefront. Klarna Payment enables consumers to choose from the different payment method products offered by Klarna. Multiple Klarna products are available within the

categories “Pay Now”, “Pay Later” and “Pay Over Time”. The cartridge integration displays payment options via a widget (iframe) added inline on the billing page, referred to as Klarna widget or just “the widget”. The widget with information about the payment method is displayed to the customer when the individual clicks on the Klarna payment method.

Customers can authorize the payment after reviewing the payment method terms and clicking Place Order button. The Klarna order is created, and customer is re-directed to the confirmation page.

Orders successfully placed with Klarna return a Fraud Status: ACCEPTED and displayed in Business manager (BM).

With ACCEPTED status, order creation in SCC proceeds as usual. Klarna payment status is saved in a custom attribute with id kpFraudStatus in the PaymentTransaction system object, and can be seen in BM on the order details Payment tab as below:

Merchant Tools > Ordering > Orders > Order: 00005332(SiteGenesisGlobal)

General Attributes **Payment** Notes History

Payment Information for Order '00005332'

Order Total:	£195.83
<u>Amount Paid:</u>	£0.00
Balance Due:	£195.83
Invoice Number:	00024518
<u>Payment Status:</u>	Paid
Payment Method:	Klarna Processor: KLARNA_PAYMENTS Transaction: 8aa32699-20ac-2f76-a5ee-1e554e6cc7cd Amount: £195.83 Klarna Payment Category ID: pay_over_time Klarna Payment Category Name: Buy now, pay later Fraud Status: ACCEPTED

<< Back to List

Figure 1 Klarna Payment Details in BM

An alternate flow when PENDING status is returned for Klarna order creation, the SCC order creation proceeds with modified statuses. If later a Klarna notification with updated fraud status FRAUD_RISK_ACCEPTED is returned, SCC order status is updated and returns to the usual flow.

Klarna payment status is saved in a custom attribute with id kpFraudStatus in the PaymentTransaction system object, and can be seen in BM on the order details Payment tab as below:

Merchant Tools > Ordering > Orders > Order: 00005339(SiteGenesisGlobal)

General Attributes **Payment** Notes History

Payment Information for Order '00005339'

Order Total:	£62.35
Amount Paid:	£0.00
Balance Due:	£62.35
Invoice Number:	00024525
Payment Status:	Paid
Payment Method:	Klarna Processor: KLARNA_PAYMENTS Transaction: 62a33ce0-3bde-2657-bdc4-31f0ba994c45 Amount: £62.35 Klarna Payment Category ID: pay_over_time Klarna Payment Category Name: Buy now, pay later Fraud Status: FRAUD_RISK_ACCEPTED

<< Back to List

Figure 2 Klarna Payment Details in BM

2.2. Locales

The cartridge supports most locales including:

- English
- German
- Danish
- Spanish
- Finnish
- French
- Italian
- Dutch
- Polish

For a list of more [supported](#) locales, contact Klarna.

2.3. Use Cases

2.3.1. Enable Klarna Payments Across International Sites (NA, EU, OC)

Klarna Payments SG can be configured independently on each site by locale.

2.3.2. Multitude of Payment Options for Customers

On the checkout billing step, configured Klarna payment options are dynamically loaded based on customer's cart information and the payment method categories returned for the current Klarna session.

The screen below shows an example of the payment options displayed in the Checkout billing page:

SELECT PAYMENT METHOD • REQUIRED

Credit Card Pay Pal Bill Me Later

Buy now, pay later **Klarna.** Buy now, pay later **Klarna.**

4 interest-free payments of \$9.44

\$9.44 Today \$9.44 In 2 weeks \$9.45 In 4 weeks \$9.45 In 6 weeks

Trusted by over 11 million Americans. ⓘ

TESTDRIVE

By continuing, I accept [Klarna Services terms](#), [Privacy Policy](#), [Pay Later in 4 terms](#) and request electronic communication.

CONTINUE TO PLACE ORDER >

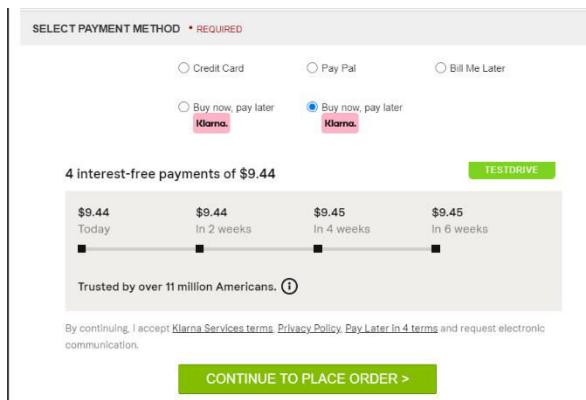


Figure 3 Payment Option

SELECT PAYMENT METHOD • REQUIRED

Credit Card Pay Pal Bill Me Later

Sofortüberweisung **Klarna.** Lastschrift **Klarna.** Rechnung **Klarna.**

TESTDRIVE

- Ohne Registrierung
- Per Online-Banking
- Klarna Käuferschutz [Mehr](#)

Durch fortfahren akzeptiere ich die Bedingungen für den Klarna Shopping Service und bestätige, dass ich die [Datenschutzerklärung](#) und den Hinweis zu [Cookies](#) gelesen habe.
[Impressum](#)

Klarna.

CONTINUE TO PLACE ORDER >

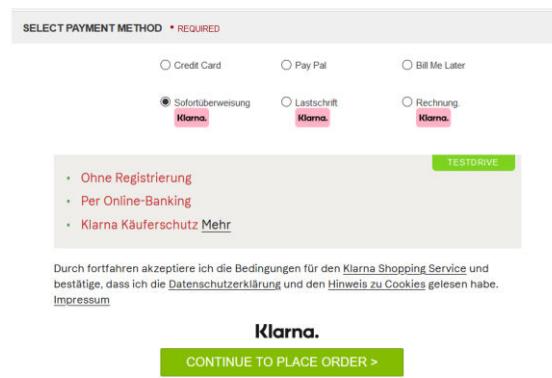


Figure 4 Payment Option

When customer selects (clicks) payment method, a widget with additional information of the Klarna product is displayed as shown above.

Note: The payment methods displayed are based on market and contractual agreement with Klarna.

2.3.3. Authorize and Place Klarna Order in Checkout

Cartridge provides best practice implementation and options to include Extra Merchant Data (EMD) to optimize acceptance rate for Klarna Payment (methods) products. This includes customer info and (Buy Online, Pickup in Store) BOPIS details included as merchant data when custom site preference "attachments" is enabled for the site. The EMD data sent can be extended but should be

reviewed case by case and optimized and validated based on merchant data & privacy requirements prior to go-live.

The customer's information (personally identifiable information) is sent once customer chooses a Klarna payment method and authorizes (clicks: "Continue to Place Order"). The required customer information facilitates assessment and verification of customer data to display payments method options available for the customer.

When customer clicks "Continue to Place Order" button, the authorization is initiated, and a successful authorization takes customer to summary page. Note that customer may be prompted for additional information prior to completion of authorization based on the payment method selected and market. If the authorization is not successful ("approved = false"), then the customer will stay on the billing page, the "Continue to Place Order" button will be disabled and depending on the Business Manager settings the payment option may be hidden or grayed out (refer to section **2.3.4 Refusal of Klarna Payments on Payment Method – Authorization**).

In some cases, the Pay Now payment category requires additional "finalize" call to be triggered when the customer clicks on the "Place Order" button in the review page. This is needed to ensure that the funds will be transferred (e.g.: Bank Transfer payment methods which initiate fund transfer) only when the customer has decided to place the order on the merchant site.

Please, note that in such cases cookie called "**selectedKlarnaPaymentCategory**" is set in the customer's browser. This cookie contains the selected payment method from the previous step and is used to initialize the "finalize" call to Klarna.

For more information regarding the authorize & finalize calls, refer to the developer documentation [here](#)

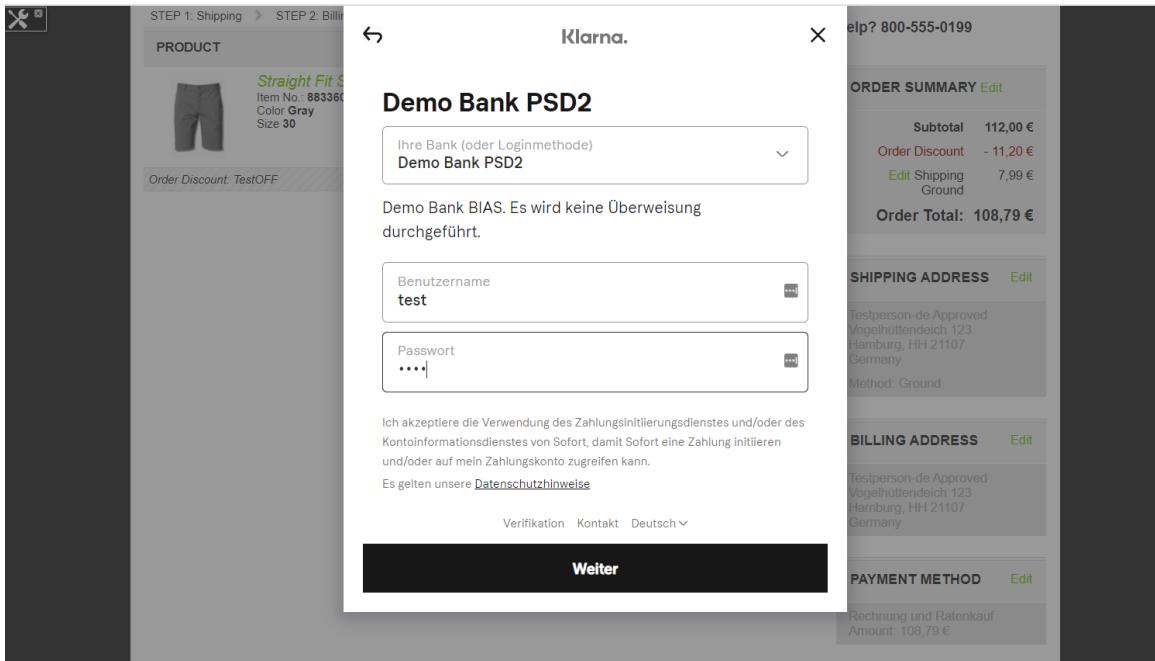


Figure 5 Finalize call screen

The Klarna Order is only placed prior to final step before SFCC order is created.

Successful payment authorizations (Klarna Payments authorization status: APPROVED) followed by placement of Klarna and SCC orders leads to a “Paid” order payment status and “Ready for Export” export status. Refused and pending Klarna Payment orders (Klarna Payments order statuses REJECTED and PENDING) lead to a “Not Paid” order payment status, and “Not Exported” export status.

In case of VCN settlement errors, Klarna orders are cancelled and SFCC orders are failed and set to a “Not Exported” export status.

When customers have selected Klarna payment option as a payment method for the order, successfully authorized the amount on order and later return to the billing page to choose a different payment method that is non-Klarna payment method. In such scenarios, when customer authorizes (non-Klarna payment method) and reaches the review page – automatic “cancelAuthorization” call will be triggered to release the authorized funds (Klarna related) & free up the available purchase amount for this customer.

MERCHANTS have the option to utilize this function to cancel prior authorization when required for specific use-cases apart from the above scenario. If enabled, the checkout flow should be tested thoroughly as part of integration, considering the valid checkout scenarios (e.g., relevant Klarna session flow, Klarna payment method switching, order amount updates, checkout with external payment method, etc.).

```

379 /**
380  * Saves/Updates Klarna Payments authorization token in the current session
381 */
382 @return {void}
383 */
384 function saveAuth() {
385     // Cancel any previous authorizations
386     // cancelAuthorization();
387 }
388 Transaction.wrap( function() {
389     session.privacy.KlarnaPaymentsAuthorizationToken = request.httpHeaders['x-auth'];
390     session.privacy.KlarnaPaymentsFinalizeRequired = request.httpHeaders['finalize-required'] === 'true';
391 });
392 response.setStatus( 200 );
393 }
394 */
395 /**
396 Deletes the previous authorization
397 @param {string} authToken Authorization Token
398 * @return {string} Service call result
399 */
400 */
401 function cancelAuthorization( authToken ) {
402     var klarnaAuthorizationToken = authToken || session.privacy.KlarnaPaymentsAuthorizationToken;

```

Figure 6 Cancel Authorization Call

2.3.4. Refusal of Klarna Payments on Payment Method – Authorization

Upon selecting one of Klarna's options as the payment method on billing step of checkout and based on the customer information provided, Klarna Payments can be refused as a payment method.

If the payment method was rejected with “**show_form=false**” & “**approved=false**” (i.e., hard reject), the merchant has the option to choose what happens with the payment option display in Billing page using BM preference “Hide Payment Methods on Deny” (**kpRejectedMethodDisplay**):

No – Leave the payment visible to the customers

Hide – The payment option will be hidden from customer

Grey Out – The payment option will be greyed out and not clickable

Please note that reloading the page will show the denied Klarna payment method again

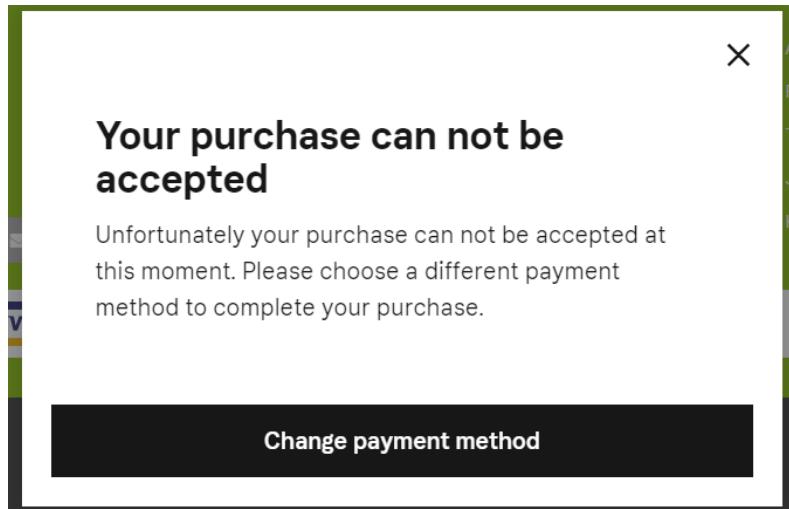


Figure 7 Denied Order Popup

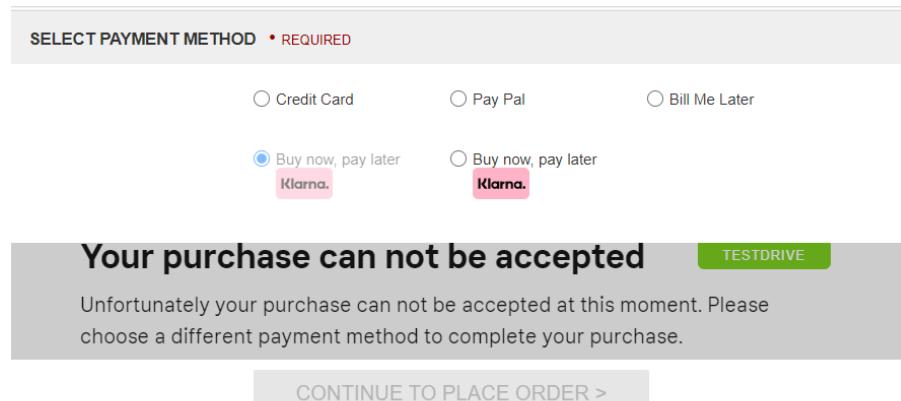


Figure 8 Greyed Out Payment Option

2.3.5. *Klarna Payment Option Not Available for Current Purchase - Billing Page*

The customer is presented with an appropriate message in the Klarna widget when customer attempts to choose Klarna in the billing page.

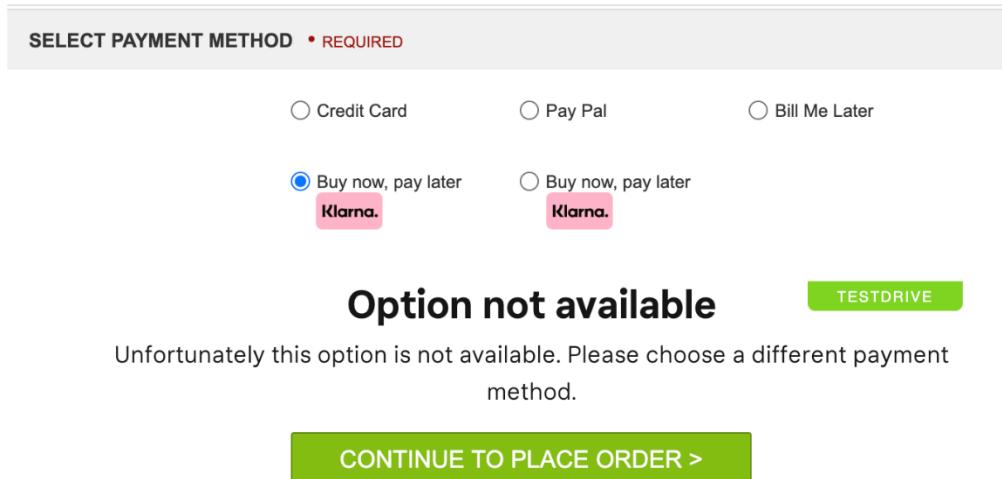


Figure 9 Option Not Available

2.3.6. Klarna Payments Not Available - Checkout

If Klarna API is not available or the site/storefront is not applicable, Klarna is not presented as a payment option in the billing page. It is recommended that Klarna session must not be created when customer chooses a non-Klarna market or merchant store, as well as in cases when merchants have multicurrency storefront with basket currency that is not supported by Karna.

2.3.7. Handling Notifications

In scenarios where the Klarna Order has been created but instead of immediately accepting the order, the Klarna order is flagged for additional review. This results in Commerce Cloud order staying in “Created” status with Fraud Status: PENDING. This order is marked with EXPORT_STATUS_NOTEEXPORTED, confirmation status NOTCONFIRMED and NOTPAID.

For Klarna orders with Fraud Status PENDING, once review is complete, updates are sent to the pre-configured notification_url on the merchant Commerce Cloud site. The updated Fraud status depends on the fraud screening, the returned Fraud Status (e.g., FRAUD_RISK_ACCEPTED) is displayed in BM. The push notification is repeatedly sent (up-to 24 hours, every 10 mins) until the POST request is acknowledged with a 200 response.

Klarna sends one of the following event types in the notification to SFCC to update risk status: FRAUD_RISK_ACCEPTED, FRAUD_RISK_REJECTED, FRAUD_RISK_STOPPED.

The notification updates are generally received within 4-24 hours. The order's payment transaction is updated (see **kpFraudStatus**). This can be seen in BM on the order details Payment tab as below:

Merchant Tools > Ordering > Orders > Order: 00005339(SiteGenesisGlobal)

General Attributes **Payment** Notes History

Payment Information for Order '00005339'

Order Total:	£62.35
Amount Paid:	£0.00
Balance Due:	£62.35
Invoice Number:	00024525
Payment Status:	Paid
Payment Method:	Klarna Processor: KLARNA_PAYMENTS Transaction: 62a33ce0-3bde-2657-bdc4-31f0ba994c45 Amount: £62.35
Klarna Payment Category ID: pay_over_time Klarna Payment Category Name: Buy now, pay later Fraud Status: FRAUD_RISK_ACCEPTED	

<< Back to List

Figure 10 Fraud Status in Payment Details

If the order is “FRAUD_RISK_ACCEPTED” upon notification, the order will be placed in SFCC (order status changes to OPEN). The order is marked with status CONFIRMATION_STATUS_CONFIRMED and export status EXPORT_STATUS_READY. If the order was placed with auto-capture, the payment status will be set to PAYMENT_STATUS_PAID and the full order amount will be captured.

If the order is “FRAUD_RISK_REJECTED” or “FRAUD_RISK_STOPPED” upon notification, the order is failed (FAIL) in SFCC.

Note: The Klarna pending functionality availability is dependent on markets and enabled based on the contractual agreement with Klarna.

2.3.8. Virtual Cards Settlements

This option is disabled by default. However, if standard order management is not a reasonable option for a Klarna integration, then Klarna's Merchant Card Service API based virtual card solution may be utilized via site preference “**kpVCNEnabled**”:

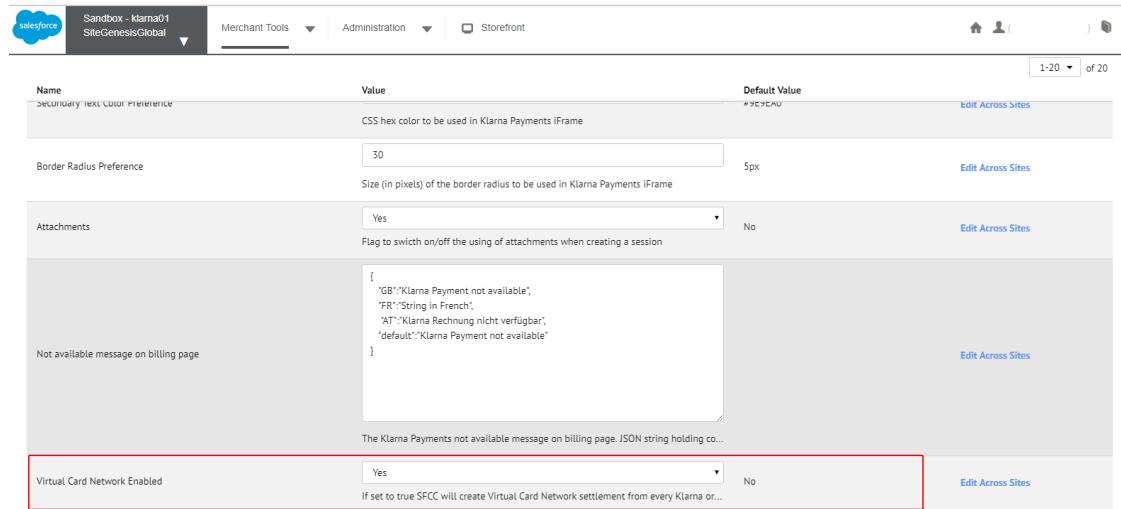


Figure 11 VCN Enablement Setting

The virtual card (see note) issued is for capture of the exact order amount for the given merchant.

When a customer places an order, the order is first booked in SFCC. Once an order has been accepted by Klarna, the cartridge integration creates a virtual card based settlement, utilizing the merchant card services (MCSv3) API.

Once a settlement has been created (virtual card returned), the encrypted card details are saved in SFCC and can be later utilized by the merchant OMS platform or custom PSP integration to authorize the virtual card until the Klarna order is valid. Then, once the order has been fulfilled, the card funds should be captured. (For delays in capture, or other special use cases, please speak with the Klarna Key Account Manager in advance). While Klarna is the original payment method of the order, the order amount will be settled with a credit card instead of direct bank account transfer.

Please review the procedures with Klarna team for details of settlement process using virtual cards.

Refer to the below code in “**controllers/KlarnaPayments.js**” and update accordingly to the integrated cards processor.

Note: If the Klarna order has a “**fraud_status**” of “PENDING”, action is not taken on the order until receiving Klarna’s push notification that the “**fraud_status**” has changed to “**FRAUD_RISK_ACCEPTED**”.

The virtual card issued is limited to 1 single successful authorization per order for a given MID.

For decrypting the credit card details refer to section **9.3 Decrypt VCN Card Details**.

```
108     .... Transaction.wrap( function() {  
109       .... paymentInstrument.paymentTransaction.transactionID = session.privacy.KlarnaPaymentsOrderID;  
110       .... paymentInstrument.paymentTransaction.paymentProcessor = paymentProcessor;  
111       .... session.privacy.OrderNo = orderNo;  
112       .... args.Order.custom.kpOrderID = session.privacy.KlarnaPaymentsOrderID;  
113       .... args.Order.custom.kplsVCN = empty( vcnEnabled ) ? false : vcnEnabled;  
114     } );  
115   };  
116   .... if ( session.privacy.KlarnaPaymentsFraudStatus === 'PENDING' ) {  
117     .... return { authorized: true };  
118   };  
119   ....  
120   .... if ( vcnEnabled ) {  
121     .... var isSettlementCreated = _handleVCNSettlement( args.Order, session.privacy.KlarnaPaymentsOrderID, localeObject ); // es1.  
122     .... if ( isSettlementCreated ) {  
123       .... //Plug here your Credit Card Processor  
124       .... return require( './cartridge/scripts/payment/payment_processor/BASIC_CREDIT' ).Authorize( { 'OrderNo':args.Order.getOrderNo(),  
125         .... } );  
126     .... var KlarnaPaymentsCancelOrderHelper = require( './cartridge/scripts/order/klarnaPaymentsCancelOrder' );  
127     .... KlarnaPaymentsCancelOrderHelper.cancelOrder( localeObject, args.Order );  
128     .... return { error: true };  
129   };  
130   ....  
131   .... return { authorized: true };  
132 };
```

Figure 12 Credit Card Authorization Call

To utilize virtual card integration option the merchant should:

- Enable VCN option in Site Preferences as shown above
- Enter the VCN Public Key ID. Unique UUIDv4 value, which should be different for playground testing and Production (live site)

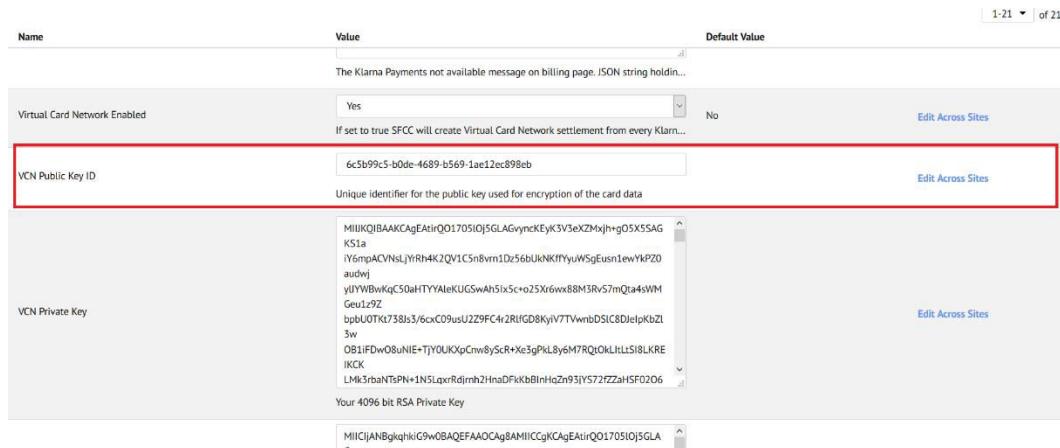


Figure 13 VCN Public Key ID

- Generate a 4096-bit RSA key pair (Refer to section **Generate Key Pair and Key Id for Virtual Card Settlements**). Set the custom preference “**vcnPublicKey**” with the value of the public key without the header and footer lines (begin and end public key) and the custom preference “**vcnPrivateKey**” with the value of the private key without the header and footer lines (begin and end private key)

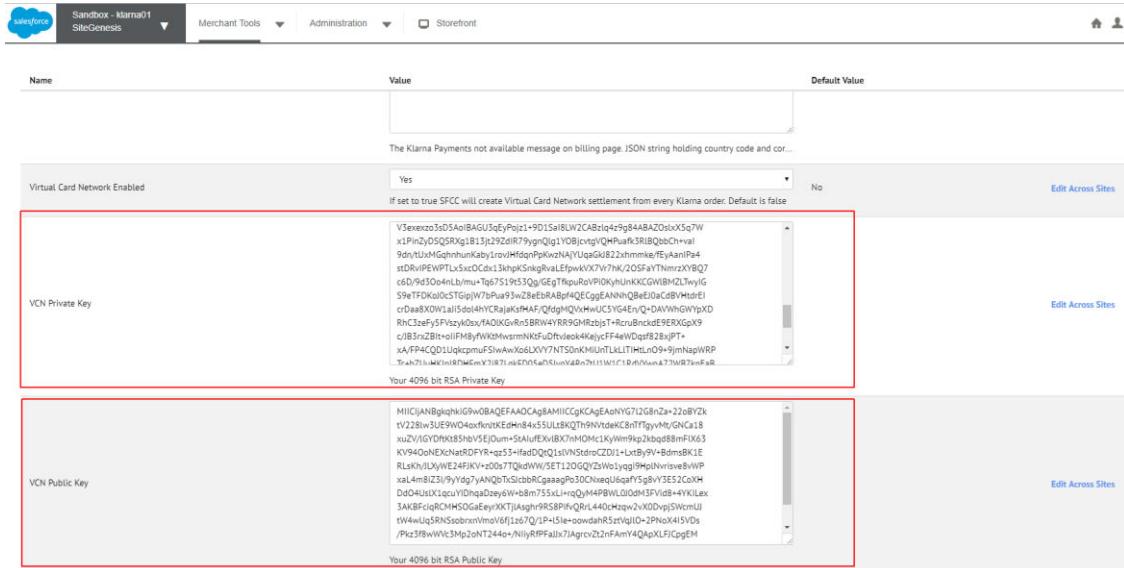


Figure 14 VCN Public & Private Keys

- Update the VCN settlement retry setting “**kpVCNRetryEnabled**”. By default, this is disabled. However, if enabled and in cases when a VCN creation error is returned, the application will retry the settlement request once again with `order_id` as the idempotency key.
- Finally, you need to send the generated unique `key_id` + public key combination in JWK format to Klarna prior to testing and go-live. It will be used to encrypt the aes key which is used for encrypting the pci data on Klarna side when settlement request is made. After confirmation from Klarna that the key has been successfully added to your merchant profile you would be able to use virtual card-based settlement option for Klarna payment methods

If enabled and fully configured, virtual card settlement request is made successfully. For orders placed with the VCN settlement option, the related custom attributes are shown below:

[Merchant Tools](#) > [Ordering](#) > [Orders](#) > Order: 00049309(RefArch)

General **Attributes** Payment Notes History

Attributes for Order '00049309'

On this page you can edit the attributes of the order. Fields with a red asterisk (*) are mandatory. Click **Apply** to save changes. Click **Reset** to revert your changes.

Klarna Payments	
Klarna Payments Order ID:	72bf2c96-6523-2add-8c50-f2af87712019
Is VCN Used:	<input checked="" type="checkbox"/>
VCN Card ID:	befbb0e9-5e98-4e39-9c00-75aba0c3372b

[**<< Back to List**](#)

Figure 15 VCN Details in Order

If required, the additional virtual card details can be assigned to this group in Administration > Site Development > System Object Types > select “Order”. In the Attribute Grouping tab select Klarna_Payments and click on “edit”. Assign the new attributes and save the data.

Administration > Site Development > System Object Types > Order - Attribute Groups > Klarna Payments

Object Type 'Order' - Attribute Definition Assignments

On this page you can assign existing attribute definitions to your attribute group.

Assign Attribute Definition						
ID:				Add	Type	Attribute Settings
Select All	ID	Name				
<input type="checkbox"/>	kpOrderID	Klarna Payments Order ID			String	
<input type="checkbox"/>	kpIsVCN	Is VCN Used			Boolean	
<input type="checkbox"/>	kpVCNCardID	VCN Card ID			String	
<input type="checkbox"/>	kpVCNHolder	VCN Holder			String	
<input type="checkbox"/>	kpVCNBrand	VCN Brand			String	
<input type="checkbox"/>	kpVCNPData	VCN PCI Data			String	
<input type="checkbox"/>	kpVCNIV	VCN Initialization Vector			String	
<input type="checkbox"/>	kpVCNAESKey	VCN AES Key			Text	

[Unassign](#)

[**<< Back**](#)

Figure 16 Full List of VCN Attributes

Please work with Klarna Account Manager and Delivery contact in advance to select the appropriate virtual card product based on your business requirements and use-cases. You can find information [here](#) around other use cases supported.

Important Note!


DO NOT SAVE DECRYPTED PCI DATA ON THE SERVER. It is the responsibility of the merchant to ensure PCI-DSS compliance and to ensure the card data is handled securely in co-ordination with required partners/Payment Service Provider/Acquirer. Please review in advance the order export details required for virtual card-based Klarna orders. Any historical decrypted PCI data should also be expunged, regardless of the validity date (see section **3.4.1 Job “OrderCleanUp”**).

2.3.9. Auto-Capture

Auto-capture is enabled via a site preference “**kpAutoCapture**” located in “**Klarna_Payments**” preference group.

When the preference is enabled (disabled by default), a full amount capture is attempted. If the capture is successful, the SFCC order’s payment transaction is marked as Paid, and viewable in the Business Manager.

The order will be marked as “*Captured*” in the Klarna’s Merchant Portal.

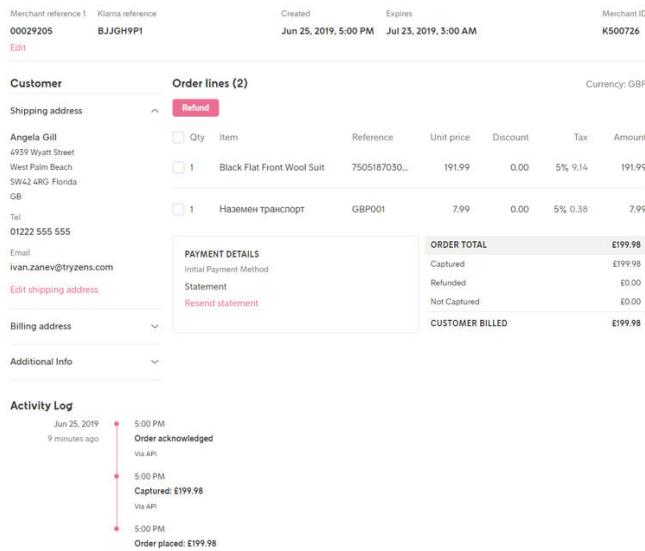

Merchant reference I: 00029205 Klarna reference: BJJ0H9P1
Created: Jun 25, 2019, 5:00 PM Expires: Jul 23, 2019, 5:00 AM Merchant ID: K500726

Customer
Shipping address: Angela Gill, 4939 Wyatt Street, West Palm Beach, SW42 4RG Florida, GB, Tel: 01222 555 555, Email: ivan.zanev@tryzen.com

Order lines (2)

Refund	Qty	Item	Reference	Unit price	Discount	Tax	Amount
	1	Black Flat Front Wool Suit	7505187030...	191.99	0.00	5% 9.14	191.99
	1	Наземен транспорт	GBP001	7.99	0.00	5% 0.38	7.99

PAYMENT DETAILS
Initial Payment Method: Captured, Statement: Resend statement
ORDER TOTAL: £199.98
Captured: £199.98, Refunded: £0.00, Not Captured: £0.00
CUSTOMER BILLED: £199.98

Activity Log
Jun 25, 2019, 9 minutes ago: 5:00 PM Order acknowledged, Via API
Jun 25, 2019, 9 minutes ago: 5:00 PM Captured: £199.98, Via API
Jun 25, 2019, 9 minutes ago: 5:00 PM Order placed: £199.98

Figure 17 Order Details in Klarna Portal

If the capture is unsuccessful, an error will be logged in the custom error log. The setting must be reviewed with Klarna delivery team before testing and go-live.

Note: Auto-capture is possible for orders when VCN is not enabled!

2.3.10. Widget Customizations

Note: The merchant will need a configured Klarna Payments account.

The merchant can style the Klarna Payments widget (skin), to match the marketing and branding needs of their store. The list with the graphic elements that can be customized out of the box through site preferences are listed below:

```
"color_details" (site preference kpColorDetails): "#COFFEE"  
"color_button" (site preference kpColorButton): "#COFFEE"  
"color_button_text" (site preference kpColorButtonText): "#COFFEE"  
"color_checkbox" (site preference kpColorCheckbox): "#COFFEE"  
"color_checkbox_checkmark" (site preference kpCheckboxCheckmark): "#COFFEE"  
"color_header"(site preference kpColorHeader): "#COFFEE"  
"color_link"(site preference kpColorLink): "#COFFEE"  
"color_border"(site preference kpColorBorder): "#COFFEE"  
"color_border_selected"(site preference kpBorderSelected): "#COFFEE"  
"color_text"(site preference kpColorText): "#COFFEE"  
"color_text_secondary"(site preference kpColorTextSecondary): "#COFFEE"  
"radius_border"(site preference kpRadiusBorder): "0px"
```

2.3.11. Customizing Payment Method Name

The payment method name “Klarna Payments” may be customized via the “Merchant Tools > Ordering > Payment Methods” section in Business Manager.

The screenshot below shows the “Klarna” method selected and the administrator choosing a language from the drop-down.

Payment Methods

Payment methods are managed here. To create a new payment method, click the New button. To remove a payment method click the remove icon in the payment method row. The default payment methods can't be removed, and their IDs can't be changed. When you select the CREDIT_CARD payment method, credit/debit cards can be reordered through drag-and-drop.

ID	Name
BANK_TRANSFER	
BLNL	
CREDIT_CARD	
DW_ANDROID_PAY	
DW_APPLE_PAY	
GIFT_CERTIFICATE	
Klarna	Rechnung und Ratenkauf
PayPal	

Language: German (Germany) ▾

- English (United Kingdom)
- English (United States)
- Finnish (Finland)
- French
- French (Belgium)
- French (Canada)
- French (France)
- German
- German (Austria)
- German (Germany)**
- German (Switzerland)
- Italian
- Italian (Italy)
- Japanese
- Japanese (Japan)

Figure 18 Customize Payment Name

The payment method name would then be visible in the mini summary & confirmation screens, the confirmation emails and My Account Order Details section.

Order Number: 00055604

Payment Information

Billing Address
Testperson-de
Approved
Vogelhüttendeich 123
Hamburg, HH 21107
Germany
Phone: +494086687781

Payment Method
Rechnung und Ratenkauf
Klarna order reference: 70aa2465-33dd-2ee0-b3f9-5a038dbe0a71
Amount: 108,79 €

Payment Total
Subtotal 112
Order Discount -11
Shipping 7,99
Order Total: 108

Shipment#1

Item	Quantity	Price	Shipping To
Straight Fit Shorts	1	112,00 €	Testperson-de Approved

Figure 19 Payment Method Name in Email

2.3.12. Klarna On-Site Messaging

On-site messaging is a platform that enables you to add tailored messaging to your website. With On-site messaging you can let shoppers know about the different payment options you have available as they browse your site. By using Klarna, customers have access to our flexible payment options in the checkout; On-site messaging is a great way to let them know even before they decide to buy.

The Klarna Payment cartridge provides multiple options in the standard implementation based on the reference architecture:

- Product Page and Cart based promotions
- Sitewide
 - Top Banner strip
 - Footer logo
- Custom Info-page

Klarna On-Site Messaging (OSM) is configured by site and by locale via the **KlarnaCountries** custom object.

To configure the OSM settings for a locale, you must visit “***Merchant Tools – Custom Object Editor***” and search for **KlarnaCountries** custom object. Select the country Key, e.g. “US”

In the custom country specific configuration, provide a valid locale for the OSM tag based on the country being configured.

The OSM Data Client ID and Data keys required are available in Klarna Merchant Portal within the On-site Messaging App:

General

Manage 'US' (KlarnaCountries)

Fields with a red asterisk (*) are mandatory. You can view and edit the name and description in other languages, if required. Click **Apply** to save the details.

General	
	Country Code: <input type="text" value="US"/>
On-site Messaging Data Default Locale:	<input type="text" value="en-US"/>
Service Credential ID:	<input type="text" value="klarna.http.uscredentials"/>
On-site Messaging	
On-site messaging Data Client ID:	<input type="text" value="60a22a39-c2fd-5d09-bfe1-771459318a4d"/>
Cart Placement Tag Enabled:	<input checked="" type="checkbox"/>
Cart Placement Data Key:	<input type="text" value="credit-promotion-standard"/>
PDP Placement Tag Enabled:	<input checked="" type="checkbox"/>
PDP Placement Data Key:	<input type="text" value="credit-promotion-badge"/>
Header Placement Tag Enabled:	<input checked="" type="checkbox"/>
Header Placement Data Key:	<input type="text" value="top-strip-promotion-auto-size"/>
Footer Placement Tag Enabled:	<input checked="" type="checkbox"/>
Footer Placement Data Key:	<input type="text" value="footer-promotion-auto-size"/>
Info Page Placement Tag Enabled:	<input checked="" type="checkbox"/>
Info Page Placement Data Key:	<input type="text" value="info-page-standard"/>
Data Inline Enabled on PDP/Cart placement (Canada only):	<input type="checkbox"/>
URL to On-Site Messaging Library URL:	<input type="text" value="https://na-library.playground.klarnaservices.com/lib.js"/>

Figure 20 OSM Settings in Business Manager

To enable Placement tag for the Cart Page, the “Cart Placement Data Key” must be filled with Data Key value and the “Cart Placement Tag Enabled” must be checked.

To enable Placement tag for the PDP Page, the “PDP Placement Data Key” must be filled with Data Key value and the “PDP Placement Tag Enabled” must be checked.

To enable Placement tag for header, the “Header Placement Data Key” must be filled with Data Key value and the “Header Placement Tag Enabled” must be checked.

To enable Placement tag for footer, the “Footer Placement Data Key” must be filled with Data Key value and the “Footer Placement Tag Enabled” must be checked.

To enable Placement tag for the Info Page, the “Info Page Placement Data Key” must be filled with Data Key value and the “Info Page Placement Tag Enabled” must be checked.

In Library URL, please input the full URL to the On-Site Messaging JavaScript Library.

In On-site messaging Data Client ID, please input the On-Site Messaging Data client ID value.

On-site messaging Data locale, please input the valid On-Site Messaging Data locale.

For Canada only, please update “Data Inline Enabled on PDP/Cart placement (Canada only)” value as follows:

- For PayBright enabled payment methods – set to true.
- For Klarna enabled payment methods – set to false.

The screenshot shows a shopping cart page with two items: a 'Sleeveless Cowl Neck Top' and an 'Upright Case'. The total estimated amount is \$65.99. A Klarna payment option is displayed as a callout box, stating '\$17 every two weeks. No fees. Pay later in 4 parts with Klarna.' with a 'Learn more' link. Navigation buttons 'Continue Shopping' and 'CHECKOUT' are visible at the top and bottom of the page.

Figure 21 On-Site Messaging Enabled on Cart Page

The screenshot shows a product detail page for a 'Sleeveless Cowl Neck Top'. It includes a large product image, a star rating, the price '\$65.99', and a Klarna payment callout box with the same '\$17 every two weeks. No fees. Pay later in 4 parts with Klarna.' message and 'Learn more' link. Below the product details are sections for 'SELECT COLOR', 'SELECT SIZE', 'Size Chart', 'AVAILABILITY', and 'ADD TO CART'.

Figure 22 On-Site Messaging Enabled on PDP Page

In addition to the above, if you wish to display the dedicated (custom) Klarna info OSM page you can use the following controller endpoint “**KlarnaPayments-InfoPage**”. For example, you should update the “**footer-about**” content asset to include this line of code as shown on the screenshot.

```
<li><a href="$url('KlarnaPayments-InfoPage')$" title="Go to Klarna Info">Klarna Info</a></li>
```



Figure 23 Footer Asset Update

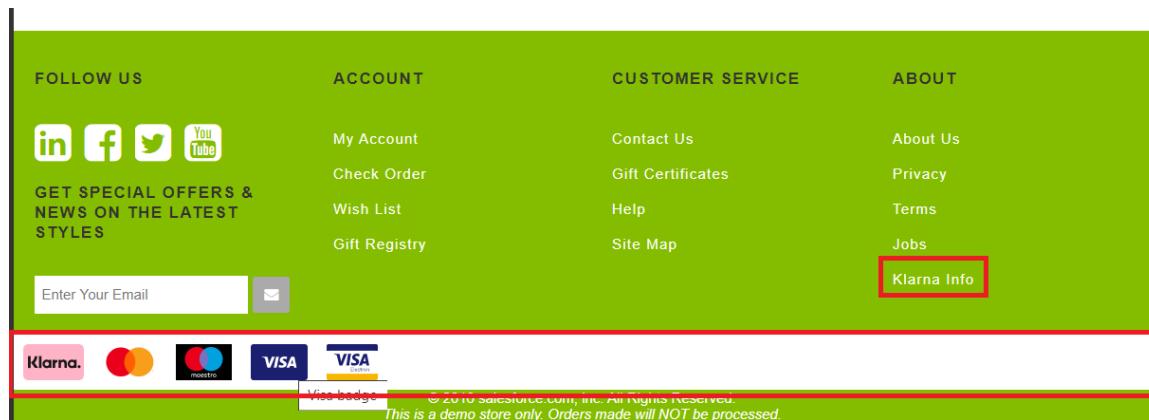


Figure 24 On-Site Messaging Enabled on Footer and link to Klarna Info Page

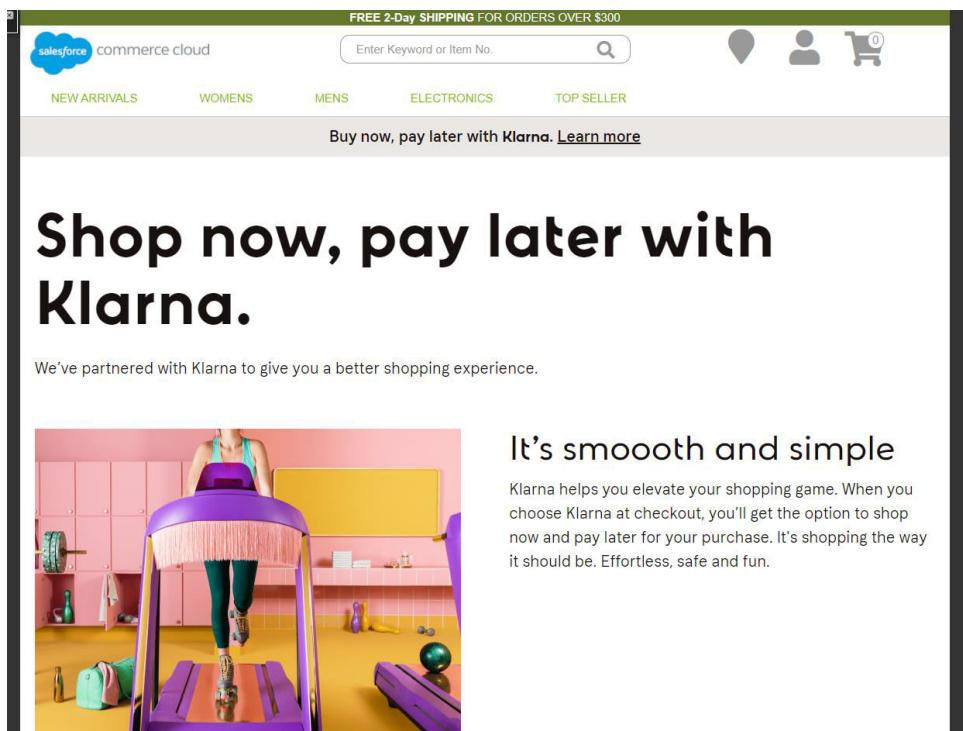


Figure 25 On-Site Messaging Enabled on Header & dedicated Klarna Info Page

For more information regarding OSM customizations and best practices, please refer to the [Klarna Developer / Docs](#)

Integration Best practice + information about Klarna Branding and Co-marketing options [here](#).

Note: It is the merchant's responsibility to ensure that user content is collected when required for OSM placements for your local market to abide by the legal requirement. e.g., [EU cookie-guide](#) in [Klarna Merchant Portal](#)

2.3.13. Klarna Express Button

The cartridge version 21.2.0 introduces the **Klarna Express button (KEB)** support (*Launch market: US) built into the standard Cart page.

By placing Klarna's Express button on the cart page of your website, shoppers can choose to log-in (or register) to their Klarna account and have their personal details pre-filled in the checkout. Klarna's 4 interest-free instalments payment method will be pre-selected for the shopper. For

Klarna's network of 16 million shoppers in the US, we can provide a pre-filled checkout experience, even if it's their first time on your website.

The KEB button can be configured and adapted to the needs of your storefront. Steps to enable KEB button:

- To enable the button, your Klarna Merchant ID (MID) and domains must be white-listed. Please reach out to your Klarna delivery manager for support with this activity prior to testing and production go-live (as the domain names white-listed defer). Please ensure that the MID matches that which is configured in the BM service credentials for your storefront.
- To configure the KEB settings for a given site, you must visit "***Merchant Tools – Custom Object Editor***" and search for **KlarnaCountries** custom object.
- Choose the respective country key (e.g.: "US") and provide the below details:
 - Express Button Merchant ID: *Allow-listed Merchant ID*
 - Express Button environment: *Klarna environment – Production/Playground*
 - Express Button Cart Enabled: *Check box to display on cart page*
 - Express Button Library URL: [Available here](#)
 - Express Button Category: *The Klarna category to be pre-selected on Checkout, e.g., "pay_over_time"*
- Please review **Figure 26** for reference.

More information to customize the button can be found [here](#).

Note: Klarna Express Button is currently available in the United States!

General

Manage 'US' (KlarnaCountries)

Fields with a red asterisk (*) are mandatory. You can view and edit the name and description in other languages, if required. Click **Apply** to save the details.

General	
 Country Code:	US <input type="button" value="Edit"/>
On-site Messaging Data Default Locale:	en-US
Service Credential ID:	klarna.http.uscredentials
On-site Messaging	
On-site messaging Data Client ID:	60a22a39-c2fd-5d09-bfe1-771459318a4d
Cart Placement Tag Enabled:	<input checked="" type="checkbox"/>
Cart Placement Data Key:	credit-promotion-standard
PDP Placement Tag Enabled:	<input checked="" type="checkbox"/>
PDP Placement Data Key:	credit-promotion-badge
Header Placement Tag Enabled:	<input checked="" type="checkbox"/>
Header Placement Data Key:	top-strip-promotion-auto-size
Footer Placement Tag Enabled:	<input checked="" type="checkbox"/>
Footer Placement Data Key:	footer-promotion-auto-size
Info Page Placement Tag Enabled:	<input checked="" type="checkbox"/>
Info Page Placement Data Key:	info-page-standard
Data Inline Enabled on PDP/Cart placement (Canada only):	<input type="checkbox"/>
URL to On-Site Messaging Library URL:	https://na-library.playground.klarnaservices.com/lib.js
Express Button	
Express Button Merchant ID:	NXXXXXX
Express Button Environment:	playground (Playground) <input type="button" value="▼"/>
Express Button Theme:	dark (Dark) <input type="button" value="▼"/>
Express Button Cart Enabled:	<input checked="" type="checkbox"/>
Express Button Library URL:	https://x.klarnacdn.net/express-button/v1/lib.js
Express Button Category:	pay_over_time

[<< Back to List](#)

Figure 26 Klarna Express Button completed configuration

Shoppers experience on the storefront cart is as below:

1. Lands on cart page where KEB is displayed
2. Clicks on KEB button
3. Shopper prompted to share their Klarna registered credentials to complete authentication

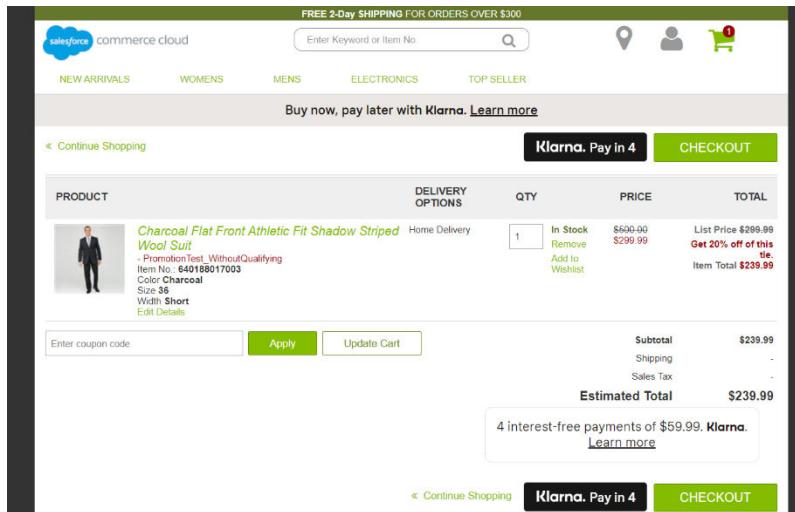


Figure 27 Klarna Express Button on Cart Page

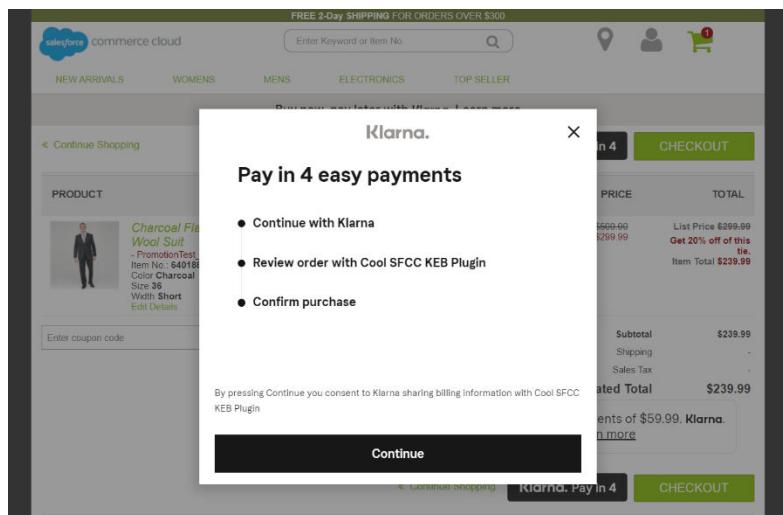


Figure 28 Klarna Express Button clicked Cart Page

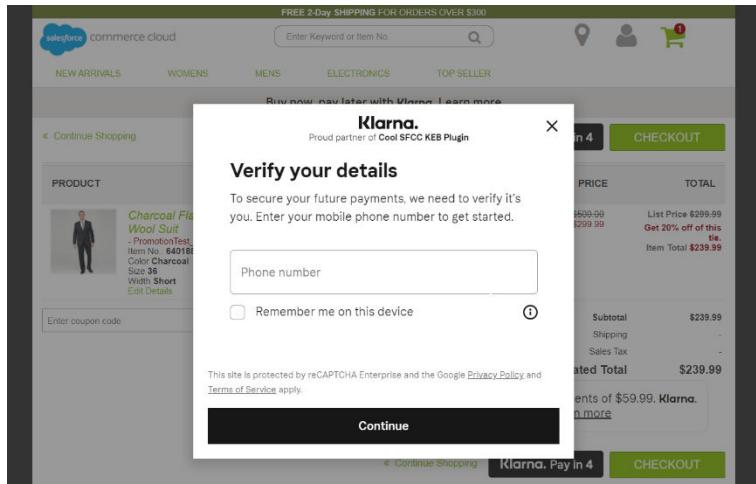


Figure 29 Klarna Express Button user credentials input actions

4. Re-direct to checkout with Klarna Payment Method pre-selected

Once the details are provided and the customer is authenticated with Klarna via the respective means, they are redirected to the checkout page with relevant details pre-populated and Klarna Payment (e.g.: “Pay in 4”) method pre-selected on the billing page.

Figure 30 Checkout details prefilled and Klarna Pay in 4 selected

For custom checkout design and when address field validations are in place, please ensure that the requisite changes are made to ensure the returned customer details are populated on the checkout forms to ensure the Klarna Payment method authorization is completed successfully.

Note: *On re-direct, in the standard checkout, any existing email ID and phone number are updated with the latest provided by the shopper*

2.3.14. Klarna Payment Method Based Promotions

As of B2C 20.7 release, merchants can include payment methods as qualifier for product, order & shipping promotions.

OOTB when such promotion is set up to use a payment method as qualifier, the total order amount will be visible to the customer once they reach the review page. This means that the Klarna authorization call will be made for larger amount than the final one.

To address this issue, once the customer clicks on any of the payment options in the billing section – a call will be made to the backend. This will re-calculate the basket totals if any promotions are applicable and will update the Klarna session details. As a result, the Klarna iframe widgets and the mini summary section on the storefront will update to show the final order details.

Note: *When the selected payment method is non-Klarna one, this logic should be customized by the merchant to handle any 3rd party payment integrations.*

2.3.15. Price Adjustment Taxation Handling

OOTB the Klarna API calls will send the product / shipping method details and the relevant discounts as separate lines items as shown below:

```

"order_lines": [
  {
    "type": "discount",
    "name": "5 Off Ties Promotion",
    "reference": "682875540326M_5_off_ties_promotion",
    "quantity": 1,
    "merchant_data": "5ties",
    "unit_price": -500,
    "tax_rate": 500,
    "total_amount": -500,
    "total_tax_amount": 0,
    "total_discount_amount": 0,
    "product_url": null,
    "image_url": null
  },
  {
    "type": "physical",
    "name": "Checked Silk Tie",
    "reference": "682875540326M",
    "quantity": 1,
    "merchant_data": "",
    "unit_price": 1919,
    "tax_rate": 500,
    "total_amount": 1919,
    "total_tax_amount": 68,
    "total_discount_amount": 0
  }
]

```

Figure 31 Line Items with Default Taxation Setting

In some cases, merchants using gross taxation might enable the “Tax Products and Shipping Only Based on Adjusted Price” preference under “Merchant Tools > Site Preferences > Pricing and Promotion” where the price adjustments are not taxed.

The setting, “**kpPromoTaxation**” has been introduced, where merchants should update this to match the promotion setting below:

- price (Based on Price) – The product, shipping and their discounts will be sent as separate lines. This is the default setting.
- adjustment (Based on Adjusted Price) – When this is selected, the product or shipping method line item will be sent with attribute “total_amount” matching the prorated price and attribute “total_discount_amount” – matching the total sum of all discounts for this item.

```

"order_lines": [
  {
    "type": "physical",
    "name": "Checked Silk Tie",
    "reference": "682875540326M",
    "quantity": 1,
    "merchant_data": "",
    "unit_price": 1919,
    "tax_rate": 2200,
    "total_amount": 1419,
    "total_tax_amount": 256,
    "total_discount_amount": 500,
  }
]

```

Figure 32 Line Items with "Based on Adj." Taxation Setting

Note: Enabling this setting is not required for storefronts with net taxation as the tax is not included in the products base price. The total order sales tax is sent as a separate line item to Klarna and not on product/shipping line-item level.

2.3.16. Buy Online, Pickup in Store (BOPIS)

When store pickup has been enabled on the storefront, the integration will send stores details to Klarna in the authorization request and when placing the Klarna order. Store information is not sent prior the interaction of the customer with the Klarna payment method widgets.

The store address(es) is always included in the EMD attachment “other_delivery_address” when applicable.

The address included on the shipping address in the Klarna order with store pick-up, is as below:

- Orders that have 1 or more store pickup shipments (no home delivery address), the first store shipment details will be set as the shipping address
- Order with store pick-up(s) and home delivery shipment, home delivery address will be used as the shipping address in the Klarna calls
- If the order contains no store pickups, no information is sent in “**other_delivery_addresses**” attribute

```
{
  "attachment": {
    "content_type": "application/vnd.klarna.internal.emd-v2+json",
    "body": [
      "other_delivery_address": [
        {
          "shipping_method": "store pick-up",
          "shipping_type": "normal",
          "first_name": "Test",
          "last_name": "Customer",
          "street_address": "1487 Bay St",
          "street_number": "",
          "postal_code": "01109",
          "city": "Springfield",
          "country": "US"
        }
      ]
    ]
  }
}
```

For more information on the options refer [here](#)

2.4. Compatibility

This cartridge has been tested against API Version 21.6 (Compatibility Mode: 19.10) and SG version 105.0.0.

2.5. Privacy, Payment

2.5.1. *GDPR Compliance*

The cartridge is compliant with GDPR recommendation and follows the best practice mentioned here and implementation transmits only required (PII) data to authorize payment method.

2.5.2. *EMD (Extra Merchant Data)*

The cartridge supports sending additional information on the customer's past purchase history, as well as "Buy Online, Pickup in Store" (BOPIS) store addresses when turned on in custom preferences: "Attachments" (**kpAttachments**). The type of data that can be send as an attachment is mentioned here. EMD is required for certain types of merchant orders and the inclusion of EMD is (e.g.customer_account_info: past interaction with merchant store) generally beneficial to improve acceptance rates.

EMD is included as part of Authorization step in Commerce Cloud checkout. The data send to Klarna is customizable and can be seen in "[int_klarna_payments/scripts/payments/additional](#)

CustomerInfo.js". This script should return a JSON string to be used as a value for the body sub-field of the attachment field as [described here](#).

If the example additionalCustomerInfo.js file is used unchanged the data send to Klarna is by the following schema:

```
{  
    "$schema": "http://json-schema.org/draft-03/schema#",  
    "id": "http://klarna.com/v2/emd#",  
    "description": "Extended Merchant Data Payload Schema",  
    "type": "object",  
    "properties": {  
        "customer_account_info": {  
            "type": "array",  
            "items": {  
                "type": "object",  
                "properties": {  
                    "unique_account_identifier": {  
                        "type": "string",  
                        "maxLength": 24  
                    },  
                    "account_registration_date": {  
                        "description": "ISO 8601 e.g. 2012-11-24T15:00",  
                        "type": "string",  
                        "format": "date-time",  
                        "pattern": "^[0-9][0-9][0-9][0-9]-[0-1][0-9]-[0-3][0-  
9]T[0-2][0-9]:[0-5][0-9](:[0-5][0-9]){:0,1}Z{:0,1}$"  
                    },  
                    "account_last_modified": {  
                        "description": "ISO 8601 e.g. 2012-11-24T15:00",  
                        "type": "string",  
                        "format": "date-time",  
                        "pattern": "^[0-9][0-9][0-9][0-9]-[0-1][0-9]-[0-3][0-  
9]T[0-2][0-9]:[0-5][0-9](:[0-5][0-9]){:0,1}Z{:0,1}$"  
                    }  
                }  
            }  
        },  
        "payment_history_full": {  
            "type": "array",  
            "items": {  
                "type": "object",  
                "additionalProperties": false,  
                "properties": {  
                    "unique_account_identifier": {  
                        "type": "string"  
                    },  
                    "payment_option": {  
                        "type": "string",  
                        "enum": ["card", "direct banking", "non klarna  
credit", "sms", "other"]  
                    },  
                    "number_paid_purchases": {  
                        "type": "integer"  
                    },  
                    "total_amount_paid_purchases": {  
                        "type": "number"  
                    }  
                }  
            }  
        }  
    }  
}
```

```
        },
        "date_of_last_paid_purchase": {
            "description": "ISO 8601 e.g. 2012-11-24T15:00",
            "type": "string",
            "format": "date-time",
            "pattern": "^[0-9][0-9][0-9][0-9]-[0-1][0-9]-[0-3][0-9]T[0-2][0-9]:[0-5][0-9](:[0-5][0-9])\\{0,1}Z\\{0,1}$"
        },
        "date_of_first_paid_purchase": {
            "description": "ISO 8601 e.g. 2012-11-24T15:00",
            "type": "string",
            "format": "date-time",
            "pattern": "^[0-9][0-9][0-9][0-9]-[0-1][0-9]-[0-3][0-9]T[0-2][0-9]:[0-5][0-9](:[0-5][0-9])\\{0,1}Z\\{0,1}$"
        }
    }
},
"other_delivery_address": {
    "type": "array",
    "items": {
        "type": "object",
        "additionalProperties": false,
        "properties": {
            "shipping_method": {
                "type": "string",
                "enum": ["store pick-up", "pick-up point", "registered box", "unregistered box"]
            },
            "shipping_type": {
                "type": "string",
                "enum": ["normal", "express"]
            },
            "first_name": {
                "type": "string"
            },
            "last_name": {
                "type": "string"
            },
            "street_address": {
                "type": "string"
            },
            "street_number": {
                "type": "string"
            },
            "postal_code": {
                "type": "string"
            },
            "city": {
                "type": "string"
            },
            "country": {
                "type": "string"
            }
        }
    }
}
}
```

Example data:

```
{  
    "attachment": {  
        "content_type": "application/vnd.klarna.internal.emd-v2+json",  
        "body": [  
            "customer_account_info": [{  
                "unique_account_identifier": "5509d9f7c8720c0e4575154b",  
                "account_registration_date": "2015-03-18T20:03:03Z",  
                "account_last_modified": "2015-03-18T20:03:03Z"  
            }],  
            "purchase_history_full": [{  
                "unique_account_identifier": "5509d9f7c8720c0e4575154b",  
                "payment_option": "card",  
                "number_paid_purchases": "23",  
                "total_amount_paid_purchases": "140023",  
                "date_of_last_paid_purchase": "2015-03-18T20:03:03Z",  
                "date_of_first_paid_purchase": "2015-03-18T20:03:03Z"  
            }],  
            "other_delivery_address": [{  
                "shipping_method": "store pick-up",  
                "shipping_type": "normal",  
                "first_name": "Test",  
                "last_name": "Customer",  
                "street_address": "1487 Bay St",  
                "street_number": "",  
                "postal_code": "01109",  
                "city": "Springfield",  
                "country": "US"  
            }]  
        ]  
    }  
}
```

Please, note that in cases when the customer uses Guest Checkout, the EMD sent includes `purchase_history_full[0].unique_account_identifier` (cqcid value set by SFCC), and all other fields are empty!!

2.5.3. PCI-DSS Compliance

Important Note: DO NOT SAVE DECRYPTED PCI DATA ON THE SERVER!

The virtual card (MCSv3) solution enables settlements using individual virtual card issued against a Klarna order. To be compliant with PCI-DSS requirements, merchant must ensure the data is securely maintained and transmitted as part of their operation in their live store environment. The required steps to ensure this, must be done in consultation with your payment service

provider/acquirer and completed prior to go-live. Please review in advance the order export details required for virtual card-based Klarna orders. Any historical decrypted PCI data should also be expunged, regardless of the VCN validity date.

3. Implementation Guide

3.1. Setup of Business Manager

The Klarna Payments LINK Cartridge contains 2 cartridges that are required for full functionality. Additionally, Controller and SFRA support is broken out into two separate cartridges, thereby facilitating the installation and use of one or the other models.

`int_klarna_payments` – Implements the core storefront functionality.

`int_klarna_payments_controllers` – Implements the storefront functionality with SG code.

3.1.1. *Cartridge Upload & Assignment*

Import the two cartridges into UX studio and associate them with a Server Connection.

- Import the “`int_klarna_payments`” cartridge into the SCC Studio Workspace:
 - Open SCC Studio
 - Click File -> Import -> General -> Existing Projects into Workspace
 - Browse to the directory where you saved the “`int_klarna_payments`” cartridge.
 - Click Finish.
 - Click OK when prompted to link the cartridge to the sandbox.

- Import the “`int_klarna_payments_controllers`” cartridge into the SCC Studio Workspace:
 - Open SCC Studio
 - Click File -> Import -> General -> Existing Projects into Workspace
 - Browse to the directory where you saved the “`int_klarna_payments_controllers`” cartridge.
 - Click Finish.
 - Click OK when prompted to link the cartridge to the sandbox.

- Prepend the Klarna cartridges to the effective site cartridge path:
 - Log into the SCC Business Manager.
 - Click Administration -> Sites -> Manage Sites.
- Select the desired site.
 - Click on the Settings tab.
 - Prepend “`int_klarna_payments_controllers:int_klarna_payments`” to the “**Cartridges**” field.
 - Click Apply

Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

Instance Type:	Sandbox/Development
Deprecated. The preferred way of configuring HTTP and HTTPS hostnames is by using new features of the site aliases configuration (“SEO > Aliases Configuration”). The HTTP/HTTPS intended only to support an older configuration style.	
HTTP Hostname:	<input type="text"/>
HTTPS Hostname:	<input type="text"/>
Instance Type: All	
Cartridges:	<input type="text" value="int_klarna_payments_controllers:int_klarna_payments:app_storefront_controllers"/>
Effective Cartridge Path:	<input type="text" value="int_klarna_payments_controllers"/> <input type="text" value="int_klarna_payments"/> <input type="text" value="app_storefront_controllers"/> <input type="text" value="app_storefront_core"/> <input type="text" value="plugin_apple_pay"/> <input type="text" value="plugin_facebook"/> <input type="text" value="plugin_payments"/> <input type="text" value="plugin_pinterest_commerce"/> <input type="text" value="plugin_web_payments"/> <input type="text" value="bc_content"/> <input type="text" value="core"/>

[<< Back to List](#)

Figure 33 Effective Cartridge Path

3.1.2. *Metadata Import*

- Go to main directory “**metadata**” folder, review the site-template content, and edit if needed. (Site template is prepared to setup “**SiteGenesis**” and “**RefArch**” sites - you may want to change that to your actual sites and delete the ones that are not needed). Zip the directory and you will have “**site-template.zip**” installation package.
- Log into the SCC Business Manager.
- Click Administration -> Sites Development -> Site Import & Export

- Browse to the directory where you saved the “**site-template.zip**”.
 - Click “**Upload**”
 - Select the uploaded site zip and click “**Import**”.
-

Note: Please, review the default **service.xml** file in the **site-template.zip** and update the configuration for Playground and Production accordingly before importing.

3.2. Configuration

- Add your account settings to the KlarnaCountries Custom Objects.
 - Log into the SCC Business Manager.
 - Select the desired site from the tabs across the top of the page.
 - Click Custom Objects -> Custom Object Editor
 - Change the Object Type dropdown to “**KlarnaCountries**”.
 - Click the “**Find**” button.
 - Click the desired country you wish to edit (See screenshot below).
 - Update the required fields as mentioned in “**KlarnaCountries**” section
 - Repeat for the other countries.

Merchant Tools > Custom Objects > Custom Objects > US - General

General

Manage 'US' (KlarnaCountries)

Fields with a red asterisk (*) are mandatory. You can view and edit the name and description in other languages, if required. Click **Apply** to save the details.

custom	
Country Code:	US
On-site Messaging Data Default Locale:	en-US
Service Credential ID:	klarna.http.uscredentials
On-site messaging Data Client ID:	60a22a39-c2fd-5d09-bfe1-771459318a4d
Cart Placement Tag Enabled:	<input checked="" type="checkbox"/>
Cart Placement Data Key:	info-page-standard
PDP Placement Tag Enabled:	<input checked="" type="checkbox"/>
PDP Placement Data Key:	credit-promotion-small
Header Placement Tag Enabled:	<input checked="" type="checkbox"/>
Header Placement Data Key:	top-strip-promotion-standard
Footer Placement Tag Enabled:	<input checked="" type="checkbox"/>
Footer Placement Data Key:	footer-promotion-auto-size
Info Page Placement Tag Enabled:	<input checked="" type="checkbox"/>
Info Page Placement Data Key:	info-page
Library URL:	https://na-library.playground.klarnaservices.com/lib.js

Figure 34 KlarnaCountries Settings

- Configure Klarna Payment Custom Preferences using the SCC Business Manager
 - Log into the SCC Business Manager
 - Select the desired site from the tabs across the top of the page.
 - Click Site Preferences -> Custom Preferences -> KlarnaPayment
 - Fill out the settings as desired. Descriptions of the site preferences are in the **Site Preferences** section.

- Configure Klarna Payment Service using the SCC Business Manager
 - Log into the SCC Business Manager
 - Click Administration > Operations > Services.
 - Click the Credentials tab.
 - Each Klarna credential correspond to one of the **KlarnaCountries** custom objects.
Click on the one you want to edit.

- Enter the MID API username and API password you received from Klarna.
- Edit URL field if Production environment. Klarna API URLs information - <https://developers.klarna.com/api/#api-urls>.

[Administration](#) > [Operations](#) > [Services](#) > [Service Credentials](#) > klarna.http.gbcredentials - Details

klarna.http.gbcredentials

Fields with a red asterisk (*) are mandatory. Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

These credentials are used by 0 services.

Name: [*]	klarna.http.gbcredentials
URL:	https://api.playground.klarna.com/
User:	your Merchant ID
Password:	*****

Figure 35 Service Settings

3.3. Template Updates

Templates have been updated to support On-site messaging and Addresses forms for Klarna. To be used as reference but feel free to customize the templates to match your specific needs. Final review and sign-off as per project requirements and contract agreements.


3.4. Jobs

3.4.1. Job “OrderCleanUp” (Optional)

This 1-time clean-up job is only applicable to merchants integrated with Klarna Payments cartridge version (< 19.1.6), utilizing (or previously used) virtual card-based settlement (VCN) and stored decrypted card details within Business Manager.

The job iterates over orders with status “Exported” and attribute “custom.kpIsVCN=true” to remove the sensitive details saved in fields kpVCNPAN, kpVCNCSC, kpVCNEExpirationMonth, kpVCNEExpirationYear as part of the previous releases. There are no parameters passed to the script.

Upon successful run, the job will log the result of processed orders in the custom debug log located in “**webdav/Sites/Logs**”. Depending on the setup, you will receive a message for the processed orders count for each storefront or message that there are no orders needing update.

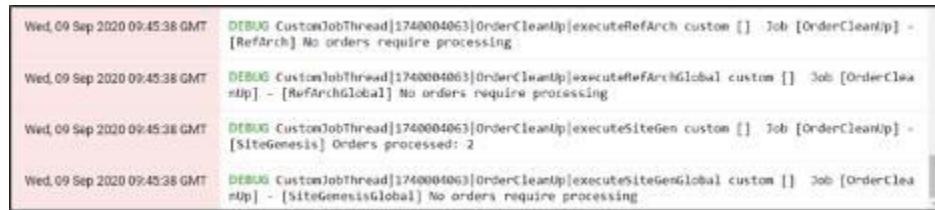

The screenshot shows four log entries from a terminal window. Each entry has a timestamp of "Wed, 09 Sep 2020 09:45:38 GMT" and a "DEBUG" level. The first three entries are identical, showing the job executing for RefArch, RefArchGlobal, and SiteGenesis scopes respectively, with a message stating "No orders require processing". The fourth entry shows the job executing for SiteGenesisGlobal, with a message stating "Orders processed: 2".

```
Wed, 09 Sep 2020 09:45:38 GMT DEBUG CustomJobThread[1740004063]OrderCleanup|executeRefArch custom [] Job [OrderCleanup] - [RefArch] No orders require processing
Wed, 09 Sep 2020 09:45:38 GMT DEBUG CustomJobThread[1740004063]OrderCleanup|executeRefArchGlobal custom [] Job [OrderCleanup] - [RefArchGlobal] No orders require processing
Wed, 09 Sep 2020 09:45:38 GMT DEBUG CustomJobThread[1740004063]OrderCleanup|executeSiteGen custom [] Job [OrderCleanup] - [SiteGenesis] Orders processed: 2
Wed, 09 Sep 2020 09:45:38 GMT DEBUG CustomJobThread[1740004063]OrderCleanup|executeSiteGenGlobal custom [] Job [OrderCleanup] - [SiteGenesisGlobal] No orders require processing
```

Figure 36 Job Logs

Upon error, the cause of the failure (message and stack) will be logged in the standard error log.



The screenshot shows a single log entry from a terminal window with a timestamp of "Wed, 09 Sep 2020 09:06:22 GMT". The log level is "ERROR". The message indicates an exception occurred while parsing a system object query, specifically for the "main.SystemObjectQueryMgrImpl" class in the "Sites-RefArch-Site" scope. It provides detailed information about the RequestID, SessionType, Truncated SessionID, and User Profile UUID.

```
Wed, 09 Sep 2020 09:06:22 GMT ERROR CustomJobThread[6180640111]OrderCleanup|execute com.demandware.beehive.core.internal.domain.SystemObjectQueryMgrImpl Sites-RefArch-Site 208 43e0d91e96 e67f0cb0ade56d99ae0c4bc12b:1640624181284573188 - Exception while parsing system object query.
System
RequestID: e67f0cb0ade56d99ae0c4bc12b
SessionType: 208
Truncated SessionID: 43e0d91e96
User Profile UUID: 03e37ff77529fd91ae75408ab
```

Figure 37 Job Logs

To setup the job, go to **Administration > Operations > Import & Export** and import file “**jobs.xml**”. Out of the box, the XML file includes only the RefArch scope, but it can be configured with multiple flows if you have more than one site using this functionality as seen bellow. Each site should be added as a separate flow.

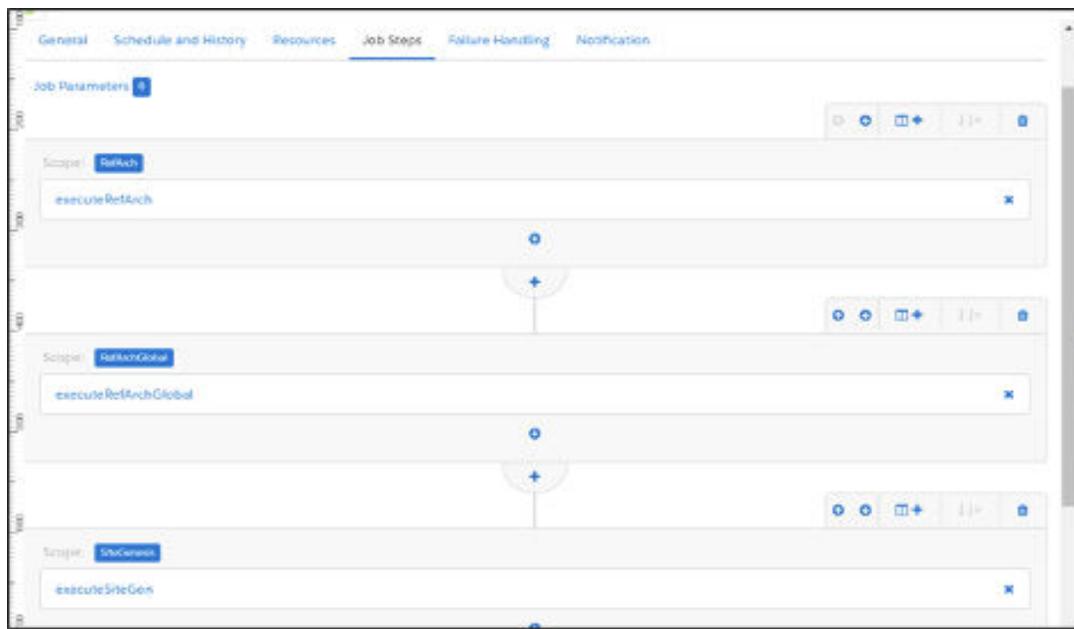


Figure 38 Job Steps

To set up the required job parameters and add new flow, follow the bellow steps. If you only have one storefront and need to change the scope to the correct one – proceed to steps 4-5 directly.

1. Click on the “Add a sequential flow” button at the bottom of the current flow.



Figure 39 Add New Job Step

- Once done, click on “Configure a step” button within the flow. In the flyout that has just opened search for “script” and select “ExecuteScriptModule”.

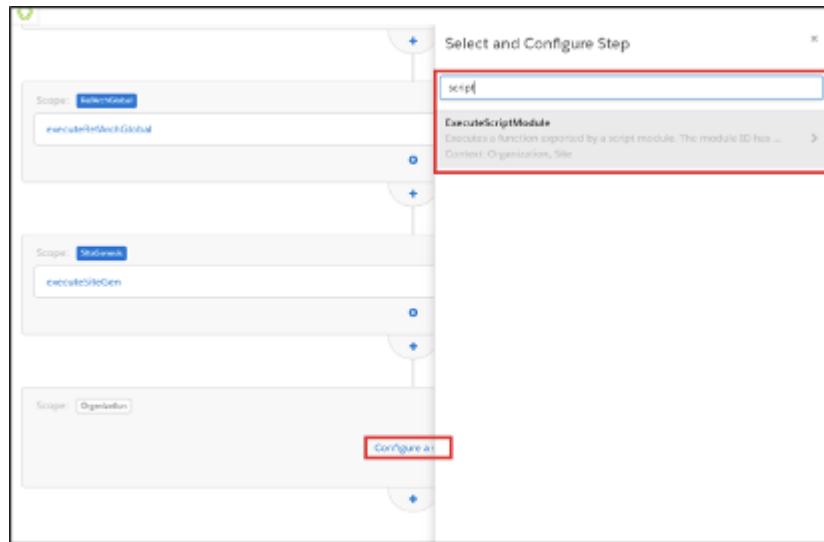


Figure 40 Configure Step

- In the flyout populate these fields and click the “Assign” button.
 - ID – Enter any meaningful name in the field. In case you have multiple flows, this should not be a duplicate one. If you enter a duplicate name, the details won’t be saved and you will see an error message.
 - ExecuteScriptModule.Module – Enter the location of the “OrderCleanUpJob.js” file. Out of the box it should be “int_klarna_payments/cartridge/scripts/job/OrderCleanUpJob.js” or the location where you have placed the script file.
 - ExecuteScriptModule.FunctionName – Leave the field value to “execute”

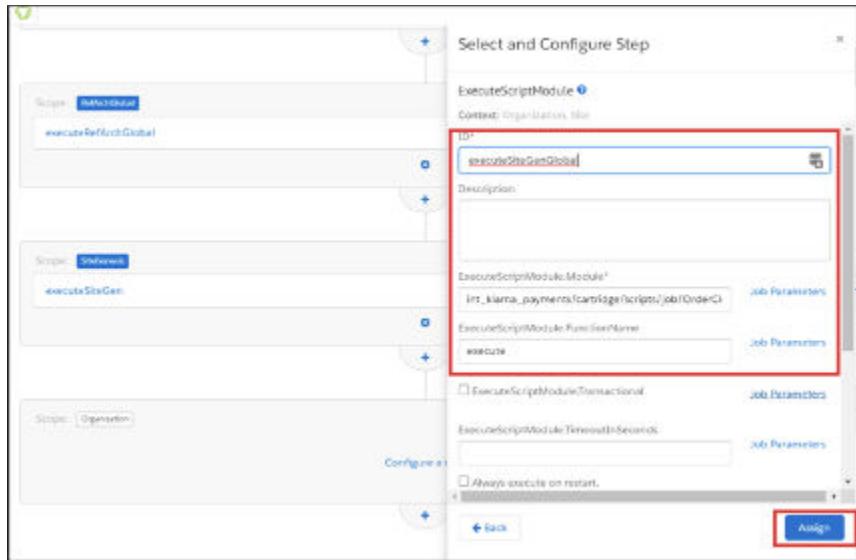


Figure 41 Configure Step (cont.)

4. Once the step has been added, you should make sure to assign it to the correct site scope. Click on “Organization” and select “Specific Sites” from the drop-down.

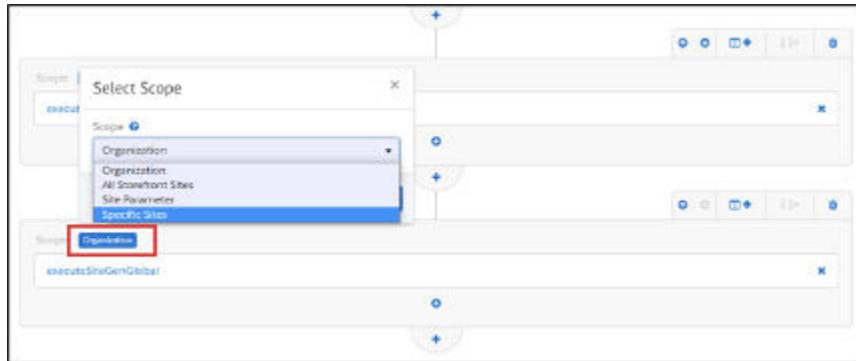


Figure 42 Job Scope

5. From the list of sites, select the respective site ID (i.e. SiteGenesisGlobal) and click on “Assign”.

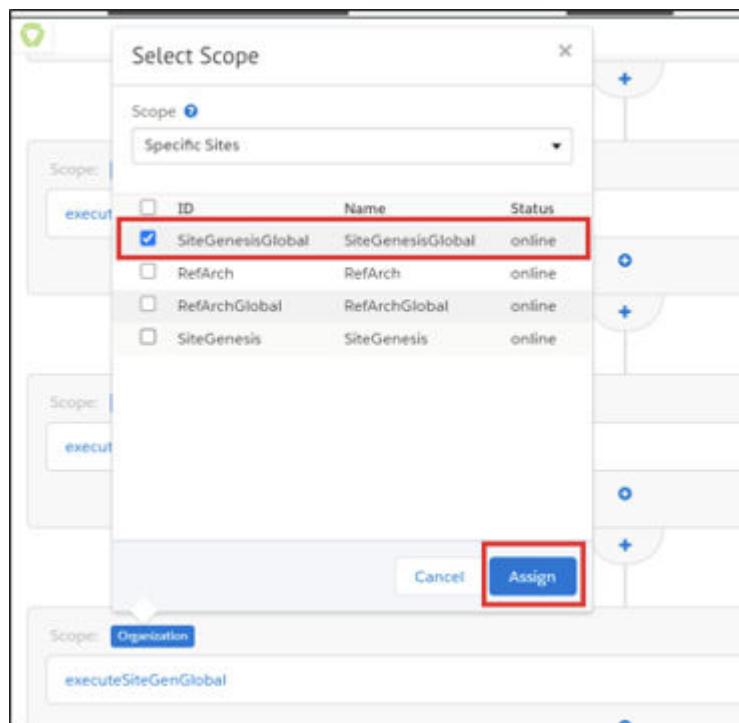


Figure 43 Job Scope (cont.)

6. Repeat steps 1-5 for each site/storefront that you have using Klarna VCN and nned additional configuration.

3.5. Custom Code

Integration may vary based on the customers' storefront. Site Genesis version 105.0.0 is used as a reference to demonstrate Klarna Payments integration.

3.5.1. *Template Modifications*

The following template changes should be made regardless of whether a controller or a pipeline integration approach are being used:

- default/checkout/billing/billing.isml
- default/checkout/summary/summary.isml
- default/checkout/billing/paymentmethods.isml
- default/checkout/shipping/minishipments.isml

- default/components/header/header.isml
- default/components/footer/footer.isml
- default/components/footer/footer_UI.isml
- default/product/producttopcontentPS.isml
- default/product/productcontent.isml
- default/product/productcontent.isml
- default/checkout/cart/cart.isml
- default/mail/orderconfirmation.isml
- default/components/order/ordrdetailsemail.isml

3.5.1.1. default/checkout/summary/summary.isml

Add Code:

```
<isif condition="${session.privacy.KlarnaPaymentsFinalizeRequired}">

    <script>
        <isinclud template="/resources/klarnapaymentsresources.isml"/>
    </script>

    <script type="text/javascript" src="${URLUtils.staticURL('/js/klarna-
payments-finalize.js')}"></script>

    <script src=" https://x.klarnacd.net/kp/lib/v1/api.js" async></script>

</isif>
```

Before `</isdecorate>` closing tag as shown below:

```

214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239

```

```

<form action="${URLUtils.https('cosummary-Submit'))" method="post" class="submit-order">
  <fieldset>
    <div class="form-row">
      <a class="back-to-cart" href="${URLUtils.url('Cart-Show'))}>
        <isprint value="${Resource.msg('summary.editcart','checkout',null)}" encoding="off" />
      </a>
      <button class="button-fancy-large" type="submit" name="submit" value="${Resource.msg('global.submitorder','locale',null)}">
        ${Resource.msg('global.submitorder','locale',null)}
      </button>
    </div>
    <input type="hidden" name="${dw.web.CSRFProtection.getTokenName()}" value="${dw.web.CSRFProtection.generateToken()}"/>
  </fieldset>
</form>
</div>
</isdecorator>

```

Figure 44 Modifications in summary.isml

3.5.1.2. default/checkout/billing/billing.isml

Add Code:

```

<script><isinclude
template="/resources/klarnapaymentsresources.isml"/></script>

<script type="text/javascript" src="${URLUtils.staticURL('/js/klarna-
payments.js')} "></script>

<script src=" https://x.klarnacd.net/kp/lib/v1/api.js" async></script>

<link rel="stylesheet" href="${URLUtils.staticURL('/css/klarna-
payments.css')}" />

```

Before `</isdecorator>` closing tag as shown below:

```

205 ...<isinclude template="checkout/billing/paymentmethods />
206 ...<isbonusdiscountlineitem p_alert_text="${Resource.msg('billing.bonusproductalert','checkout',null)}" p_discount_line_item="${p
207 ...
208 ...
209 ...<div class="form-row form-row-button">
210 .....<button class="button-fancy-large" type="submit" name="${pdict.CurrentForms.billing.save.htmlName}" value="${Resource.
211 .....</div>
212 .....<input type="hidden" name="${dw.web.CSRFProtection.getTokenName()}" value="${dw.web.CSRFProtection.generateToken()}" />
213 ...
214 </form>
215 </isscript>
216 ....importScript("util/ViewHelpers.ds");
217 ....var addressForm = pdict.CurrentForms.billing.billingAddress.addressFields;
218 ....var countries = ViewHelpers.getCountryAndRegions(addressForm);
219 ....var json = JSON.stringify(countries);
220 </isscript>
221 <script>window.Countries = <isprint value="${json}" encoding="off"/></script>
222 ...
223 <script><isinclude template="/resources/klarnapaymentsresources.isml"/></script>
224 <script type="text/javascript" src="${URLUtils.staticURL('/js/klarna-payments.js')} "></script>
225 <script src=" https://x.klarnacd.net/kp/lib/v1/api.js" async></script>
226 <link rel="stylesheet" href="${URLUtils.staticURL('/css/klarna-payments.css')}" />
227 ...
228 </isdecorator>
~~

```

Figure 45 Modifications in billing.isml

3.5.1.3. default/checkout/billing/paymentmethods.isml

Add code:

```
<isif condition="${paymentMethodType.value === 'Klarna'}">hide</isif>
```

After `<div class="form-row label-inline"` close to line 18 as shown below:



```

1 <iscontent type="text/html" charset="UTF-8" compact="true"/>
2 <iscment TEMPLATENAME: paymentmethods.isml </iscment>
3 <isloop template="util/modules">
4 <ifif condition="#{pdict.OrderTotal > 0}">
5   <fields>
6     <legend>
7       ${Resource.msg('billing.paymentheader','checkout',null)}
8       <div class="dialog-required"> <span class="required-indicator">&#8226; <em>${Resource.msg('global.requiredfield','locale',null)}</em></span></div>
9     </legend>
10    <div class="payment-method-options form-indent">
11      <isloop items="#{pdict.CurrentForms.billing.paymentMethods.selectedPaymentMethodID.options}" var="paymentMethodType">
12        <iscment>Ignore GIFT_CERTIFICATE method, GCs are handled separately before other payment methods.</iscment>
13        <ifif condition="#{paymentMethodType.value.equals(dw.order.PaymentInstrument.METHOD_GIFT_CERTIFICATE)}"><iscontinue/></ifif>
14        <div class="form-row label-inline <isif condition="${paymentMethodType.value === 'Klarna'}">hide</isif>">
15          <isset name="radioID" value="${paymentMethodType.value}" scope="page"/>
16          <div class="field-wrapper">
17            <input id="is-${radioID}" type="radio" class="input-radio" name="#{pdict.CurrentForms.billing.paymentMethods.selectedPaymentMethodID.htmlName}" v
18            </div>
19            <label for="is-${radioID}"><isprint value="${Resource.msg(paymentMethodType.label,'forms',null)}"/><isif condition="${!empty(dw.order.PaymentMpr.getF
20            </div>
21          </isloop>
22        </div>
23      </isloop>
24    </div>
25  </isloop>
26 </div>
27 <div class="form-row form-row-button">
28   <isinclude template="klarnapayments/klarnapaymentscategories.isml"/>
29 </div>
30 </div>
31 </div>
32 </div>


```

Figure 46 Modifications in paymentmethods.isml

Add Code:

```
<isinclude template="klarnapayments/klarnapaymentscategories.isml"/>
```

After `</isloop>` close to line 28 as shown below:

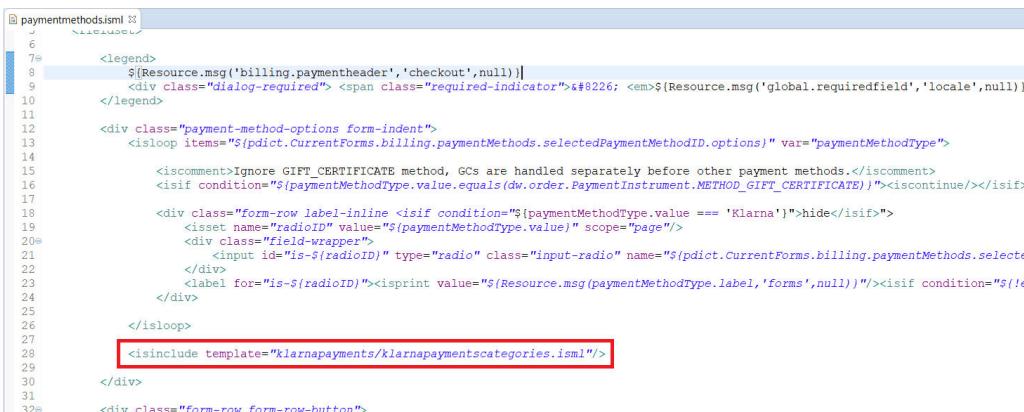

```

1 <iscontent type="text/html" charset="UTF-8" compact="true"/>
2 <iscment TEMPLATENAME: paymentmethods.isml </iscment>
3 <isloop template="util/modules">
4 <ifif condition="#{pdict.OrderTotal > 0}">
5   <fields>
6     <legend>
7       ${Resource.msg('billing.paymentheader','checkout',null)}
8       <div class="dialog-required"> <span class="required-indicator">&#8226; <em>${Resource.msg('global.requiredfield','locale',null)}</em></span></div>
9     </legend>
10    <div class="payment-method-options form-indent">
11      <isloop items="#{pdict.CurrentForms.billing.paymentMethods.selectedPaymentMethodID.options}" var="paymentMethodType">
12        <iscment>Ignore GIFT_CERTIFICATE method, GCs are handled separately before other payment methods.</iscment>
13        <ifif condition="#{paymentMethodType.value.equals(dw.order.PaymentInstrument.METHOD_GIFT_CERTIFICATE)}"><iscontinue/></ifif>
14        <div class="form-row label-inline <isif condition="${paymentMethodType.value === 'Klarna'}">hide</isif>">
15          <isset name="radioID" value="${paymentMethodType.value}" scope="page"/>
16          <div class="field-wrapper">
17            <input id="is-${radioID}" type="radio" class="input-radio" name="#{pdict.CurrentForms.billing.paymentMethods.selecte
18            </div>
19            <label for="is-${radioID}"><isprint value="${Resource.msg(paymentMethodType.label,'forms',null)}"/><isif condition="${!empty(dw.order.PaymentMpr.getF
20            </div>
21          </isloop>
22        </div>
23      </isloop>
24    </div>
25  </isloop>
26 </div>
27 <div class="form-row form-row-button">
28   <isinclude template="klarnapayments/klarnapaymentscategories.isml"/>
29 </div>
30 </div>
31 </div>
32 </div>

```

Figure 47 Modifications in paymentmethods.isml (cont.)

Add Code:

```
<iscomment>

    Klarna Payments

</iscomment>

<isinclude template="klarnapayments/klarnapaymentblock.isml"/>
```

Before `</fieldset>` closing tag, close to line 150 as shown below:

```
paymentmethods.isml >
124    <isinputfield formfield="$pdict.CurrentForms.billing.paymentMethods.bml.year" type="select" rowclass="year"/>
125    <isinputfield formfield="$pdict.CurrentForms.billing.paymentMethods.bml.month" type="select" rowclass="month"/>
126    <isinputfield formfield="$pdict.CurrentForms.billing.paymentMethods.bml.day" type="select" rowclass="day"/>
127
128    <isinputfield formfield="$pdict.CurrentForms.billing.paymentMethods.bml.ssn" type="input"/>
129
130    <div class="bml-terms-and-conditions form-caption">
131        <iscontentasset aid="Bml-tc"/>
132    </div>
133
134    <div class="form-row form-caption">
135        <isinputfield formfield="$pdict.CurrentForms.billing.paymentMethods.bml.termsandconditions" type="checkbox"/>
136    </div>
137
138    </div>
139
140
141    <iscomment>
142        Custom processor
143    <!--
144    </iscomment>
145
146    <div class="payment-method <isif condition="$!empty(pdct.selectedPaymentID) && pdct.selectedPaymentID=='PayPal'">paym
147        <!-- Your custom payment method implementation goes here. -->
148        ${Resource.msg('billing.custompaymentmethod','checkout',null)}
149    </div>
150
151    <iscomment>
152        Klarna Payments
153    <!--
154    </iscomment>
155
156    <isinclude template="klarnapayments/klarnapaymentblock.isml"/>
157
158    </fieldset>
159 <iselse/>
160    <div class="gift-cert-used form-indent">
161        <isif condition="$pdict.gcPITotal>0">${Resource.msg('billing.giftcertmethod','checkout',null)}<iselse/>${Resource.msg
162        <input type="hidden" name="$pdict.CurrentForms.billing.paymentMethods.selectedPaymentMethodIn htmlName()" value="$pdct.o
```

Figure 48 Modifications in paymentmethods.isml (cont.)

3.5.1.4. default/checkout/shipping/minishipments.isml

Add the following code:

```
<isinclude template="klarnapayments/modules.isml"/>
```

In the end beginning of the file as shown below:

```

1 <iscontent type="text/html" charset="UTF-8" compact="true"/>
2 <isinclude template="util/modules.isml"/>
3 <isinclude template="KlarnaPayments/modules.isml"/>
4
5<iscomment>
6     This template renders a summary of all shipments of the basket which is
7     used below the order summary at the right hand side in the checkout
8     process.
9 </iscomment>
10 <isset name="Shipments" value="${pdict.Basket.shipments}" scope="page"/>
11
12 <iscomment>the url to edit shipping addresses depends on the checkout scenario</iscomment>
13 <isset name="editUrl" value="${URLUtils_https('COShipping-Start')}" scope="page"/>
14<isif condition="${pdict.CurrentForms.multishipping.entered.value}">
15     <isset name="editUrl" value="${URLUtils_https('COShippingMultiple-Start')}" scope="page"/>
16 </isif>
17

```

Figure 49 Modifications in minishipments.isml

Add the following code:

```
<iskpaddresshelper p_address="${shipment.shippingAddress}" />
```

After `<isminicheckout_address p_address="${shipment.shippingAddress}" />` as shown below:

```

29 <isif condition="${Shipments.size() > 1 && pdict.Basket.productLineItems.size() > 0}"><div class="name">${Resource.msg('minishipments.giftcertdeliver)}
30
31<h3 class="section-header">
32    <isif condition="${shipment.giftCertificateLineItems.size() > 0}">
33        ${Resource.msg('minishipments.shipping','checkout',null)} <span>${Resource.msg('minishipments.giftcertdeliver,
34        ${Resource.msg('minishipments.custom.shipmentType', 'instore')}">
35            <a href="${editUrl}" class="section-header-note">${Resource.msg('global.edit','locale',null)}</a>
36            ${Resource.msg('cart.store.instorepickup','checkout',null)}
37        <iselseif condition="${shipment.shippingAddress != null && pdict.Basket.productLineItems.size() > 0}">
38            <a href="${editUrl}" class="section-header-note">${Resource.msg('global.edit','locale',null)}</a>
39            ${Resource.msg('minishipments.shippingaddress','checkout',null)}
40        </iselseif>
41    </isif>
42 </h3>
43
44<div class="details">
45    <iscomment>
46        render the detail section depending on whether this is a physical shipment with products
47        (shipped to an address) or if this is gift certificate (send via email)
48    </iscomment>
49    <isif condition="${shipment.giftCertificateLineItems.size() > 0}">
50        <isloop items="${shipment.giftCertificateLineItems}" var="giftCertLI">
51            <div><isprint value="${giftCertLI.recipientName}" /></div>
52            <div><isprint value="${giftCertLI.recipientEmail}" /></div>
53        </isloop>
54    <iselseif condition="${shipment.shippingAddress != null && pdict.Basket.productLineItems.size() > 0}">
55        <isminicheckout_address p_address="${shipment.shippingAddress}" />
56        <iskpaddresshelper p_address="${shipment.shippingAddress}" />
57        <isif condition="${!empty(shipment.shippingMethod)}">
58            <div class="minishipments-method">
59                <span>${Resource.msg('order.orderdetails.shippingmethod','order',null)}</span>
60                <span><isprint value="${shipment.shippingMethod.displayName}" /></span>
61            </div>
62        </isif>
63    </iselseif>
64 </isloop>
65
66    </div>
67 </isif>
68 </isloop>
69 </isif>

```

Figure 50 Modifications in minishipments.isml (cont.)

3.5.1.5. default/components/footer/footer_Ul.isml

Add Code:

```
<isinclude template="klarnapayments/scripts.isml"/>
```

Before `<script src="${URLUtils.staticURL('/js/app.js')}"></script>` script tag as shown below:

```
27
28 <isinclude template="klarnapayments/scripts.isml"/>
29
30 <script src="${URLUtils.staticURL('/js/app.js')}"></script>
```

Figure 51 Modifications in footer_Ul.isml

3.5.1.6. default/components/footer/footer.isml

Add the following code:

```
<!-- Klarna OSM footer -->

<div class="klarna-footer">

    <isinclude template="klarnapayments/modules.isml"/>

    <iskosmfooter />

</div>

<!-- /Klarna OSM footer -->

<!-- Klarna KEB form -->

<iskebform />

<!-- Klarna KEB form -->
```

right after the `</footer>` end tag and before `<iscontentasset aid="footer-copy"/>` as shown below :

```

17      <div class="footer-item">
18          <iscontentasset aid="footer-support"/>
19      </div>
20      <div class="footer-item">
21          <iscontentasset aid="footer-about"/>
22      </div>
23  </div>
24 </footer>
25
26 <!-- Klarna OSM footer -->
27<div class="klarna-footer">
28    <isinclude template="klarnapayments/modules.isml"/>
29    <iskosmfpoter />
30 </div>
31 <!-- /Klarna OSM footer -->
32
33 <!-- Klarna KEB form -->
34 <iskebform />
35 <!-- Klarna KEB form -->
36
37 <iscontentasset aid="footer-copy"/>
38 |
39<iscomment>
40     Customer registration can happen everywhere in the page flow. As special tag in the pdict
41     is indicating it. So we have to check on every page, if we have to report this event for
42     the reporting engine.
43 </iscomment>
44 <isinclude template="util/reporting/ReportUserRegistration.isml"/>
45
46 <isinclude template="components/footer/footer_UI"/>
47

```

Figure 52 Modifications in footer.isml

3.5.1.7. default/product/producttopcontentPS.isml

Add the following code:

```

<isinclude template="klarnapayments/modules.isml"/>

<iskosmpdp p_product="${psProduct}" />

```

, right under the `pricing` template include as shown below:

```

165   <label>${Resource.msg('product.setpricelabel','product',null)}</label>
166   <isinclude template="product/components/pricing"/>
167
168   <isinclude template="klarnapayments/modules.isml"/>
169   <iskosmpdp p_product="${psProduct}" />
170

```

Figure 53 Modifications in producttopcontentPS.isml

3.5.1.8. default/product/productcontent.isml

Add the following code:

```

<isif condition="${!isQuickView}">

    <isinclude template="klarnapayments/modules.isml"/>

    <iskosmpdp p_product="${pdct.Product}" />

</isif>

```

, right under the `pricing` template include as shown below:

```

77     <isinclude template="product/components/pricing"/>
78
79@     <isif condition="${!isQuickView}">
80         <isinclude template="klarnapayments/modules.isml"/>
81         <iskosmpdp p_product="${pdict.Product}" />
82     </isif>
83
84     <isset name="pam" value="${pdict.Product.getAttributeModel()}" scope="page"/>

```

Figure 54 Modifications in producttopcontent.isml

3.5.1.9. js/pages/product/variant.js

Add the following code:

```

window.KlarnaOnsiteService = window.KlarnaOnsiteService || [];
window.KlarnaOnsiteService.push({eventName: 'refresh-placements'});

```

in the variation update callback, on line 35

```

29         callback: function () {
30             if (SitePreferences.STORE_PICKUP) {
31                 productStoreInventory.init();
32             }
33             image.replaceImages();
34             tooltip.init();
35             window.KlarnaOnsiteService = window.KlarnaOnsiteService || [];
36             window.KlarnaOnsiteService.push({eventName: 'refresh-placements'});
37         }

```

Figure 55 Modifications in variant.js

3.5.1.10. default/checkout/cart/cart.isml

Add the following code on line 5:

```

<isinclude template="klarnapayments/modules.isml"/>

cart.isml
1 <iscontent type="text/html" charset="UTF-8" compact="true"/>
2@ <isdecorate template="checkout/cart/pt_cart">
3     <isinclude template="util/modules" />
4     <isinclude template="util/reporting/ReportBasket.isml" />
5     <isinclude template="klarnapayments/modules.isml"/>
6
7     <isset name="enableCheckout" value="${pdict.EnableCheckout}" scope="page" />
8@     <isif condition="${dw.system.Site.getCurrent().getCustomPreferenceValue('enableStorePickUp')}">
9         <isset name="store" value="${dw.catalog.StoreMgr.getStore(pdict.CurrentSession.custom.storeId)}" scope="page" />
10    </isif>
11    <isslot id="cart-banner" description="Banner for Cart page" context="global" />

```

Figure 56 Modifications in cart.isml

Add the following code on line 823:

```
<iskosmcart p_lineitemctnr="${pdict.Basket}" />
```

, right after the `<isordertotals>`:

The screenshot shows a code editor window with the file 'cart.isml' open. The code is a snippet of XML with line numbers from 811 to 829. A red box highlights the line '823 <iskosmcart p_lineitemctnr="\${pdict.Basket}" />' which is added right after the 'isordertotals' block.

```
811             </div>
812         </td>
813     </tr>
814   </isloop>
815 </tfoot>
816 </table>
817
818<div class="cart-footer">
819
820     <input type="hidden" name="${pdict.CurrentForms.cart.updateCart.htmlName}" value="${pdict.CurrentForm:
821<div class="cart-order-totals">
822     <isordertotals p_lineitemctnr="${pdict.Basket}" p_totallabel="${Resource.msg('global.estimatedtot
823     <iskosmcart p_lineitemctnr="${pdict.Basket}" />
824 </div>
825<div class="cart-coupon-code">
826
827     <input type="text" name="${pdict.CurrentForms.cart.couponCode.htmlName}" id="${pdict.CurrentForm:
828
829<button type="submit" value="${pdict.CurrentForms.cart.addCoupon.htmlName}" name="${pdict.Curren
```

Figure 57 Modifications in cart.isml (cont.)

Add the following code on lines 33 & 864:

```
<iskebcart />
```

, right after the `<isif condition="${enableCheckout}">`

The screenshot shows a code editor window with the file 'cart.isml' open. The code is a snippet of XML with line numbers from 28 to 44. A red box highlights the line '32 <isif condition="\${enableCheckout}">' followed by the 'iskebcart' block.

```
28<div class="cart-actions cart-actions-top">
29    <!--comment--> continue shop url is a non-secure but checkout needs a secure and that is why separate forms!<!--comment-->
30    <form class="cart-action-checkout" action="${URLUtils.httpsContinue()}" method="post" name="${pdict.CurrentForm:
31        <fieldset>
32            <isif condition="${enableCheckout}">
33                <iskebcart />
34                    <button class="button-fancy-large" type="submit" value="${Resource.msg('global.checkout','Locale
35                        ${Resource.msg('global.checkout','locale',null)}
36                    </button>
37                    <isapplepay></isapplepay>
38            <iselse/>
39                <button class="button-fancy-large" disabled="disabled" type="submit" value="${Resource.msg('glob
40                    ${Resource.msg('global.checkout','locale',null)}
41                </button>
42            </isif>
43        </fieldset>
44    </form>
```

Figure 58 Modifications in cart.isml (cont.)

The screenshot shows a code editor window with the file 'cart.isml' open. The code is a snippet of XML with line numbers from 858 to 876. A red box highlights the line '863 <isif condition="\${enableCheckout}">' followed by the 'iskebcart' block.

```
858<div class="cart-actions">
859
860    <!--comment--> continue shop url is a non-secure but checkout needs a secure and that is why separate forms!<!--comment-->
861    <form class="cart-action-checkout" action="${URLUtils.httpsContinue()}" method="post" name="${pdict.CurrentForm:
862        <fieldset>
863            <isif condition="${enableCheckout}">
864                <iskebcart />
865                    <button class="button-fancy-large" type="submit" value="${Resource.msg('global.checkout','Locale
866                        ${Resource.msg('global.checkout','locale',null)}
867                    </button>
868                    <isapplepay></isapplepay>
869            <iselse/>
870                <button class="button-fancy-large" disabled="disabled" type="submit" value="${Resource.msg('glob
871                    ${Resource.msg('global.checkout','locale',null)}
872                </button>
873            </isif>
874        </fieldset>
875    </form>
```

Figure 59 Modifications in cart.isml (cont.)

3.5.1.11. default/components/header/header.isml

Add the following code:

```
<!-- Klarna OSM header -->

<isinclude template="klarnapayments/modules.isml"/>

<iskosmheader />

<!-- /Klarna OSM header -->
```

At the end of the file as shown below:

```
32             <span>${Resource.msg('global.header.storelocator', 'locale', null)}</span>
33         </a>
34     </li>
35
36     <iscomment>INCLUDE: Customer login information, login, etc. (contains personal information, do not cache)</iscomment>
37     <isinclude url="${URLUtils.url('Home-IncludeHeaderCustomerInfo')}" />
38
39     </ul>
40
41     <iscomment>Country Selector</iscomment>
42     <isinclude template="components/header/countryselector"/>
43
44     </nav>
45
46     <iscomment>INCLUDE: Mini-cart, do not cache</iscomment>
47     <div id="mini-cart">
48         <isinclude url="${URLUtils.url('Cart-MiniCart')}" />
49     </div>
50
51 </div><!-- /header -->
52
53 <!-- Klarna OSM header -->
54 <isinclude template="klarnapayments/modules.isml"/>
55 <iskosmheader />
56 <!-- /Klarna OSM header -->
57
```

Figure 60 Modifications in header.isml

3.5.1.12. default/mail/orderconfirmation.isml

Add the following code:

```
<tr>

    <td style="font-size:12px;font-family:arial;padding:20px 10px;vertical-align:top;">


        <isset name="confirmationAsset" value="${require('/cartridge/scripts/util/KlarnaHelper').getConfirmationEmailAsset()}" scope="page" />

        <isprint value="${confirmationAsset}" encoding="off" />

    </td>

</tr>
```

Before the `</table>` closing tag as shown:

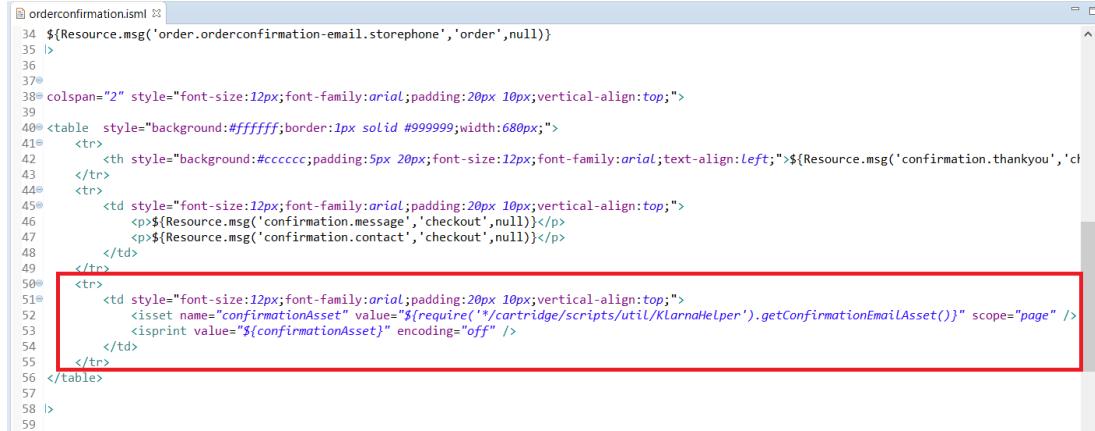

```
orderconfirmation.isml
34 ${Resource.msg('order.orderconfirmation-email.storephone','order',null)}
35 |>
36
37@ 38@ colspan="2" style="font-size:12px;font-family:arial;padding:20px 10px;vertical-align:top;">
39
40@ <table style="background:#ffffff; border:1px solid #999999; width:680px;">
41@   <tr>
42   <th style="background:#cccccc; padding:5px 20px; font-size:12px; font-family:arial; text-align:left;">${Resource.msg('confirmation.thankyou','cl')}
43   </tr>
44@   <tr>
45@     <td style="font-size:12px;font-family:arial;padding:20px 10px;vertical-align:top;">
46       <p>${Resource.msg('confirmation.message','checkout',null)}</p>
47       <p>${Resource.msg('confirmation.contact','checkout',null)}</p>
48     </td>
49   </tr>
50@   <tr>
51@     <td style="font-size:12px;font-family:arial;padding:20px 10px;vertical-align:top;">
52       <isset name="confirmationAsset" value="${require('/cartridge/scripts/util/KlarnaHelper').getConfirmationEmailAsset()}" scope="page" />
53       <isprint value="${confirmationAsset}" encoding="off" />
54     </td>
55   </tr>
56 </table>
57
58 |>
```

Figure 61 Modifications in orderconfirmation.isml

3.5.1.13. default/components/order/orderdetailsemail.isml

Add the following code:

```
<iselseif condition="${paymentInstr.paymentMethod.equals('Klarna')}" >

${Resource.msg('email.order.reference','klarnapayments',null)}:
${Order.custom.kpOrderID} <br />
```

Before the closing `</isif>` tag on line 51 as shown below:

```

39      <>>${Resource.msg('order.orderdetails.paymentmethod', 'order', null)}</>
40    <iselse/>
41      <>>${Resource.msg('order.orderdetails.paymentmethods','order',null)}</b>
42    </isif>
43
44    <iscomment>Render All Payment Instruments</iscomment>
45    <isloop items="${Order.getPaymentInstruments()}" var="paymentInstr" status="piloopstate">
46      <div><isprint value="${dw.order.PaymentMgr.getMethod(paymentInstr.paymentMethod).name}" /></div>
47      <isif condition="${dw.order.PaymentInstrument.METHOD_GIFT_CERTIFICATE.equals(paymentInstr.paymentMethod)}>
48        <isprint value="${paymentInstr.maskedGiftCertificateCode}" /><br />
49      <iselseif condition="${paymentInstr.paymentMethod.equals('Klarna')}">
50        ${Resource.msg('email.order.reference','klarnapayments',null)}: ${Order.custom.kpOrderID} <br />
51      </isif>
52      <ismincreditcard card='${paymentInstr}' show_expiration='$!false' />
53      <div>
54        <span class="label">${Resource.msg('global.amount','locale',null)}:</span>
55        <span class="value"><isprint value="${paymentInstr.paymentTransaction.amount}" /></span>
56        <br />
57      </div><!-- END: payment-amount -->
58    </isloop>
59  </td>

```

Figure 62 Modifications in orderdetailsemail.isml

3.5.2. Controller Modification

If using a controller based SiteGenesis integration, additionally follow the instructions in this chapter.

3.5.2.1. COBilling.js

Go to COBilling.js controller, `returnToForm()` method and add the following code block:

```

try {
require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.
js').CreateOrUpdateSession();

} catch( e ) {

  require( 'dw/system/Logger' ).getLogger( 'COBilling.js' ).error( 'Klarna
Create Session Error: {0}', e );

}

```

after `pageMeta.update()` function (see screen shot below)

```

COBilling.js ✘
75 * Renders the checkout/billing/billing template.
76 * @param {module:models/CartModel-CartModel} cart - A CartModel wrapping the current Basket.
77 * @param {object} params - (optional) if passed, added to view properties so they can be accessed in the template.
78 */
79 function returnToForm(cart, params) {
80     var pageMeta = require('~/cartridge/scripts/meta');
81
82     // if the payment method is set to gift certificate get the gift certificate code from the form
83     if (!empty(cart.getPaymentInstrument()) && cart.getPaymentInstrument().getPaymentMethod() === PaymentInstrument.METHOD_GIFT_CERTIFICATE) {
84         app.getForm('billing').copyFrom({
85             giftCertCode: cart.getPaymentInstrument().getGiftCertificateCode()
86         });
87     }
88
89     pageMeta.update({
90         pageTitle: Resource.msg('billing.meta.pagetitle', 'checkout', 'SiteGenesis Checkout')
91     });
92
93     try {
94         require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').CreateOrUpdateSession();
95     } catch (e) {
96         require('dw/system/Logger').getLogger('COBilling.js').error('Klarna Create Session Error: {0}', e);
97     }
98
99     if (params) {
100        app.getView(require('~/cartridge/scripts/object')).extend(params, {
101            Basket: cart.object,
102            ContinueURL: URLUtils_https('COBilling-Billing')
103        }).render('checkout/billing/billing');

```

Figure 63 Modifications in COBilling.js

In the method `resetPaymentForms()`, add the command for the three conditions:

```
cart.removePaymentInstruments(cart.getPaymentInstruments('Klarna'));
```

```

349 */
350 function resetPaymentForms() {
351     var cart = app.getModel('Cart').get();
352
353     var status = Transaction.wrap(function () {
354         if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value.equals('PayPal')) {
355             app.getForm('billing').object.paymentMethods.creditCard.clearFormElement();
356             app.getForm('billing').object.paymentMethods.bml.clearFormElement();
357
358             cart.removePaymentInstruments(cart.getPaymentInstruments(PaymentInstrument.METHOD_CREDIT_CARD));
359             cart.removePaymentInstruments(cart.getPaymentInstruments(PaymentInstrument.METHOD_BML));
360             cart.removePaymentInstruments(cart.getPaymentInstruments('Klarna'));
361
362         } else if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value.equals(PaymentInstrument.METHOD_CREDIT_CARD)) {
363             app.getForm('billing').object.paymentMethods.bml.clearFormElement();
364
365             cart.removePaymentInstruments(cart.getPaymentInstruments(PaymentInstrument.METHOD_BML));
366             cart.removePaymentInstruments(cart.getPaymentInstruments('PayPal'));
367             cart.removePaymentInstruments(cart.getPaymentInstruments('Klarna'));
368
369         } else if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value.equals(PaymentInstrument.METHOD_BML)) {
370             app.getForm('billing').object.paymentMethods.creditCard.clearFormElement();
371
372             if (!app.getForm('billing').object.paymentMethods.bml.ssn.valid) {
373                 return false;
374             }
375
376             cart.removePaymentInstruments(cart.getPaymentInstruments(PaymentInstrument.METHOD_CREDIT_CARD));
377             cart.removePaymentInstruments(cart.getPaymentInstruments('PayPal'));
378             cart.removePaymentInstruments(cart.getPaymentInstruments('Klarna'));
379
380         }
381     });
382
383     return true;
384 }

```

Figure 64 Modifications in COBilling.js (cont.)

In method `handlePaymentSelection(cart)`, go to line 441 and add the following code block:

```
if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value !== 'Klarna') {
    require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').CancelAuthorization();
}

431 .....};§
432 .....}§
433 §
434 .....if (empty(PaymentMgr.getPaymentMethod(app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value).paymentProcessor)) {§
435 .....result = {}§
436 .....error: true,§
437 .....MissingPaymentProcessor: true§
438 .....};§
439 .....}§
440 §
441 .....if (!result) {§
442 .....if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value !== 'Klarna') {§
443 .....require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').CancelAuthorization();§
444 .....}§
445 .....result = app.getModel('PaymentProcessor').handle(cart.object, app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value);§
446 .....}§
447 .....return result;§
448 }§
449 §
450* * Gets or creates a billing address and copies it to the billingaddress form. Also sets the customer email address§
451 .....
```

3.5.2.2. COSummary.js

Go to `COSummary.js` controller, `submit()` method, and add the following code block:

```
try {

require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.
js').Redirect();

} catch( e ) {

    require( 'dw/system/Logger' ).getLogger( 'COSummary.js' ).error( 'Klarna
Redirect Error: {0}', e );

}
```

before `showConfirmation(placeOrderResult.Order)` (see screen shot below)



```

56 /**
57 * This function is called when the "Place Order" action is triggered by the
58 * customer.
59 */
60 */
61 function submit() {
62     // Calls the COPlaceOrder controller that does the place order action and any payment authorization.
63     // COPlaceOrder returns a JSON object with an order_created key and a boolean value if the order was created successfully.
64     // If the order creation failed, it returns a JSON object with an error key and a boolean value.
65     var placeOrderResult = app.getController('COPlaceOrder').Start();
66     if (placeOrderResult.error) {
67         start({
68             PlaceOrderError: placeOrderResult.PlaceOrderError
69         });
70     } else if (placeOrderResult.order_created) {
71         try {
72             require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').Redirect();
73         } catch (e) {
74             require('dw/system/Logger').getLogger( 'COsummary.js' ).error( 'Klarna Redirect Error: {0}', e );
75         }
76     }
77     showConfirmation(placeOrderResult.Order);
78 }
79
80 }

```

Figure 65 Modifications in COSummary.js

3.5.2.3. OrderModel.js

Go to OrderModel.js, placeOrder method and add the following code block:

```

if ( session.privacy.KlarnaPaymentsFraudStatus === 'PENDING' ) {
    try {
        require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js')
        .PendingOrder(order);
    } catch( e ) {
        require( 'dw/system/Logger' ).getLogger( 'OrderModel.js' ).error( 'Klarna Payments Pending Order Error: {0}', e );
    }
    return;
}

```

before `var placeOrderStatus = OrderMgr.placeOrder(order);` (see screen shot below)



```

7
8 /* API Includes */
9 var AbstractModel = require('./AbstractModel');
10 var Order = require('dw/order/Order');
11 var OrderMgr = require('dw/order/OrderMgr');
12 var Resource = require('dw/web/Resource');
13 var Status = require('dw/system>Status');
14 var Transaction = require('dw/system/Transaction');
15
16 /**
17 * Place an order using OrderMgr. If order is placed successfully,
18 * its status will be set as confirmed, and export status set to ready.
19 * @param {dw.order.Order} order
20 */
21 function placeOrder(order) {
22
23     if(session.privacy.KlarnaPaymentsFraudStatus === 'PENDING') {
24         try {
25             require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').PendingOrder(order);
26         } catch(e) {
27             require('dw/system/Logger' ).getLogger( 'OrderModel.js' ).error( 'Klarna Payments Pending Order Error: {0}', e );
28         }
29         return;
30     }
31
32     var placeOrderStatus = OrderMgr.placeOrder(order);
33     if (placeOrderStatus === Status.ERROR) {
34         OrderMgr.failOrder(order);
35         throw new Error('Failed to place order.');
36     }
37     order.setConfirmationStatus(Order.CONFIRMATION_STATUS_CONFIRMED);
38     order.setExportStatus(Order.EXPORT_STATUS_READY);
39 }

```

Figure 66 Modifications in OrderModel.js

3.6. External Interfaces

All requests are done through Klarna's REST API and encrypted using SHA-256 with the shared secret provided by Klarna. Only HTTPS is allowed. JSON is used across all communications.

The full reference guide, along with the resource structure for requests & responses, can be found in the developer portal - <https://developers.klarna.com/api/#payments-api>

4. Testing

Klarna has a set of testing credentials and triggers that can be used.

Please, refer to the following URL: <https://docs.klarna.com/resources/test-environment/>

5. Operations, Maintenance

5.1. Data Storage

5.1.1. System Object Extensions

5.1.1.1. Basket

Parameter Name	Attribute ID	Description
Klarna Session ID	kpSessionId	The Klarna session ID returned after "Create Session" API endpoint is called. (Applicable since version 21.2.0)
Klarna Client Token	kpClientToken	Client token returned by "Create Session" API endpoint and used to initialize the JS SDK. (Applicable since version 21.2.0)

Table 1 Basket Attributes

5.1.1.2. Order

Parameter Name	Attribute ID	Description
Klarna Payments Order ID	kpOrderID	The Klarna payments Order ID for Klarna payment method selected by customer
VCN Brand	kpVCNBrand	Klarna Payments virtual card scheme name
VCN Holder	kpVCNHolder	Klarna Payments virtual card holder name
VCN Card ID	kpVCNCARDID	Klarna Payments Virtual Card - Card ID
VCN PCI Data	kpVCNPcidata	Klarna Payments Virtual Card PCI Data in encrypted format
VCN Initialization Vector	kpVCNIV	Klarna Payments Virtual Card Initialization Vector
VCN AES Key	kpVCNAESKey	Klarna Payments Virtual Card AES Key
Is VCN Used	kplIsVCN	True if virtual card is enabled & used for payment of the order, otherwise false
Klarna Session ID	kpSessionId	The Klarna session ID returned after “Create Session” API endpoint is called (Applicable since version 21.2.0)
Klarna Client Token	kpClientToken	Client token returned by “Create Session” API endpoint and used to initialize the JS SDK (Applicable since version 21.2.0)

Table 2 Order Attributes

5.1.1.3. Order Payment Instrument

Parameter Name	Attribute ID	Description
Klarna Payment Category ID	klarnaPaymentCategoryID	ID of Klarna payment category
Klarna Payment Category Name	klarnaPaymentCategoryName	Name of Klarna payment category

Table 3 Order Payment Instrument Attributes

5.1.1.4. Payment Transaction

Parameter Name	Attribute ID	Description
Fraud Status	kpFraudStatus	Klarna Payments order fraud status

Table 4 Payment Transaction Attributes

5.1.1.5. Site Preferences

The site custom preferences have been extended with a new group called “Klarna_Payments”. The table below describes the preferences within that group:

Parameter Name	Attribute ID	Description
Auto-capture	kpAutoCapture	When enabled “Yes”, a full order capture will be attempted automatically. The standalone order management API capture request will include total order amount value for “captured_amount”. Default value is “No”
Klarna Payments Service Name	kpServiceName	The service name used for the current site
Send product_url and image_url	sendProductAndImageURLs	If set to true, product_url and image_url fields will be included in the Klarna session and order API calls. This enhances shopper experience post purchase. Default value is “Yes”

Parameter Name	Attribute ID	Description
Merchant Reference 2 Mapping	merchant_reference2_mapping	<p>The field from SCC order (basket) object that is mapped to merchant_reference2 field from klarna API request.</p> <p>Has to be one of the class attributes of SCC LineItemCtnr.</p> <p>Note that for complex data structures result may vary.</p> <p>Note: Merchant Reference 1 value is always set to the SCC order ID</p>
Border Color Preference	kpColorBorder	CSS (hex value) color set for Border in Klarna Payments iFrame
Border Selected Color Preference	kpColorBorderSelected	CSS (hex value) color set for selected element Border in Klarna Payments iFrame
Button Color Preference	kpColorButton	CSS (hex value) color set for Button in Klarna Payments iFrame
Button Text Color Preference	kpColorButtonText	CSS (hex value) color set for Button text in Klarna Payments iFrame
Checkbox Color Preference	kpColorCheckbox	CSS (hex value) color set for Checkbox in Klarna Payments iFrame
Checkbox Checkmark Color Preference	kpColorCheckboxCheckmark	CSS (hex value) color set for checkbox checked(selected) in Klarna Payments iFrame
Details Color Preference	kpColorDetails	CSS (hex value) color set for details in Klarna Payments iFrame
Header Color Preference	kpColorHeader	CSS (hex value) color set for Header in Klarna Payments iFrame
Link Color Preference	kpColorLink	CSS (hex value) color set for link in Klarna Payments iFrame
Text Color Preference	kpColorText	CSS (hex value) color set for text in Klarna Payments iFrame
Secondary Text Color Preference	kpColorTextSecondary	CSS (hex value) color set for secondary text in Klarna Payments iFrame
Border Radius Preference	kpRadiusBorder	Value (in pixels) of the border radius to be used in Klarna Payments iFrame
Attachments	kpAttachments	Toggle (Yes/No) for the inclusion of

Parameter Name	Attribute ID	Description
		<p>attachments when creating an order. Specific to inclusion of EMD (customer_account_info, other_delivery_address) when applicable.</p> <p>Default is “No”.</p>
Not available message on billing page	kpNotAvailableMessage	<p>The Klarna Payment not available message on billing page. JSON string holding country code and corresponding message string.</p> <p>For example:</p> <pre>{ "GB": "Klarna Payment not available", "default": "Klarna Payment not available" }</pre> <p>Note: This is deprecated and will be removed in next releases!</p>
Virtual Card Number Enabled	kpVCEnabled	<p>If this option is set to “Yes”, Klarna settlement request will generate a Virtual Card Number for every Klarna order.</p> <p>Note: the option will only work if VCN private/public keys are configured properly as below and public key shared in advance with Klarna</p>
VCN Public Key ID	kpVCNkeyId	UUIDv4 value corresponding to the key pair. Shared with Klarna respectively for Production & Playground (test) env.
VCN Private Key	vcnPrivateKey	<p>SSL private key used only to decode Virtual Card information (used with kpVCEnabled).</p> <p>Refer to section 9.3 Decrypt VCN Card Details</p>
VCN Public Key	vcnPublicKey	SSL public key used with Virtual Card integration (used with kpVCEnabled).

Parameter Name	Attribute ID	Description
		Shared with Klarna and stored here for reference.
VCN Settlement Retry Enabled	kpVCNRetryEnabled	If set to "Yes", SFCC will retry the VCN settlement once again in case of service error. Default is "No"
Promotion Price Taxation	kpPromoTaxation	Only use "Based on Adjusted Price" value if you have enabled the corresponding value in "Merchant Tools > Site Preferences > Promotions > Discount Taxation" and use gross taxation. Default: Based on Price
Hide Payment Methods on Deny	kpRejectedMethodDisplay	If set to value other than "No", the Klarna payment method options on the checkout will be greyed out or not displayed to customer in the current view when Klarna authorization request is rejected in the response (i.e hard reject - "show_form" and "approved" values are both "false")

Table 5 Site Preferences

5.1.2. Custom Objects

5.1.2.1. KlarnaCountries

The respective object is dynamically selected based on the request locale country, e.g., SFCC site with locale “**de_DE**” or “**en_DE**” will use the “**DE**” custom object. In cases when the request locale country can't be dynamically resolved (i.e. with “default” SFCC locale) – attribute “**klarnaLocale**” can be utilized to pass the proper locale to Klarna. For all other cases, this field can be left blank and will not be taken into consideration.

Even if you have locales that are not supported by Klarna Payments, we recommend creating a corresponding entry in the custom object for that locale. Thus, on the billing page of the unsupported locale you will have the Klarna Payments widget showing an appropriate message.

The custom objects store data such as Klarna default locale, service credential IDs and Klarna Payments placement data keys to ensure that Klarna Payments integration is correctly configured.

Note: The same custom object is used by Klarna Checkout cartridge integration!

Administration > Site Development > Custom Object Types > KlarnaCountries - Attribute Definitions																																																																																										
General			Attribute Definitions		Attribute Grouping																																																																																					
Object Type 'KlarnaCountries'																																																																																										
<small>This page lists the attribute definitions of your object type. Use the search to find attribute definitions by ID and name. Click New to create new attribute definitions. Click Delete to delete existing attribute definitions.</small>																																																																																										
<table border="1"> <thead> <tr> <th>ID or Name</th> <th>Find</th> <th>Type</th> <th>Attribute Settings</th> <th>Values</th> <th>Edit</th> </tr> </thead> <tbody> <tr> <td>Select All</td> <td></td> <td>String</td> <td>*</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>UUID</td> <td></td> <td>String</td> <td>*</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>country</td> <td></td> <td>Date+Time</td> <td>*</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>creationDate</td> <td></td> <td>String</td> <td>0</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>credentialID</td> <td></td> <td>String</td> <td>0</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>klarnaLocale</td> <td></td> <td>Date+Time</td> <td>*</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>lastModified</td> <td></td> <td>Boolean</td> <td>0</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>osmCartEnabled</td> <td></td> <td>String</td> <td>0</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>osmCartTagId</td> <td></td> <td>String</td> <td>0</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>osmLibraryId</td> <td></td> <td>Boolean</td> <td>0</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>osmPDPEnabled</td> <td></td> <td>String</td> <td>0</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>osmPDPTagId</td> <td></td> <td>String</td> <td>0</td> <td>0</td> <td>Edit</td> </tr> <tr> <td>osmUCI</td> <td></td> <td>String</td> <td>0</td> <td>0</td> <td>Edit</td> </tr> </tbody> </table>							ID or Name	Find	Type	Attribute Settings	Values	Edit	Select All		String	*	0	Edit	UUID		String	*	0	Edit	country		Date+Time	*	0	Edit	creationDate		String	0	0	Edit	credentialID		String	0	0	Edit	klarnaLocale		Date+Time	*	0	Edit	lastModified		Boolean	0	0	Edit	osmCartEnabled		String	0	0	Edit	osmCartTagId		String	0	0	Edit	osmLibraryId		Boolean	0	0	Edit	osmPDPEnabled		String	0	0	Edit	osmPDPTagId		String	0	0	Edit	osmUCI		String	0	0	Edit
ID or Name	Find	Type	Attribute Settings	Values	Edit																																																																																					
Select All		String	*	0	Edit																																																																																					
UUID		String	*	0	Edit																																																																																					
country		Date+Time	*	0	Edit																																																																																					
creationDate		String	0	0	Edit																																																																																					
credentialID		String	0	0	Edit																																																																																					
klarnaLocale		Date+Time	*	0	Edit																																																																																					
lastModified		Boolean	0	0	Edit																																																																																					
osmCartEnabled		String	0	0	Edit																																																																																					
osmCartTagId		String	0	0	Edit																																																																																					
osmLibraryId		Boolean	0	0	Edit																																																																																					
osmPDPEnabled		String	0	0	Edit																																																																																					
osmPDPTagId		String	0	0	Edit																																																																																					
osmUCI		String	0	0	Edit																																																																																					

Figure 67 KlarnaCountries Attributes

The table below describes attributes of the **KlarnaCountries** custom object:

Attribute Name	Attribute ID	Description
Country Code	country	Two-letter country code
On-site Messaging Data Default Locale	klarnaLocale	Fallback, if the request locale can't be dynamically resolved, i.e., when using "default" SFCC locale
Service Credential ID	credentialID	The ID of service credentials for this locale.
On-site messaging Data Client ID	osmUCI	The Klarna On-site Messaging "data-client-id" applicable for a given country
Cart Placement Tag Enabled	osmCartEnabled	To enable Cart Placement for a given locale.
Cart Placement Tag ID	osmCartTagId	The Klarna On-site Messaging "data-key" of placement applicable for Cart Page for a given locale.
PDP Placement Tag Enabled	osmPDPEnabled	To enable PDP Placement for a given locale.
PDP Placement Tag ID	osmPDPTagId	The Klarna On-site Messaging "data-key" of placement applicable for Product Display page

Attribute Name	Attribute ID	Description
		for a given locale.
Header Placement Tag Enabled	osmHeaderEnabled	To enable Klarna Header Placement in a given storefront
Header Placement Data Key	osmHeaderTagId	The Klarna On-site Messaging “data-key” of placement applicable for the Header
Footer Placement Tag Enabled	osmFooterEnabled	To enable Klarna footer Placement in a given storefront
Footer Placement Data Key	osmFooterTagId	The Klarna On-site Messaging “data-key” of placement applicable for the footer
Info Page Placement Tag Enabled	osmInfoPageEnabled	To enable Klarna Info Page Placement in a given storefront
Info Page Placement Data Key	osmInfoPageTagId	The Klarna On-site Messaging “data-key” of placement applicable for the Info Page
Data Inline Enabled on PDP/Cart placement (Canada only)	osmDataInlineEnabled	Enable this when using PayBright payment method in Canada
URL to On-Site Messaging Library URL	osmLibraryUrl	URL to On-Site Messaging Library URL, applicable for testing and production
Express Button Environment	kebEnvironment	The express button environment. Default is playground
Express Button Merchant ID	kebMerchantID	The merchant ID used to display the button
Express Button Library URL	kebLibraryUrl	URL of the express button library
Express Button Cart Enabled	kebCartEnabled	To enable the Klarna Express Button on cart page
Express Button Theme	kebTheme	The theme of the button. Options include default, light & dark
Express Button Category	kebCategory	The Klarna category to be pre-selected on Checkout Page, e.g., “pay_over_time”

Table 6 KlarnaCountries Attributes

Note: The `data-client-id` and `data-key` values used in the OSM placements are available in the Klarna Merchant Portal (Europe/US (CA included)/Oceania) within the On-site Messaging App. When selecting the `data-key` values, ensure that the filter is set to the right country and language.

5.1.3. Session Attributes & Cookies

The following session custom attributes are saved in “**session.privacy**” storage and accessible in checkout. The attributes are retained for the session lifetime & cleared when the customer logs out of their profile.

Attribute	Description
KlarnaLocale	The Klarna locale in use
KlarnaPaymentsSessionID (Not applicable since version 21.2.0)	The Klarna session ID returned after “Create Session” API endpoint is called
KlarnaPaymentsClientToken (Not applicable since version 21.2.0)	Client token returned by “Create Session” API endpoint and used to initialize the JS SDK
KlarnaPaymentMethods	The available payment method categories for the respective Klarna session; Saved in JSON format
SelectedKlarnaPaymentMethod	The selected payment method on checkout (e.g., “pay_later”)
KlarnaPaymentsAuthorizationToken	The authorization token returned by JS SDK “Authorize” call
KlarnaPaymentsFinalizeRequired	Whether finalization is required for the payment method; Returned by JS SDK “Authorize” call
KlarnaExpressCategory	The KEB payment category; Currently applicable for US and defaults to “pay_over_time”
KlarnaPaymentsOrderID	The Klarna order ID returned by the “Create Order” API call
KlarnaPaymentsRedirectURL	The URL to redirect the customer to after placing the order; Returned by the “Create Order” API call
KlarnaPaymentsFraudStatus	The fraud status of the order returned by the “Create Order” API call

Table 7 Klarna Session Attributes

The following cookies are being set by Klarna integration:

Cookie Name	Description
selectedKlarnaPaymentCategory	The selected payment method on checkout (e.g. "pay_later")

Table 8 Klarna Cookies

5.1.4. Library

In addition to the configurations, the following 2 library assets will be added:

- “**footer-about**” – Updated OOTB asset including link to Klarna OSM dedicated page in the footer.
- “**klarna-email-info**” – Asset containing links to review the Klarna Payment information. Used in the confirmation email sent to the customers.

5.1.5. Services

An HTTP service “**klarna.http.defaultendpoint**” has been added with “**klarna.http.service**” profile and service credentials for each country (described in **KlarnaCountries** custom object).

*Please, note that up until version 21.2.0 of the cartridge, the **KlarnaCountries** custom object was replicable. To avoid issues with service credentials during replication, merchants should use the same service credential name in staging, development, and production environments!*

Please, review section 9.4 Update KlarnaCountries Definition on possible ways to update the definition in your instances.

5.2. Logs

The integration includes the following logs:

- Service communication logs – starts with “service-klarna-***”. These logs contain every request and response to the Klarna endpoints. Personal information, i.e. emails & names required for the Klarna API calls are masked in the logs.
- Custom errors and debug info are logged under “customerror-***”, “custodebug-***” & “custominfo-***” files depending on the case.

5.3. Availability

Cartridge functionality will be dependent on the availability of the Klarna API service. Current Klarna operational status can be viewed here - <http://status.klarna.com/>

5.4. Failover/Recovery Process

If Klarna API is not available, Klarna is not presented as a payment option. In case of any failure within the Klarna API, contact Klarna for support.

5.5. Support

Klarna's service center is responsible for handling operational tasks. The service center is divided into the following two teams: Customer Service and Merchant Support.

5.5.1. *Customer Service*

A customer service workshop can be conducted during the implementation process before going live to align the operational processes and ensure customer satisfaction. Klarna provides all customers with the possibility to log into Klarna App via website: <https://app.klarna.com/login> or download the Klarna App (free) on a mobile (Android/iOS). The customers can contact support, view their statements, pay for their purchase, track delivery updates, and prolong the due dates if they have chosen to pay after delivery.

5.5.2. *Merchant Support*

Reporting core SFCC functionality issues in the Klarna cartridge technical integration – please contact commercecloud@klarna.com

For production issue related to Klarna API availability, merchant representative should reach their Klarna Account manager after reviewing the current operational status at <http://status.klarna.com/>. Report the problem in Production (Post Go-live) if you have a suspicion about degraded performances or issues with Klarna's service. The Klarna contact would then be able to report this internally to the incident management team who have established routines to handle and resolve

reported incidents. The Klarna contact may request additional information from the individual reporting the problem to help internal team ascertain and identify the issue. The KAM may also advise the merchant to follow the updates on the status page if it is a known incident with on-going updates.

Pre-requisite information to be provided by merchant when reporting incident to help with speedy investigation and resolution:

- Merchant's affected MID or market
- Impact and examples of customer orders (order_id or Klarna session_id if available)
- Screenshots, timeframe, additional information as required

6. User Guide

6.1. Roles, Responsibilities

There are no recurring tasks required by the merchant. Once configurations are set up, the functionality runs on demand.

6.2. Storefront Functionality

When Klarna has been setup, the Klarna Payments options and iframe widgets will be shown on the billing step. All the SFCC OOTB checkout functionality remains in place, such as but not limited to cart updates during checkout, checkout with applied coupon(s) code(s), checkout with applied product level promotion, checkout with applied order level promotion, checkout with applied shipping level promotion, checkout with applied order level promotion with bonus product.

Select one of Klarna's payment options as the payment method on billing step of checkout process and click the "Next: Place Order" button:

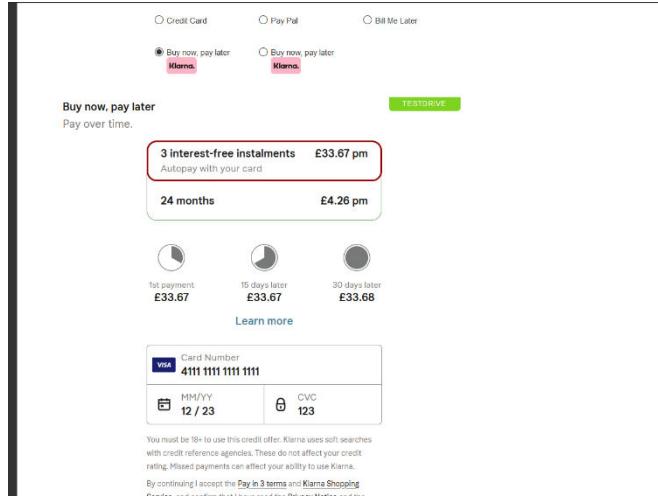


Figure 68 Payment Options on Checkout

Depending on the payment method selected and the region, you will see one of Klarna's popup windows to provide the details. Follow the steps on the screen:

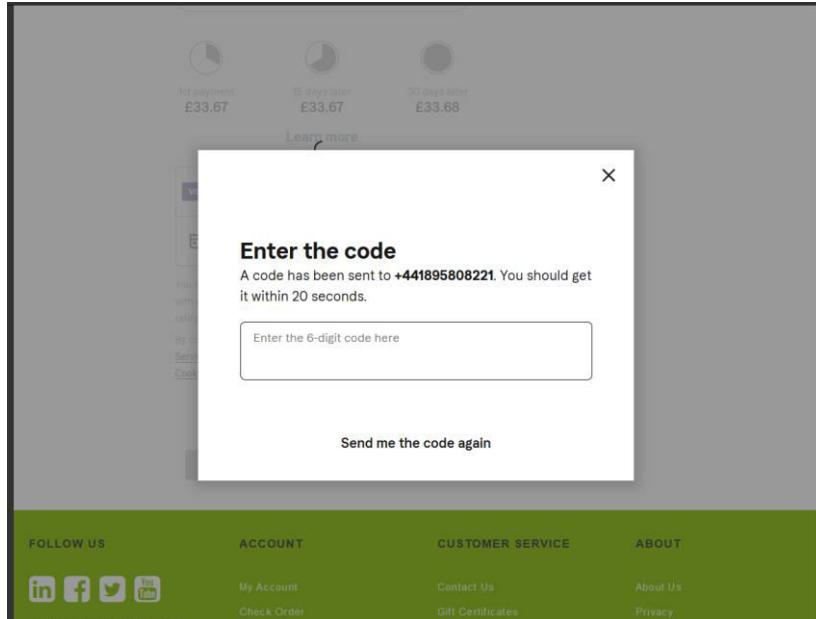


Figure 69 Klarna Popup Screen

On the Review step click on “Place Order” button:

STEP 1: Shipping > STEP 2: Billing > **STEP 3: Place Order**

PRODUCT	QTY	TOTAL
 Sleeveless Cowl Neck Top Item No.: 701643571284 Colour: White Multi Size: S	1 In Stock	£42.23
 Classic Skirt Item No.: 701643488872 Colour: Chino Size: 6	1 In Stock	£63.36

Order Discount: TestOFF

Subtotal	£105.59
Order Discount	- £10.56
Shipping Ground	£5.99
Order Total	£101.02

[« Edit Cart](#) **PLACE ORDER** [Edit](#)

ORDER SUMMARY [Edit](#)

Subtotal £105.59
Order Discount - £10.56
Edit Shipping £5.99
Ground
Order Total: £101.02

SHIPPING ADDRESS [Edit](#)

John Doe
13 New Burlington St
Apt 214
London, W13 3BG
United Kingdom
Method: Ground

BILLING ADDRESS [Edit](#)

John Doe
13 New Burlington St
Apt 214
London, W13 3BG
United Kingdom

PAYMENT METHOD [Edit](#)

Klarna Payments
Amount: £101.02

Figure 70 Payment Review Screen

The customer's browser is sent to the “`redirect_url`” and immediately thereafter shown the Commerce Cloud Order Confirmation page.

If you have questions about your order, we're happy to take your call (800-555-0199) Monday - Friday, 8AM - 8PM

Order Number: 00055607	CREATE ACCOUNT
Order Placed: 4 Mar 2021	Creating an account is easy. Just fill out the form below and enjoy the benefits of being a registered customer.
PAYMENT METHOD	<input checked="" type="radio"/> First Name: John <input type="radio"/> Last Name: Doe <input type="radio"/> Email: john@doe.com <input type="radio"/> Confirm Email: <input type="radio"/> Password: 8 - 255 characters <input type="radio"/> Confirm Password: Create Account
BILLING ADDRESS	John Doe 13 New Burlington St Apt 214 London, W13 3BG United Kingdom Phone: 01895808221
SHIPMENT NO. 1	PAYMENT TOTAL
SHIPPING STATUS: Not Shipped	Subtotal: £105.59
METHOD: Ground	Order Discount: - £10.56
	Shipping Ground: £5.99
	Order Total: £101.02
ITEM	SHIPPING TO
Sleeveless Cowl Neck Top ITEM NO.: 701643571284 COLOUR: White Multi SIZE: S	John Doe 13 New Burlington St Apt 214 London, W13 3BG United Kingdom 01895808221
	QTY: 1
	PRICE: £42.23
Classic Skirt ITEM NO.: 701643488872 COLOUR: Chino SIZE: 6	QTY: 1
	PRICE: £63.36

[Return to Shopping](#)

Figure 71 Order Confirmation Page

The newly created order can be inspected in Business Manager:

You're using the new Search service.

This page allows you to search for orders by order number. Select **Advanced** to use more search options. Select **By Number** to se: or newline. Entered text is treated as case-sensitive; substring matching isn't supported.

Order Search				
Order Number:		Find		
Number	Order Date	Site	Created By	Registration Status
00055607	3/4/21 3:00:52 pm Etc/UTC	SiteGenesisGlobal	Customer	Unregistered
00055606	3/4/21 2:58:25 pm Etc/UTC	SiteGenesisGlobal	Customer	Unregistered
00055605	3/4/21 2:52:27 pm Etc/UTC	SiteGenesisGlobal	Customer	Registered
00055604	3/4/21 12:51:34 pm Etc/UTC	SiteGenesisGlobal	Customer	Registered
00055603	3/4/21 12:49:03 pm Etc/UTC	SiteGenesisGlobal	Customer	Registered
00055602	3/4/21 11:08:50 am Etc/UTC	SiteGenesisGlobal	Customer	Unregistered
00055505	3/3/21 5:58:33 pm Etc/UTC	SiteGenesisGlobal	Customer	Unregistered
00055405	3/2/21 8:41:39 am Etc/UTC	SiteGenesisGlobal	Customer	Registered
00055404	3/2/21 8:35:37 am Etc/UTC	SiteGenesisGlobal	Customer	Registered
00055403	3/2/21 7:46:22 am Etc/UTC	SiteGenesisGlobal	Customer	Registered

Showing 1 - 10 of 506 items

Show [50](#) [100](#) [All](#) items

Figure 72 Orders List in BM

Klarna Payments order id can be inspected in the Attributes tab of the order:

Merchant Tools > Ordering > Orders > Order: 00055607(SiteGenesisGlobal)

General **Attributes** Payment Notes History

Attributes for Order '00055607'

On this page you can edit the attributes of the order. Fields with a red asterisk (*) are mandatory. Click **Apply** to save changes. Click **Reset** to i

Klarna Payments

Klarna Payments Order ID:

Is VCN Used:

VCN Card ID:

[<< Back to List](#)

Figure 73 Order Attributes

Payment method details can be inspected on the Payment tab of the order, and it should be Klarna:

Merchant Tools > Ordering > Orders > Order: 00055607(SiteGenesisGlobal)

General Attributes **Payment** Notes History

Payment Information for Order '00055607'

Order Total:	£101.02
Amount Paid:	£0.00
Balance Due:	£101.02
Invoice Number:	00242007
Payment Status:	Paid
Payment Method:	Klarna Processor: KLARNA_PAYMENTS Transaction: 77aa252d-70fa-2719-957b-b047a82b3343 Amount: £101.02
	Klarna Payment Category ID: pay_over_time Klarna Payment Category Name: Buy now, pay later Fraud Status: ACCEPTED

<< Back to List

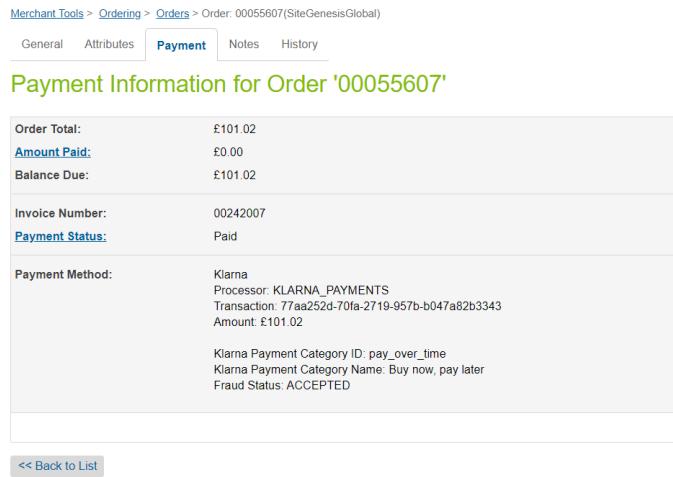


Figure 74 Order Payment Detail

Order can be further inspected in Klarna Merchant Portal:

- EU: eu.portal.klarna.com
- US: us.portal.klarna.com
- OC: us.portal.klarna.com

#BW6DKM8G Captured **£101.02**

Merchant reference 1 00055607 Edit	Merchant reference 2 4f8acec8fc30bebb330570ab69 Edit	Created Mar 4, 2021, 5:00 PM	Expires Apr 1, 2021, 3:00 AM	Merchant ID K500726
---	---	--	--	-------------------------------

Customer

Shipping address

John Doe
13 New Burlington St
Apt 214
London
W13 3BG
GB
Tel
01895808221
Email
john@doe.com

[Edit shipping address](#)

Billing address

Additional Info

Order lines (3)

	Item / Reference	Qty	Unit price	Discount	Tax	Amount
<input type="checkbox"/>	Sleeveless Cowl Neck Top 701643571284	1	42.23	4.22	20% 6.34	38.01 Captured
<input type="checkbox"/>	Classic Skirt 701643488872	1	63.36	6.34	20% 9.50	57.02 Captured
<input type="checkbox"/>	Ground GBP001	1	5.99	0.00	20% 1.00	5.99 Captured

Currency: GBP

PAYMENT DETAILS

Initial Payment Method	ORDER TOTAL	£101.02
Pay later in parts	Captured	£101.02
VISA 411111*****1111	Refunded	£0.00
Resend statement	Not Captured	£0.00

Activity Log

- Mar 4, 2021 7 minutes ago 5:00 PM **Captured: £101.02** Via API
- 5:00 PM **Order placed: £101.02** By Klarna

Klarna. Copyright © 2005-2021 Klarna Bank AB (publ). All rights reserved [Terms & Conditions](#)

Figure 75 Klarna Portal Order View

7. Known Issues

The LINK Cartridge has no known issues.

8. Release History

Version	Date	Changes
18.1.0		Initial release of Klarna Payments
19.1.0		Added SFRA version
19.1.1		Updated VCN to use the newest API version
19.1.2		Fix auto capture for the pipelines cartridge
19.1.4		New country locales added. Minor bug fixes. Cartridge templates and forms updated for latest SFRA.
19.1.5		Added additional verification for all notifications. Minor fixes around the configuration objects. Added Canadian support. Documentation updates.
19.1.6		New country locales added. Updated VCN to store encrypted card details
21.1.0		Fixes around discounts taxation & VCN error handling. Added VCN improvements, additional On-site Messaging placements, BOPIS support. New IT, CA, FR & NZ country locales. Removed acknowledge call. Documentation updates.
21.1.1		New On-Site Messaging setting for Canada. Remove not required locale templates for SG Spain & Belgium. Documentation updates.
21.1.2		Fixed core file naming convention issues in 21.1.0 and 21.1.1. Please upgrade to the latest version if you are currently using 21.1.0 or 21.1.1. Removed deprecated “scripts/util/Builder.js” file.
21.2.0		Added Klarna Express Button.

Version	Date	Changes
		<p>Moved Klarna session ID & client token from SFCC session privacy to Basket attributes.</p> <p>Changed KlarnaCountries definition to not replicable.</p> <p>Code cleanup.</p> <p>Documentation updates.</p>
21.3.0		<p>Improvements for create_session errors</p> <p>Expired user session issues related to empty shipment.shippingMethod</p> <p>Additional locale (PL) included in config files</p>
21.3.1		Documentation updates.

9. Additional Information

9.1. Klarna API Information

The Klarna Payments API is accessible through different endpoint based on the context of the webstore. There are separate endpoints for testing and live and the Klarna merchant identifier (MID) is configured for respective markets in regions (EU, NA, OC) by endpoint.

9.1.1. Live Environment

The API for the European production environment can be found at

- <https://api.klarna.com/>

The API for the North America production environment can be found at

- <https://api-na.klarna.com/>

The API for the Oceania production environment can be found at

- <https://api-oc.klarna.com/>

9.1.2. Testing Environment

The API for the European Playground/testing environment can be found at

- <https://api.playground.klarna.com/>

The API for the North America Playground/testing environment can be found at

- <https://api-na.playground.klarna.com/>

The API for the Oceania Playground/testing environment can be found at

- <https://api-oc.playground.klarna.com/>

9.2. Generate Key Pair and Key Id for Virtual Card Settlements (VCN)

The recommend RSA keypair size of 4096 bits. This key pair must be associated with a key_id (UUIDv4). The public key must be shared in JWK format with Klarna contact. Note that for production and playground, the key_id and keypair combination shared are different and must be configured prior to testing/go-live of the virtual card product.

To generate an RSA keypair with a 4096-bit private key you can use the following ***openssl*** command:

```
openssl genpkey -algorithm RSA -out private_key.pem -pkeyopt
rsa_keygen_bits:4096
```

To extract the public key from an RSA keypair, you can use the following ***openssl*** command:

```
openssl rsa -pubout -in private_key.pem -out public_key.pem
```

In the folder where you have executed the above commands two new files will be created - **public_key.pem** and **private_key.pem**.

The contents of the files should look something like:

public_key.pem

```
-----BEGIN PUBLIC KEY-----
MIICIJANBgkqhkiG9w0BAQEFAAOCAg8AMIIICCgKCAgEAoNYG712G8nZa+22oBYZk
tv2281w3UE9WO4oxfknJtKEdHn84x55Ult8KQTh9NVtdeKC8nTfTgyvMt/GNCa18
xuZV/1GYDftKt85hbV5EjOum+StAIufEXv1BX7nMOMc1KyWm9kp2kbqd88mFIX63
KV94OoNEXcNatRDFYR+qz53+ifadDQtQ1slVNstdroCZDJ1+LxtBy9V+BdmsBK1E
RLsKh/JLXyWE24FJKV+z0Os7TQkdWW/5ET12OGQYZsWo1yqgi9HplNvrise8vWP
xaL4m8iz3I/9yYdg7yANqbTxSJccbRCgaaagPo30CNxeqU6qafY5g8vY3E52CoXH
DdO4Us1X1qcuYIDhqaDzeY6W+b8m755xLi+rqQyM4PBWL0J0dM3FVid8+4YKILex
3AKBFciqRCMHSOGaEeyrXKTjlAsghr9RS8PifvQRrL440cHzqw2vX0DvpjSWcmUJ
```

```
tW4wUq5RNSSobrxnVmoV6fj1z67Q/1P+15Ie+oowdahR5ztVqJlO+2PN0X4I5VDs
/Pkz3f8wWvC3Mp2oNT244o+/NIiyRPFaJJx7JAgrcvZt2nFAmY4QApXLFJCpgEM
wYucE4AH4gJKsh3KZbxRERrr072bL2rxvWqBp/0h7DcMsV9sQs4BvxxI16CF506F
ThzmclaKLBAyd5LALiXiPfkCAwEAAQ==

-----END PUBLIC KEY-----
```

private_key.pem

```
-----BEGIN PRIVATE KEY-----
MIIJQQIBADANBgkqhkiG9w0BAQEFAASCCSswggknAgEAAoICAQCg1gbuXYbydlr7
bagFhmS1XbbyXxDQT1Y7ijF+Scm0oR0efzjHn1Qu3wpBOH01W114oLydN9ODK8y3
8Y0JrXzG51X+UzgN+0q3zmFtXkSM66b5K0Ai58Re+UFFucw4xzUrJab2SnaRup3z
yYUhfrpcX3g6g0Rdw1q1EMvhH6rPnf6J9p0NC1DWyVU1K12ugJkMnX4vG0HL1X4F
2awErUREuwqH8ktfJYTbgUkpX7PTSztNCR1Zb/kRPXY4ZBhmxajXKqCL0emU2+uK
y97y9Y/FovibyJncj/3Jh2DvIA1BtPFI1xttEKBppqA+jfQI3F6pTqpp9jmDy9jc
TnYKhccN07hSyVfWpy5ggOGpoPN7Lpb5vybvnnEuL6upD1zg8FYvQnR0zcVWJ3z7
hgogt7HcAoEVyKpEIwdI4ZoR7KtcpOOUCyCGv1FLw+J+9BGsvjjRwfOrDa9fQO+m
NJZyZQm1bjBSr1E1KyhuvGdWahXp+PXPrtd/U/6Xkh76ijB1qFhnO1WomU77Y82h
fgj1UOz8+TPd/zBVzcynag1Pbjij780iLJF88VoknHskCCTy9m3acUCZjhAClcs
UkKmAQzBi5wTgAfqyHcp1vFERGus7vZsvavG9aoGn/SHsNwyxX2xCzgG/HEiX
oIXnToVOHOZyVoosEDJ3ksAuJeI9+QIDAQABAOICACRkaUsUNI22RB3yEPu3DiCP
p06v+QAeA4gTW+GUdqR9dcZLaSCZ7bhxVVouoX4qPzsl06hjUmOyzG6upFgVPk+P
HNQfyEUzoC148Eib9OziAXUN2URMpv1KbwVm+BO814X8zguai7uru0PHTG1oy677
4Ct1OknxAxxHQDIaxT6XJF05SA4EinUfNz2Bo3/xry/QjxW/mCK0GwDd4PNp9TGM
FPTv2SgdSDOWzGQ1OH5N3owuzMpI8NV6z74wv+i5Ptv41Dzu8WhyXpiYSsk00SRK
HPC68j2bAzTPghp5aSZ9976SGm2SPonJXyboXdiHbI/osdyqDxeIT3iB9GmrHX/i
kHPGJCh7fRZvqj39Hc+IxYjabwW3rDeDIPB7ab9z1KLF4z1D6AZOKCPyTaDRdQ1Q
eDi7LwDmk7NHEPrmF/nIcgQdqbIbmFO2zEs0TOe6y4uBMndRsbQprTNSMUdBkrA
1NaYVSTQ1Z0Y/8DZDpGcyS1OnJv74F15uDjKN6/ov991mZ1JrZ+V2sdS3EDUlmvp
6thQKwi7Ln6h+ApHtWUG1NmVQe5gJE0qAeJ9b45clUzIRUwhVmEp8NoIJh0kAjaN
d4lk7xy9ZRDUY5yekPeYrJPShjsHAYeoktJIjRufI2UUq3uxNjjjCoQcOVGfNDIS
YTTPwpulpmC0C+rh2fgBAoIBAQDRultRArvtc2JKhVOUyZk88zd9kvrI6fNiYKmi
HgiWf7qkTPD9xh0QWDw3iwRFQAD+YkgV5MCB08wp8o08GEsOCI+XZWExOcpt0Vfj
PZHiQrtFn1fG/+fAO14xLf3j3ED4YQXdHOKI3xoLknQx/EydLoctxgkkpgWLrsA7
DwdSAgl/0sBvaHY27ogAfdimHdaKZ50Ae4a9k1qP3xVZBuOe8Sd65unBavUJLDuv
ikeNmksVgW1sm5/729Jir63USHF76It+vE1cdZ+vKg5vYotsQgPzvNBmUO/E8Gj
zMXQRfqfvEDlNXEX0rCupTkw1G6AGTwQc/NPzyr/LTpLe6UBAoIBAQDEUjTiG11V
hf7WjdG3gctRlr+mYapQHgXdVLx2QSaqUYid+0QXK11YfJlsRB6nwa+OED83Rfp0
l1FqxpudSLPmoDuIBT7D15c/aleyKs/siUusP8QVDXk6OAR84XSytC35sIRV7pE
VMuBL91jfkQ0Lf/Pres1k/kI6Yvwwp4qrHK6/f9TgciHc1Ytf+/oti4ky6GJgfmP
fmuCqjxmUKbXXFPd5RbL2THGOowlb8zDLjf3R1b1QFqogAk6H9hp2V0VZLiJhp
UWM3z3zxDWeDaqJ08sHuk/rA9QpsVTu8IGTQsxdj8JwliuN1Q+YZiOuPiSENbqPzT
V3exexo3sD5AoIBAGU3qEyPojz1+9D1SaI8LW2CABz1q4z9g84ABAZOslxx5q7W
x1PinZyDSQSRXg1B13jt29ZdIR79ygnQlg1YOBjcvtgVQHPuafk3R1BQbbCh+vaI
9dn/tUxMGqhnunKaby1rovJHfdqnPpKwzNAjYUqaGkJ822xhmmke/fEyAanIPa4
stDRvIPEWPTLx5xcOCdx13khpKSnkgrVaLEfpwkVX7Vr7hK/2OSFaYTNmrzXYBQ7
c6D/9d30o4nLb/mu+Tq67S19t53Qg/GEgTfkpuRoVp1OkyhUnKKCGW1BMZLTwyIG
S9eTFDKoJ0cSTGipjW7bPua93wZ8eEbRABpf4QECggEANNhQBeEJ0aCdBVHtdreI
crDaa8X0W1aJi5dol4hYCRajaKsfHAF/QfdgMQVxHwUC5YG4En/Q+DAVWhGWYpXD
RhC3zeFy5FVszyk0sx/fAOlKGvRn5BRW4YRR9GMRzbjst+RcruBnckdE9ERXGpX9
c/JB3rxZB1t+oIiFM8yfWKtMwsrmNKtFuDftvJeok4KejycFF4eWDqsf828xjPT+
xA/FP4CQD1UqkcpmuFSIwAwXo6LXVY7NTS0nKMiUnTLkL1TIhtLnO9+9jmNapWRP
Tc+hZUuHKlpI8DHFMx2j87LgkFD05eD51ynY4RgZtU1W1C1RdVYwoA72WB7knEaB
uQKCAQAH9s67P/7ffX9dfEans3PHU4nGjD8dJ8eoNQ6DhBMydZpGWI5ZUeEBZDRk
0cBOeRs5B0cS43Em9kETpzawyCwxmnwz1+CzoPzMqCtw9tXomF9HG6RJ9XBdJfGA
ALAwCd4bASxmFM6guSP5GKnZ9aY3tR3tWWDFr7f9z8wOewzzpPclwRh009fPe4TC
NXoEm1MELJVeUiEdSLKZgjgCw8WHGqLItONpa0/fwSM2gIcxETVV7qx3aPuJzCVh
LQZoBLQk3UMKsWDdpzeBdiERe66NAgVk92Xe7SY9EY2vymaq761i1x1v1prT27qp
```

```
240LDJawqM0IraKmdCvWjofWSaOU  
-----END PRIVATE KEY-----
```

9.3. Decrypt VCN Card Details

To decrypt the virtual card details stored on order level and authorize the credit card processor you can use the following code snippet. You can find more information about the decryption process [here](#).

```
var OrderMgr = require( 'dw/order/OrderMgr' );
var Cipher = require( 'dw/crypto/Cipher' );
var Encoding = require( 'dw/crypto/Encoding' );
var Site = require( 'dw/system/Site' );

var Order = OrderMgr.getOrder( "order_id" );
var VCNPrivateKey = Site.getCurrent().getCustomPreferenceValue(
'vcnPrivateKey' );
var cipher = new Cipher();

var keyEncryptedBase64 = Order.custom.kpVCNAESKey;
var keyEncryptedBytes = Encoding.fromBase64( keyEncryptedBase64 );
var keyDecrypted = cipher.decryptBytes( keyEncryptedBytes, VCNPrivateKey,
"RSA/ECB/PKCS1PADDING", null, 0 );
var keyDecryptedBase64 = Encoding.toBase64( keyDecrypted );
var cardDataEncryptedBase64 = Order.custom.kpVCNPIData;
var cardDataEncryptedBytes = Encoding.fromBase64( cardDataEncryptedBase64 );
var cardDecrypted = cipher.decryptBytes( cardDataEncryptedBytes,
keyDecryptedBase64, "AES/CTR/NoPadding", Order.custom.kpVCNIV, 0 );

var cardDecryptedUtf8 = decodeURIComponent( cardDecrypted );
var cardObj = JSON.parse( cardDecryptedUtf8 );
var expiryDateArr = cardObj.expiry_date.split( "/" );

// Retrieve encrypted card details
var cardPAN = cardObj.pan, cardCVV = cardObj.cvv,
cardExpiryMonth = expiryDateArr[0], cardExpiryYear = expiryDateArr[1];
```

9.4. Update KlarnaCountries Definition

With version 21.2.0 of the cartridge, the KlarnaCountries custom object definition changed to non-replicable. If you are using an earlier version, to mitigate any issues that may be present in your environments, please follow these steps to update the definitions:

1. Back-up KlarnaCountries configurations per country for each site as changing the definition will remove all configurations on your environment!

- a. For merchant with one site - Go to "**Merchant Tools > Custom Objects > Import & Export**", select KlarnaCountries & export the data.
 - b. For merchant with multiple sites using Klarna – You can export the configurations via "**Admin > Site Development > Site Import & Export**" and select each site that uses Klarna to be included in the export zip file. This section requires Account Manager access for users and will export all custom objects, not just Klarna ones.
2. Export custom object definitions from "**Admin > Site Development > Import & Export**". This action will export all custom object definitions that you have.
 3. Update KlarnaCountries.xml definitions in file exported in step 2 and set "**<staging-mode>source-to-target</staging-mode>**" to "**<staging-mode>no-staging</staging-mode>**"
 4. Import the updated KlarnaCountries.xml definition in "**Admin > Site Development > Import & Export**".
 5. Import the KlarnaCountries configs exported in step 1 (manually or via bulk import)
 - a. If you've followed step 1.b with multiple sites, you may want to edit the zip file and remove everything else apart from KlarnaCountries.xml