

Klarna®

Klarna Payments for SG

Version 24.2.0



1

Table of Contents

1. Summary	6
2. Component Overview	7
2.1. Functional Overview	7
2.2. Locales	9
2.3. Use Cases	10
2.3.1. Enable Klarna Payments Across International Sites (NA, EU, OC)	10
2.3.2. Multitude of Payment Options for Customers	10
2.3.3. Authorize and Place Klarna Order in Checkout	10
2.3.4. Refusal of Klarna Payments on Payment Method – Authorization	13
2.3.5. Klarna Payment Option Not Available for Current Purchase - Billing Page	14
2.3.6. Klarna Payments Not Available - Checkout	15
2.3.7. Handling Notifications	15
2.3.8. Virtual Cards Settlements	17
2.3.9. Auto-Capture	21
2.3.10. Widget Customizations	22
2.3.11. Customizing Payment Method Name	23
2.3.12. Klarna On-Site Messaging	25
2.3.13. Klarna Express Button	31
2.3.14. Klarna Payment Method Based Promotions	34
2.3.15. Price Adjustment Taxation Handling	35
2.3.16. Buy Online, Pickup in Store (BOPIS)	36
2.3.17. Configuration Support for Service Rate Limits	38
2.3.18. Klarna Subscriptions	39
2.3.18.1. Configuration	39
2.3.18.2 Cart page	40
2.3.18.3 Checkout	41
2.3.18.4. Account Subscription dashboard	42
2.3.18.5. Recurring Subscription Order Creation	42
2.3.19. Klarna Express Checkout	43
2.3.19.1 PDP	43
2.3.19.2 Minicart and Cart buttons	44
2.3.19.3 Configuration	45

2.4.	<i>Compatibility</i>	46
2.5.	<i>Privacy, Payment</i>	46
2.5.1.	GDPR Compliance	46
2.5.2.	EMD (Extra Merchant Data)	47
2.5.3.	PCI-DSS Compliance	50
3.	Implementation Guide	50
3.1.	<i>Setup of Business Manager</i>	50
3.1.1.	Cartridge Upload & Assignment	50
3.1.2.	Metadata Import	52
3.2.	<i>Configuration</i>	52
3.3.	<i>Template Updates</i>	56
3.4.	<i>Jobs</i>	56
3.4.1.	Job “OrderCleanUp” (Optional)	56
3.4.2.	Job “RecurringOrders”	61
3.5.	<i>Custom Code</i>	62
3.5.1.	Template Modifications	62
3.5.1.1.	default/checkout/summary/summary.isml	63
3.5.1.2.	default/checkout/billing/billing.isml	65
3.5.1.3.	default/checkout/billing/paymentmethods.isml	65
3.5.1.4.	default/checkout/shipping/minishipments.isml	67
3.5.1.5.	default/components/footer/footer_UI.isml	68
3.5.1.6.	default/components/footer/footer.isml	68
3.5.1.7.	default/product/producttopcontentPS.isml	69
3.5.1.8.	default/product/productcontent.isml	70
3.5.1.9.	js/pages/product/variant.js	71
3.5.1.10.	default/checkout/cart/cart.isml	71
3.5.1.11.	default/components/header/header.isml	75
3.5.1.12.	default/mail/orderconfirmation.isml	75
3.5.1.13.	default/components/order/ordrdetailsemail.isml	76
3.5.1.14.	default/checkout /cart/minicart.isml	77
3.5.1.15.	js/pages/cart.js	78
3.5.1.16.	default/checkout/shipping/singleshipping.isml	81
3.5.1.17.	scripts/cart/ValidateCartForCheckout.js	82

3.5.1.18.	scripts/util/Resource.ds	83
3.5.1.19.	js/pages/account.js	83
3.5.1.20.	default/account/orders.isml	86
3.5.1.21.	default/checkout/components/minicheckout_address.isml	86
3.5.1.22.	js/minicart.js	87
3.5.2.	Controller Modification	87
3.5.2.1.	COBilling.js	87
3.5.2.2.	COSummary.js	89
3.5.2.3.	OrderModel.js	90
3.5.2.4.	CartModel.js	91
3.5.2.5.	Cart.js	92
3.5.2.6.	COShipping.js	95
3.5.2.7.	Order.js	96
3.5.2.8.	COCustomer.js	97
3.5.2.9.	COPlaceOrder.js	98
3.6.	<i>External Interfaces</i>	99
4.	Testing	99
5.	Operations, Maintenance	100
5.1.	<i>Data Storage</i>	100
5.1.1.	System Object Extensions	100
5.1.1.1.	Basket	100
5.1.1.2.	Order	101
5.1.1.3.	Order Payment Instrument	103
5.1.1.4.	Payment Transaction	103
5.1.1.5.	Site Preferences	103
5.1.1.6.	Product	109
5.1.1.7.	ProductLineItem	109
5.1.1.8.	Profile	109
5.1.2.	Custom Objects	109
5.1.2.1.	Klarna Express Button	109
5.1.2.2.	KlarnaCountries	111
5.1.3.	Session Attributes & Cookies	115
5.1.4.	Library	117

5.1.5.	Services	117
5.2.	<i>Logs</i>	117
5.3.	<i>Availability</i>	118
5.4.	<i>Failover/Recovery Process</i>	118
5.5.	<i>Support</i>	118
5.5.1.	Customer Service	118
5.5.2.	Merchant Support	118
6.	User Guide	119
6.1.	<i>Roles, Responsibilities</i>	120
6.2.	<i>Storefront Functionality</i>	120
7.	Known Issues	125
8.	Release History	126
9.	Additional Information	129
9.1.	<i>Klarna API Information</i>	129
9.1.1.	Live Environment	129
9.1.2.	Testing Environment	129
9.2.	<i>Generate Key Pair and Key Id for Virtual Card Settlements (VCN)</i>	129
9.3.	<i>Decrypt VCN Card Details</i>	131
9.4.	<i>Update KlarnaCountries Definition</i>	132

1. Summary

The **Klarna Payments SG cartridge** enables integration of Klarna Payment solution on Commerce Cloud Storefront. The integration provides merchants the flexibility to offer choice of multiple Klarna Payment products on the Commerce Cloud checkout.

This document contains the instructions for a developer to install the cartridge and integrate it on the Salesforce Commerce Cloud site. The cartridge is fully compatible with the SiteGenesis JavaScript Controllers (SGJS).

Merchant teams are required also to configure the cartridge with the valid merchant credentials and site configurations in Commerce Cloud Business Manager to enable Klarna payments methods in the checkout.

The integration consists of an archive, which contains the following contents:

- Cartridge called “int_klarna_payments” and “int_klarna_payments_controllers” to be imported.
- A site-template archive containing new attributes and settings.
- This document for Site Genesis (Klarna Payments Integration Guide).
- The integration is based on the SiteGenesis demo store provided by Commerce Cloud.

It is a requirement that Merchant sign a contract for integration support and production go-live with Klarna.

Klarna offers a playground (test) environment, so the integration can be tested before switching to the Klarna production environment. Based on the contract, Klarna shall provide assistance with integration and testing prior to sign-off for go-live.

2. Component Overview

2.1. Functional Overview

Key Features:

- Integrate Klarna Payments using best practices on international sites based (markets in North America, Europe, Oceania)
- Enable multiple payment products for customer in Pay Now, Pay Later and Pay Over Time categories
- Fast integration/go-live with virtual card-based integration approach for settlement
- Handle Notification: pending status updates (reject/accept) for suspected orders post review
- Site managers can customize the Klarna Payments widget styling displayed in checkout, to match the style guide of merchant website(s)
- GDPR (EU) compliant checkout flow
- Multi Shipping Address support
- Supports Klarna authorize with finalize for Bank Transfer methods (Pay Now)
- Enable Onsite Messaging placements on PDP, Cart, Header, Footer, and dedicated Info page
- Enable Klarna's Express Button on Cart page (*US) for faster checkout
- BOPIS (Buy Online, Pickup in Store) support including extra merchant data
- Support for Klarna Payment Method based promotions
- Support for adjusted price promotions with Gross Tax Policy
- Support disabling Payment method for authorization rejection
- Support Auto-Capture
- Support for custom service rate limits configuration

Klarna Payment cartridge makes use of the Klarna Payments JSON REST API and a JavaScript SDK to integrate on the storefront. Klarna Payment enables consumers to choose from the different

payment method products offered by Klarna. Multiple Klarna products are available within the categories “Pay Now”, “Pay Later” and “Pay Over Time”. The cartridge integration displays payment options via a widget (iframe) added inline on the billing page, referred to as Klarna widget or just “the widget”. The widget with information about the payment method is displayed to the customer when the individual clicks on the Klarna payment method.

Customers can authorize the payment after reviewing the payment method terms and clicking Place Order button. The Klarna order is created, and customer is re-directed to the confirmation page.

Orders successfully placed with Klarna return a Fraud Status: ACCEPTED and displayed in Business manager (BM).

With ACCEPTED status, order creation in SCC proceeds as usual. Klarna payment status is saved in a custom attribute with id kpFraudStatus in the PaymentTransaction system object, and can be seen in BM on the order details Payment tab as below:

Merchant Tools > Ordering > Orders > Order: 00005332(SiteGenesisGlobal)

General Attributes **Payment** Notes History

Payment Information for Order '00005332'

Order Total:	£195.83
Amount Paid:	£0.00
Balance Due:	£195.83
Invoice Number:	00024518
Payment Status:	Paid
Payment Method:	Klarna Processor: KLARNA_PAYMENTS Transaction: 8aa32699-20ac-2f76-a5ee-1e554e6cc7cd Amount: £195.83 Klarna Payment Category ID: pay_over_time Klarna Payment Category Name: Buy now, pay later Fraud Status: ACCEPTED

<< Back to List

Figure 1 Klarna Payment Details in BM

An alternate flow when PENDING status is returned for Klarna order creation, the SCC order creation proceeds with modified statuses. If later a Klarna notification with updated fraud status

FRAUD_RISK_ACCEPTED is returned, SCC order status is updated and returns to the usual flow. Klarna payment status is saved in a custom attribute with id kpFraudStatus in the PaymentTransaction system object, and can be seen in BM on the order details Payment tab as below:

The screenshot shows the 'Payment' tab of the Order details in the Merchant Tools. The URL is Merchant Tools > Ordering > Orders > Order: 00005339(SiteGenesisGlobal). The 'Payment' tab is selected. The page title is 'Payment Information for Order '00005339''. The table contains the following data:

Order Total:	£62.35
Amount Paid:	£0.00
Balance Due:	£62.35
Invoice Number:	00024525
Payment Status:	Paid
Payment Method:	Klarna Processor: KLARNA_PAYMENTS Transaction: 62a33ce0-3bde-2657-bdc4-31f0ba994c45 Amount: £62.35
	Klarna Payment Category ID: pay_over_time Klarna Payment Category Name: Buy now, pay later Fraud Status: FRAUD_RISK_ACCEPTED

At the bottom left is a button labeled '<< Back to List'.

Figure 2 Klarna Payment Details in BM

2.2. Locales

The cartridge supports most locales including:

- English
- German
- Danish
- Spanish
- Finnish
- French
- Italian
- Dutch
- Polish
- Mexican

For a list of more [supported](#) locales, contact Klarna.

2.3. Use Cases

2.3.1. Enable Klarna Payments Across International Sites (NA, EU, OC)

Klarna Payments on SG can be configured independently on each site by locale.

2.3.2. Multitude of Payment Options for Customers

On the checkout billing step, configured Klarna payment options are dynamically loaded based on customer's cart information and the payment method categories returned for the current Klarna session.

The screen below shows an example of the payment options displayed in the Checkout billing page:

SELECT PAYMENT METHOD • REQUIRED

Credit Card Pay Pal Bill Me Later

Buy now, pay later Buy now, pay later

4 interest-free payments of \$9.44

\$9.44 Today \$9.44 In 2 weeks \$9.45 In 4 weeks \$9.45 In 6 weeks

TESTDRIVE

Trusted by over 11 million Americans. ⓘ

By continuing, I accept [Klarna Services terms](#), [Privacy Policy](#), [Pay Later in 4 terms](#) and request electronic communication.

CONTINUE TO PLACE ORDER >

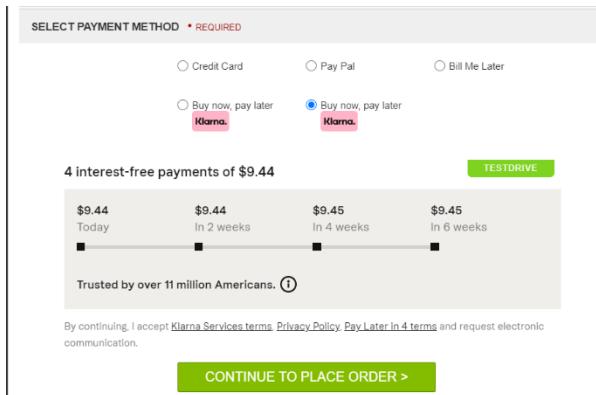


Figure 3 Payment Option

SELECT PAYMENT METHOD • REQUIRED

Credit Card Pay Pal Bill Me Later

Sofortüberweisung Lastschrift Rechnung

• Ohne Registrierung
• Per Online-Banking
• Klarna Käuferschutz Mehr

TESTDRIVE

Durch fortfahren akzeptiere ich die Bedingungen für den Klarna Shopping Service und bestätige, dass ich die [Datenschutzerklärung](#) und den [Hinweis zu Cookies](#) gelesen habe.
[Impressum](#)

Klarna.

CONTINUE TO PLACE ORDER >

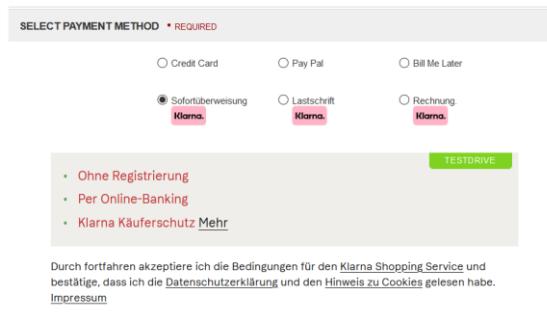


Figure 4 Payment Option

When customer selects (clicks) payment method, a widget with additional information of the Klarna product is displayed as shown above.

Note: The payment methods displayed are based on market availability and/or contractual agreement with Klarna.

2.3.3. Authorize and Place Klarna Order in Checkout

Cartridge provides best practice implementation and options to include Extra Merchant Data (EMD) to optimize acceptance rate for Klarna Payment (methods) products. This includes customer info and (Buy Online, Pickup in Store) BOPIS details included as merchant data when custom site preference “attachments” is enabled for the site. The EMD data sent can be extended but should be reviewed case by case and optimized and validated based on merchant data & privacy requirements prior to go-live.

The customer’s information (personally identifiable information) is sent once customer chooses a Klarna payment method and authorizes (clicks: “Continue to Place Order”). The required customer information facilitates assessment and verification of customer data to display payments method options available for the customer.

When customer clicks “Continue to Place Order” button, the authorization is initiated, and a successful authorization takes customer to summary page. Note that customer may be prompted for additional information prior to completion of authorization based on the payment method selected and market. If the authorization is not successful (“approved = false”), then the customer will stay on the billing page, the “Continue to Place Order” button will be disabled and depending on the Business Manager settings the payment option may be hidden or grayed out (refer to section **2.3.4 Refusal of Klarna Payments on Payment Method – Authorization**).

In some cases, the Pay Now payment category requires additional “finalize” call to be triggered when the customer clicks on the “Place Order” button in the review page. This is needed to ensure that the funds will be transferred (e.g.: Bank Transfer payment methods which initiate fund transfer) only when the customer has decided to place the order on the merchant site.

Please, note that in such cases cookie called “**selectedKlarnaPaymentCategory**” is set in the customer’s browser. This cookie contains the selected payment method from the previous step and is used to initialize the “finalize” call to Klarna.

For more information regarding the authorize & finalize calls, refer to the developer documentation [here](#)

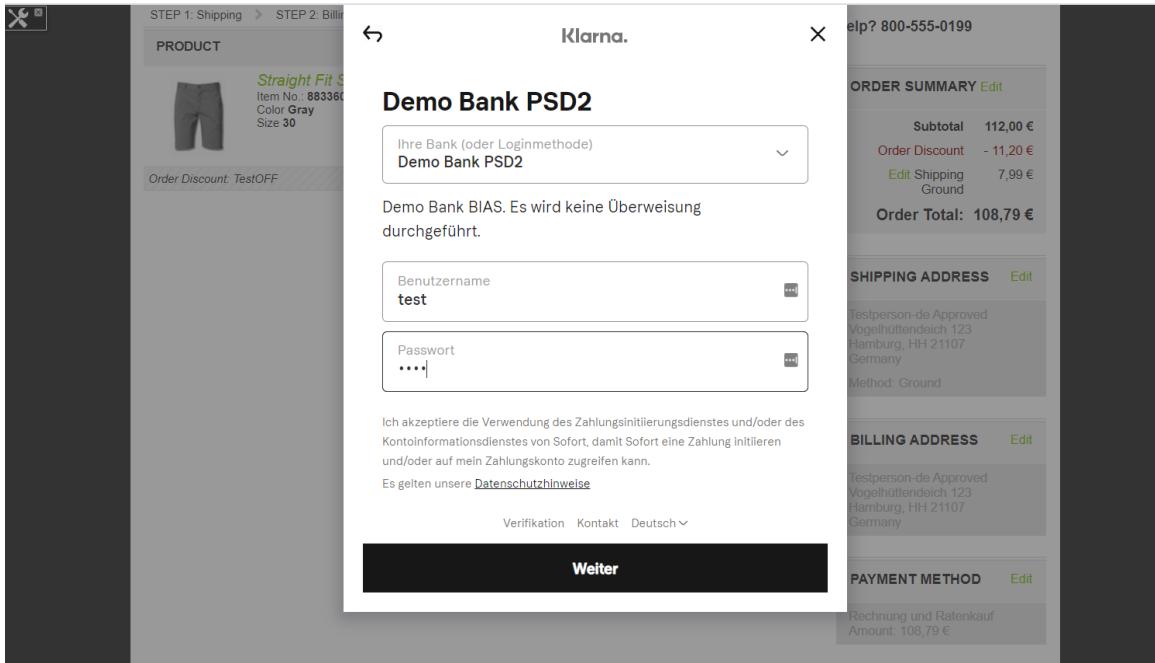


Figure 5 Finalize call screen

The Klarna Order is only placed prior to final step before SFCC order is created.

Successful payment authorizations (Klarna Payments authorization status: APPROVED) followed by placement of Klarna and SCC orders leads to a “Paid” order payment status and “Ready for Export” export status. Refused and pending Klarna Payment orders (Klarna Payments order statuses REJECTED and PENDING) lead to a “Not Paid” order payment status, and “Not Exported” export status.

In case of VCN settlement errors, Klarna orders are cancelled and SFCC orders are failed and set to a “Not Exported” export status.

When customers have selected Klarna payment option as a payment method for the order, successfully authorized the amount on order and later return to the billing page to choose a different payment method that is non-Klarna payment method. In such scenarios, when customer authorizes (non-Klarna payment method) and reaches the review page – automatic “cancelAuthorization” call will be triggered to release the authorized funds (Klarna related) & free up the available purchase amount for this customer.

MERCHANTS have the option to utilize this function to cancel prior authorization when required for specific use-cases apart from the above scenario. If enabled, the checkout flow should be tested thoroughly as part of integration, considering the valid checkout scenarios (e.g., relevant Klarna session flow, Klarna payment method switching, order amount updates, checkout with external payment method, etc.).

```

379 /**
380 * Saves/Updates Klarna Payments authorization token in the current session
381 */
382 @return {void}
383 */
384 function saveAuth() {
385     // Cancel any previous authorizations
386     // cancelAuthorization();
387 }
388 Transaction.wrap( function() {
389     session.privacy.KlarnaPaymentsAuthorizationToken = request.httpHeaders['x-auth'];
390     session.privacy.KlarnaPaymentsFinalizeRequired = request.httpHeaders['finalize-required'] === 'true';
391 });
392 response.setStatus( 200 );
393 }
394 */
395 */
396 /**
397 * Deletes the previous authorization
398 * @param {string} authToken Authorization Token
399 * @return {string} Service call result
400 */
401 function cancelAuthorization( authToken ) {
402     var klarnaAuthorizationToken = authToken || session.privacy.KlarnaPaymentsAuthorizationToken;
403 }

```

Figure 6 Cancel Authorization Call

2.3.4. Refusal of Klarna Payments on Payment Method – Authorization

Upon selecting one of Klarna's options as the payment method on billing step of checkout and based on the customer information provided, Klarna Payments can be refused as a payment method.

If the payment method was rejected with “**show_form=false**” & “**approved=false**” (i.e., hard reject), the merchant has the option to choose what happens with the payment option display in Billing page using BM preference “Hide Payment Methods on Deny” (**kpRejectedMethodDisplay**):

No – Leave the payment visible to the customers

Hide – The payment option will be hidden from customer

Grey Out – The payment option will be greyed out and not clickable

Please note that reloading the page will show the denied Klarna payment method again

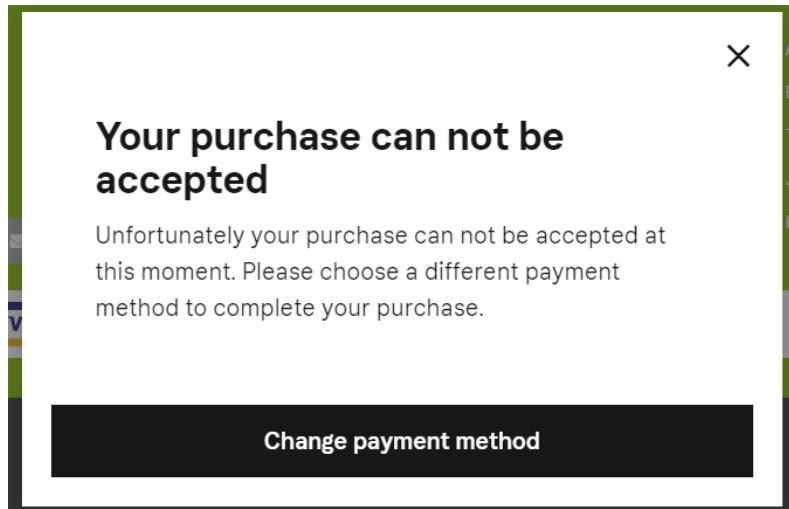


Figure 7 Denied Order Popup

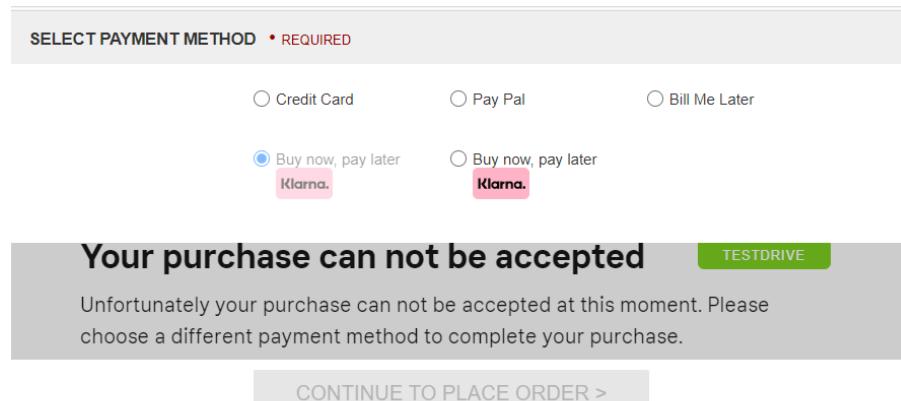


Figure 8 Greyed Out Payment Option

2.3.5. *Klarna Payment Option Not Available for Current Purchase - Billing Page*

The customer is presented with an appropriate message in the Klarna widget when customer attempts to choose Klarna in the billing page.

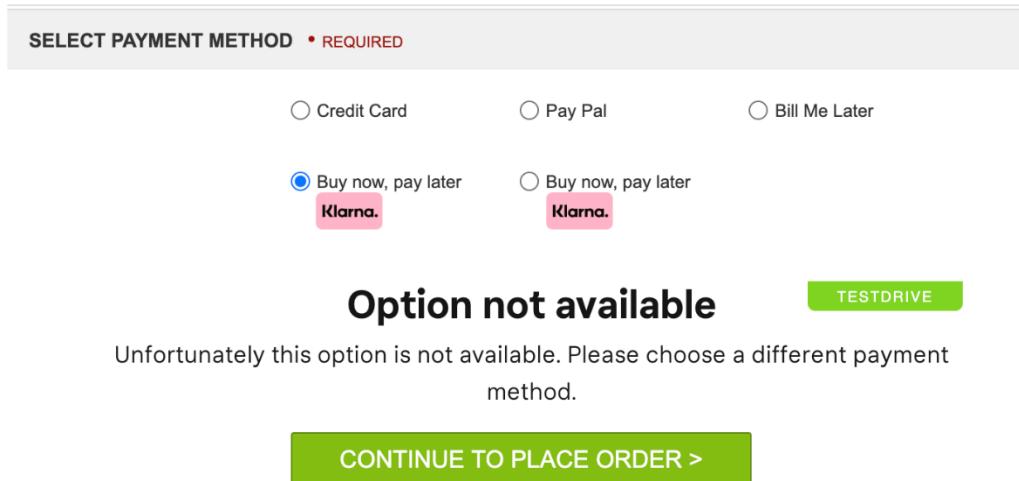


Figure 9 Option Not Available

2.3.6. Klarna Payments Not Available - Checkout

If Klarna API is not available or the site/storefront is not applicable, Klarna is not presented as a payment option in the billing page. It is recommended that Klarna session must not be created when customer chooses a non-Klarna market or merchant store, as well as in cases when merchants have multicurrency storefront with basket currency that is not supported by Karna.

2.3.7. Handling Notifications

In scenarios where the Klarna Order has been created but instead of immediately accepting the order, the Klarna order is flagged for additional review. This results in Commerce Cloud order staying in “Created” status with Fraud Status: PENDING. This order is marked with EXPORT_STATUS_NOTEXPORTED, confirmation status NOTCONFIRMED and NOTPAID.

For Klarna orders with Fraud Status PENDING, once review is complete, updates are sent to the pre-configured notification_url on the merchant Commerce Cloud site. The updated Fraud status depends on the fraud screening, the returned Fraud Status (e.g., FRAUD_RISK_ACCEPTED) is displayed in BM. The push notification is repeatedly sent (up-to 24 hours, every 10 mins) until the POST request is acknowledged with a 200 response.

Klarna sends one of the following event types in the notification to SFCC to update risk status: FRAUD_RISK_ACCEPTED, FRAUD_RISK_REJECTED, FRAUD_RISK_STOPPED.

The notification updates are generally received within 4-24 hours. The order's payment transaction is updated (see **kpFraudStatus**). This can be seen in BM on the order details Payment tab as below:

Merchant Tools > Ordering > Orders > Order: 00005339(SiteGenesisGlobal)

General Attributes **Payment** Notes History

Payment Information for Order '00005339'

<u>Order Total:</u>	£62.35
<u>Amount Paid:</u>	£0.00
<u>Balance Due:</u>	£62.35
<u>Invoice Number:</u>	00024525
<u>Payment Status:</u>	Paid
<u>Payment Method:</u>	Klarna Processor: KLARNA_PAYMENTS Transaction: 62a33ce0-3bde-2657-bdc4-31f0ba994c45 Amount: £62.35
	Klarna Payment Category ID: pay_over_time Klarna Payment Category Name: Buy now, pay later Fraud Status: FRAUD_RISK_ACCEPTED

<< Back to List

Figure 10 Fraud Status in Payment Details

If the order is “FRAUD_RISK_ACCEPTED” upon notification, the order will be placed in SFCC (order status changes to OPEN). The order is marked with status CONFIRMATION_STATUS_CONFIRMED and export status EXPORT_STATUS_READY. If the order was placed with auto-capture, the payment status will be set to PAYMENT_STATUS_PAID and the full order amount will be captured.

If the order is “FRAUD_RISK_REJECTED” or “FRAUD_RISK_STOPPED” upon notification, the order is failed (FAIL) in SFCC.

Note: The Klarna pending functionality availability is dependent on markets and enabled based on the contractual agreement with Klarna.

2.3.8. Virtual Cards Settlements

This option is disabled by default. However, if standard order management is not a reasonable option for a Klarna integration, then Klarna's Merchant Card Service API based virtual card solution may be utilized via site preference “**kpVCNEnabled**”:

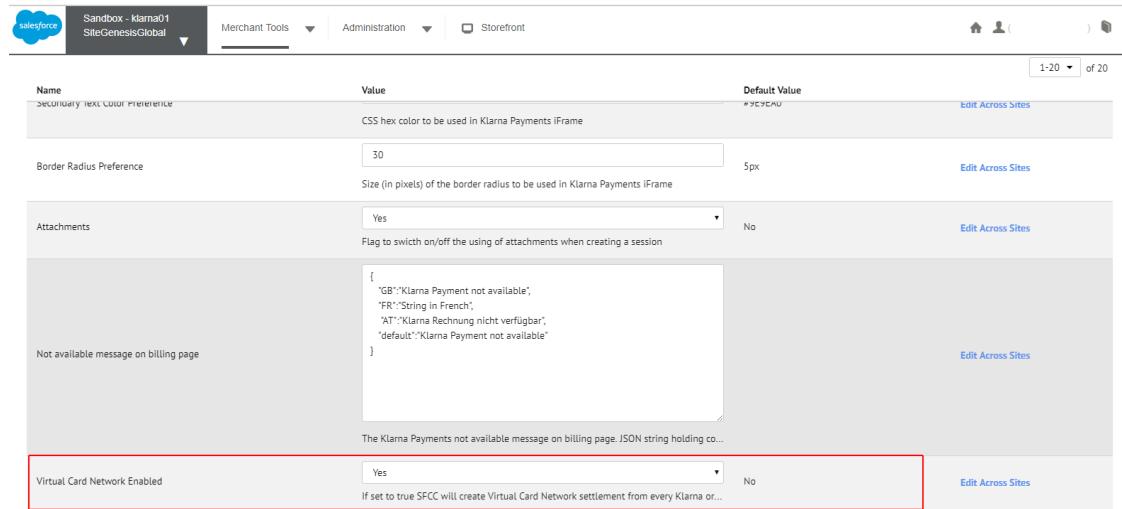


Figure 11 VCN Enablement Setting

The virtual card (see note) is issued against an Klarna order, for the purpose of capturing the Klarna authorized order amount using the standard card rails.

When a customer places an order, the order is first booked in SFCC. Once an order has been accepted by Klarna, the cartridge integration creates a virtual card based settlement, utilizing the merchant card services (MCSv3) API.

Once a settlement has been created (virtual card returned), the encrypted card details are saved in SFCC and can be later utilized by the merchant OMS platform or custom PSP integration to authorize the virtual card until the Klarna order is valid. Then, once the order has been fulfilled, the card funds should be captured. (For delays in capture, or other special use cases, please speak with the Klarna Key Account Manager in advance). While Klarna is the original payment method of the order, the order amount will be settled with the merchant using the issued virtual credit card instead of direct bank account transfer.

Please review the procedures with Klarna team for details of settlement process using virtual cards.

Refer to the below code in “**controllers/KlarnaPayments.js**” and update accordingly to the integrated cards processor.

Note: If the Klarna order has a “**fraud_status**” of “PENDING”, action is not taken on the order until receiving Klarna’s push notification that the “**fraud_status**” has changed to “FRAUD_RISK_ACCEPTED”.

The virtual card issued is limited to 1 single successful authorization per order for a given MID.

For decrypting the credit card details refer to section **9.3 Decrypt VCN Card Details**.

```
109 // ...
108     .... Transaction.wrap( function() {  
109       .... paymentInstrument.paymentTransaction.transactionID = session.privacy.KlarnaPaymentsOrderID;  
110       .... paymentInstrument.paymentTransaction.paymentProcessor = paymentProcessor;  
111       .... session.privacy.OrderNo = orderNo;  
112       .... args.Order.custom.kpOrderID = session.privacy.KlarnaPaymentsOrderID;  
113       .... args.Order.custom.kpisVCN = empty( vcnEnabled ) ? false : vcnEnabled;  
114     } );  
115   ....  
116   .... if ( session.privacy.KlarnaPaymentsFraudStatus === 'PENDING' ) {  
117     .... return { authorized: true };  
118   } ....  
119   ....  
120   .... if ( vcnEnabled ) {  
121     .... var isSettlementCreated = _handleVCNSettlement( args.Order, session.privacy.KlarnaPaymentsOrderID, localeObject ); // eslint-disable-line no-unused-vars  
122     .... if ( isSettlementCreated ) {  
123       .... //Plug here your Credit Card Processor  
124       .... return require( '/cartridge/scripts/payment/processor/BASIC_CREDIT' ).Authorize( { 'OrderNo':args.Order.getOrderNo() },  
125     .... );  
126     .... var klarnaPaymentsCancelOrderHelper = require( '/cartridge/scripts/order/klarnaPaymentsCancelOrder' );  
127     .... klarnaPaymentsCancelOrderHelper.cancelOrder( localeObject, args.Order );  
128     .... return { error: true };  
129   } ....  
130   .... return { authorized: true };  
131 } ....  
132 }
```

Figure 12 Credit Card Authorization Call

To utilize virtual card integration option the merchant should:

- Enable VCN option in Site Preferences as shown above
- Enter the VCN Public Key ID. Unique UUIDv4 value, which should be different for playground testing and Production (live site)

Name	Value	Default Value
The Klarna Payments not available message on billing page. JSON string holding...		
Virtual Card Network Enabled	Yes	No
If set to true SFCC will create Virtual Card Network settlement from every Klarn...		
VCN Public Key ID	6c5b99c5-b0de-4689-b569-1ae12ec898eb	Edit Across Sites
Unique identifier for the public key used for encryption of the card data		
VCN Private Key	<pre>MIIKQIBAKCAgEAtirQQ170510j5GLAGvyncKeyK3V3eXZ2Mxhg+g05X5SAG KS1a iY6mpACVNLSjYRH+K2QV1C5n8vn1Dz56bUkNKfIywuWSqEusn1ewYKpZ0 audwj y1YWVbwKqC50aITYAhrKUIGSwAh5ix5c+o25X6w88MS5Rv57mQta4sWM Geu1z9Z bjpBUOTK738js3/6cxCO9usJ229FC4r2RlGCD8Kyiv7TVwnbDS1C8DjeIpKbzL 3w O81FDvxObuNIE+TjY0UKXpCnw8yScR+Xe5pKL8y6M7RQtlOkLlt518LKR IKCK LMik3rbNTpPn+1NSJqxRdrh21naDfkKbBlhHzn9fYf572fZzaHSF0206</pre> <p>Your 4096 bit RSA Private Key</p>	Edit Across Sites
<pre>MIICljAHBgkqhkiG9w0BAQEAAQCa8AMIIICgjKCAGeAtirQQ170510j5GLA</pre>		

Figure 13 VCN Public Key ID

- Generate a 4096-bit RSA key pair (Refer to section Generate Key Pair and Key Id for Virtual Card Settlements). Set the custom preference “**vcnPublicKey**” with the value of the public key without the header and footer lines (begin and end public key) and the custom preference “**vcnPrivateKey**” with the value of the private key without the header and footer lines (begin and end private key)

Name	Value	Default Value
The Klarna Payments not available message on billing page. JSON string holding country code and cor...		
Virtual Card Network Enabled	Yes	No
If set to true SFCC will create Virtual Card Network settlement from every Klarna order. Default is false		
VCN Private Key	<pre>V3=----- ----- -----</pre> <p>Your 4096 bit RSA Private Key</p>	Edit Across Sites
VCN Public Key	<pre>MIIJANBgkqhkiG9w0BAQEFAAOCAgBAMIIICgjKCAGeAtirQQ170510j5GLA tv1238wJUEPWR04cfrcttEd+e4+S5UL8sQ7H8WnhdKEcnT7gymAeGKu1 xuV1G7Dn083n9p5SE0un+RAJlfXvKtX7hMDMcL1Vhmm0818m1fX4J3 KjP4Os1tXhly9Q2P9r-qq53-fsDQDQJiH9dmcZD1+Lsd+P1-BemPbxE RLskJiUYhE2AFWV+o2o77QdHW5ET120GQj72We1zy9pHepNvrvbe+iWP xuL+e8Z31/9y/dp7ykQbTs1cbRCgaaap9j30Cnveq1lspif5g9+y1EE532CoX Dd0-UstXacuJOnqa2zy6w+b9n75SxL+I+jQ44P9h1L0D9h13VfId+4YKLax 3AK8FcjQCMH4OGAEyXKj7kgphrPSRPi9QR440ckp2vX0DvpjSWmmlJ tW4wUqSRN5SzbnnVmvoVfj1z7Qf1P4sle+covdah85rtvQjO-2PNo141SYd /pKz18wWV3Mp2oN72440+NillyRPFall7jAgro+Z2nFlAmY4QhpXLFjCpgEM</pre> <p>Your 4096 bit RSA Public Key</p>	Edit Across Sites

Figure 14 VCN Public & Private Keys

- Update the VCN settlement retry setting “**kpVCNRetryEnabled**”. By default, this is disabled. However, if enabled and in cases when a VCN creation error is returned, the application will retry the settlement request once again with order_id as the idempotency key.

- Finally, you need to send the generated unique key_id + public key combination in JWK format to Klarna prior to testing and go-live. It will be used to encrypt the aes key which is used for encrypting the pci data on Klarna side when settlement request is made. After confirmation from Klarna that the key has been successfully added to your merchant profile you would be able to use virtual card-based settlement option for Klarna payment methods

If enabled and fully configured, virtual card settlement request is made successfully. For orders placed with the VCN settlement option, the related custom attributes are shown below:

The screenshot shows the 'Attributes' tab of an order detail page. The URL in the address bar is 'Merchant Tools > Ordering > Orders > Order: 00049309(RefArch)'. The tab bar includes General, Attributes (which is selected), Payment, Notes, and History. The main content area is titled 'Attributes for Order '00049309''. Below this, a note says 'On this page you can edit the attributes of the order. Fields with a red asterisk (*) are mandatory. Click **Apply** to save changes. Click **Reset** to revert your changes.' A 'Klarna Payments' group contains fields: 'Klarna Payments Order ID' with value '72bf2c96-6523-2add-8c50-f2af87712019', 'Is VCN Used' with checked checkbox, and 'VCN Card ID' with value 'befbb0e9-5e98-4e39-9c00-75aba0c3372b'. At the bottom left is a 'Back to List' button.

Figure 15 VCN Details in Order

If required, the additional virtual card details can be assigned to this group in Administration > Site Development > System Object Types > select “Order”. In the Attribute Grouping tab select Klarna_Payments and click on “edit”. Assign the new attributes and save the data.

Object Type 'Order' - Attribute Definition Assignments

On this page you can assign existing attribute definitions to your attribute group.

Assign Attribute Definition						
ID:	Select All		Add	Type	Attribute Settings	Sorting
<input type="checkbox"/>	kpOrderID	Klarna Payments Order ID		String		
<input type="checkbox"/>	kplIsVCN	Is VCN Used		Boolean		
<input type="checkbox"/>	kpVCNCardID	VCN Card ID		String		
<input type="checkbox"/>	kpVCNHolder	VCN Holder		String		
<input type="checkbox"/>	kpVCNBrand	VCN Brand		String		
<input type="checkbox"/>	kpVCNPCTData	VCN PCI Data		String		
<input type="checkbox"/>	kpVCNIV	VCN Initialization Vector		String		
<input type="checkbox"/>	kpVCNAESKey	VCN AES Key		Text		

[Unassign](#)

[<< Back](#)

Figure 16 Full List of VCN Attributes

Please work with Klarna Account Manager and Delivery contact in advance to select the appropriate virtual card product based on your business requirements and use-cases. You can find information [here](#) around other use cases supported.

Important Note!

DO NOT SAVE DECRYPTED PCI DATA ON THE SERVER. It is the responsibility of the merchant to ensure PCI-DSS compliance and to ensure the card data is handled securely in co-ordination with required partners/Payment Service Provider/Acquirer. Please review in advance the order export details required for virtual card-based Klarna orders. Any historical decrypted PCI data should also be expunged, regardless of the validity date (see section 3.4.1 Job "OrderCleanUp").

2.3.9. Auto-Capture

Auto-capture is enabled via a site preference “**kpAutoCapture**” located in “**Klarna_Payments**” preference group.

When the preference is enabled (disabled by default), a full amount capture is attempted. If the capture is successful, the SFCC order’s payment transaction is marked as Paid, and viewable in the Business Manager.

The order will be marked as “*Captured*” in the Klarna’s Merchant Portal.

Merchant reference 1: Klama reference
00029205 BJJGHH9P1
Edit

Created: Jun 25, 2019, 5:00 PM Expires: Jul 23, 2019, 5:00 AM Merchant ID: K500726

Customer

Shipping address: Angela Gill, 4939 Wyatt Street, West Palm Beach, SW42 4RG, Florida, GB. Tel: 01222 555 555. Email: ivan.zanov@tryzens.com. Edit shipping address.

Billing address: Nizamien transport.

Order lines (2)

Refund

Qty	Item	Reference	Unit price	Discount	Tax	Amount
1	Black Flat Front Wool Suit	7505187030...	191.99	0.00	5% 9.14	191.99
1	Низамен транспорт	GBP001	7.99	0.00	5% 0.38	7.99

Currency: GBP

PAYMENT DETAILS

Initial Payment Method: Statement. Resend statement.

ORDER TOTAL: £199.98

Captured	£199.98
Refunded	£0.00
Not Captured	£0.00

CUSTOMER BILLED: £199.98

Activity Log:

Jun 25, 2019 9 minutes ago 5:00 PM Order acknowledged Via API

5:00 PM Captured: £199.98 Via API

5:00 PM Order placed: £199.98

Figure 17 Order Details in Klarna Portal

If the capture is unsuccessful, an error will be logged in the custom error log. The setting must be reviewed with Klarna delivery team before testing and go-live.

Note: Auto-capture is possible for orders when VCN is not enabled!

2.3.10. Widget Customizations

Note: The merchant will need a configured Klarna Payments account.

The merchant can style the Klarna Payments widget (skin), to match the marketing and branding needs of their store. The list with the graphic elements that can be customized out of the box through site preferences are listed below:

"color_details" (site preference kpColorDetails): "#COFFEE"

"color_button" (site preference kpColorButton): "#COFFEE"

"color_button_text" (site preference kpColorButtonText): "#COFFEE"

```

"color_checkbox" (site preference kpColorCheckbox): "#COFFEE"

"color_checkbox_checkmark" (site preference kpCheckboxCheckmark): "#COFFEE"

"color_header"(site preference kpColorHeader): "#COFFEE"

"color_link"(site preference kpColorLink): "#COFFEE"

"color_border"(site preference kpColorBorder): "#COFFEE"

"color_border_selected"(site preference kpBorderSelected): "#COFFEE"

"color_text"(site preference kpColorText): "#COFFEE"

"color_text_secondary"(site preference kpColorTextSecondary): "#COFFEE"

"radius_border"(site preference kpRadiusBorder): "0px"

```

2.3.11. Customizing Payment Method Name

The payment method name “*Klarna Payments*” may be customized via the “*Merchant Tools > Ordering > Payment Methods*” section in Business Manager.

The screenshot below shows the “*Klarna*” method selected and the administrator choosing a language from the drop-down.

Payment Methods

The screenshot shows a list of payment methods. The 'Klarna' method is selected and highlighted with a red box. To the right of the list, a 'Language' dropdown menu is open, displaying a list of available languages. The 'German (Germany)' option is selected and highlighted with a red box. Other options listed include English (United Kingdom), English (United States), Finnish (Finland), French, French (Belgium), French (Canada), French (France), German, German (Austria), German (Germany), German (Switzerland), Italian, Italian (Italy), Japanese, and Japanese (Japan).

Figure 18 Customize Payment Name

The payment method name would then be visible in the mini summary & confirmation screens, the confirmation emails and My Account Order Details section.

Order Number: 00055604

Payment Information		
Billing Address Testperson-de Approved Vogelhüttendeich 123 Hamburg, HH 21107 Germany Phone: +494086687781	Payment Method Rechnung und Ratenkauf <small>Klarna order reference: roaa2465-33dd-2ee0-b3f9-5a038dbe0a71</small> Amount: 108,79 €	Payment Total Subtotal 112 Order Discount - 11 € Shipping Ground 7,9€ Order Total: 108

Shipment#1

Item	Quantity	Price	Shipping To
Straight Fit Shorts	1	112,00 €	Testperson-de Approved

Figure 19 Payment Method Name in Email

2.3.12. Klarna On-Site Messaging

On-site messaging is a platform that enables you to add tailored messaging to your website. With On-site messaging you can let shoppers know about the different payment options you have available as they browse your site. By using Klarna, customers have access to our flexible payment options in the checkout; On-site messaging is a great way to let them know even before they decide to buy.

The Klarna Payment cartridge provides multiple options in the standard implementation based on the reference architecture:

- Product Page and Cart based promotions
- Sitewide
 - Top Banner strip
 - Footer logo
- Custom Info-page

Klarna On-Site Messaging (OSM) is configured by site and by locale via the **KlarnaCountries** custom object.

To configure the OSM settings for a locale, you must visit “***Merchant Tools – Custom Object Editor***” and search for **KlarnaCountries** custom object. Select the country Key, e.g. “US”

In the custom country specific configuration, provide a valid locale for the OSM tag based on the country being configured.

The OSM Data Client ID and Data keys required are available in Klarna Merchant Portal within the On-site Messaging App:

On-site Messaging

URL to On-Site Messaging Library URL:

On-site messaging Data Client ID:

On-Site Messaging Environment:

Cart Placement Tag Enabled:

Cart Placement Data Key:

Cart Placement Theme:

Cart Placement Custom Styling (#osm-cart-placement):

```
>#osm-cart-placement {<br>    font-family: 'Lobster', cursive;<br>}<br>#osm-cart-placement::part(osm-message) {<br>    color: #46C2CB;<br>}</style>
```

PDP Placement Tag Enabled:

PDP Placement Data Key:

PDP Placement Theme:

PDP Placement Custom Styling (#osm-pdp-placement):

```
>#osm-pdp-placement {<br>    font-family: 'Lobster', cursive;<br>}<br>#osm-pdp-placement::part(osm-message) {<br>    color: #46C2CB;<br>}</style>
```

Figure 20 OSM Settings in Business Manager

Header Placement Tag Enabled:

Header Placement Data Key:

Header Placement Theme:

Header Placement Custom Styling (#osm-header-placement):

Footer Placement Tag Enabled:

Footer Placement Data Key:

Footer Placement Theme:

Footer Placement Custom Styling (#osm-footer-placement):

```
>#osm-footer-placement {<br>    background-color: #FAEAB1;<br>}<br>#osm-footer-placement::part(badge) {<br>    transform: scale(1.1);<br>}</style>
```

Info Page Placement Tag Enabled:

Info Page Placement Data Key:

Info Page Placement Theme:

Info Page Placement Custom Styling (#osm-info-page-placement):

```
<style><br>@import url('https://fonts.googleapis.com/css2?family=Lobster&family=Montserrat:ital,wght@1,100&display=swap');<br>#osm-info-page-placement::part(osm-container){<br>    font-family: 'Montserrat', sans-serif;<br>    color: #F48D1A;<br>}<br>#osm-info-page-placement::part(osm-heading) {<br>    font-family: 'Lobster', cursive;<br>}</style>
```

Data Inline Enabled on PDP/Cart placement (Canada only):

Figure 21 OSM Settings in Business Manager(cont.)

To enable Placement tag for the Cart Page, the “Cart Placement Data Key” must be filled with Data Key value and the “Cart Placement Tag Enabled” must be checked. To customize the Cart Placement – theme could be selected and/or custom CSS entered in “Cart Placement Custom Styling” attribute using the placement id - **#osm-cart-placement**.

To enable Placement tag for the PDP Page, the “PDP Placement Data Key” must be filled with Data Key value and the “PDP Placement Tag Enabled” must be checked. To customize the PDP Placement – theme could be selected and/or custom CSS entered in “PDP Placement Custom Styling” attribute using the placement id - **#osm-pdp-placement**.

To enable Placement tag for header, the “Header Placement Data Key” must be filled with Data Key value and the “Header Placement Tag Enabled” must be checked. To customize the Header Placement – theme could be selected and/or custom CSS entered in “Header Placement Custom Styling” attribute using the placement id - **#osm-header-placement**.

To enable Placement tag for footer, the “Footer Placement Data Key” must be filled with Data Key value and the “Footer Placement Tag Enabled” must be checked. To customize the Footer Placement Tag – theme could be selected and/or custom CSS entered in “Footer Placement Custom Styling” attribute using the placement id - **#osm-footer-placement**.

To enable Placement tag for the Info Page, the “Info Page Placement Data Key” must be filled with Data Key value and the “Info Page Placement Tag Enabled” must be checked. To customize the Info Page Placement Tag – theme could be selected and/or custom CSS entered in “Info Page Placement Custom Styling” attribute using the placement id - **#osm-info-page-placement**.

In Library URL, please input the full URL to the On-Site Messaging JavaScript Library.

In On-Site Messaging Environment please select the corresponding environment playground for test or production.

In On-site messaging Data Client ID, please input the On-Site Messaging Data client ID value.

On-site messaging Data locale, please input the valid On-Site Messaging Data locale.

All the placements can be customized with custom CSS using the placement component id – in the brackets of attribute name. The customization value should be wrapped in `<style>` element:



Figure 22 OSM Placements CSS customization

CSS customizations are available only for the new OSM library version.

Please follow Klarna guidance for placement styling - <https://docs.klarna.com/on-site-messaging/in-depth-knowledge/styling-on-site-messaging-with-css/>.

For Canada only, please update “Data Inline Enabled on PDP/Cart placement (Canada only)” value as follows:

- For PayBright enabled payment methods – set to true.
- For Klarna enabled payment methods – set to false.

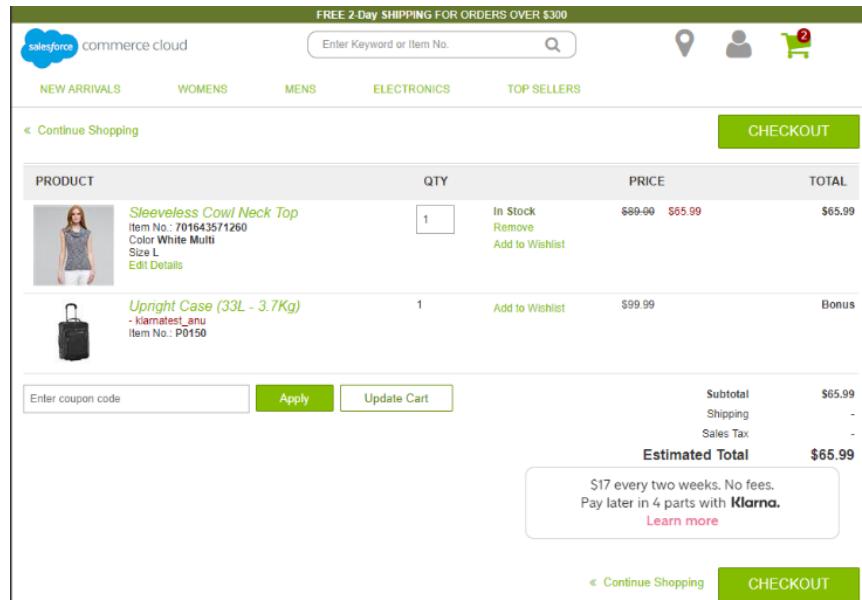


Figure 23 On-Site Messaging Enabled on Cart Page

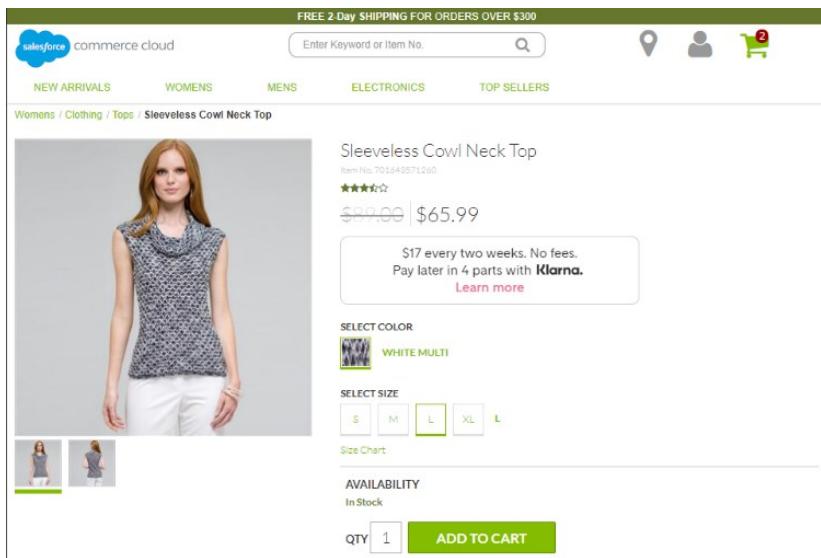


Figure 24 On-Site Messaging Enabled on PDP Page

In addition to the above, if you wish to display the dedicated (custom) Klarna info OSM page you can use the following controller endpoint “**KlarnaPayments-InfoPage**”. For example, you should update the “**footer-about**” content asset to include this line of code as shown on the screenshot.

```
<li><a href="$url('KlarnaPayments-InfoPage')$" title="Go to Klarna Info">Klarna Info</a></li>
```

Body:

```
<h3><a class="title" href="#">About</a></h3>
<ul class="menu-footer content">
<li><a href="$url('Page-Show', 'cid', 'about-us')$" title="Go to About Us">About Us</a></li>
<li><a href="$url('Page-Show', 'cid', 'privacy-policy')$" title="Go to Privacy">Privacy</a></li>
<li><a href="$url('Page-Show', 'cid', 'terms')$" title="Go to Terms">Terms</a></li>
<li><a href="$url('Page-Show', 'cid', 'jobs-landing')$" title="Go to Jobs">Jobs</a></li>
<li><a href="$url('KlarnaPayments-InfoPage')$" title="Go to Klarna Info">Klarna Info</a></li>
</ul><!-- END. footer_about -->
```

Figure 25 Footer Asset Update

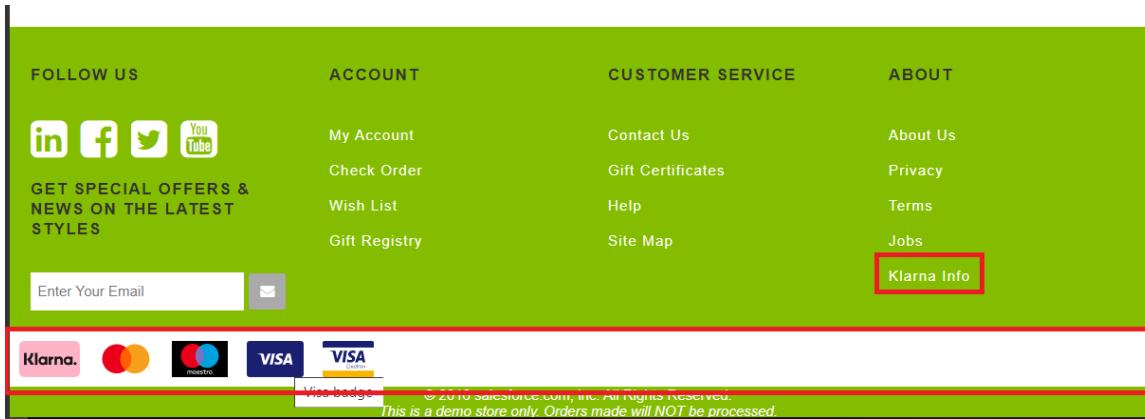


Figure 26 On-Site Messaging Enabled on Footer and link to Klarna Info Page

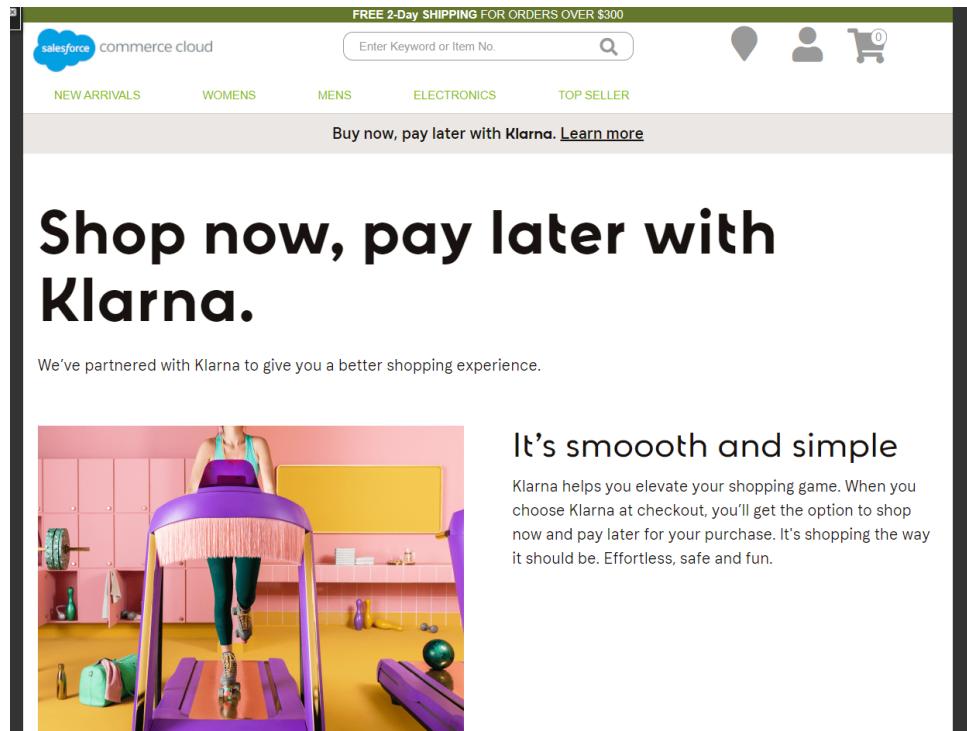


Figure 27 On-Site Messaging Enabled on Header & dedicated Klarna Info Page

For more information regarding OSM customizations and best practices, please refer to the [Klarna Developer / Docs](#)

Integration Best practice + information about Klarna Branding and Co-marketing options [here](#).

Note: It is the merchant's responsibility to ensure that user content is collected when required for OSM placements for your local market to abide by the legal requirement. e.g., [EU cookie-guide](#) in Klarna Merchant Portal

2.3.13. Klarna Express Button

The cartridge supports the **Klarna Express button (KEB)** on the standard Cart page and mini-Cart.

By enabling Klarna's Express button on the cart page of your website, shoppers can choose to log into their (or sign up for a) Klarna account and have their personal details pre-filled in the checkout. Klarna's payment method will be pre-selected for the shopper. In [supported](#) markets, Klarna's network of shoppers benefit from a pre-filled checkout experience, which also includes first time shoppers on a merchant storefront.

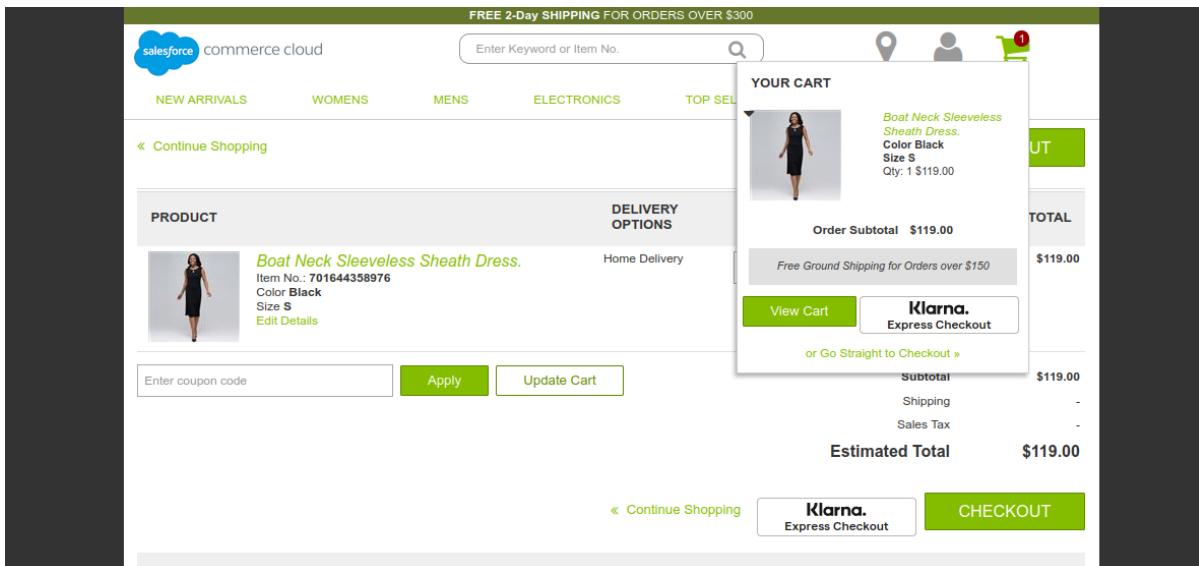


Figure 28 Klarna Express Button on Cart Page

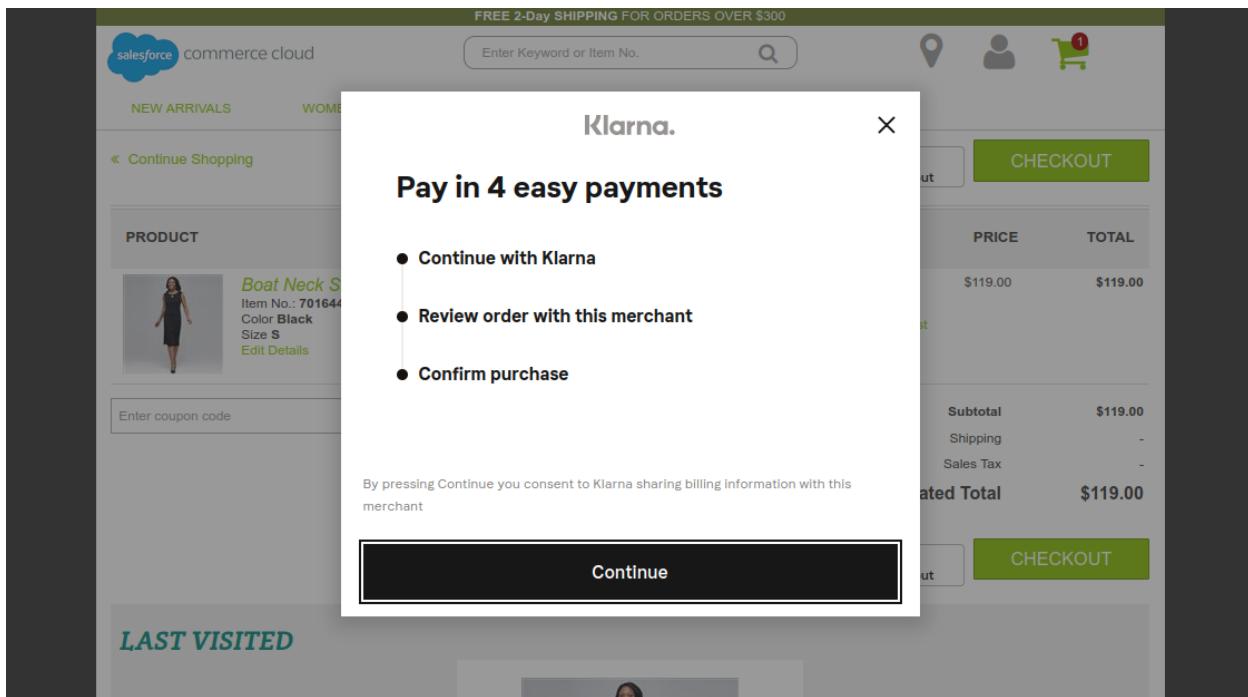


Figure 29 Klarna Express Button clicked Cart Page

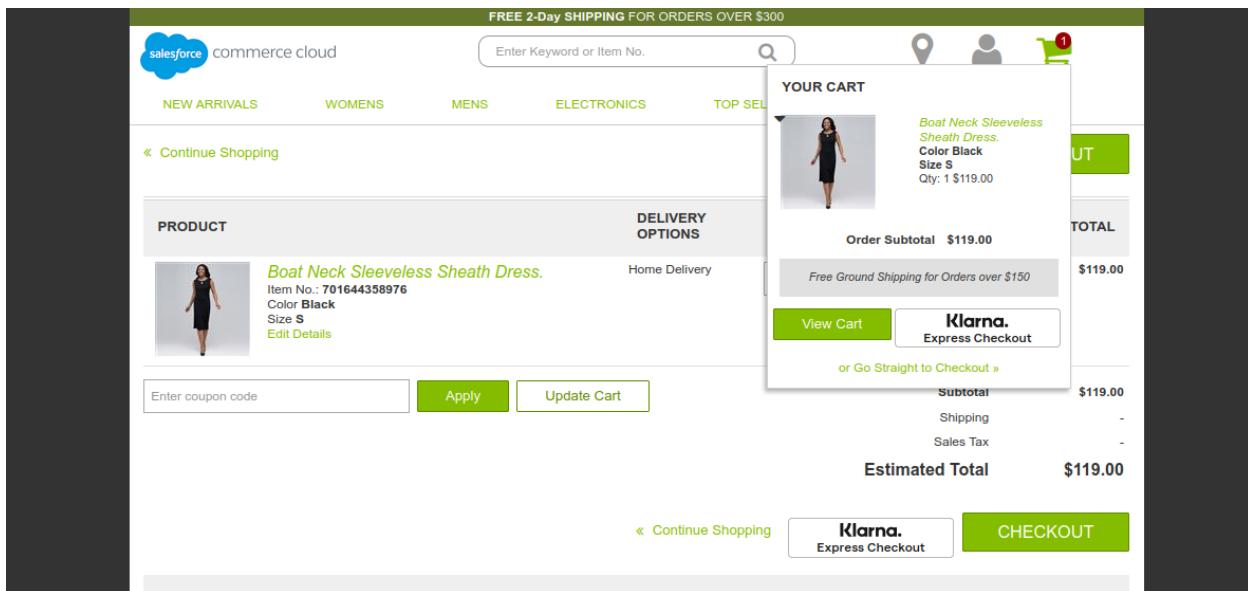


Figure 30 Klarna Express Button on Cart Page

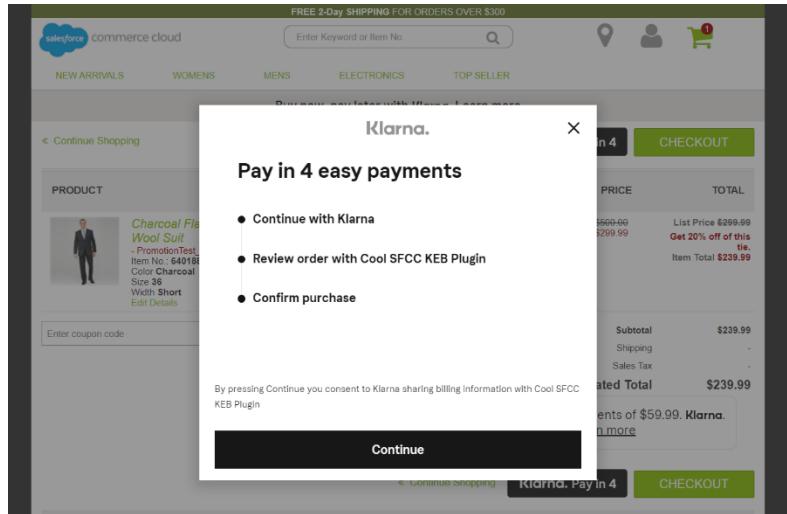


Figure 31 Klarna Express Button clicked Cart Page

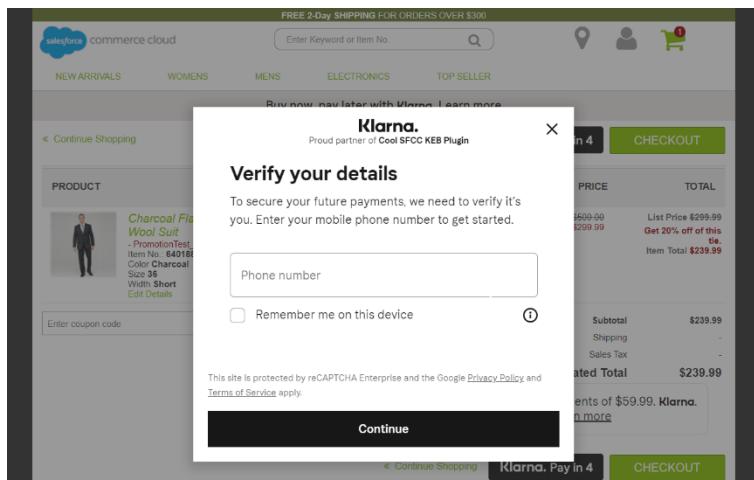


Figure 32 Klarna Express Button user credentials input actions

Once the credentials have been provided and the shopper has successfully authenticated with their Klarna account, they are redirected to the checkout page with relevant details pre-populated and Klarna Payment (e.g.: “Pay in 4”) method pre-selected on the billing page.

The screenshot shows a checkout form with the following details:

- Billing Address:** Lombard St 10, Beverly Hills, CA 90210, United States. Method: Ground.
- Phone:** +16173279035
- Email:** someone@example.com
- Payment Method:** Klarna Payments Amount: \$262.48
- Gift Certificate/Coupon Codes:** Enter coupon code (button: Apply) and Redeem Gift Certificate (button: Apply, Check Balance).
- Payment Method Selection:** Radio buttons for Credit Card, PayPal, and Bill Me Later. The "4 interest free payments" option is selected, with "Klarna" highlighted.
- Klarna Payment Plan:** Shows 4 interest-free payments of \$65.62. Options include "Today", "In 2 weeks", "In 4 weeks", and "In 6 weeks".
- Trust:** Trusted by over 15 million Americans.
- Legal:** By continuing, I accept [Klarna Shopping Service Privacy Policy](#). Pay Later In 4 terms and request electronic communication.
- Buttons:** CONTINUE TO PLACE ORDER >

Figure 33 Checkout details prefilled and Klarna Pay in 4 selected

For custom checkout design and when address field validations are in place, please review the changes to ensure the shopper details are populated on the checkout forms as expected and to ensure the Klarna Payment method authorization is completed successfully.

Note: On re-direct, in the standard checkout, any existing email ID and phone number are updated with the latest provided by the shopper

2.3.14. Klarna Payment Method Based Promotions

As of B2C 20.7 release, merchants can include payment methods as qualifier for product, order & shipping promotions.

OOTB when such promotion is set up to use a payment method as qualifier, the total order amount will be visible to the customer once they reach the review page. This means that the Klarna authorization call will be made for larger amount than the final one.

To address this issue, once the customer clicks on any of the payment options in the billing section – a call will be made to the backend. This will re-calculate the basket totals if any promotions are applicable and will update the Klarna session details. As a result, the Klarna iframe widgets and the mini summary section on the storefront will update to show the final order details.

Note: When the selected payment method is non-Klarna one, this logic should be customized by the merchant to handle any 3rd party payment integrations.

2.3.15. Price Adjustment Taxation Handling

OOTB the Klarna API calls will send the product / shipping method details and the relevant discounts as separate lines items as shown below:

```
"order_lines": [
  {
    "type": "discount",
    "name": "5 Off Ties Promotion",
    "reference": "682875540326M_5_off_ties_promotion",
    "quantity": 1,
    "merchant_data": "5ties",
    "unit_price": -500,
    "tax_rate": 500,
    "total_amount": -500,
    "total_tax_amount": 0,
    "total_discount_amount": 0,
    "product_url": null,
    "image_url": null
  },
  {
    "type": "physical",
    "name": "Checked Silk Tie",
    "reference": "682875540326M",
    "quantity": 1,
    "merchant_data": "",
    "unit_price": 1919,
    "tax_rate": 500,
    "total_amount": 1919,
    "total_tax_amount": 68,
    "total_discount_amount": 0,
  }
]
```

Figure 34 Line Items with Default Taxation Setting

In some cases, merchants using gross taxation might enable the “Tax Products and Shipping Only Based on Adjusted Price” preference under “Merchant Tools > Site Preferences > Pricing and Promotion” where the price adjustments are not taxed.

The setting, “**kpPromoTaxation**” has been introduced, where merchants should update this to match the promotion setting below:

- price (Based on Price) – The product, shipping and their discounts will be sent as separate lines. This is the default setting.
- adjustment (Based on Adjusted Price) – When this is selected, the product or shipping method line item will be sent with attribute “total_amount” matching the prorated price and attribute “total_discount_amount” – matching the total sum of all discounts for this item.

```
"order_lines": [
  {
    "type": "physical",
    "name": "Checked Silk Tie",
    "reference": "682875540326M",
    "quantity": 1,
    "merchant_data": "",
    "unit_price": 1919,
    "tax_rate": 2200,
    "total_amount": 1419,
    "total_tax_amount": 256,
    "total_discount_amount": 500,
```

Figure 35 Line Items with “Based on Adj.” Taxation Setting

***Note:** Enabling this setting is not required for storefronts with net taxation as the tax is not included in the products base price. The total order sales tax is sent as a separate line item to Klarna and not on product/shipping line-item level.*

2.3.16. Buy Online, Pickup in Store (BOPIS)

When store pickup has been enabled on the storefront, the integration will send stores details to Klarna in the authorization request and when placing the Klarna order. Store information is not sent prior the interaction of the customer with the Klarna payment method widgets.

The store address(es) is always included in the EMD attachment “other_delivery_address” when applicable.

The address included on the shipping address in the Klarna order with store pick-up, is as below:

- Orders that have 1 or more store pickup shipments (no home delivery address), the first store shipment details will be set as the shipping address
- Order with store pick-up(s) and home delivery shipment, home delivery address will be used as the shipping address in the Klarna calls
- If the order contains no store pickups, no information is sent in “**other_delivery_addresses**” attribute

```
{  
    "attachment": {  
        "content_type": "application/vnd.klarna.internal.emd-v2+json",  
        "body": {  
            "other_delivery_address": [{  
                "shipping_method": "store pick-up",  
                "shipping_type": "normal",  
                "first_name": "Test",  
                "last_name": "Customer",  
                "street_address": "1487 Bay St",  
                "street_number": "",  
                "postal_code": "01109",  
                "city": "Springfield",  
                "country": "US"  
            }]  
        }  
    }  
}
```

For more information on the options refer [here](#)

2.3.17. Configuration Support for Service Rate Limits

Klarna Payment API sets rate limits by operation (session creation, order creation, etc) to maintain a high quality of service for all its customers. A merchant has the flexibility to request higher rate limits for a specific duration. The duration of such events may last the period of high traffic events (e.g.: Flash sales or Holiday shopping). To enable these agreed rate limits, the service rate limits feature can be utilized.

The Service ID (e.g.: klarna.http.createSession) and Service Profile (e.g.: klarna.http.createSession) for default operations are included in the meta file.

The screenshot shows the SiteGenesis administration interface under the 'Services' tab. The top navigation bar includes links for Merchant Tools, Administration, Storefront, and Toolkit. Below the navigation, a breadcrumb path shows 'Administration > Operations > Services'. The main content area is titled 'Services' and displays a table of available services. The table has columns for 'Select All', 'Name', 'Type', and 'Profile'. The listed services include various Klarna and Braintree API endpoints such as 'int_braintree.http.xml.payment.Braintree', 'int_paypal.http.nvp.payment.PayPal.RefArch', and 'klarna.http.cancelAuthorization'.

Select All	Name	Type	Profile
<input type="checkbox"/>	int_braintree.http.xml.payment.Braintree	HTTP	Braintree Default Profile
<input type="checkbox"/>	int_paypal.http.nvp.payment.PayPal.RefArch	HTTP	PayPal Default Profile
<input type="checkbox"/>	klarna.http.cancelAuthorization	HTTP	klarna.http.cancelAuthorization
<input type="checkbox"/>	klarna.http.cancelOrder	HTTP	klarna.http.cancelOrder
<input type="checkbox"/>	klarna.http.createCapture	HTTP	klarna.http.createCapture
<input type="checkbox"/>	klarna.http.createOrder	HTTP	klarna.http.createOrder
<input type="checkbox"/>	klarna.http.createSession	HTTP	klarna.http.createSession
<input type="checkbox"/>	klarna.http.defaultEndpoint	HTTP	klarna.http.service
<input type="checkbox"/>	klarna.http.getOrder	HTTP	klarna.http.getOrder
<input type="checkbox"/>	klarna.http.getSession	HTTP	klarna.http.getSession
<input type="checkbox"/>	klarna.http.updateSession	HTTP	klarna.http.updateSession
<input type="checkbox"/>	klarna.http.vcnSettlement	HTTP	klarna.http.vcnSettlement

Default Klarna Service Operations:

- Create Session
- Update Session
- Create Order
- Cancel Order
- Capture Order (Full Capture)
- New Order Settlement (Virtual Card)

For more information on the options refer [here](#)

2.3.18. Klarna Subscriptions

The cartridge supports subscription handling.

2.3.18.1. Configuration

Subscription details are configured on product level. Products can be subscription, standard or both. The trial period should be an integer value.

Klarna Subscription

Is Klarna Subscription Product:	Yes
Klarna Trial Days Usage:	15 (Integer)
Is Klarna Standard Product:	No

Figure 36 Product subscription configuration

2.3.18.2 Cart page

- Subscription products

Subscription-only products are automatically added to the shopping cart as subscription line items. For products that can be both subscription and standard, users can select their preference on the cart page. It's important to note that the checkout process won't proceed if the cart contains a mix of standard and subscription products with different trial periods, or if some products have a trial period while others do not.

PRODUCT	DELIVERY OPTIONS	QTY	PRICE	TOTAL
 <p>Sleeveless Cowl Neck Knit. Item No.: 701644356217 Color Black Size M Edit Details</p> <p>Standard and subscription product without trial period</p>	Home Delivery <input checked="" type="checkbox"/> Subscribe This product can be purchased as a Subscription with Klarna payments.	<input type="text" value="1"/>	In Stock Remove Add to Wishlist	\$74.00
 <p>Spring Shorts Item No.: 883360524726 Color Grey Size 31 Edit Details</p> <p>Subscription only product with trial period</p>	Home Delivery <input checked="" type="checkbox"/> Subscribe This product can be purchased as a Subscription with Klarna payments.	<input type="text" value="1"/>	In Stock Remove Add to Wishlist	\$165.00
 <p>Charcoal Single Pleat Striped Wool Suit Item No.: 640188016358 Color Charcoal Size 39 Width Regular Edit Details</p> <p>Subscription and standard product with trial period</p>	Home Delivery <input type="checkbox"/> Subscribe This product can be purchased as a Subscription with Klarna payments. Subscription Trial period: 12 days	<input type="text" value="1"/>	In Stock Remove Add to Wishlist	\$500.00 \$299.99 \$299.99

Figure 37 Subscription products on cart page

- Subscription details

Dropdown menus with predefined values appear on the cart page when there's at least one subscription product in the cart. The configuration of these values can be managed in the Administration panel under "Site Development" > "System Object Types" > "Basket - Attribute Definitions." The attributes available for configuration are:

- kpSubscriptionFrequency
- kpSubscriptionPeriod

PRODUCT	DELIVERY OPTIONS	QTY	PRICE	TOTAL
<p>Sleeveless Cowl Neck Knit. Item No.: 701644356217 Color Black Size M Edit Details</p>	Home Delivery <input checked="" type="checkbox"/> Subscribe This product can be purchased as a Subscription with Klarna payments.	1	In Stock Remove Add to Wishlist	\$74.00
Enter coupon code <input type="text"/> Apply Update Cart				
Subscription Info				
Subscription Period <input type="button" value="Day"/> <input type="button" value="Day"/> Day Week Month Year				
Subscription Period <input type="button" value="Day"/> Day Week Month Year				
Subscription Frequency <input type="button" value="4"/> 1 2 3 4 5 6 15				
Estimated Total \$74.00 4 interest-free payments of \$18.50 with KL TESTDRIVE Learn more				
Continue Shopping Klarna Express Checkout CHECKOUT				

Figure 38 Subscriptions details in cart page

2.3.18.3 Checkout

Only Logged in user is allowed to do a subscription check out. Session intent is defined based on the basket content:

- “tokenize” – basket contains products with trial period, user is not charged on order creation
- “buy_and_tokenize”– subscription products without trial period
- “buy”– only standard products, no subscription products

For intents “tokenize” and “buy_and_tokenize” Klarna customer token for recurring payments is created. This is stored in customer profile for future usage.

Once the order is created the user profile is updated with subscription data:

- token
- enabled: Status of subscription
- nextChargeDate: A calculated date for the next subscription charge
- subscriptionPeriod: An enumerated value representing the subscription period ('week', 'month', or 'year').

- subscriptionFrequency: The frequency of subscription with will be numeric 1,2,3,4,5,6,15)
- subscriptionProductID: The corresponding subscription product ID.
- lastOrderID: The ID of the last order for the subscription.

2.3.18.4. Account Subscription dashboard

There is a full list of subscriptions per user in my account section. The user will be able to cancel subscriptions. Cancelled subscriptions are displayed with **Inactive** status. Cancel subscription button will deactivate the customer token and no further charges will be made with it.

Figure 39 Subscriptions dashboard

2.3.18.5. Recurring Subscription Order Creation

A back-end job to process recurring subscription against each user in SFCC if subscription exists. The job iterates through customers and checks for subscriptions due for payment on the same day.

- Create a new order (with data from lastOrderID) and make a charge call to Klarna using the token and price from the lastOrderID.
- On success - update nextChargeDatebased on subscriptionPeriod and set lastOrderID to the ID of the newly placed order. Update the same in the Subscription Dashboard against the subscription.
- On failure:
 - o Retry

MERCHANTS can configure a retry mechanism where they can set a retry after specific number of days. If the retry fails, then the subscription can be Deactivated. This is generic configuration for retry:

- Retry: Boolean field with value Yes/No

- Number of Retry: 1,2 If Retry field is set as Yes, then merchant can configure this field.
- Retry Frequency: 1, 2 If Retry field is set as Yes, then merchant can configure this field.
- Cancel subscription – if retry is disabled the subscription is cancelled.

Orders with trial period subscriptions are paid after the trial period is over. On the next charge date, a new order will be created.

New orders are with channel type = SUBSCRIPTIONS.

2.3.19. Klarna Express Checkout

Klarna Express Checkout is a new feature introduced in Storefront where Express Checkout Button will be displayed in PDP, Cart and Mini Cart and user will be redirected to Klarna after clicking Express Checkout button. Klarna Express Checkout enabled quick and easy checkout where Shipping Address, Billing Address and Payment details will be preselected so that Checkout can be completed in fewer clicks. Klarna Documentation - <https://docs.klarna.com/express-checkout/>. Multi step checkout is implemented with finalize call at place order stage.

2.3.19.1 PDP

- Button is not visible if the product is subscription only.
- Product is added to cart and the checkout is started with new basket only for this product. Once the checkout is completed the old basket is restored based on a session attribute.

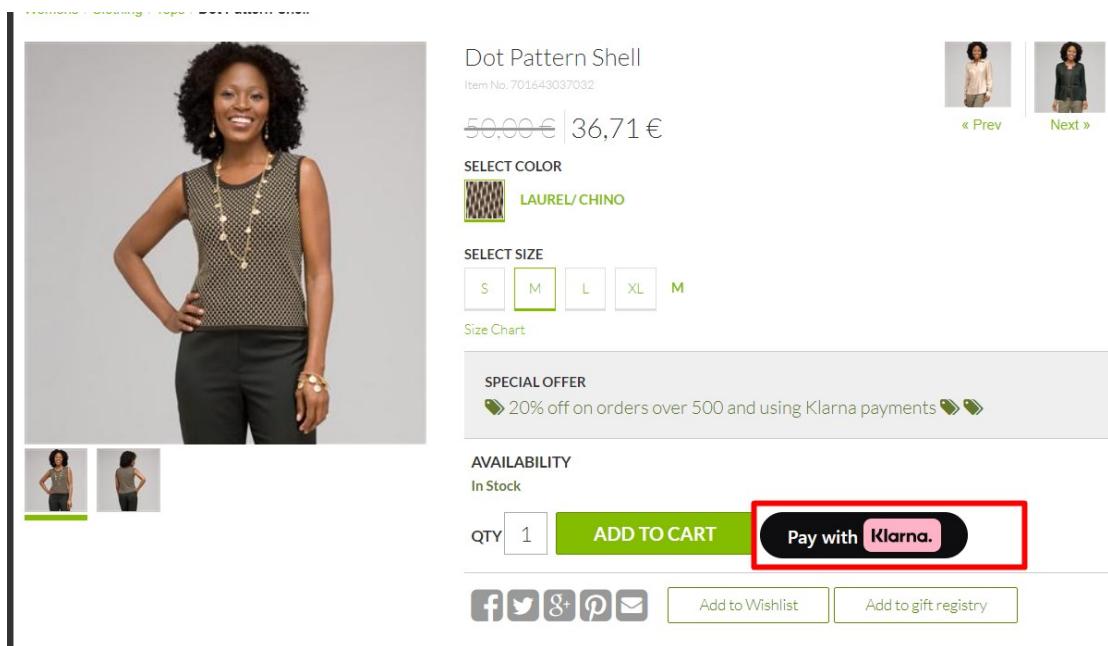


Figure 40 Klarna Express Checkout on PDP

2.3.19.2 Minicart and Cart buttons

- Express checkout button is not displayed in minicart if there are only subscription only products in the cart.

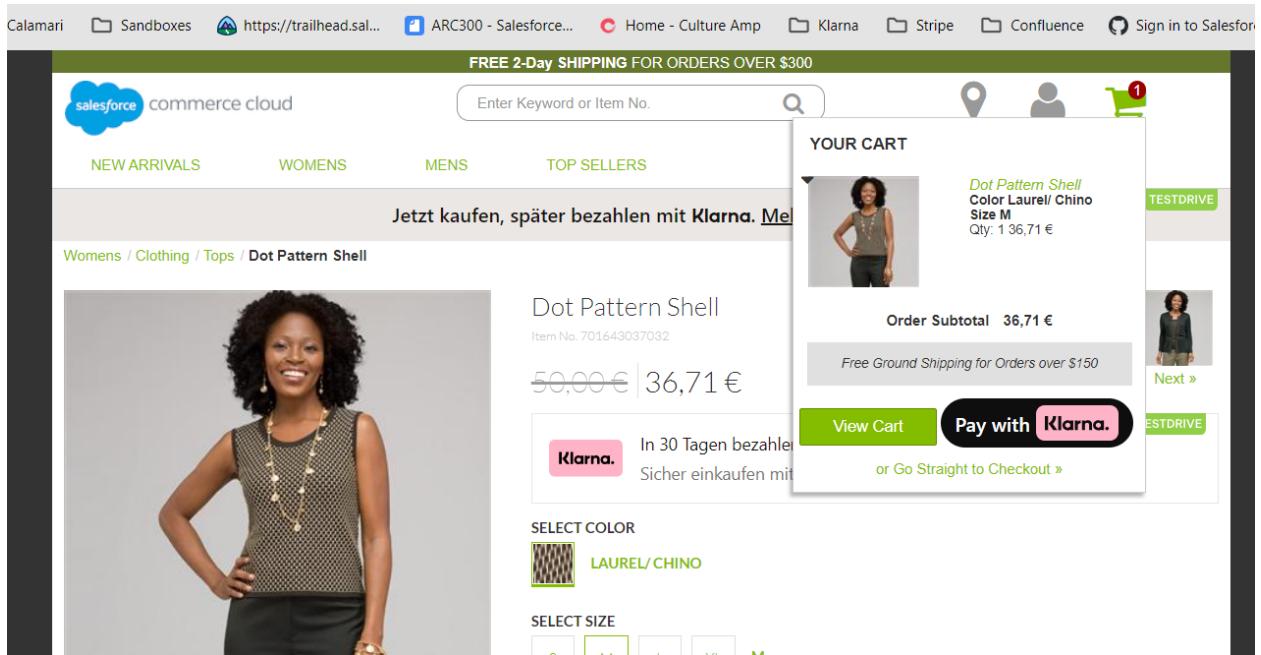


Figure 41 Klarna Express Checkout on MiniCart

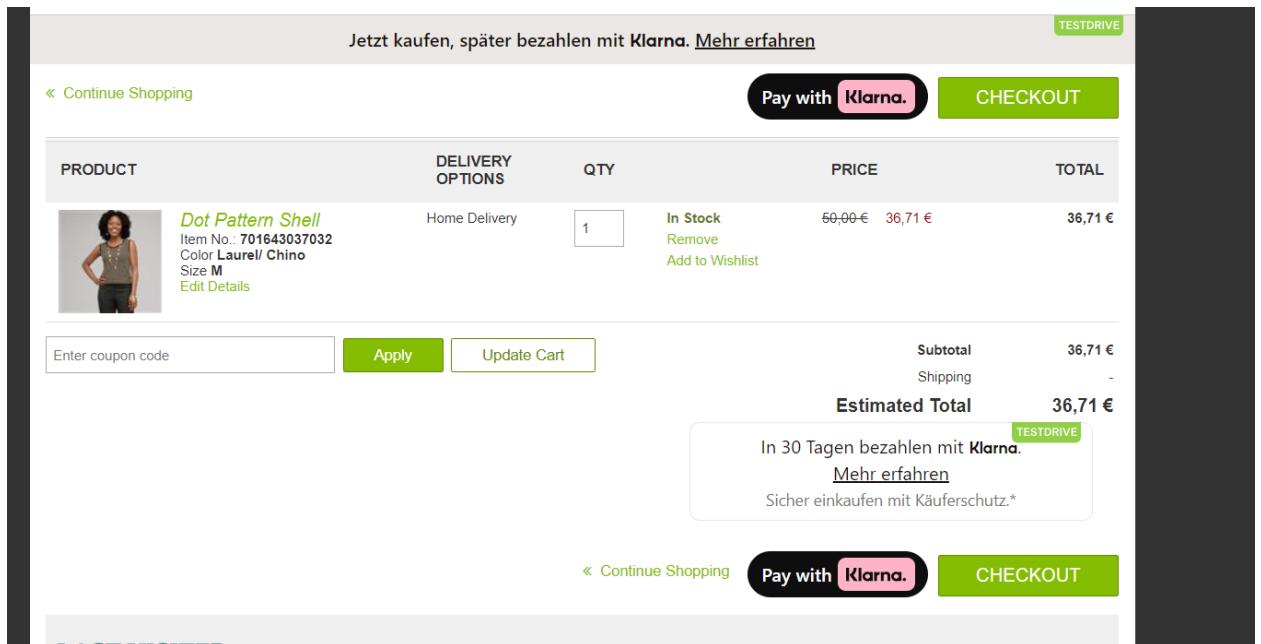


Figure 42 Klarna Express Checkout on Cart page

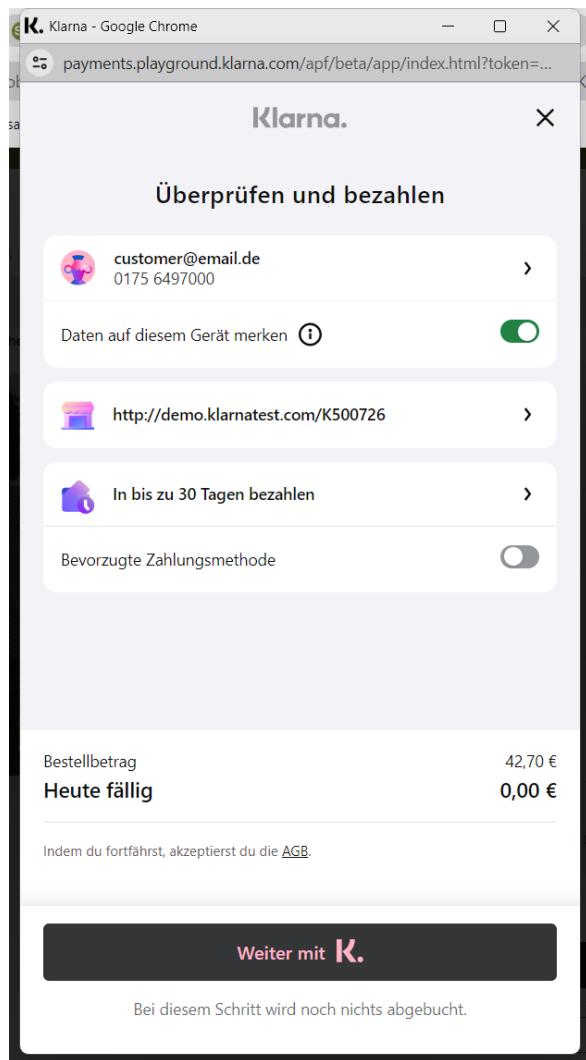


Figure 43 Klarna Express Checkout widget

2.3.19.3 Configuration

- Basket has custom attribute "kplIsExpressCheckout" set as true for Express Checkout process.
- Merchant Tools > Site Preferences > Custom Site Preference Groups > Klarna Express Checkout

In Site Preferences we can enable/disable the feature and configure the buttons style. By default we have "Klarna" as payment method category which is displayed in checkout payment methods.

Name	Value	Default Value	
Klarna Express Checkout Enabled (kpECEnabled)	Yes	No	Edit Across Sites
Klarna Express Checkout Collect Shipping Address (kpECCollectShippingAddress)	Yes	No	Edit Across Sites
Klarna Express Checkout Button Theme (kpECButtonTheme)	Dark (dark)	Default	Edit Across Sites
Klarna Express Checkout Button Shape (kpECButtonShape)	Pill (pill)	Default	Edit Across Sites
Payment Category Content (kpECPaymentCategoryContent)	<pre>[{ "asset_urls": { "descriptive": "https://x.klarnacd.net/payment-method/assets/badges/generic/klarna.svg", "standard": "https://x.klarnacd.net/payment-method/assets/badges/generic/klarna.svg" }, "identifier": "klarna", "name": "klarna.payment.method" }]</pre>		Edit Across Sites

Figure 44 Klarna Express Checkout configuration

- Merchant Tools > Custom Objects > Manage Custom Objects > KlarnaCountries
- Client key configuration by region in “**Klarna Express Checkout Client Key:**”

Minicart Express Button Shape:	- None -
Express Checkout	Klarna Express Checkout Client Key: klarna_test_client_VIU3KUNjMW53JDBVRUxucG1IZF1xdmNsc
<< Back to List	

Figure 45 KlarnaCountries Express Checkout Client Key

2.4. Compatibility

This cartridge has been tested against API Version 22.6 (Compatibility Mode: 21.10) and SG version 105.0.0.

2.5. Privacy, Payment

2.5.1. GDPR Compliance

The cartridge is compliant with GDPR recommendation and follows the best practice mentioned here and implementation transmits only required (PII) data to authorize payment method.

2.5.2. EMD (Extra Merchant Data)

The cartridge supports sending additional information on the customer's past purchase history, as well as "Buy Online, Pickup in Store" (BOPIS) store addresses when turned on in custom preferences: "Attachments" (**kpAttachments**). The type of data that can be send as an attachment is mentioned here. EMD is required for certain types of merchant orders and the inclusion of EMD is (e.g.`customer_account_info`: past interaction with merchant store) generally beneficial to improve acceptance rates.

EMD is included as part of Authorization step in Commerce Cloud checkout. The data send to Klarna is customizable and can be seen in “`int_klarna_payments/scripts/payments/additionalCustomerInfo.js`”. This script should return a JSON string to be used as a value for the body sub-field of the attachment field as [described here](#).

If the example `additionalCustomerInfo.js` file is used unchanged the data send to Klarna is by the following schema:

```
{  
    "$schema": "http://json-schema.org/draft-03/schema#",  
    "id": "http://klarna.com/v2/emd#",  
    "description": "Extended Merchant Data Payload Schema",  
    "type": "object",  
    "properties": {  
        "customer_account_info": {  
            "type": "array",  
            "items": {  
                "type": "object",  
                "properties": {  
                    "unique_account_identifier": {  
                        "type": "string",  
                        "maxLength": 24  
                    },  
                    "account_registration_date": {  
                        "description": "ISO 8601 e.g. 2012-11-24T15:00",  
                        "type": "string",  
                        "format": "date-time",  
                        "pattern": "^[0-9][0-9][0-9][0-9]-[0-1][0-9]-[0-3][0-9]T[0-2][0-9]:[0-5][0-9](:[0-5][0-9])\\{0,1\\}Z\\{0,1\\}$"  
                    },  
                    "account_last_modified": {  
                        "description": "ISO 8601 e.g. 2012-11-24T15:00",  
                        "type": "string",  
                        "format": "date-time",  
                        "pattern": "^[0-9][0-9][0-9][0-9]-[0-1][0-9]-[0-3][0-9]T[0-2][0-9]:[0-5][0-9](:[0-5][0-9])\\{0,1\\}Z\\{0,1\\}$"  
                    }  
                }  
            }  
        },  
        "payment_history_full": {  
            "type": "array",  
            "items": {  
                "type": "object",  
                "properties": {  
                    "type": "string",  
                    "format": "date-time",  
                    "pattern": "^[0-9][0-9][0-9][0-9]-[0-1][0-9]-[0-3][0-9]T[0-2][0-9]:[0-5][0-9](:[0-5][0-9])\\{0,1\\}Z\\{0,1\\}$"  
                }  
            }  
        }  
    }  
}
```

```

        "items": {
            "type": "object",
            "additionalProperties": false,
            "properties": {
                "unique_account_identifier": {
                    "type": "string"
                },
                "payment_option": {
                    "type": "string",
                    "enum": ["card", "direct banking", "non klarna credit", "sms", "other"]
                },
                "number_paid_purchases": {
                    "type": "integer"
                },
                "total_amount_paid_purchases": {
                    "type": "number"
                },
                "date_of_last_paid_purchase": {
                    "description": "ISO 8601 e.g. 2012-11-24T15:00",
                    "type": "string",
                    "format": "date-time",
                    "pattern": "^[0-9][0-9][0-9][0-9]-[0-1][0-9]-[0-3][0-9]T[0-2][0-9]:[0-5][0-9](:[0-5][0-9])\\{0,1}Z\\{0,1}$"
                },
                "date_of_first_paid_purchase": {
                    "description": "ISO 8601 e.g. 2012-11-24T15:00",
                    "type": "string",
                    "format": "date-time",
                    "pattern": "^[0-9][0-9][0-9][0-9]-[0-1][0-9]-[0-3][0-9]T[0-2][0-9]:[0-5][0-9](:[0-5][0-9])\\{0,1}Z\\{0,1}$"
                }
            }
        },
        "other_delivery_address": {
            "type": "array",
            "items": {
                "type": "object",
                "additionalProperties": false,
                "properties": {
                    "shipping_method": {
                        "type": "string",
                        "enum": ["store pick-up", "pick-up point", "registered box", "unregistered box"]
                    },
                    "shipping_type": {
                        "type": "string",
                        "enum": ["normal", "express"]
                    },
                    "first_name": {
                        "type": "string"
                    },
                    "last_name": {
                        "type": "string"
                    },
                    "street_address": {
                        "type": "string"
                    }
                }
            }
        }
    }
}

```

```
        "street_number": {  
            "type": "string"  
        },  
        "postal_code": {  
            "type": "string"  
        },  
        "city": {  
            "type": "string"  
        },  
        "country": {  
            "type": "string"  
        }  
    }  
}
```

Example data:

```
{  
    "attachment": {  
        "content_type": "application/vnd.klarna.internal.emd-v2+json",  
        "body": {  
            "customer_account_info": [{  
                "unique_account_identifier": "5509d9f7c8720c0e4575154b",  
                "account_registration_date": "2015-03-18T20:03:03Z",  
                "account_last_modified": "2015-03-18T20:03:03Z"  
            }],  
            "payment_history_full": [{  
                "unique_account_identifier": "5509d9f7c8720c0e4575154b",  
                "payment_option": "card",  
                "number_paid_purchases": "23",  
                "total_amount_paid_purchases": "140023",  
                "date_of_last_paid_purchase": "2015-03-18T20:03:03Z",  
                "date_of_first_paid_purchase": "2015-03-18T20:03:03Z"  
            }],  
            "other_delivery_address": [  
                "shipping_method": "store pick-up",  
                "shipping_type": "normal",  
                "first_name": "Test",  
                "last_name": "Customer",  
                "street_address": "1487 Bay St",  
                "street_number": "",  
                "postal_code": "01109",  
                "city": "Springfield",  
                "country": "US"  
            ]  
        }]  
    }  
}
```

Please, note that in cases when the customer uses Guest Checkout, the EMD sent includes `payment_history_full[0].unique_account_identifier` (cqid value set by SFCC), and all other fields are empty!!

2.5.3. PCI-DSS Compliance

Important Note: DO NOT SAVE UNENCRYPTED PCI DATA ON THE SERVER!

The virtual card (MCSv3) solution enables settlements using individual virtual card issued against a Klarna order. To be compliant with PCI-DSS requirements, merchant must ensure the data is securely maintained and transmitted as part of their operation in their live store environment. The required steps to ensure this, must be done in consultation with your payment service provider/acquirer and completed prior to go-live. Please review in advance the order export details required for virtual card-based Klarna orders. Any historical decrypted PCI data should also be expunged, regardless of the VCN validity date.

3. Implementation Guide

3.1. Setup of Business Manager

The Klarna Payments LINK Cartridge contains 2 cartridges that are required for full functionality. Additionally, Controller and SFRA support is broken out into two separate cartridges, thereby facilitating the installation and use of one or the other models.

`int_klarna_payments` – Implements the core storefront functionality.

`int_klarna_payments_controllers` – Implements the storefront functionality with SG code.

3.1.1. Cartridge Upload & Assignment

Import the two cartridges into UX studio and associate them with a Server Connection.

- Import the “`int_klarna_payments`” cartridge into the SCC Studio Workspace:
 - Open SCC Studio
 - Click File -> Import -> General -> Existing Projects into Workspace
 - Browse to the directory where you saved the “`int_klarna_payments`” cartridge.

- Click Finish.
 - Click OK when prompted to link the cartridge to the sandbox.
- Import the “**int_klarna_payments_controllers**” cartridge into the SCC Studio Workspace:
 - Open SCC Studio
 - Click File -> Import -> General -> Existing Projects into Workspace
 - Browse to the directory where you saved the “**int_klarna_payments_controllers**” cartridge.
 - Click Finish.
 - Click OK when prompted to link the cartridge to the sandbox.
- Prepend the Klarna cartridges to the effective site cartridge path:
 - Log into the SCC Business Manager.
 - Click Administration -> Sites -> Manage Sites.
- Select the desired site.
 - Click on the Settings tab.
 - Prepend “**int_klarna_payments_controllers:int_klarna_payments**” to the “**Cartridges**” field.
 - Click Apply

Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

Instance Type: Sandbox/Development ▾

Deprecated. The preferred way of configuring HTTP and HTTPS hostnames is by using new features of the site aliases configuration ("SEO > Aliases Configuration"). The HTTP/HTTPS intended only to support an older configuration style.

HTTP Hostname:

HTTPS Hostname:

Instance Type: All

Cartridges:

Effective Cartridge Path:

`int_klarna_payments_controllers:int_klarna_payments:app_storefront_controllers`

`int_klarna_payments`
`int_klarna_payments`
`app_storefront_controllers`
`app_storefront_core`
`plugin_apple_pay`
`plugin_facebook`
`plugin_payments`
`plugin_pinterest_commerce`
`plugin_web_payments`
`bc_content`
`core`

<< Back to List

Figure 46 Effective Cartridge Path

3.1.2. *Metadata Import*

- Go to main directory “**metadata**” folder, review the site-template content, and edit if needed. (Site template is prepared to setup “**SiteGenesis**” and “**RefArch**” sites - you may want to change that to your actual sites and delete the ones that are not needed). Zip the directory and you will have “**site-template.zip**” installation package.
- Log into the SCC Business Manager.
- Click Administration -> Sites Development -> Site Import & Export
- Browse to the directory where you saved the “**site-template.zip**”.
- Click “**Upload**”
- Select the uploaded site zip and click “**Import**”.

Note: Please, review the default `service.xml` file in the `site-template.zip` and update the configuration for Playground and Production accordingly before importing.

3.2. Configuration

- Add your account settings to the KlarnaCountries Custom Objects.
 - Log into the SCC Business Manager.
 - Select the desired site from the tabs across the top of the page.

- Click Custom Objects -> Custom Object Editor
- Change the Object Type dropdown to “**KlarnaCountries**”.
- Click the “**Find**” button.
- Click the desired country you wish to edit (See screenshot below).
- Update the required fields as mentioned in “KlarnaCountries” section
- Repeat for the other countries.

Merchant Tools > Custom Objects > Custom Objects > US - General

General

Manage 'US' (KlarnaCountries)

Fields with a red asterisk (*) are mandatory. You can view and edit the name and description in other languages, if required. Click **Apply** to save the details.

custom	
Country Code:	US
On-site Messaging Data Default Locale:	en-US
Service Credential ID:	klarna.http.uscredentials
On-site messaging Data Client ID:	60a22a39-c2fd-5d09-bfe1-771459318a4d
Cart Placement Tag Enabled:	<input checked="" type="checkbox"/>
Cart Placement Data Key:	info-page-standard
PDP Placement Tag Enabled:	<input checked="" type="checkbox"/>
PDP Placement Data Key:	credit-promotion-small
Header Placement Tag Enabled:	<input checked="" type="checkbox"/>
Header Placement Data Key:	top-strip-promotion-standard
Footer Placement Tag Enabled:	<input checked="" type="checkbox"/>
Footer Placement Data Key:	footer-promotion-auto-size
Info Page Placement Tag Enabled:	<input checked="" type="checkbox"/>
Info Page Placement Data Key:	info-page
Library URL:	https://na-library.playground.klarnaservices.com/lib.js

Figure 47 KlarnaCountries Settings

- Configure Klarna Payment Custom Preferences using the SCC Business Manager
 - Log into the SCC Business Manager
 - Select the desired site from the tabs across the top of the page.
 - Click Site Preferences -> Custom Preferences -> KlarnaPayment
 - Fill out the settings as desired. Descriptions of the site preferences are in the Site Preferences section.

- Configure Klarna Payment Service using the SCC Business Manager
 - Log into the SCC Business Manager
 - Click Administration > Operations > Services.
 - Click the Credentials tab.
 - Each Klarna credential correspond to one of the KlarnaCountries custom objects. Click on the one you want to edit.
 - Enter the MID API username and API password you received from Klarna.
 - Edit URL field if Production environment. Klarna API URLs information - <https://developers.klarna.com/api/#api-urls>.

[Administration](#) > [Operations](#) > [Services](#) > [Service Credentials](#) > klarna.http.gbcredentials - Details

klarna.http.gbcredentials

Fields with a red asterisk (*) are mandatory. Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

These credentials are used by 0 services.

Name: [*]	klarna.http.gbcredentials
URL:	https://api.playground.klarna.com/
User:	your Merchant ID
Password:	*****

Figure 48 Service Settings

- Configure Klarna Rate Limited Service Profile using the SCC Business Manager (Optional)
 - Log into the SCC Business Manager
 - Navigation : Merchant Tools > Site preferences > Custom Site Preferences group > Klarna Payments
 - Enable Service Limit configuration > Select “Rate Limit By Operation” to Yes. If it is selected to NO, the default service will control the rate limit.

Name	Value	Default Value
"Merchant Tools > Site Preferences > Promotions > Discount Taxation" and use gross taxation...	Only use "Based on Adjusted Price" value if you have enabled the cor...	
Hide Payment Methods on Deny		
(kpRejectedMethodDisplay)	Grey Out (greyout)	No
If set to value other than "No", the Klarna payment method options on the checkout will be greyed out or not displayed to customer in the current view when Klarna authorization request is re...	If set to value other than "No", the Klarna payment method options ...	
Klarna Payment Create New Session When Expires		
(kpCreateNewSessionWhenExpires)	None	No
Klarna Payment Create New Session When Klarna existing Session Expires	Klarna Payment Create New Session When Klarna existing Session Ex...	
Rate Limit By Operation		
(kpRateLimitByOperation)	Yes	No
Klarna Payment Rate Limit By Operation	Klarna Payment Rate Limit By Operation	

- Configure Custom Rate limits in SCC Business Manager (Optional)
 - Log into the SCC Business Manager
 - Navigation: Administration > Operations > Service
 - Select a required profile (e.g : Klarna.http.createSession)
 - Enable Rate Limit: Check box
 - Max Rate Limit Calls: 50 (e.g.: The higher rate limit agreed with Klarna)
 - Rate Limit Internal (millisecond): 1000
 - Repeat for all Service operation with respective agreed rate limits

[Administration](#) > [Operations](#) > [Services](#) > [Service Profiles](#) > klarna.http.createSession - Details

klarna.http.createSession

Fields with a red asterisk (*) are mandatory. Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

This profile is used by 1 service.

Name:*	klarna.http.createSession
Connection Timeout (ms):	30,000
Enable Circuit Breaker:	<input type="checkbox"/>
Max Circuit Breaker Calls:	0
Circuit Breaker Interval (ms):	0
Enable Rate Limit:	<input checked="" type="checkbox"/>
Max Rate Limit Calls:	50
Rate Limit Interval (ms):	1000

[**<< Back to List**](#)

3.3. Template Updates

Templates have been updated to support On-site messaging and Addresses forms for Klarna. To be used as reference but feel free to customize the templates to match your specific needs. Final review and sign-off as per project requirements and contract agreements.


3.4. Jobs

3.4.1. Job “OrderCleanUp” (Optional)

This 1-time clean-up job is only applicable to merchants integrated with Klarna Payments cartridge version (< 19.1.6), utilizing (or previously used) virtual card-based settlement (VCN) and stored decrypted card details within Business Manager.

The job iterates over orders with status “Exported” and attribute “custom.kplIsVCN=true” to remove the sensitive details saved in fields kpVCNPAN, kpVCNCSC, kpVCNExpirationMonth, kpVCNExpirationYear as part of the previous releases. There are no parameters passed to the script.

Upon successful run, the job will log the result of processed orders in the custom debug log located in “**webdav/Sites/Logs**”. Depending on the setup, you will receive a message for the processed orders count for each storefront or message that there are no orders needing update.

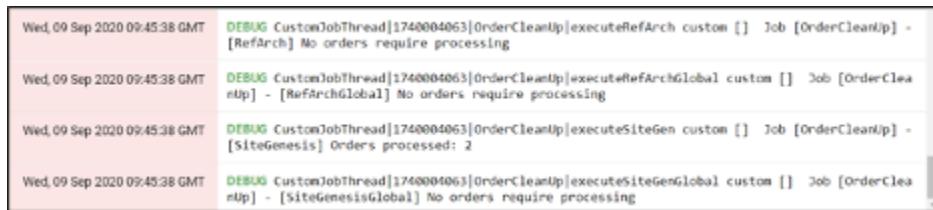


The screenshot shows a terminal window displaying four log entries from a CustomJobThread. Each entry is timestamped at "Wed, 09 Sep 2020 09:45:38 GMT". The log levels are DEBUG. The messages indicate the execution of different RefArch components: OrderCleanUp, OrderCleanUpGlobal, SiteGen, and SiteGenesisGlobal. All entries state that no orders require processing, except for the SiteGen entry which indicates 2 orders were processed.

```
Wed, 09 Sep 2020 09:45:38 GMT DEBUG CustomJobThread[1740004063]OrderCleanUp|executeRefArch custom [] Job [OrderCleanUp] - [RefArch] No orders require processing
Wed, 09 Sep 2020 09:45:38 GMT DEBUG CustomJobThread[1740004063]OrderCleanUp|executeRefArchGlobal custom [] Job [OrderCleanUp] - [RefArchGlobal] No orders require processing
Wed, 09 Sep 2020 09:45:38 GMT DEBUG CustomJobThread[1740004063]OrderCleanUp|executeSiteGen custom [] Job [OrderCleanUp] - [SiteGenesis] Orders processed: 2
Wed, 09 Sep 2020 09:45:38 GMT DEBUG CustomJobThread[1740004063]OrderCleanUp|executeSiteGenGlobal custom [] Job [OrderCleanUp] - [SiteGenesisGlobal] No orders require processing
```

Figure 49 Job Logs

Upon error, the cause of the failure (message and stack) will be logged in the standard error log.

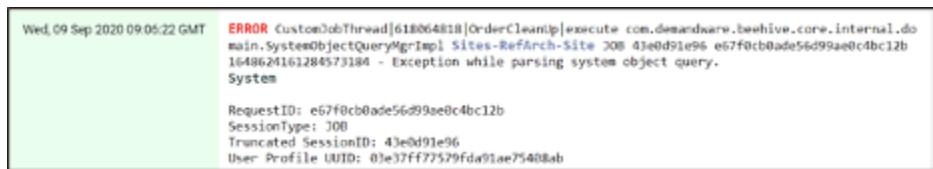

The screenshot shows a terminal window displaying an error log entry from a CustomJobThread. The timestamp is "Wed, 09 Sep 2020 09:05:22 GMT" and the log level is ERROR. The message details an exception while parsing a system object query, specifically mentioning a truncated session ID. It also includes several trace identifiers such as RequestID, SessionType, Truncated SessionID, and User Profile UUID.

```
Wed, 09 Sep 2020 09:05:22 GMT ERROR CustomJobThread[610064@11]OrderCleanUp|execute com.demandware.beehive.core.internal.domain.SystemsObjectQueryMgrImpl Sites-RefArch-Site 308 43e0d91e96 e67f0cb0ade56d99ae0c4bc12b 1648624161284573184 - Exception while parsing system object query.
System
RequestID: e67f0cb0ade56d99ae0c4bc12b
SessionType: J00
Truncated SessionID: 43e0d91e96
User Profile UUID: 01e37ff72529fda91ae75408ab
```

Figure 50 Job Logs

To setup the job, go to **Administration > Operations > Import & Export** and import file “**jobs.xml**”. Out of the box, the XML file includes only the RefArch scope, but it can be configured with multiple flows if you have more than one site using this functionality as seen bellow. Each site should be added as a separate flow.

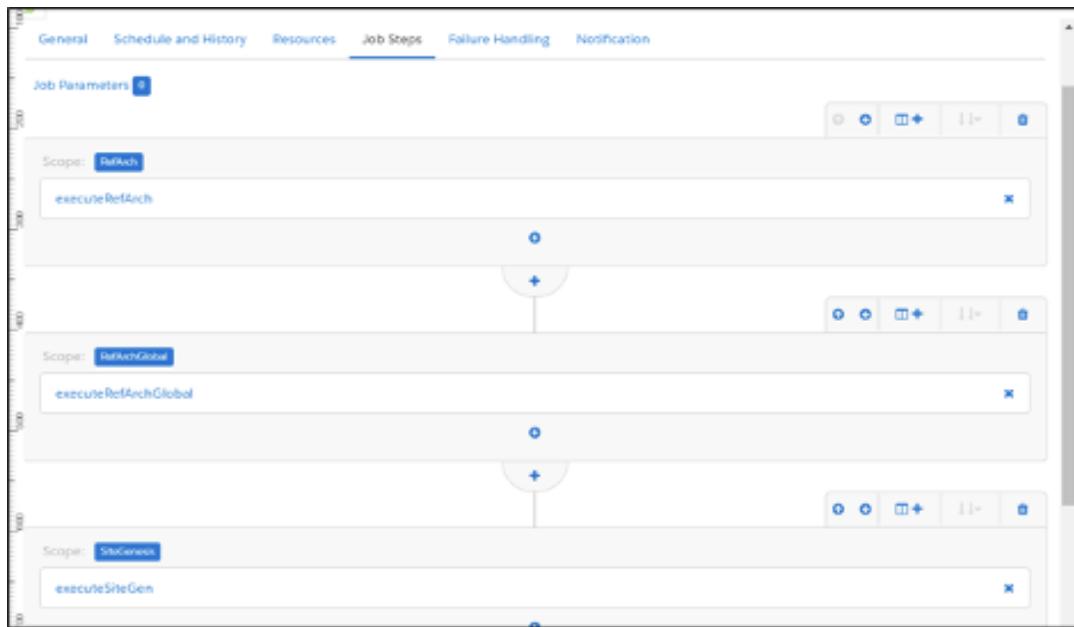


Figure 51 Job Steps

To set up the required job parameters and add new flow, follow the bellow steps. If you only have one storefront and need to change the scope to the correct one – proceed to steps 4-5 directly.

1. Click on the “Add a sequential flow” button at the bottom of the current flow.



Figure 52 Add New Job Step

- Once done, click on “Configure a step” button within the flow. In the flyout that has just opened search for “script” and select “ExecuteScriptModule”.

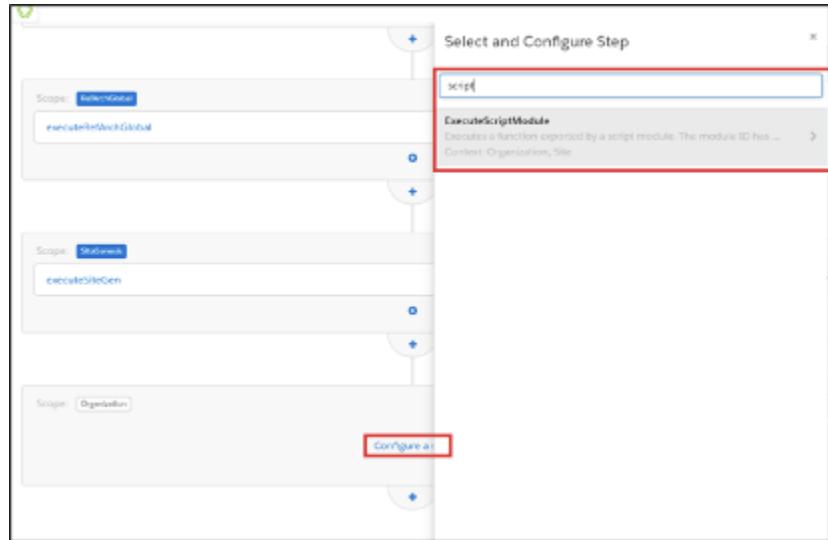


Figure 53 Configure Step

- In the flyout populate these fields and click the “Assign” button.
 - ID – Enter any meaningful name in the field. In case you have multiple flows, this should not be a duplicate one. If you enter a duplicate name, the details won’t be saved and you will see an error message.
 - ExecuteScriptModule.Module – Enter the location of the “OrderCleanUpJob.js” file. Out of the box it should be “int_klarna_payments/cartridge/scripts/job/OrderCleanUpJob.js” or the location where you have placed the script file.
 - ExecuteScriptModule.FunctionName – Leave the field value to “execute”

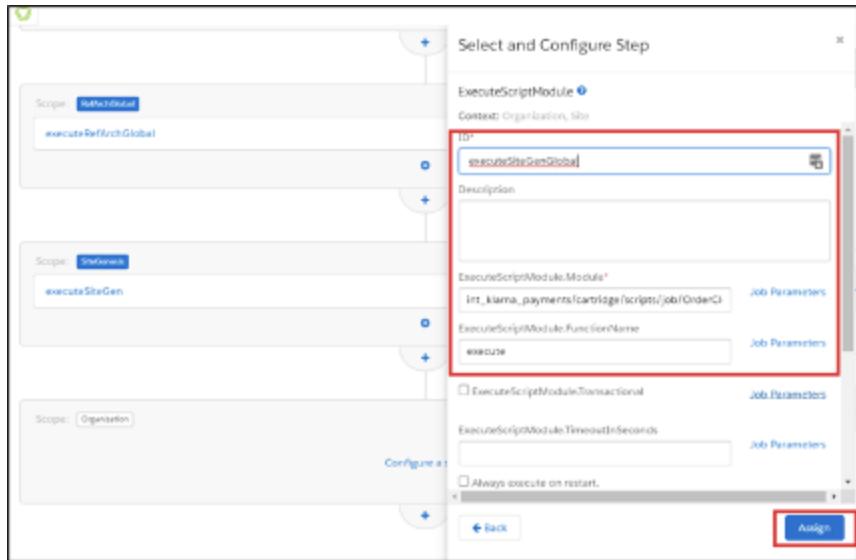


Figure 54 Configure Step (cont.)

- Once the step has been added, you should make sure to assign it to the correct site scope. Click on “Organization” and select “Specific Sites” from the drop-down.

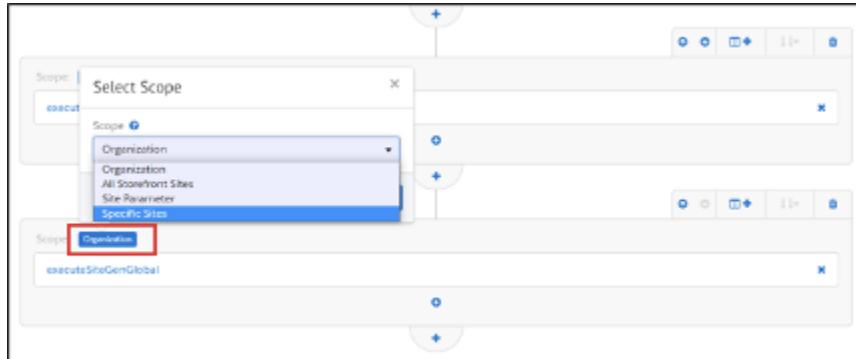


Figure 55 Job Scope

- From the list of sites, select the respective site ID (i.e. SiteGenesisGlobal) and click on “Assign”.

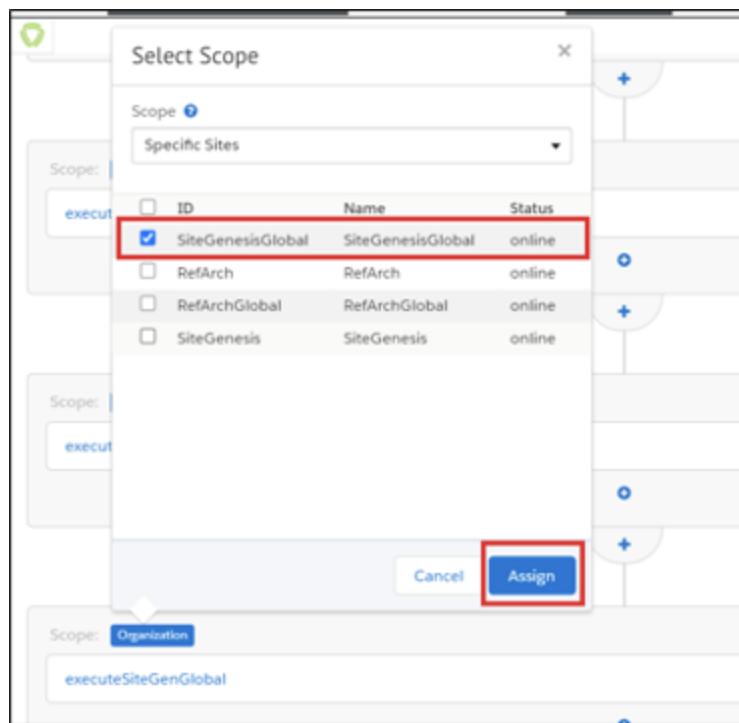


Figure 56 Job Scope (cont.)

- Repeat steps 1-5 for each site/storefront that you have using Klarna VCN and needed additional configuration.

3.4.2. Job "RecurringOrders"

The job iterates over all customers checking for subscriptions entries. Process all subscription entries eligible for charge – subscription should be enabled and nextChargeDate or nextRetryDate should match the current date. New SFCC orders are created and the old ones are replaced. Orders with expiring trial period, are only charged.

By default in jobs.xml the job is configured to run on RefArch site but this can be changed either in file or in storefront.

The job has one job step – createOrder with following configuration:

- ExecuteScriptModule.Module
int_klarna_payments/cartridge/scripts/job/RecurringOrdersJob.js
- ExecuteScriptModule.FunctionName – **execute**

The job is executed on site level.

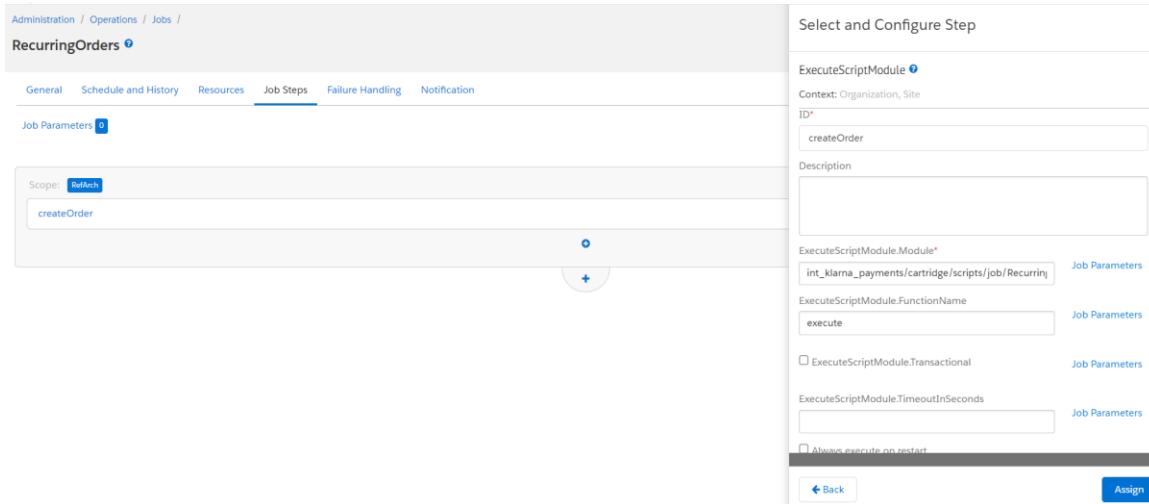


Figure 57 RecurringOrders job

3.5. Custom Code

Integration may vary based on the customers' storefront. Site Genesis version 105.0.0 is used as a reference to demonstrate Klarna Payments integration.

3.5.1. *Template Modifications*

The following template changes should be made regardless of whether a controller or a pipeline integration approach are being used:

- default/checkout/summary/summary.isml
- default/checkout/billing/billing.isml
- default/checkout/billing/paymentmethods.isml
- default/checkout/shipping/minishipments.isml
- default/components/header/header.isml
- default/components/footer/footer.isml
- default/components/footer/footer_UI.isml
- default/product/producttopcontentPS.isml
- default/product/productcontent.isml
- default/product/productcontent.isml

- default/checkout/cart/cart.isml
- default/mail/orderconfirmation.isml
- default/components/order/ordrdetailsemail.isml
- default/checkout/cart/minicart.isml

3.5.1.1. default/checkout/summary/summary.isml

Add Code:

```

<isif condition="${session.privacy.KlarnaPaymentsFinalizeRequired}">
    <script>
        <isinclude template="/resources/klarnapaymentsresources.isml"/>
    </script>
    <script defer src="${URLUtils.staticURL('/js/klarna-payments-
finalize.js')}"></script>
    <script defer src=" https://x.klarnacdn.net/kp/lib/v1/api.js"></script>
</isif>

<isif condition="${!session.privacy.KlarnaPaymentsFinalizeRequired &&
dw.system.Site.getCurrent().getCustomPreferenceValue(
'kpUseAlternativePaymentFlow' )}">
    <isinclude template="klarnapayments/modules.isml"/>
    <isset name="billingAddress" value="${pdict.Basket.billingAddress}">
        <skpbillingaddresshelper p_address="${billingAddress}">
            p_email="${pdict.Basket.customerEmail}"</skpbillingaddresshelper>
    </isset>
    <isloop items="${JSON.parse(session.privacy.KlarnaPaymentMethods)}" var="klarnaPaymentMethod">
        <div class="payment-method" data-
test="${session.privacy.KlarnaPaymentsFinalizeRequired}" data-
method="${'klarna_payments_' + klarnaPaymentMethod.identifier}" hidden>
            <div id="${'klarna_payments_' + klarnaPaymentMethod.identifier + 
'_container'}" style="text-align: center;"></div>
            <isif condition="${empty(pdict.Basket.custom.kpSessionId)}">
                <div class="klarna_payments_error" style="text-align: center;
font-weight: bold; color: red;"><isprint
value="${KlarnaPaymentNotAvailable}"></div>
            </isif>
        </div>
    </isloop>
<script>

```

```
<isinclude template="/resources/klarnapaymentsresources.isml"/>
</script>
<script defer src="${URLUtils.staticURL('/js/klarna-payments-alternative-
flow.js')}"></script>
<script defer src=" https://x.klarnacdn.net/kp/lib/v1/api.js"></script>
</isif>
```

Before `</isdecorate>` closing tag as shown below at the end of file:

```
226
227     </fieldset>
228   </form>
229
230   </div>
231
232   <isif condition="${session.privacy.KlarnaPaymentsFinalizeRequired && !dw.system.Site.getCurrent().getCustomPreferenceValue('kpUs...}>
233     <script>
234       <isinclude template="/resources/klarnapaymentsresources.isml"/>
235     </script>
236     <script defer src="${URLUtils.staticURL('/js/klarna-payments-finalize.js'))}"></script>
237     <script defer src="https://x.klarnacdn.net/kp/lib/v1/api.js"></script>
238   </isif>
239
240   <isif condition="${!session.privacy.KlarnaPaymentsFinalizeRequired && dw.system.Site.getCurrent().getCustomPreferenceValue( 'kpUs...}>
241     <isinclude template="klarnapayments/modules.isml"/>
242     <isset name="billingAddress" value="${pdict.Basket.billingAddress}" scope="page"/>
243     <iskpbillingaddresshelper p_address="${billingAddress}" p_email="${pdict.Basket.customerEmail}" />
244
245     <isloop items="${JSON.parse(session.privacy.KlarnaPaymentMethods)}" var="klarnaPaymentMethod">
246       <div class="payment-method" data-test="${session.privacy.KlarnaPaymentsFinalizeRequired}" data-method="${'klarna_payments...}>
247         <div id="${'klarna_payments' + klarnaPaymentMethod.identifier + '_container'}" style="text-align: center;"></div>
248         <isif condition="${empty(pdict.Basket.custom.kpSessionId)}">
249           <div class="klarna_payments_error" style="text-align: center; font-weight: bold; color: red;"><isprint value="${K...
250             </isif>
251           </div>
252         </isloop>
253
254         <script>
255           <isinclude template="/resources/klarnapaymentsresources.isml"/>
256         </script>
257         <script defer src="${URLUtils.staticURL('/js/klarna-payments-alternative-flow.js'))}"></script>
258         <script defer src="https://x.klarnacdn.net/kp/lib/v1/api.js"></script>
259   </isif>
260
261 </isdecoration>
262
```

Figure 58 Modifications in summary.isml

Update condition on line 232:

```
<isif condition="${(session.privacy.KlarnaPaymentsFinalizeRequired & !dw.system.Site.getCurrent().getCustomPreferenceValue('kpUseAlternativePaymentFlow')) || pdict.Basket.custom.kpIsExpressCheckout}">
```

for finalize script include.

```
230     </div>
231
232     <isif condition="$(session.privacy.KlarnaPaymentsFinalizeRequired &&
233                         !dw.system.Site.getCurrent().getCustomPreferenceValue('kpUseAlternativePaymentFlow')) ||"
234                         pdict.Basket.custom.kpIsExpressCheckout">
235         <script>
236             <isinclude template="/resources/klarnapaymentsresources.isml"/>
237         </script>
238         <script type="text/javascript" src="$(URLUtils.staticURL('/js/klarna-payments-finalize.js'))"></script>
239         <script src="https://x.klarnacd.net/kp/lib/v1/api.js" async></script>
240     </isif>
241
242     <isif condition="$(session.privacy.KlarnaPaymentsFinalizeRequired && dw.system.Site.getCurrent().getCustomPreferenceValue(
243                         <isinclude template="klarnapayments/modules.isml"/>
244                         <isset name="billingAddress" value="$(pdict.Basket.billingAddress)" scope="page"/>
245                         <iskpbillingaddresshelper p_address="$(billingAddress)" p_email="$(pdict.Basket.customerEmail)"/>
246                     )"
```

Figure 59 Modifications in summary.isml (cont.)

3.5.1.2. default/checkout/billing/billing.isml

Add Code:

```
<script><isinclude
template="/resources/klarnapaymentsresources.isml"/></script>

<script defer src="${URLUtils.staticURL('/js/klarna-payments.js')}"></script>

<script defer src="https://x.klarnacdn.net/kp/lib/v1/api.js"></script>

<link rel="stylesheet" href="${URLUtils.staticURL('/css/klarna-
payments.css')}" />
```

Before `</isdecorate>` closing tag as shown below:

```
214 </form>
215<isscript>
216     importScript("util/ViewHelpers.ds");
217     var addressForm = pdict.CurrentForms.billing.billingAddress.addressFields;
218     var countries = ViewHelpers.getCountriesAndRegions(addressForm);
219     var json = JSON.stringify(countries);
220 </isscript>
221 <script>window.Countries = <isprint value="${json}" encoding="off"/>;</script>
222 
223 <script><isinclude template="/resources/klarnapaymentsresources.isml"/></script>
224 <script defer src="${URLUtils.staticURL('/js/klarna-payments.js')}"></script>
225 <script defer src="https://x.klarnacdn.net/kp/lib/v1/api.js"></script>
226 <link rel="stylesheet" href="${URLUtils.staticURL('/css/klarna-payments.css')}" />
227 
228 </isdecorate>
229 
```

Figure 60 Modifications in billing.isml

3.5.1.3. default/checkout/billing/paymentmethods.isml

Add code:

```
<isif condition="${paymentMethodType.value === 'Klarna'}">hide</isif>
```

After `<div class="form-row label-inline"` close to line 18 as shown below:

```
1 <iscontent type="text/html" charset="UTF-8" compact="true"/>
2 <iscomment by="MPLATENAME" paymentmethods.isml </iscomment>
3 <isinclude template="util/modules">
4<isif condition="#{pdict.OrderTotal > 0}">
5   <fieldset>
6     <legend>
7       ${Resource.msg('billing.paymentheader','checkout',null)}
8       <div class="dialog-required" ><span class="required-indicator">*</span><em>${Resource.msg('global.requiredfield','locale',null)}</em></span></div>
9     </legend>
10    <div class="payment-method-options form-indent">
11      <isloop items="#{pdict.CurrentForms.billing.paymentMethods.selectedPaymentMethodID.options}" var="paymentMethodType">
12        <iscomment Ignore GIFT_CERTIFICATE method, GCs are handled separately before other payment methods.</iscomment>
13        <if condition="#{paymentMethodType.value.equals(dw.order.PaymentInstrument.METHOD_GIFT_CERTIFICATE)}"><iscontinue/></if>
14        <div class="form-row label-inline <isif condition="${paymentMethodType.value === 'Klarna'}">hide</isif>">
15          <input name="radioID" value="${paymentMethodType.value}" type="radio" class="input-radio" name="#{pdict.CurrentForms.billing.paymentMethods.selectedPaymentMethodID.htmlName}" v-
16          <div class="field-wrapper">
17            <input id="is-#{$radioID}" type="radio" class="input-radio" name="#{pdict.CurrentForms.billing.paymentMethods.selectedPaymentMethodID.htmlName}" v-
18            <label for="is-#{$radioID}"><isprint value="${Resource.msg(paymentMethodType.label,'forms',null)}"/><isif condition="#{!empty(dw.order.PaymentM...</label>
19          </div>
20        </div>
21      </isloop>
22    </div>
23  </div>
24</iscomment>
25</isif>
26</isloop>
```

Figure 61 Modifications in paymentmethods.isml

Add Code:

```
<isinclude template="klarnapayments/klarnapaymentscategories.isml"/>
```

After `</isloop>` close to line 28 as shown below:




The screenshot shows a code editor with the file 'paymentmethods.isml' open. The code is a template for payment methods. A red box highlights the line `<isinclude template="klarnapayments/klarnapaymentscategories.isml"/>` at line 28. The code includes sections for Klarna payments, a legend, and various payment method options like GIFT_CERTIFICATE.

```
paymentmethods.isml
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
```

Figure 62 Modifications in paymentmethods.isml (cont.)

Add Code:

```
<iscomment>
```

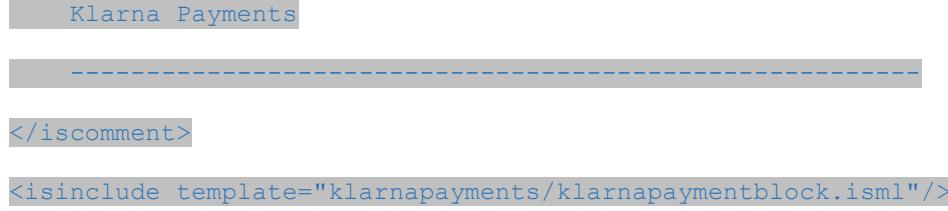

The screenshot shows a user interface section titled 'Klarna Payments'. Below it is a dashed line separator. The code for this section is as follows:

```
Klarna Payments
-----
</iscomment>
```

```
<isinclude template="klarnapayments/klarnapaymentblock.isml"/>
```

Before `</fieldset>` closing tag, close to line 150 as shown below:

```

1 paymentmethods.isml
124  <isinputfield formfield="${pdict.CurrentForms.billing.paymentMethods.bml.year}" type="select" rowclass="year"/>
125  <isinputfield formfield="${pdict.CurrentForms.billing.paymentMethods.bml.month}" type="select" rowclass="month"/>
126  <isinputfield formfield="${pdict.CurrentForms.billing.paymentMethods.bml.day}" type="select" rowclass="day"/>
127
128  <isinputfield formfield="${pdict.CurrentForms.billing.paymentMethods.bml.ssn}" type="input"/>
129
130  <div class="bml-terms-and-conditions form-caption">
131      <iscontentset aid="bml-tc"/>
132  </div>
133
134  <div class="form-row form-caption">
135      <isinputfield formfield="${pdict.CurrentForms.billing.paymentMethods.bml.termsandconditions}" type="checkbox"/>
136  </div>
137
138
139
140
141  <iscollection>
142      Custom processor
143      -----
144  </iscollection>
145
146  <div class="payment-method <isif condition="${!empty(pdict.selectedPaymentID) && pdict.selectedPaymentID=='PayPal}">'>paym
147      <!-- Your custom payment method implementation goes here. -->
148      ${Resource.msg('billing.custompaymentmethod','checkout',null)}
149  </div>
150
151  <iscollection>
152      Klarna Payments
153      -----
154  </iscollection>
155
156  <isinclude template="klarnapayments/klarnapaymentblock.isml"/>
157
158  </fieldset>
159 <iselse/>
160  <div class="gift-cert-used form-indent">
161      <isif condition="${pdict.gcPITotal>0}">${Resource.msg('billing.giftcertnmethod','checkout',null)}<iselse/>${Resource.msg
162      <input type="hidden" name="${pdict.CurrentForms.billing.paymentMethods.selectedPaymentID.htmlName}" value="${pdict.cur
163

```

Figure 63 Modifications in paymentmethods.isml (cont.)

3.5.1.4. default/checkout/shipping/minishipments.isml

Add the following code:

```
<isinclude template="klarnapayments/modules.isml"/>
```

In the end beginning of the file as shown below:

```

1 minishipments.isml
2 <iscontent type="text/html" charset="UTF-8" compact="true"/>
3 <isinclude template="util/modules.isml"/>
4 <isinclude template="klarnapayments/modules.isml"/>
5 <iscollection>
6     This template renders a summary of all shipments of the basket which is
7     used below the order summary at the right hand side in the checkout
8     process.
9 </iscollection>
10 <isset name="Shipments" value="${pdict.Basket.shipments}" scope="page"/>
11
12 <iscollection>the url to edit shipping addresses depends on the checkout scenario</iscollection>
13 <isset name="editUrl" value="${URLUtils_https('COShipping-Start')}" scope="page"/>
14 <isif condition="${pdict.CurrentForms.multishipping.entered.value}">
15     <isset name="editUrl" value="${URLUtils_https('COshippingMultiple-Start')}" scope="page"/>
16 </isif>
17

```

Figure 64 Modifications in minishipments.isml

Add the following code:

```

<iskpaddresshelper
    p_shipment="${shipment}"
    p_address="${shipment.shippingAddress}"/>

```

After `<isminicheckout_address p_address="${shipment.shippingAddress}"/>` as shown below:

```

minishipments.isml
50      <a href="${editUrl}" class="section-header-note">${Resource.msg('global.edit','locale',null)}</a>
51      ${Resource.msg('cart.store.instorepickup','checkout',null)}
52      <elseif condition="${shipment.shippingAddress != null && pdict.Basket.productLineItems.size() > 0}">
53          <a href="${editUrl}" class="section-header-note">${Resource.msg('global.edit','locale',null)}</a>
54          ${Resource.msg('minishipments.shippingaddress','checkout',null)}
55      </elseif>
56  </h3>
57
58  <div class="details">
59      <iscomment>
60          render the detail section depending on whether this is a physical shipment with products
61          (shipped to an address) or if this is a gift certificate (send via email)
62      </iscomment>
63      <isif condition="${shipment.giftCertificateLineItems.size() > 0}">
64          <isloop items="${shipment.giftCertificateLineItems}" var="giftCertLI">
65              <div><isprint value="${giftCertLI.recipientName}" /></div>
66              <div>(<isprint value="${giftCertLI.recipientEmail}" />)</div>
67          </isloop>
68      <iselseif condition="${shipment.shippingAddress != null && pdict.Basket.productLineItems.size() > 0}">
69          <isminicheckout address_p_address="${shipment.shippingAddress}">
70          <iskpaddresshelper p_shipment="${shipment}" p_address="${shipment.shippingAddress}" />
71
72          <isif condition="${empty(shipment.shippingMethod)}">
73              <div class="minishipments-method">
74                  <span>${Resource.msg('order.orderdetails.shippingmethod','order',null)}</span>
75                  <span><isprint value="${shipment.shippingMethod.displayName}" /></span>
76              </div>
77          </isif>
78      </iselseif>
79  </div>
80
81      </div>
82  </isloop>
83 </isif>

```

Figure 65 Modifications in minishipments.isml (cont.)

3.5.1.5. default/components/footer/footer_Ul.isml

Add Code:

```
<isinclude template="klarnapayments/scripts.isml"/>
```

Before `<script src="${URLUtils.staticURL('/js/app.js')}"></script>` script tag as shown below:

```

27
28  <isinclude template="klarnapayments/scripts.isml"/>
29
30 <script src="${URLUtils.staticURL('/js/app.js')}"></script>

```

Figure 66 Modifications in footer_Ul.isml

3.5.1.6. default/components/footer/footer.isml

Add the following code:

```

<!-- Klarna OSM footer -->

<div class="klarna-footer">

    <isinclude template="klarnapayments/modules.isml"/>

    <iskosmfooter />

```

```

</div>

<!-- /Klarna OSM footer -->

<!-- Klarna KEB form -->

<iskebform />

<!-- Klarna KEB form -->

right after the </footer> end tag and before <iscontentasset aid="footer-copy"/> as
shown below:

```

```

17  <div class="footer-item" /
18      <iscontentasset aid="footer-support"/>
19  </div>
20<div class="footer-item" /
21      <iscontentasset aid="footer-about"/>
22  </div>
23 </div>
24 </footer>
25

26 <!-- Klarna OSM footer -->
27<div class="klarna-footer">
28     <isinclude template="klarnapayments/modules.isml"/>
29     <iskosmfpotter />
30 </div>
31 <!-- /Klarna OSM footer -->
32
33 <!-- Klarna KEB form -->
34 <iskebform />
35 <!-- Klarna KEB form -->

36 <iscontentasset aid="footer-copy"/>
37 |
38 <iscomment>
39     Customer registration can happen everywhere in the page flow. As special tag in the pdict
40     is indicating it. So we have to check on every page, if we have to report this event for
41     the reporting engine.
42 </iscomment>
43 <isinclude template="util/reporting/ReportUserRegistration.isml"/>
44
45 <isinclude template="components/footer/footer_UI"/>
46
47

```

Figure 67 Modifications in footer.isml

3.5.1.7. default/product/producttopcontentPS.isml

Add the following code:

```

<isinclude template="klarnapayments/modules.isml"/>

<iskosmpdp p_product="${psProduct}" />

```

, right under the `pricing` template include as shown below:

```

165     <label>${Resource.msg('product.setpricelabel','product',null)}</label>
166     <isinclude template="product/components/pricing"/>
167
168     <isinclude template="klarnapayments/modules.isml"/>
169     <iskosmpdp p_product="${psProduct}" />
170

```

Figure 68 Modifications in producttopcontentPS.isml

3.5.1.8. default/product/productcontent.isml

Add the following code:

```
<isif condition="${!isQuickView}">
    <isinclude template="klarnapayments/modules.isml"/>
    <iskosmpdp p_product="${pdict.Product}" />
</isif>
```

, right under the `pricing` template include as shown below:

```
77      <isinclude template="product/components/pricing"/>
78
79@    <isif condition="${!isQuickView}">
80        <isinclude template="klarnapayments/modules.isml"/>
81        <iskosmpdp p_product="${pdict.Product}" />
82    </isif>
83
84    <isset name="pam" value="${pdict.Product.getAttributeModel()}" scope="page"/>
```

Figure 69 Modifications in producttopcontent.isml

Add the following code:

```
var isStandardProduct = !empty(product.custom.kpIsStandardProduct) ?  
product.custom.kpIsStandardProduct : true;  
var isSubscriptionProduct = !empty(product.custom.kpIsSubscriptionProduct) ?  
product.custom.kpIsSubscriptionProduct : false;  
var isSubscriptionOnly = (isSubscriptionProduct && !isStandardProduct);
```

on line 24 in `<isscript>` element:

```
19      let availableCount = "0";
20      if (pdict.isProductAvailable && !empty(avm.inventoryRecord)) {
21          availableCount = avm.inventoryRecord.perpetual ? "999" : avm.inventoryRecord.ATS.value.toFixed().toString();
22      }
23      var isStandardProduct = !empty(product.custom.kpIsStandardProduct) ? product.custom.kpIsStandardProduct : true;
24      var isSubscriptionProduct = !empty(product.custom.kpIsSubscriptionProduct) ? product.custom.kpIsSubscriptionProduct : false;
25      var isSubscriptionOnly = (isSubscriptionProduct && !isStandardProduct);
26
27      // ...
28@    <iscomment>
29        primary details
</iscomment>
```

Figure 70 Modifications in productcontent.isml

Add the following code:

```
<isif condition="${!isSubscriptionOnly}">
    <iskecpdp />
</isif>
```

on line 256 after add to cart button:

```
252          var buttonTitleDisabledSelectVariation = StringUtils.format(Resource.ms
253              <isscript>
254                  <button id="add-to-cart" type="button" title="${buttonTitleDisabledSelectV
255                      </isscript>
256                      <isif condition="${!isSubscriptionOnly}">
257                          <iskecpdp />
258                      </isif>
259                      </div><!-- end details block -->
260                  </fieldset>
261
```

Figure 71 Modifications in productcontent.isml (cont.)

3.5.1.9. js/pages/product/variant.js

Add the following code:

```
if (window.Klarna && window.Klarna.OnsiteMessaging) {  
    window.Klarna.OnsiteMessaging.refresh();  
}
```

in the variation update callback, on line 35

```
29     callback: function () {  
30         if (SitePreferences.STORE_PICKUP) {  
31             productStoreInventory.init();  
32         }  
33         image.replaceImages();  
34         tooltip.init();  
35         if (window.Klarna && window.Klarna.OnsiteMessaging) {  
36             window.Klarna.OnsiteMessaging.refresh();  
37         }  
38     },  
39 };
```

Figure 72 Modifications in variant.js

Add following code:

```
if (window.klarnaExpressCheckout) {  
    window.klarnaExpressCheckout.klarnaExpressCheckoutPDP();  
}
```

in the variation update callback on line 37:

```
31     productStoreInventory.init(),  
32     image.replaceImages();  
33     tooltip.init();  
34     if (window.Klarna && window.Klarna.OnsiteMessaging) {  
35         window.Klarna.OnsiteMessaging.refresh();  
36     }  
37     if (window.klarnaExpressCheckout) {  
38         window.klarnaExpressCheckout.klarnaExpressCheckoutPDP();  
39     }  
40 }  
41 };  
42 };  
43 };  
44 module.exports = function () {  
45 }
```

Figure 73 Modifications in variant.js (cont.)

3.5.1.10. default/checkout/cart/cart.isml

Add the following code on line 5:

```
<isinclude template="klarnapayments/modules.isml"/>
```

```

1 <iscontent type="text/html" charset="UTF-8" compact="true"/>
2 <isdecorate template="checkout/cart/pt_cart">
3   <isinclude template="util/modules" />
4   <isinclude template="util/reporting/ReportBasket.isml" />
5   <isinclude template="klarnapayments/modules.isml" />
6
7   <isset name="enableCheckout" value="${pdict.EnableCheckout}" scope="page" />
8   <isif condition="${dw.system.Site.getCurrent().getCustomPreferenceValue('enableStorePickUp')}">
9     <isset name="store" value="${dw.catalog.StoreMgr.getStore(pdict.CurrentSession.custom.storeId)}" scope="page" />
10    </isif>
11   <isslot id="cart-banner" description="Banner for Cart page" context="global" />

```

Figure 74 Modifications in cart.isml

Add the following code on line 823:

```
<iskosmcart p_lineitemctnr="${pdict.Basket}" />
```

, right after the <isordertotals>:

```

811           </td>
812           </td>
813         </tr>
814       </isloop>
815     </tfoot>
816   </table>
817
818   <div class="cart-footer">
819
820     <input type="hidden" name="${pdict.CurrentForms.cart.updateCart.htmlName}" value="${pdict.CurrentForm:>
821       <div class="cart-order-totals">
822         <isordertotals p_lineitemctnr="${pdict.Basket}" p_totallabel="${Resource.msg('global.estimatedto:>
823         <iskosmcart p_lineitemctnr="${pdict.Basket}" />
824       </div>
825       <div class="cart-coupon-code">
826
827         <input type="text" name="${pdict.CurrentForms.cart.couponCode.htmlName}" id="${pdict.CurrentForm:>
828
829       <button type="submit" value="${pdict.CurrentForms.cart.addCoupon.htmlName}" name="${pdict.Curren:>

```

Figure 75 Modifications in cart.isml (cont.)

Add the following code on lines 33 & 864:

```
<iskebcart />
```

, right after the <isif condition="\${enableCheckout}">

```

28   <div class="cart-actions cart-actions-top">
29     <!--comment: continue shop url is a non-secure but checkout needs a secure and that is why separate forms!!-->
30     <form class="cart-action-checkout" action="${URLUtils.httpsContinue()}" method="post" name="${pdict.CurrentForm:>
31       <fieldset>
32         <isif condition="${enableCheckout}">
33           <iskebcart />
34             <button class="button-fancy-large" type="submit" value="${Resource.msg('global.checkout','Locale:>
35               ${Resource.msg('global.checkout','locale',null)}>
36             </button>
37             <isapplepay>/isapplepay</isapplepay>
38           <iselse/>
39             <button class="button-fancy-large" disabled="disabled" type="submit" value="${Resource.msg('glob:>
40               ${Resource.msg('global.checkout','locale',null)}>
41             </button>
42           </isif>
43         </fieldset>
44       </form>

```

Figure 76 Modifications in cart.isml (cont.)

```

858@      <div class="cart-actions">
859
860      <!--comment>continue shop url is a non-secure but checkout needs a secure and that is why separate forms!</comment>
861@      <form class="cart-action-checkout" action="${URLUtils.httpsContinue()}" method="post" name="${pdict.CurrentF
862@          <fieldset>
863@              <isif condition="${enableCheckout}">
864@                  <iskebcart />
865@                  <button class="button-fancy-large" type="submit" value="${Resource.msg('global.checkout','Locale
866@                      ${Resource.msg('global.checkout','locale',null)}
867@                  </button>
868@                  <isapplepay></isapplepay>
869@              <iselse/>
870@                  <button class="button-fancy-large" disabled="disabled" type="submit" value="${Resource.msg('globa
871@                      ${Resource.msg('global.checkout','locale',null))
872@                  </button>
873@              </isif>
874@          </fieldset>
875@      </form>
876

```

Figure 77 Modifications in cart.isml (cont.)

Add the following code on line 182:

```

<isset name="kpIsStandardProduct"
       value="${!empty(product.custom.kpIsStandardProduct) ? 
product.custom.kpIsStandardProduct : true}" scope="page" />

<iskpsubscription lineitem="${lineItem}"
showsubscription="${product.custom.kpIsSubscriptionProduct}"
disablesubscribe="${product.custom.kpIsSubscriptionProduct &&
!kpIsStandardProduct}"

kptrialdaysusage="${product.custom.kpTrialDaysUsage}"

lmkpsubscription="${lineItem.custom.kpSubscription}"/>

```

after deliveryoptions include:

```

<isinclude template="checkout/cart/storepickup/deliveryoptions" />

        <td class="item-delivery-options">
            <isinclude template="checkout/cart/storepickup/deliveryoptions" />
            <isset name="kpIsStandardProduct"
                   value="${!empty(product.custom.kpIsStandardProduct) ? product.custom.kpIsStandardProduct : true}"
                   scope="page" />
            <iskpsubscription lineitem="${lineItem}" showsubscription="${product.custom.kpIsSubscriptionProduct}"
                               disablesubscribe="${product.custom.kpIsSubscriptionProduct && !kpIsStandardProduct}"
                               kptrialdaysusage="${product.custom.kpTrialDaysUsage}"
                               lmkpsubscription="${lineItem.custom.kpSubscription}"/>
        </td>
    </isif>

```

Figure 78 Modifications in cart.isml (cont.)

Add the following code on line 65:

```

<elseif condition="${pdict.BasketStatus.code != null && pdict.BasketStatus.code
== 'SubscriptionError'}">
    ${pdict.BasketStatus.message}

```

in div with class 'error-form'.

```

60     <div class="error-form">
61         <i class="fa fa-exclamation-triangle fa-2x pull-left"></i>
62         <isif condition="${pdict.BasketStatus.code != null && pdict.BasketStatus.code=='CouponError'}">
63             ${Resource.msg('cart.cartcouponinvalid','checkout',null)}
64         <iselseif condition="${pdict.BasketStatus.code != null && pdict.BasketStatus.code=='TaxError'}">
65             ${Resource.msg('cart.taxinvalid','checkout',null)}
66         <iselseif condition="${pdict.BasketStatus.code != null && pdict.BasketStatus.code == 'SubscriptionError'}">
67             ${pdict.BasketStatus.message}
68         </iselse/>
69         ${pdict.BasketStatus.code}
70         ${Resource.msg('cart.carterror','checkout',null)}
71     </isif>
72 </div>

```

Figure 79 Modifications in cart.isml (cont.)

Add following code on line 862:

```
<isinclude template="klarnapayments/subscription/cartSubscriptionDetails" />
```

at the end in div 'cart-footer'

```

858             </div>
859         </isif>
860     </div>
861
862     <isinclude template="klarnapayments/subscription/cartSubscriptionDetails" />
863
864 </div>
865

```

Figure 80 Modifications in cart.isml (cont.)

Add following code on line 34:

```
<iskeccart container_id="klarnaExpressCheckout"/>
```

before checkout button.

```

30         <form class="cart-action-checkout" action="${URLUtils.httpsContinue()}" method="post">
31             <fieldset>
32                 <isif condition="${enableCheckout}">
33                     <iskeccart />
34                     <iskeccart container_id="klarnaExpressCheckout"/>
35                     <button class="button-fancy-large" type="submit" value="${Resource.msg(
36                         ${Resource.msg('global.checkout','locale',null)}}
37                         ${Resource.msg('global.checkout','locale',null))}"
38                     </button>
39                     <isapplepay></isapplepay>
40                 </iselse/>
41                 <button class="button-fancy-large" disabled="disabled" type="submit" va-
42                     ${Resource.msg('global.checkout','locale',null)}
43                 </button>
44             </isif>
45         </fieldset>
46     </form>

```

Figure 81 Modifications in cart.isml (cont.)

Add following code on line 879:

```
<iskeccart container_id="klarnaExpressCheckoutBottom"/>
```

in enabledCheckout case before checkout button.

```

874 | <iscomment>continue shop url is a non-secure but checkout needs a secure and that is why s
875@ <form class="cart-action-checkout" action="${URLUtils.httpsContinue()}" method="post" name=
876@     <fieldset>
877@         <isif condition="${enableCheckout}">
878@             <iskebcart />
879@             <iskeccart container_id="klarnaExpressCheckoutBottom"/>
880@                 <button class="button-fancy-large" type="submit" value="${Resource.msg('global.
881@                             ${Resource.msg('global.checkout','locale',null)}
882@                         '
883@                         <isapplepay></isapplepay>
884@                     <iselse/>
885@                         <button class="button-fancy-large" disabled="disabled" type="submit" value="${Resource.
886@                             ${Resource.msg('global.checkout','locale',null)}
887@                         '
888@                         .."

```

Figure 82 Modifications in cart.isml(cont.)

3.5.1.11. default/components/header/header.isml

Add the following code:

```

<!-- Klarna OSM header -->

<isinclude template="klarnapayments/modules.isml"/>

<iskosmheader />

<!-- /Klarna OSM header -->

```

At the end of the file as shown below:



```

32             <span>${Resource.msg('global.header.storelocator', 'locale', null)}</span>
33         </a>
34     </li>
35
36     <iscomment>INCLUDE: Customer login information, login, etc. (contains personal information, do not cache)</iscomment>
37     <isinclude url="${URLUtils.url('Home-IncludeHeaderCustomerInfo')}" />
38
39 </ul>
40
41     <iscomment>Country Selector</iscomment>
42     <isinclude template="components/header/countryselector"/>
43
44 </nav>
45
46     <iscomment>INCLUDE: Mini-cart, do not cache</iscomment>
47     <div id="mini-cart">
48         <isinclude url="${URLUtils.url('Cart-MiniCart')}" />
49     </div>
50
51 </div><!-- /header -->
52
53 <!-- Klarna OSM header -->
54 <isinclude template="klarnapayments/modules.isml"/>
55 <iskosmheader />
56 <!-- /Klarna OSM header -->

```

Figure 83 Modifications in header.isml

3.5.1.12. default/mail/orderconfirmation.isml

Add the following code:

```

<tr>

    <td style="font-size:12px;font-family:arial;padding:20px 10px;vertical-align:top;">

```

```

        <isset name="confirmationAsset"
value="${require('/cartridge/scripts/util/klarnaHelper').getConfirmationEmailAsset()}" scope="page" />

        <isprint value="${confirmationAsset}" encoding="off" />

    </td>
</tr>

```

Before the `</table>` closing tag as shown:

```

34 ${Resource.msg('order.orderconfirmation-email.storephone','order',null)}
35 |>
36
37@ colspan="2" style="font-size:12px;font-family:arial;padding:20px 10px;vertical-align:top;">
38@ <table style="background:#ffffffff;border:1px solid #999999;width:680px;">
41@   <tr>
42     <th style="background:#cccccc;padding:5px 20px;font-size:12px;font-family:arial;text-align:left;">${Resource.msg('confirmation.thankyou','confirmation',null)}
43   </tr>
44@   <tr>
45@     <td style="font-size:12px;font-family:arial;padding:20px 10px;vertical-align:top;">
46       <p>${Resource.msg('confirmation.message','checkout',null)}</p>
47       <p>${Resource.msg('confirmation.contact','checkout',null)}</p>
48     </td>
49   </tr>
50@   <tr>
51@     <td style="font-size:12px;font-family:arial;padding:20px 10px;vertical-align:top;">
52       <isset name="confirmationAsset" value="${require('/cartridge/scripts/util/KlarnaHelper').getConfirmationEmailAsset()}" scope="page" />
53       <isprint value="${confirmationAsset}" encoding="off" />
54     </td>
55   </tr>
56 </table>
57
58 |>
59

```

Figure 84 Modifications in orderconfirmation.isml

3.5.1.13. default/components/order/orderdetailsemail.isml

Add the following code:

```

<iselseif condition="${paymentInstr.paymentMethod.equals('Klarna')}" >

${Resource.msg('email.order.reference','klarnapayments',null)}:
${Order.custom.kpOrderID} <br />

```

Before the closing `</isif>` tag on line 51 as shown below:

```

39     <@>${resource.msg('order.orderdetails.paymentmethodno', order, null)}</@>
40     <iselse/>
41     <>${Resource.msg('order.orderdetails.paymentmethods','order',null)}</b>
42   </isif>
43
44   <comment>Render All Payment Instruments</comment>
45   <isloop items="${Order.getPaymentInstruments()}" var="paymentInstr" status="piLoopState">
46     <div><isprint value="${dv.order.PaymentMgr.getPaymentMethod(paymentInstr.paymentMethod).name}" /></div>
47     <isif condition="${dv.order.PaymentInstrument.METHOD_GIFT_CERTIFICATE.equals(paymentInstr.paymentMethod)}>
48       <isprint value="${paymentInstr.maskedGiftCertificateCode}" /><br />
49     <iselseif condition="${paymentInstr.paymentMethod.equals('Klarna')}">
50       ${Resource.msg('email.order.reference','klarnapayments',null)}: ${Order.custom.kpOrderID} <br />
51     </isif>
52     <isminicreditcard card="${paymentInstr}" show_expiration="false" />
53   </div>
54     <span class="label">${Resource.msg('global.amount','locale',null)}:</span>
55     <span class="value"><isprint value="${paymentInstr.paymentTransaction.amount}" /></span>
56     <br />
57   </div><!-- END: payment-amount -->
58 </isloop>
59 </td>

```

Figure 85 Modifications in orderdetailsemail.isml

3.5.1.14. default/checkout/cart/minicart.isml

Add the following code:

```

<issetname="KlarnaOSM"
value="${require('*/cartridge/scripts/marketing/klarnaOSM')} scope="page" />

<isif condition="${KlarnaOSM.isEnabledMCEExpressButton()}">

  <isinclude template="klarnapayments/modules.isml"/>

  <ismckebe />

  <script type="text/javascript" src="${URLUtils.staticURL('/js/minicart-
keb.js')}"></script>

</isif>

```

Before the `` tag on line 74 as shown below:

```

44 <comment> the dynamically shown view of the last added item </comment>
45 <isif condition="${!empty(pdct.Basket) && (pdct.Basket.productLineItems.size() > 0 || pdct.Basket.giftCertificateLineItems.size() > 0)}>
46   <div class="mini-cart-content">
47     <div class="mini-cart-header">
48       ${Resource.msg('minicart.title','checkout',null)}
49     </div>
50     <div class="mini-cart-products">
51       <isminlineitem p_lineitemctrn="${pdct.Basket}" p_showreverse="${true}" p_productlineitem="${pdct.ProductLineItem}" p_giftcertlineit
52       </div>
53
54     <div class="mini-cart-totals">
55       <div class="mini-cart-subtotals">
56         <span class="label">${Resource.msg('order.ordersummary.ordersubtotal','order',null)}</span>
57         <span class="value"><isprint value="${pdct.Basket.getAdjustedMerchandiseTotalPrice(false).add(pdct.Basket.giftCertificateTotalPri
58           </div>
59           <div class="mini-cart-slot">
60             <isslot id="minicart-banner" description="This is the banner within the minicart, directly above the View Cart/Checkout link." cont
61           </div>
62           <a class="button mini-cart-link-cart" href="${URLUtils.staticURL('Cart>Show'))" title="${Resource.msg('minicart.viewcart.label','checkout',
63             <isapplepay></isapplepay>
64             <isset name="KlarnaOSM" value="${require('*/cartridge/scripts/marketing/klarnaOSM')}" scope="page" />
65             <isif condition="${KlarnaOSM.isEnabledMCEExpressButton()}">
66               <isinclude template="klarnapayments/modules.isml"/>
67               <ismckebe />
68               <script type="text/javascript" src="${URLUtils.staticURL('/js/minicart-keb.js')}"></script>
69             </isif>
70             <a class="mini-cart-link-checkout" href="${URLUtils.staticURL('COCustomer-Start'))" title="${Resource.msg('minicart.directcheckout','checko
71           </div>
72         </div>
73       </div>
74     </div>
75   </div>
76 </isif>

```

Figure 86 Modifications in minicart.isml

Add the following code:

```
<isif condition="${KlarnaOSM.isKlarnExpressCheckoutEnabled()}">
    <isset name="SubscriptionHelper"
value="${require('../cartridge/scripts/subscription/subscriptionHelper')}"
scope="page" />
    <isif condition="${!SubscriptionHelper.hasSubscriptionOnly()}">
        <isinclude template="klarnapayments/modules.isml" />
        <iskecminicart />
    </isif>
</isif>
```

Before the `<a class="mini-cart-link-checkout"...` tag on line 81 as shown below:

```
72             <script type="text/javascript" src="${URLUtils.staticURL('/js/minicart-keb.js')}"></script>
73         </isif>
74         <isif condition="${KlarnaOSM.isKlarnExpressCheckoutEnabled()}">
75             <isset name="SubscriptionHelper" value="${require('../cartridge/scripts/subscription/subscriptionHelper')}" scope="page" />
76             <isif condition="${!SubscriptionHelper.hasSubscriptionOnly()}">
77                 <isinclude template="klarnapayments/modules.isml" />
78                 <iskecminicart />
79             </isif>
80         </isif>
81         <a class="mini-cart-link-checkout" href="${URLUtils_https('COCustomer-Start')}" title="${Resource.msg('minicart.directcheckout')}"/>
82     </div>
83 </div>
84 </isif>
85 <isbonusdiscountlineitem p_alert_text="${Resource.msg('product.bonusproductalert','product',null)}" p_discount_line_item="${pdict.BonusDis..."
```

Figure 87 Modifications in minicart.isml (cont.)

3.5.1.15. js/pages/cart.js

Add the following code after line 6:

```
util = require('../util'),
^
3@var account = require('../account'),
4    bonusProductsView = require('../bonus-products-view'),
5    quickview = require('../quickview'),
6    util = require('../util'),
7    cartStoreInventory = require('../storeinventory/cart');
8
```

Figure 88 Modifications in cart.js

Add the following code after line 40:

```
$( 'body' ).on( 'change', '.kp-subscription', async function () {
    var isSubscribed = $(this).is(":checked");
    var productID = $(this).data('pid');
    var url = $(this).data('action');
    var uuid = $(this).data('uuid');

    var urlParams = {
        pid: productID,
        subscription: isSubscribed,
        uuid: uuid
    }
```

```

    } ;

    url = util.appendParamsToUrl(url, urlParams);

    $.ajax({
        url: url,
        type: 'get',
        context: this,
        dataType: 'json',
        success: function (data) {
            if (data.isSubscriptionBasket) {
                $('.subscription-data').show();
            } else {
                $('.subscription-data').hide();
            }
        },
        error: function (err) {
            if (err.responseJSON.redirectUrl) {
                window.location.href = err.responseJSON.redirectUrl;
            }
        }
    ));
}
);

```

at the end of initializeEvents() function.

```

```
41
42 $('body').on('change', '.kp-subscription', async function () {
43 var isSubscribed = $(this).is(":checked");
44 var productID = $(this).data('pid');
45 var url = $(this).data('action');
46 var uuid = $(this).data('uuid');
47
48 var urlParams = {
49 pid: productID,
50 subscription: isSubscribed,
51 uuid: uuid
52 };
53 url = util.appendParamsToUrl(url, urlParams);
54
55 $.ajax({
56 url: url,
57 type: 'get',
58 context: this,
59 dataType: 'json',
60 success: function (data) {
61 if (data.isSubscriptionBasket) {
62 $('.subscription-data').show();
63 } else {
64 $('.subscription-data').hide();
65 }
66 },
67 error: function (err) {
68 if (err.responseJSON.redirectUrl) {
69 window.location.href = err.responseJSON.redirectUrl;
70 }
71 }
72 });
73 });
74
75 $('body').on('change', '.subscription-period, .subscription-frequency', function () {
76 var selectedValue = $('option:selected', this).val();

```

**Figure 89 Modifications in cart.js (cont.)**

Add the following code on line 75:

```

 $('body').on('change', '.subscription-period, .subscription-frequency',
function () {
 var selectedValue = $('option:selected', this).val();
 console.log(selectedValue);
 var url = $(this).data('url');

 var subscriptionField = $(this).data('field');

 var urlParams = {
 selectedValue: selectedValue,
 subscriptionField: subscriptionField
 };

 url = util.appendParamsToUrl(url, urlParams);

 $.ajax({
 url: url,
 type: 'get',
 context: this,
 dataType: 'json',
 success: function (data) {

```

```

 if (data.error) {
 console.error(data.errorMessage);
 }
 },
 error: function (err) {
 if (err.responseJSON.redirectUrl) {
 window.location.href = err.responseJSON.redirectUrl;
 }
 }
);
}

}

'4
75 $('body').on('change', '.subscription-period, .subscription-frequency', function () {
76 var selectedValue = $('option:selected', this).val();
77 console.log(selectedValue);
78 var url = $(this).data('url');
79 var subscriptionField = $(this).data('field');
80
81 var urlParams = {
82 selectedValue: selectedValue,
83 subscriptionField: subscriptionField
84 };
85
86 url = util.appendParamsToUrl(url, urlParams);
87
88
89 $.ajax({
90 url: url,
91 type: 'get',
92 context: this,
93 dataType: 'json',
94 success: function (data) {
95 if (data.error) {
96 console.error(data.errorMessage);
97 }
98 },
99 error: function (err) {
100 if (err.responseJSON.redirectUrl) {
101 window.location.href = err.responseJSON.redirectUrl;
102 }
103 }
104 });
105 });

```

**Figure 90 Modifications in cart.js (cont.)**

### 3.5.1.16. default/checkout/shipping/singleshipping.isml

Add the following code after line 98:

```

<fieldset>
 <isinclude template="checkout/shipping/subscriptionDetails" />
</fieldset>

```

after shipping method list.

```

96 <div id="shipping-method-list">
97 <isinclude url="${URLUtils_https('COShipping-UpdateShippingMethodList')}" />
98 </div>
99
100 <fieldset>
101 <isinclude template="checkout/shipping/subscriptionDetails" />
102 </fieldset>
103 </isif>
104 <fieldset>

```

**Figure 91 Modifications in singleshipping.isml**

Add the following code on line 145:

```

<isif condition="${KlarnaOSM.isKlarnExpressCheckoutEnabled() &&
KlarnaOSM.getKlarnExpressCheckoutClientKey() }">
 <script src=" https://x.klarnacdn.net/kp/lib/v1/api.js" async></script>
</isif>

```

before closing isdecorate tag:

```

139 var countries = ViewHelpers.getCountryAndRegions(addressForm);
140 var json = JSON.stringify(countries);
141 </isscript>
142 <script>window.Countries = <isprint value="${json}" encoding="off"/>;</script>
143
144 <isif condition="${KlarnaOSM.isKlarnExpressCheckoutEnabled() && KlarnaOSM.getKlarnExpressCheckoutClientKey() }">
145 <script src=" https://x.klarnacdn.net/kp/lib/v1/api.js" async></script>
146 </isif>
147 </isdecorate>
148
149

```

**Figure 92 Modifications in singleshipping.isml (cont.)**

### 3.5.1.17. scripts/cart/ValidateCartForCheckout.js

Add the following code block in validate function:

```

var Resource = require('dw/web/Resource');

var SubscriptionHelper =
require('*/cartridge/scripts/subscription/subscriptionHelper');

var subValidation = SubscriptionHelper.validateCartProducts(basket);

if (subValidation && subValidation.error) {
 return {
 BasketStatus: new Status(Status.ERROR, 'SubscriptionError',
subValidation.message)
 };
}

var subscriptionUserError = session.privacy.guest_subscription_error;
session.privacy.guest_subscription_error = null;

if (subscriptionUserError) {
 var msg = Resource.msg('klarna.subscription.checkout.guestuser.error',
'subscription', null);

 return {
 BasketStatus: new Status(Status.ERROR, 'SubscriptionError', msg),
 EnableCheckout: true
 };
}

```

```
}
```

before the DONE section on line 115.

```
113
114 var Resource = require('dw/web/Resource');
115 var SubscriptionHelper = require('*cartridge/scripts/subscription/subscriptionHelper');
116 var subValidation = SubscriptionHelper.validateCartProducts(basket);
117 if (subValidation && subValidation.error) {
118 return [
119 BasketStatus: new Status(Status.ERROR, 'SubscriptionError', subValidation.message)
120];
121 }
122
123 var subscriptionUserError = session.privacy.guest_subscription_error;
124 session.privacy.guest_subscription_error = null;
125 if (subscriptionUserError) {
126 var msg = Resource.msg('klarna.subscription.checkout.guestuser.error', 'subscription', null);
127 return [
128 BasketStatus: new Status(Status.ERROR, 'SubscriptionError', msg),
129 EnableCheckout: true
130];
131 }
132
133
134 // =====
135 // ===== DONE =====
136 // =====
```

Figure 93 Modifications in ValidateCartForCheckout.js

### 3.5.1.18. scripts/util/Resource.ds

Add the following code block before validation messages section:

```
CANCEL_SUBSCRIPTION :
Resource.msg('heading.cancel.subscriptions', 'subscription', null),

CANCEL : Resource.msg('global.cancel',
'locale', null),

107 QUICK_VIEW_POPUP : Resource.msg('product.quickview.popup', 'product', null),
108 TLS_WARNING : Resource.msg('global.browsertoolscheck.tls', 'locale', null),
109 CSRF_TOKEN_MISMATCH : Resource.msg('global.csrf.failed.error', 'locale', null),
110 CANCEL_SUBSCRIPTION : Resource.msg('heading.cancel.subscriptions', 'subscription', null),
111 CANCEL : Resource.msg('global.cancel', 'locale', null),

112 // Validation messages
113 VALIDATE_REQUIRED : Resource.msg('validate.required', 'forms', null),
114 VALIDATE_REMOTE : Resource.msg('validate.remote', 'forms', null),
115
```

Figure 94 Modifications in Resource.ds

### 3.5.1.19. js/pages/account.js

Add the following code block after initializePaymentForm() function:

```
function initSubscriptionEvents() {

 $('.cancel-subscription').on('click', function (e) {

 e.preventDefault();

 var subid = $(this).attr('data-subid');

 var cancelBtn = $(this);

 console.log(subid);

 var cancelDialogHTML = $('#subscription-dialog-body').html();
```

```

 dialog.open({
 html: cancelDialogHTML,
 options: {
 width: 400,
 title: Resources.CANCEL_SUBSCRIPTION,
 buttons: [
 {
 text: Resources.CANCEL,
 click: function () {
 $(this).dialog('close');
 }
 },
 {
 text: Resources.OK,
 click: function () {
 e.preventDefault();
 }
 }
]
 }
 });

 var url = cancelBtn.data('action');
 var subid = cancelBtn.data('subid');

 url = util.appendParamToURL(url, 'subid', subid);

 $.ajax({
 url: url,
 type: 'get',
 dataType: 'json',
 success: function (data) {
 if (data.status.toLowerCase() === 'ok') {
 cancelBtn.prop('disabled', true);

 cancelBtn.closest('.order-history-header').find('.subscription-status').text(data.statusMsg);

 cancelBtn.closest('.order-history-header').find('.subscription-status').addClass('error');
 }
 dialog.close();
 } else {

```

```

 dialog.close();
 }
}

if (data.message) {
 window.alert(data.message);
}
}

},
error: function (err) {
 page.refresh();
}

}) ;
}

}
}

}] ;

}

}

}) ;
}

}) ;
}
}

175 });
176 }
177
178 function initializePaymentForm() {
179 $('#CreditCardForm').on('click', '.cancel-button', function (e) {
180 e.preventDefault();
181 dialog.close();
182 });
183
184 }
185
186 function initSubscriptionEvents() {
187 $('.cancel-subscription').on('click', function (e) {
188 e.preventDefault();
189 var subid = $(this).attr('data-subid');
190 var cancelBtn = $(this);
191 console.log(subid);
192
193 var cancelDialogHTML = $('#subscription-dialog-body').html();
194
195 dialog.open({
196 html: cancelDialogHTML,
197 options: {
198 width: 400,
199 title: Resources.CANCEL_SUBSCRIPTION,
200 buttons: [
201 {
202 text: Resources.CANCEL,
203 type: 'button',
204 value: 'cancel'
205 }
206]
207 }
208 });
209 });
210 }

```

**Figure 95 Modifications in account.js**

Add following code in initializeEvents():

```
initSubscriptionEvents();
```

```

240 /**
241 * @private
242 * @function
243 * @description Binds the events of the order, address and payment pages
244 */
251@function initializeEvents() {
252 toggleFullOrder();
253 initAddressEvents();
254 initPaymentEvents();
255 login.init();
256 initSubscriptionEvents();
257 }
258
259@var account = {
260@ init: function () {
261@ initializeEvents();

```

Figure 96 Modifications in account.js (cont.)

### 3.5.1.20. default/account/orders.isml

Add following code in “order-history-header” div:

```

<isif condition="${order.object.custom.kpCustomerToken}">
 <div class="order-number">
 ${Resource.msg('label.subscriptions.subscriptionId',
'subscription', null)}:
 <isprint
value="${order.object.custom.kpCustomerToken}" />
 </div>
</isif>

37
38@ <div class="order-number">
39@ ${Resource.msg('account.orders.numberlabel','account',null)}
40@ <isprint value="${order.object.orderNo}" />
41@ </div>
42@ <isif condition="${order.object.custom.kpCustomerToken}">
43@ <div class="order-number">
44@ ${Resource.msg('label.subscriptions.subscriptionId',
'subscription', null)}:
45@ <isprint value="${order.object.custom.kpCustomerToken}" />
46@ </div>
47@ </isif>
48@ </div>
49@ <div class="order-history-items">
50@ </div>
51@ <div class="order-history-items">
52@ </div>

```

Figure 97 Modifications in orders.isml

### 3.5.1.21. default/checkout/components/minicheckout\_address.isml

Add following code on line 16:

```

<div><isprint
value="${Resource.msg("country."+pdict.p_address.countryCode.value.toLowerCase(),
"forms", null)}"/></div>
11@ <div><isprint value="${pdct.p_address.address1}" /></div>
12@ <isif condition="${!empty(pdct.p_address.address2)}">
13@ <div><isprint value="${pdct.p_address.address2}" /></div>
14@ </isif>
15@ <div><isprint value="${pdct.p_address.city}" /> <isprint value="${pdct.p_address.stateCode}" /> <isprint value="${pdct.p_address.countryCode.value.toLowerCase(),
"forms", null}" /></div>
16@ <div><isprint value="${Resource.msg("country."+pdct.p_address.countryCode.value.toLowerCase(),
"forms", null)}"/></div>
17@ </div>
18

```

Figure 98 Modifications in minicheckout\_address.isml

### 3.5.1.22. js/minicart.js

Add following code:

```
if (window.klarnaExpressCheckout) {
 window.klarnaExpressCheckout.klarnaExpressCheckoutMiniCart();
}
```

on line 38 in mouseenter event:

```
33 // events
34 this.$el.find('.mini-cart-total').on('mouseenter', function () {
35 if (this.$content.not(':visible')) {
36 this.slide();
37 }
38 if (window.klarnaExpressCheckout) {
39 window.klarnaExpressCheckout.klarnaExpressCheckoutMiniCart();
40 }
41 }.bind(this));
42
43 this.$content.on('mouseenter', function () {
44 //
```

Figure 99 Modifications in minicart.js

Add following code:

```
if (window.klarnaExpressCheckout) {
 window.klarnaExpressCheckout.klarnaExpressCheckoutMiniCart();
}
```

on line 60 in show minicart event:

```
54 */
55 show: function (html) {
56 this.$el.html(html);
57 util.scrollBrowser(0);
58 this.init();
59 this.slide();
60 if (window.klarnaExpressCheckout) {
61 window.klarnaExpressCheckout.klarnaExpressCheckoutMiniCart();
62 }
63 bonusProductsView.loadBonusOption();
64 },
65 /**
```

Figure 100 Modifications in minicart.js (cont.)

## 3.5.2. Controller Modification

If using a controller based SiteGenesis integration, additionally follow the instructions in this chapter.

### 3.5.2.1. COBilling.js

Go to COBilling.js controller, `returnToForm()` method and add the following code block:

```

try {
 require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').CreateOrUpdateSession();
} catch(e) {

 require('dw/system/Logger').getLogger('COBilling.js').error('Klarna Create Session Error: {0}', e);
}

}

```

after `pageMeta.update()` function (see screen shot below)

```

1 COBilling.js 33 |
2 75 * Renders the checkout/billing/billing template.
3 76 * @param {module:models/CartModel-CartModel} cart - A CartModel wrapping the current Basket.
4 77 * @param {object} params - (optional) if passed, added to view properties so they can be accessed in the template.
5 78 */
6 79 function returnToForm(cart, params) {
7 80 var pageMeta = require('~/cartridge/scripts/meta');
7 81
7 82 // if the payment method is set to gift certificate get the gift certificate code from the form
7 83 if (!empty(cart.getPaymentInstrument()) && cart.getPaymentInstrument().getPaymentMethod() === PaymentInstrument.NETBANK)
7 84 app.getForm('billing').copyFrom({
7 85 giftCertCode: cart.getPaymentInstrument().getGiftCertificateCode()
7 86 });
7 87 }
7 88
7 89 pageMeta.update({
7 90 pageTitle: Resource.msg('billing.meta.pagetitle', 'checkout', 'SiteGenesis Checkout')
7 91 });
7 92
7 93 try {
7 94 require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').CreateOrUpdateSession();
7 95 } catch (e) {
7 96 require('dw/system/Logger').getLogger('COBilling.js').error('Klarna Create Session Error: {0}', e);
7 97 }
7 98
7 99 if (params) {
7 100 app.getView(require('~/cartridge/scripts/object').extend(params, {
7 101 Basket: cart.object,
7 102 ContinueURL: URLUtils.https('COBilling-Billing')
7 103 })).render('checkout/billing/billing');
7 104 }
7 105 }

```

Figure 101 Modifications in COBilling.js

In the method `resetPaymentForms()`, add the command for the three conditions:

```

cart.removePaymentInstruments(cart.getPaymentInstruments('Klarna'));

```

```

349 // */
350 function resetPaymentForms() {
351 }
352 var cart = app.getModel('Cart').get();
353
354 var status = Transaction.wrap(function() {
355 if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value.equals('PayPal')) {
356 app.getForm('billing').object.paymentMethods.creditCard.clearFormElement();
357 app.getForm('billing').object.paymentMethods.bml.clearFormElement();
358 }
359
360 cart.removePaymentInstruments(cart.getPaymentInstruments(PaymentInstrument.METHOD_CREDIT_CARD));
361 cart.removePaymentInstruments(cart.getPaymentInstruments(PaymentInstrument.METHOD_BML));
362 cart.removePaymentInstruments(cart.getPaymentInstruments('Klarna'));
363 } else if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value.equals(PaymentInstrument.METHOD_CREDIT_CARD)) {
364 app.getForm('billing').object.paymentMethods.bml.clearFormElement();
365
366 cart.removePaymentInstruments(cart.getPaymentInstruments('PayPal'));
367 cart.removePaymentInstruments(cart.getPaymentInstruments('Klarna'));
368 } else if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value.equals(PaymentInstrument.METHOD_BML)) {
369 app.getForm('billing').object.paymentMethods.creditCard.clearFormElement();
370
371 if (!app.getForm('billing').object.paymentMethods.bml.ssn.valid) {
372 return false;
373 }
374
375 cart.removePaymentInstruments(cart.getPaymentInstruments(PaymentInstrument.METHOD_CREDIT_CARD));
376 cart.removePaymentInstruments(cart.getPaymentInstruments('PayPal'));
377 cart.removePaymentInstruments(cart.getPaymentInstruments('Klarna'));
378 }
379
380 return true;
381}

```

**Figure 102 Modifications in COBilling.js (cont.)**

In method `handlePaymentSelection(cart)`, go to line 441 and add the following code block:

```

if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value !==
'Klarna') {
 require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').CancelAuthorization();
}

431
432
433
434 if (empty(PaymentMgr.getPaymentMethod(app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value).paymentProcessor)) {
435 result = {
436 error: true,
437 MissingPaymentProcessor: true
438 };
439 }
440
441 if (!result) {
442 if (app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value !== 'Klarna') {
443 require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').CancelAuthorization();
444 }
445 result = app.getModel('PaymentProcessor').handle(cart.object, app.getForm('billing').object.paymentMethods.selectedPaymentMethodID.value);
446 }
447 return result;
448
449 /**
450 * Gets or creates a billing address and copies it to the billingaddress form. Also sets the customer email address
451 */

```

**Figure 103 Modifications in COBilling.js (cont.)**

### 3.5.2.2. COSummary.js

Go to COSummary.js controller, `submit()` method, and add the following code block:

```

try {

require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.
js').Redirect();

} catch(e) {

 require('dw/system/Logger').getLogger('COSummary.js').error('Klarna
Redirect Error: {0}', e);

}

}

```

before `showConfirmation(placeOrderResult.Order)` (see screen shot below)

```

56
57 /**
58 * This function is called when the "Place Order" action is triggered by the
59 * customer.
60 */
61 function submit() {
62 // Calls the COPlaceOrder controller that does the place order action and any payment authorization.
63 // COPlaceOrder returns a JSON object with an order_created key and a boolean value if the order was created successfully.
64 // If the order creation failed, it returns a JSON object with an error key and a boolean value.
65 var placeOrderResult = app.getController('COPlaceOrder').Start();
66 if (placeOrderResult.error) {
67 start({
68 PlaceOrderError: placeOrderResult.PlaceOrderError
69 });
70 } else if (placeOrderResult.order_created) {
71
72 try {
73 require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').Redirect();
74 } catch(e) {
75 require('dw/system/Logger').getLogger('COSummary.js').error('Klarna Redirect Error: {0}', e);
76 }
77
78 showConfirmation(placeOrderResult.Order);
79 }
80 }

```

Figure 104 Modifications in COSummary.js

### 3.5.2.3. OrderModel.js


Go to OrderModel.js, placeOrder method and add the following code block:

```

if (session.privacy.KlarnaPaymentsFraudStatus === 'PENDING') {
 try {
require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js')
.PendingOrder(order);
 } catch(e) {
 require('dw/system/Logger').getLogger('OrderModel.js').error('Klarna
Payments Pending Order Error: {0}', e);
 }
 return;
}

```

before `var placeOrderStatus = OrderMgr.placeOrder(order);` (see screen shot below)

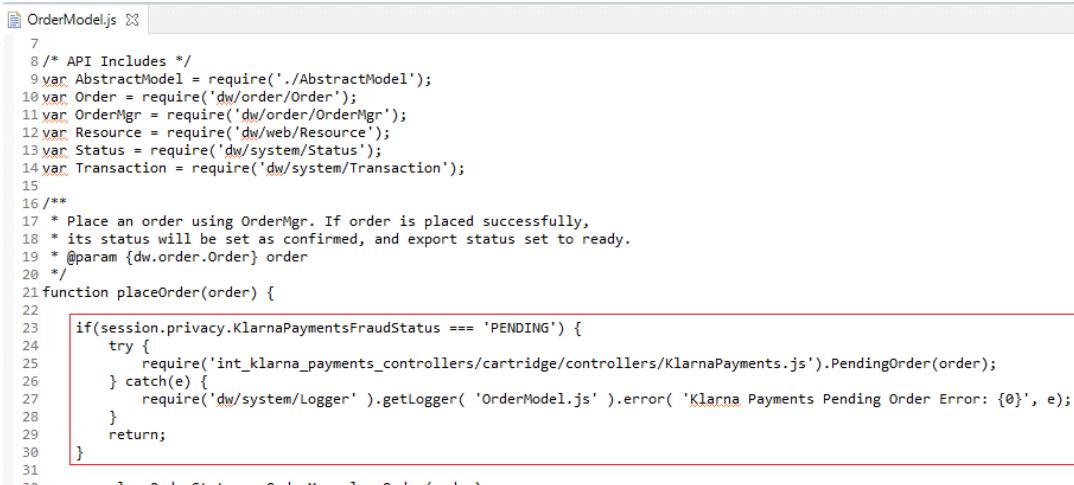

```

OrderModel.js ✘

7
8 /* API Includes */
9 var AbstractModel = require('./AbstractModel');
10 var Order = require('dw/order/Order');
11 var OrderMgr = require('dw/order/OrderMgr');
12 var Resource = require('dw/web/Resource');
13 var Status = require('dw/system>Status');
14 var Transaction = require('dw/system/Transaction');
15
16 /**
17 * Place an order using OrderMgr. If order is placed successfully,
18 * its status will be set as confirmed, and export status set to ready.
19 * @param {dw.order.Order} order
20 */
21 function placeOrder(order) {
22
23 if(session.privacy.KlarnaPaymentsFraudStatus === 'PENDING') {
24 try {
25 require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').PendingOrder(order);
26 } catch(e) {
27 require('dw/system/Logger').getLogger('OrderModel.js').error('Klarna Payments Pending Order Error: {0}', e);
28 }
29 return;
30 }
31
32 var placeOrderStatus = OrderMgr.placeOrder(order);
33 if (placeOrderStatus === Status.ERROR) {
34 OrderMgr.failOrder(order);
35 throw new Error('Failed to place order.');
36 }
37 order.setConfirmationStatus(Order.CONFIRMATION_STATUS_CONFIRMED);
38 order.setExportStatus(Order.EXPORT_STATUS_READY);
39 }

```

**Figure 105 Modifications in OrderModel.js**

In placeOrder method add the following code at the end:

```

if (session.privacy.customer_token) {
 var SubscriptionHelper = require('*/*cartridge/scripts/subscription/subscriptionHelper');
 SubscriptionHelper.updateCustomerSubscriptionData(order);
}

21@function placeOrder(order) {
22
23 if (session.privacy.KlarnaPaymentsFraudStatus === 'PENDING') {
24 try {
25 require('int_klarna_payments_controllers/cartridge/controllers/KlarnaPayments.js').PendingOrder(order);
26 } catch (e) {
27 require('dw/system/Logger').getLogger('OrderModel.js').error('Klarna Payments Pending Order Error: {0}', e);
28 }
29 return;
30 }
31
32 var placeOrderStatus = OrderMgr.placeOrder(order);
33 if (placeOrderStatus === Status.ERROR) {
34 OrderMgr.failOrder(order);
35 throw new Error('Failed to place order.');
36 }
37 order.setConfirmationStatus(Order.CONFIRMATION_STATUS_CONFIRMED);
38 order.setExportStatus(Order.EXPORT_STATUS_READY);
39
40 if (session.privacy.customer_token) {
41 var SubscriptionHelper = require('*/*cartridge/scripts/subscription/subscriptionHelper');
42 SubscriptionHelper.updateCustomerSubscriptionData(order);
43 }
44}
45@/*
46 * Order helper class providing enhanced order functionality.

```

**Figure 106 Modifications in OrderModel.js (cont.)**

### 3.5.2.4. CartModel.js

Add the following code in addProductListItem function:

```

var productListItem = cart.createProductLineItem(productListItems, shipment);
productListItem.setQuantityValue(quantity);
if (productListItem) {

```

```
var isSubscriptionProduct =
productListItem.product.custom.kpIsSubscriptionProduct;

var isStandardProduct =
!empty(productListItem.product.custom.kpIsStandardProduct) ?
productListItem.product.custom.kpIsStandardProduct : true;

if (isSubscriptionProduct && !isStandardProduct) {
 productLineItem.custom.kpSubscription = true;
}
}
```

after shipment is assigned on line 153.

```
151 Transaction.wrap(function () {
152 var shipment = cart.object.defaultShipment;
153 var productLineItem = cart.createProductLineItem(productListItem, shipment);
154 productLineItem.setQuantityValue(quantity);
155 if (productLineItem) {
156 var isSubscriptionProduct = productListItem.product.custom.kpIsSubscriptionProduct;
157 var isStandardProduct = !empty(productListItem.product.custom.kpIsStandardProduct)
158 ? productListItem.product.custom.kpIsStandardProduct : true;
159 if (isSubscriptionProduct && !isStandardProduct) {
160 productLineItem.custom.kpSubscription = true;
161 }
162 }
163
164 cart.calculate();
165 });
166 }
```

**Figure 107 Modifications in CartModel.js**

Add the following code in addProductItem function:

```
var isSubscriptionProduct = product.custom.kpIsSubscriptionProduct;

var isStandardProduct = !empty(product.custom.kpIsStandardProduct) ?
product.custom.kpIsStandardProduct : true;

if (isSubscriptionProduct && !isStandardProduct) {
 productLineItem.custom.kpSubscription = true;
}
}
```

on line 220.

```
193 } else {
194 productLineItem = cart.createProductLineItem(product, productOptionModel, shipment);
195
196 if (quantity) {
197 productLineItem.setQuantityValue(quantity);
198 }
199 }
200
201 var isSubscriptionProduct = product.custom.kpIsSubscriptionProduct;
202 var isStandardProduct = !empty(product.custom.kpIsStandardProduct) ? product.custom.kpIsStandardProduct : true;
203 if (isSubscriptionProduct && !isStandardProduct) {
204 productLineItem.custom.kpSubscription = true;
205 }
206
207 /**
208 * By default, when a bundle is added to cart, all its child products are added too, but if those products are
209 * variants then the code must replace the master products with the selected variants that get passed in the
210 * variants parameter. This logic is implemented in the CartService class. CartService is
211 * responsible for adding the variants to the cart.
```

**Figure 108 Modifications in Cartmodel.js (cont.)**

### 3.5.2.5. *Cart.js*

Add following code before module exports section:

```
function updateSubscriptionAjax() {
```

```

var productId = request.httpParameterMap.pid.stringValue;
var subscription = request.httpParameterMap.subscription.stringValue ===
'true';
var uuid = request.httpParameterMap.uuid.stringValue;
var SubscriptionHelper =
require('*/cartridge/scripts/subscription/subscriptionHelper');

let r = require('~/cartridge/scripts/util/Response');

var cart = app.getModel('Cart').goc();

if (!cart) {
 r.renderJSON({
 status: 'error',
 success: false,
 });
}

var matchingLineItem = cart.getProductLineItemByUUID(uuid);

if (matchingLineItem) {
 Transaction.wrap(function () {
 matchingLineItem.custom.kpSubscription = subscription;
 });
}

if (matchingLineItem) {
 r.renderJSON({
 success: true,
 isSubscriptionBasket:
SubscriptionHelper.isSubscriptionBasket(cart.object)
 });
} else {
 r.renderJSON({
 statusCode: 500,
 success: false,
 errorMessage: Resource.msg('error.cannot.update.product.subscription',
'subscription', null)
 });
}

```

```
}
```

Add the following code before module exports section:

```
function updateSubscriptionDetailsAjax() {
 var SubscriptionHelper =
require('*cartridge/scripts/subscription/subscriptionHelper');

 var selectedValue = request.httpParameterMap.selectedValue.stringValue;
 var subscriptionField =
request.httpParameterMap.subscriptionField.stringValue;

 let r = require('~/cartridge/scripts/util/Response');

 var cart = app.getModel('Cart').goc();

 if (!cart) {
 r.renderJSON({
 status: 'error',
 success: false,
 });
 }

 var updated = SubscriptionHelper.updateSubscriptionAttribute(cart.object,
subscriptionField, selectedValue);

 if (updated) {
 r.renderJSON({
 success: true
 });
 } else {
 r.renderJSON({
 status: 'error',
 success: false,
 });
 }
}
```

Add following code at the end of exposed methods section:

```
/** update subscription status
```

```

* @see {@link module:controllers/Cart~updateSubscriptionAjax} */
exports.UpdateSubscription = guard.ensure(['https'], updateSubscriptionAjax);
/** update subscription details
 * @see {@link module:controllers/Cart~updateSubscriptionDetailsAjax} */
exports.UpdateSubscriptionDetails = guard.ensure(['https'],
updateSubscriptionDetailsAjax);

538 * @see {@link module:controllers/Cart~addBonusProductJson} */
539 exports.AddBonusProduct = guard.ensure(['post'], addBonusProductJson);
540 /** update subscription status
541 * @see {@link module:controllers/Cart~updateSubscriptionAjax} */
542 exports.UpdateSubscription = guard.ensure(['https'], updateSubscriptionAjax);
543 /** update subscription details
544 * @see {@link module:controllers/Cart~updateSubscriptionDetailsAjax} */
545 exports.UpdateSubscriptionDetails = guard.ensure(['https'], updateSubscriptionDetailsAjax);
546

```

Figure 109 Modifications in Cart.js

### 3.5.2.6. COShipping.js

Add following code after cart calculation on line 100:

```

var isSubscriptionBasket =
require('*/cartridge/scripts/subscription/subscriptionHelper').isSubscriptionBasket(cart.object);

if (isSubscriptionBasket && !customer.authenticated) {
 session.privacy.guest_subscription_error = true;
 response.redirect(URLUtils_https('Cart-Show'));
 return;
}

100 var isSubscriptionBasket = require('*/cartridge/scripts/subscription/subscriptionHelper').isSubscriptionBasket(cart.object);
101 if (isSubscriptionBasket && !customer.authenticated) {
102 session.privacy.guest_subscription_error = true;
103 response.redirect(URLUtils_https('Cart-Show'));
104 return;
105 }
106 // Go to billing step, if we have no product line items, but only gift certificates in the basket, shipping is not required.
107 if (cart.getProductLineItems().size() === 0) {
108 app.getController('COBilling').Start();
109 } else {
110

```

Figure 110 COShipping.js modifications

Update prepareShipments function with param in attributes and pass it to cart model:

```

function prepareShipments(param) {
 var cart, homeDeliveries;
 cart = app.getModel('Cart').get(param);
 32 */
 33 function prepareShipments(param) { Rumyana Topalska,
 34 var cart, homeDeliveries;
 35 cart = app.getModel('Cart').get(param);
 36
 37 homeDeliveries = Transaction.wrap(function () {
 38 var homeDeliveries = false;
 39
 40 cart.updateGiftCertificateShipments();

```

Figure 111 COShipping.js modifications (cont.)

### 3.5.2.7. Order.js

Add subscription function at the end of controller:

```

/*
 * Renders a page with all customer's subscriptions
 */

function subscriptions() {
 var subscriptions = [];
 var profile = customer.profile;
 if (profile.custom.kpSubscriptions) {
 subscriptions = JSON.parse(profile.custom.kpSubscriptions);
 }
 app.getView({
 subscriptions: subscriptions
 }).render('klarnapayments/subscription/account/subscriptionHistory');
}

```

```

101 function subscriptions() {
102 var subscriptions = [];
103 var profile = customer.profile;
104 if (profile.custom.kpSubscriptions) {
105 subscriptions = JSON.parse(profile.custom.kpSubscriptions);
106 }
107 app.getView({
108 subscriptions: subscriptions
109 }).render('klarnapayments/subscription/account/subscriptionHistory');
110 }
111
112 /**
113 * Module exports
114 */
115
116 /**
117 * Web exposed methods
118 */
119 /** Renders a page with the order history of the current logged in customer.
120 * @see module:controllers/Order~history */
121 exports.History = guard.ensure(['get', 'https', 'loggedIn'], history);
122 /** Renders the order detail page

```

Figure 112 Order.js modifications

Add module export for the same:

```

/** Renders a page with the subscriptions history of the current logged in
customer.

 * @see module:controllers/Order~subscriptions */

exports.Subscriptions = guard.ensure(['get', 'https', 'loggedIn'], subscriptions);

119 /** Renders a page with the order history of the current logged in customer.
120 * @see module:controllers/Order~history */
121 exports.History = guard.ensure(['get', 'https', 'loggedIn'], history);
122 /** Renders the order detail page.
123 * @see module:controllers/Order~orders */
124 exports.Orders = guard.ensure(['post', 'https', 'loggedIn'], orders);
125 /** Renders a page with details of a single order.
126 * @see module:controllers/Order~track */
127 exports.Track = guard.ensure(['get', 'https'], track);
128 /** Renders a page with the subscriptions history of the current logged in customer.
129 * @see module:controllers/Order~subscriptions */
130 exports.Subscriptions = guard.ensure(['get', 'https', 'loggedIn'], subscriptions);
131

```

Figure 113 Order.js modifications (cont.)

### 3.5.2.8. COCustomer.js

Add the following code on line 38:

```

var SubscriptionHelper =
require('*cartridge/scripts/subscription/subscriptionHelper');

var subValidation =
SubscriptionHelper.validateCartProducts(Cart.goc().object);

if (subValidation && subValidation.error) {
 response.redirect(URLUtils_https('Cart-Show'));
 return;
}

```

```

SubscriptionHelper.updateCartSubscriptionDetails(Cart.goc().object);

after removeAllPayments() call

34 Transaction.wrap(function () {
35 Cart.goc().removeAllPaymentInstruments();
36 });
37
38 var SubscriptionHelper = require('*cartridge/scripts/subscription/subscriptionHelper');
39
40 var subValidation = SubscriptionHelper.validateCartProducts(Cart.goc().object);
41 if (subValidation && subValidation.error) {
42 response.redirect(URLUtils_https('Cart-Show'));
43 return;
44 }
45
46 SubscriptionHelper.updateCartSubscriptionDetails(Cart.goc().object);
47
48 // Direct to first checkout step if already authenticated.
49 if (customer.authenticated) {
50 response.redirect(URLUtils_https('COShipping-Start'));
51 return;
52 } else {
53 loginForm = app.getForm('Login');
54 }

```

**Figure 114 Modifications in COCustomer.js**

### 3.5.2.9. COPlaceOrder.js

Update start() function with param in attributes:

```

function start(param) {
 var cart = Cart.get(param);
 if (!cart) {
 app.getController('Cart').Show();
 return {};
 }
 var COShipping = app.getController('COShipping');
 // Clean shipments.
 COShipping.PrepareShipments();
}

```

```

86 'function start(param) {
87 var cart = Cart.get(param);
88
89 if (!cart) {
90 app.getController('Cart').Show();
91 return {};
92 }
93
94 var COShipping = app.getController('COShipping');
95
96 // Clean shipments.
97 COShipping.PrepareShipments();
98
99 // Make sure there is a valid shipping address, accounting for gift certificates that do not have one.
100 if (cart.getProductLineItems().size() > 0 && cart.getDefaultShipment().getShippingAddress() === null) {
101 COShipping.Start();
102 return {};

```

Figure 115 COPlaceOrder.js modifications

### 3.6. External Interfaces

All requests are done through Klarna's REST API and encrypted using SHA-256 with the shared secret provided by Klarna. Only HTTPS is allowed. JSON is used across all communications.

The full reference guide, along with the resource structure for requests & responses, can be found in the developer portal - <https://docs.klarna.com/klarna-payments/api/>

## 4. Testing

Klarna has a set of testing credentials and triggers that can be used.

Please, refer to the following URL: <https://docs.klarna.com/resources/test-environment/>

## 5. Operations, Maintenance

### 5.1. Data Storage

#### 5.1.1. System Object Extensions

##### 5.1.1.1. Basket

| Parameter Name                | Attribute ID            | Description                                                                                                               |
|-------------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Klarna Session ID             | kpSessionId             | The Klarna session ID returned after “Create Session” API endpoint is called.<br><i>(Applicable since version 21.2.0)</i> |
| Klarna Client Token           | kpClientToken           | Client token returned by “Create Session” API endpoint and used to initialize the JS SDK.                                 |
| Klarna Subscription Frequency | kpSubscriptionFrequency | Subscription frequency values (day, month, etc.)                                                                          |
| Klarna Subscription Period    | kpSubscriptionPeriod    | Predefined subscription period in numbers                                                                                 |
| Klarna Is Express Checkout    | kplIsExpressCheckout    | Determines if the basket is an express checkout                                                                           |

Table 1 Basket Attributes

#### 5.1.1.2. Order

| Parameter Name                | Attribute ID            | Description                                                                                                                          |
|-------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Klarna Payments Order ID      | kpOrderID               | The Klarna payments Order ID for Klarna payment method selected by customer                                                          |
| VCN Brand                     | kpVCNBrand              | Klarna Payments virtual card scheme name                                                                                             |
| VCN Holder                    | kpVCNHolder             | Klarna Payments virtual card holder name                                                                                             |
| VCN Card ID                   | kpVCNCARDID             | Klarna Payments Virtual Card - Card ID                                                                                               |
| VCN PCI Data                  | kpVCNPCLData            | Klarna Payments Virtual Card PCI Data in encrypted format                                                                            |
| VCN Initialization Vector     | kpVCNIV                 | Klarna Payments Virtual Card Initialization Vector                                                                                   |
| VCN AES Key                   | kpVCNAESKey             | Klarna Payments Virtual Card AES Key                                                                                                 |
| Is VCN Used                   | kplIsVCN                | True if virtual card is enabled & used for payment of the order, otherwise false                                                     |
| Klarna Session ID             | kpSessionId             | The Klarna session ID returned after “Create Session” API endpoint is called<br><b>(Applicable since version 21.2.0)</b>             |
| Klarna Client Token           | kpClientToken           | Client token returned by “Create Session” API endpoint and used to initialize the JS SDK<br><b>(Applicable since version 21.2.0)</b> |
| Klarna Subscription Frequency | kpSubscriptionFrequency | Subscription frequency values (day, month, etc.)                                                                                     |
| Klarna Subscription Period    | kpSubscriptionPeriod    | Predefined subscription period in numbers                                                                                            |

| Parameter Name             | Attribute ID         | Description                                                                                                                                                                                                                     |
|----------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Klarna Authorization Token | kpAuthorizationToken | <p>This attribute stores the Klarna authorization token, which is a string value used to authenticate and finalize the order creation process with Klarna's payment system.</p> <p><b>(Applicable since version 23.2.0)</b></p> |
| Klarna Redirect URL        | kpRedirectURL        | <p>This attribute holds the URL to which the customer is redirected after the payment authorization is successfully completed by Klarna's system.</p> <p><b>(Applicable since version 23.2.0)</b></p>                           |

Table 2 Order Attributes

#### *5.1.1.3. Order Payment Instrument*

| Parameter Name               | Attribute ID              | Description                     |
|------------------------------|---------------------------|---------------------------------|
| Klarna Payment Category ID   | klarnaPaymentCategoryID   | ID of Klarna payment category   |
| Klarna Payment Category Name | klarnaPaymentCategoryName | Name of Klarna payment category |

**Table 3 Order Payment Instrument Attributes**

#### *5.1.1.4. Payment Transaction*

| Parameter Name | Attribute ID  | Description                        |
|----------------|---------------|------------------------------------|
| Fraud Status   | kpFraudStatus | Klarna Payments order fraud status |

**Table 4 Payment Transaction Attributes**

#### *5.1.1.5. Site Preferences*

The site custom preferences have been extended with a new group called “*Klarna\_Payments*”. The table below describes the preferences within that group:

| Parameter Name                 | Attribute ID            | Description                                                                                                                                                                                                      |
|--------------------------------|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Auto-capture                   | kpAutoCapture           | When enabled “Yes”, a full order capture will be attempted automatically. The standalone order management API capture request will include total order amount value for “captured_amount”. Default value is “No” |
| Klarna Payments Service Name   | kpServiceName           | The service name used for the current site                                                                                                                                                                       |
| Send product_url and image_url | sendProductAndImageURLs | If set to true, product_url and image_url fields will be included in the Klarna session and order API calls. This enhances shopper experience post purchase.                                                     |

| Parameter Name                      | Attribute ID                | Description                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                     |                             | Default value is “Yes”                                                                                                                                                                                                                                                                                                         |
| Merchant Reference 2 Mapping        | merchant_reference2_mapping | <p>The field from SCC order (basket) object that is mapped to merchant_reference2 field from klarna API request.</p> <p>Has to be one of the class attributes of SCC LineItemCtnr.</p> <p>Note that for complex data structures result may vary.</p> <p>Note: Merchant Reference 1 value is always set to the SCC order ID</p> |
| Border Color Preference             | kpColorBorder               | CSS (hex value) color set for Border in Klarna Payments iFrame                                                                                                                                                                                                                                                                 |
| Border Selected Color Preference    | kpColorBorderSelected       | CSS (hex value) color set for selected element Border in Klarna Payments iFrame                                                                                                                                                                                                                                                |
| Button Color Preference             | kpColorButton               | CSS (hex value) color set for Button in Klarna Payments iFrame                                                                                                                                                                                                                                                                 |
| Button Text Color Preference        | kpColorButtonText           | CSS (hex value) color set for Button text in Klarna Payments iFrame                                                                                                                                                                                                                                                            |
| Checkbox Color Preference           | kpColorCheckbox             | CSS (hex value) color set for Checkbox in Klarna Payments iFrame                                                                                                                                                                                                                                                               |
| Checkbox Checkmark Color Preference | kpColorCheckboxCheckmark    | CSS (hex value) color set for checkbox checked(selected) in Klarna Payments iFrame                                                                                                                                                                                                                                             |
| Details Color Preference            | kpColorDetails              | CSS (hex value) color set for details in Klarna Payments iFrame                                                                                                                                                                                                                                                                |
| Header Color Preference             | kpColorHeader               | CSS (hex value) color set for Header in Klarna Payments iFrame                                                                                                                                                                                                                                                                 |
| Rate limit By Operation             | kpRateLimitByOperation      | Select “Rate Limit By Operation” to Yes. If it is                                                                                                                                                                                                                                                                              |

| Parameter Name                                 | Attribute ID                  | Description                                                                                                                                                                                                                                     |
|------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                |                               | selected to NO, the default service profile will be utilized. The API rate limit for the Klarna service will be the standard values as mentioned on docs.klarna.com. The default service id is klarna.http.defaultendpoint.                     |
| Klarna Payment Create New Session When Expires | kpCreateNewSessionWhenExpires | If set to Yes, then a new Klarna session will be created if Klarna session expires before SFCC basket expires                                                                                                                                   |
| Link Color Preference                          | kpColorLink                   | CSS (hex value) color set for link in Klarna Payments iFrame                                                                                                                                                                                    |
| Text Color Preference                          | kpColorText                   | CSS (hex value) color set for text in Klarna Payments iFrame                                                                                                                                                                                    |
| Secondary Text Color Preference                | kpColorTextSecondary          | CSS (hex value) color set for secondary text in Klarna Payments iFrame                                                                                                                                                                          |
| Border Radius Preference                       | kpRadiusBorder                | Value (in pixels) of the border radius to be used in Klarna Payments iFrame                                                                                                                                                                     |
| Attachments                                    | kpAttachments                 | Toggle (Yes/No) for the inclusion of attachments when creating an order. Specific to inclusion of EMD (customer_account_info, other_delivery_address) when applicable.<br><br>Default is "No".                                                  |
| Not available message on billing page          | kpNotAvailableMessage         | The Klarna Payment not available message on billing page. JSON string holding country code and corresponding message string.<br><br>For example:<br><br>{<br>"GB": "Klarna Payment not available",<br>"default": "Klarna Payment not available" |

| Parameter Name               | Attribute ID      | Description                                                                                                                                                                                                                                                                  |
|------------------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                              |                   | <p>}</p> <p><b>Note:</b> This is deprecated and will be removed in next releases!</p>                                                                                                                                                                                        |
| Virtual Card Number Enabled  | kpVCEnabled       | <p>If this option is set to "Yes", Klarna settlement request will generate a Virtual Card Number for every Klarna order.</p> <p>Note: the option will only work if VCN private/public keys are configured properly as below and public key shared in advance with Klarna</p> |
| VCN Public Key ID            | kpVCNkeyId        | UUIDv4 value corresponding to the key pair. Shared with Klarna respectively for Production & Playground (test) env.                                                                                                                                                          |
| VCN Private Key              | vcnPrivateKey     | <p>SSL private key used only to decode Virtual Card information (used with kpVCEnabled).</p> <p>Refer to section <b>9.3 Decrypt VCN Card Details</b></p>                                                                                                                     |
| VCN Public Key               | vcnPublicKey      | <p>SSL public key used with Virtual Card integration (used with kpVCEnabled).</p> <p>Shared with Klarna and stored here for reference.</p>                                                                                                                                   |
| VCN Settlement Retry Enabled | kpVCNRetryEnabled | <p>If set to "Yes", SFCC will retry the VCN settlement once again in case of service error.</p> <p>Default is "No"</p>                                                                                                                                                       |
| Promotion Price Taxation     | kpPromoTaxation   | Only use "Based on Adjusted Price" value if you have enabled the corresponding value in "Merchant Tools >                                                                                                                                                                    |

| Parameter Name                     | Attribute ID                | Description                                                                                                                                                                                                                                                                                  |
|------------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                    |                             | Site Preferences > Promotions > Discount Taxation" and use gross taxation.<br><br>Default: Based on Price                                                                                                                                                                                    |
| Hide Payment Methods on Deny       | kpRejectedMethodDisplay     | If set to value other than "No", the Klarna payment method options on the checkout will be greyed out or not displayed to customer in the current view when Klarna authorization request is rejected in the response (.i.e hard reject - "show_form" and "approved" values are both "false") |
| Alternative Klarna Payment Flow    | kpUseAlternativePaymentFlow | If set to "Yes", Klarna Authorization and Order creation steps will be triggered on Checkout Review page when customer clicks CTA/Place Order Button.<br><br>Default: No                                                                                                                     |
| Enable OMS                         | kpOMSEnabled                | If set to "Yes", it updates the order information ingested in SFOMS (SalesForce Order Management System) in the format that Klarna expects. It is required when there is an integration between SFCC and SFOMS.<br><br>Default: No                                                           |
| Klarna Payments Additional Logging | kpAdditionalLogging         | If set to "Yes", it writes additional logging info to get more order details when issue occurs.                                                                                                                                                                                              |

| Parameter Name                                   | Attribute ID                | Description                                                                            |
|--------------------------------------------------|-----------------------------|----------------------------------------------------------------------------------------|
|                                                  |                             | Default: No                                                                            |
| Agent User Name                                  | kpAgentUserName             | User Agent Name for orders on behalf                                                   |
| Agent User Password                              | kpAgentUserPassword         | User Agent Password for orders on behalf                                               |
| Enable Retry for Recurring Orders                | kpEnableRecurringOrderRetry | Enable retry for failed orders                                                         |
| Number Of Retries                                | kpRecurringNumberOfRetry    | Recurring number of retries                                                            |
| Recurring Retry Frequency                        | kpRecurringRetryFrequency   | Retry frequency for recurring orders                                                   |
| Klarna Create Order Token                        | kpCreateOrderToken          | Token used to verify the caller for recurring orders                                   |
| Use Bank Transfer callback                       | kpBankTransferCallback      | If set to "Yes", SFCC will wait for Klarna callback to place an order. Default is "No" |
| Klarna Express Checkout (Klarna_ExpressCheckout) |                             |                                                                                        |
| Klarna Express Checkout Enabled                  | kpECEnabled                 | Boolean flag to enable/disable Klarna Express Checkout                                 |
| Klarna Express Checkout Collect Shipping Address | kpECCollectShippingAddress  | If set to "Yes" Klarna will send the customer address in authorize response            |
| Klarna Express Checkout Button Theme             | kpECButtonTheme             | The theme of the button. Options include default, light & dark                         |
| Klarna Express Checkout Button Shape             | kpECButtonShape             | The shape of the button. Options include default, rect & pill                          |
| Payment Category Content                         | kpECPaymentCategoryContent  | Klarna default express payment method content                                          |

**Table 5 Site Preferences**

*5.1.1.6. Product*

| Parameter Name                 | Attribute ID             | Description                                                                                  |
|--------------------------------|--------------------------|----------------------------------------------------------------------------------------------|
| Is Klarna Standard Product     | kplIsStandardProduct     | Boolean attribute to define if the product is standard.<br><i>(Applicable since version)</i> |
| Is Klarna Subscription Product | kplIsSubscriptionProduct | Boolean attribute to define if the product is eligible for subscription.                     |
| Klarna Trial Days Usage        | kpTrialDaysUsage         | Numeric value used for free trial definition.                                                |

*5.1.1.7. ProductLineItem*

| Parameter Name                       | Attribute ID            | Description                                                                            |
|--------------------------------------|-------------------------|----------------------------------------------------------------------------------------|
| Is Selected for Subscription product | kpSubscription          | Boolean attribute to define if the product is selected for subscription in the basket. |
| Enriched data for product line item. | klarna_oms_lineItemJSON | String data for product line item.                                                     |

*5.1.1.8. Profile*

| Parameter Name       | Attribute ID    | Description                                              |
|----------------------|-----------------|----------------------------------------------------------|
| Klarna Subscriptions | kpSubscriptions | Text attribute to store customer subscriptions to Klarna |

*5.1.2. Custom Objects*

*5.1.2.1. Klarna Express Button*

The KEB button can be configured and adapted to the needs of your storefront. Steps to enable KEB button:

- To enable the button, your Klarna Merchant ID (MID) and domains must be white-listed. Please reach out to your Klarna delivery manager for support with this activity prior to testing and production go-live (as the domain names white-listed defer). Please ensure that the MID matches that which is configured in the BM service credentials for your storefront.
- To configure the KEB settings for a given site, you must visit "***Merchant Tools – Custom Object Editor***" and search for **KlarnaCountries** custom object.
- Choose the respective country key (e.g.: "US") and provide the below details:
  - o Express Button Merchant ID: *Allow-listed Merchant ID*
  - o Express Button environment: *Klarna environment – Production/Playground*
  - o Express Button Cart Enabled: *Check box to display on cart page*
  - o MiniCart Express Button Enabled: *Check box to display on minicart page*
  - o MiniCart Express Button Theme/Shape: *theme/shape to display on minicart page*
  - o Express Button Library URL: [Available here](#)
  - o Express Button Category: *The Klarna category to be pre-selected on Checkout, e.g., "pay\_over\_time"*
- Please review **Fig 69** for reference.

More information to customize the button can be found [here](#).

---

**Note:** Klarna Express Button is currently available in these markets with more to follow!

---

The screenshot displays the Klarna Express Button configuration interface within the SiteGenesis platform. At the top, the navigation bar includes links for Merchant Tools, Administration, Storefront, and Toolkit. The main configuration area contains several sections:

- Cart Placement Data Key:** credit-promotion-badge
- PDP Placement Tag Enabled:**
- PDP Placement Data Key:** credit-promotion-badge
- Header Placement Tag Enabled:**
- Header Placement Data Key:** top-strip-promotion-auto-size
- Footer Placement Tag Enabled:**
- Footer Placement Data Key:** footer-promotion-auto-size
- Info Page Placement Tag Enabled:**
- Info Page Placement Data Key:** info-page
- Data Inline Enabled on PDP/Cart placement (Canada only):**
- URL to On-Site Messaging Library URL:** https://na-library.playground.klarnaservices.com/lib.js
- Express Button** section:
  - Express Button Merchant ID:** PNXXXXX
  - Express Button Environment:** playground (Playground)
  - Express Button Theme:** light (Light)
  - Express Button Shape:** - None -
  - Express Button Cart Enabled:**
  - Express Button Library URL:** https://x.klarnacdn.net/express-button/v1/lib.js
  - Express Button Category:** pay\_over\_time
- MiniCart Express Button** section:
  - MiniCart Express Button Enabled:**
  - MiniCart Express Button Theme:** light (Light)
  - Minicart Express Button Shape:** - None -

At the bottom left, there is a link labeled "Back to List".

Figure 116 Klarna Express Button completed configuration

Shoppers experience on the storefront cart is as below:

1. Lands on cart page where KEB is displayed
2. Clicks on KEB button
3. Shopper prompted to share their Klarna registered credentials to complete authentication
4. Re-direct to checkout with Klarna Payment Method pre-selected

#### 5.1.2.2. KlarnaCountries

The respective object is dynamically selected based on the request locale country, e.g., SFCC site with locale “**de\_DE**” or “**en\_DE**” will use the “**DE**” custom object. In cases when the request locale country can’t be dynamically resolved (i.e. with “default” SFCC locale) – attribute “**klarnaLocale**” can be utilized to pass the proper locale to Klarna. For all other cases, this field can be left blank and will not be taken into consideration.

Even if you have locales that are not supported by Klarna Payments, we recommend creating a corresponding entry in the custom object for that locale. Thus, on the billing page of the unsupported locale you will have the Klarna Payments widget showing an appropriate message.

The custom objects store data such as Klarna default locale, service credential IDs and Klarna Payments placement data keys to ensure that Klarna Payments integration is correctly configured.

*Note: The same custom object is used by Klarna Checkout cartridge integration!*

| Administration > Site Development > Custom Object Types > KlarnaCountries - Attribute Definitions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                    |                            |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|----------------------------|--|-----------------------|--|--|------------------------------|--|--|-------------|-------|--|------------|----|------|--------------------------|----------------------------------------------------------|------|--------------------------|-------------------------------------------------------------|--------------|--------------------------|------------------------------------------------------------------|---------------|--------------------------|------------------------------------------------------------------|-----------------------|--------------------------|------------------------------------------------------------------|---------------|--------------------------|------------------------------------------------------------------|---------------|--------------------------|--------------------------------------------------------------------|----------------------------|--------------------------|------------------------------------------------------------------|-----------------------|--------------------------|------------------------------------------------------------------|-------------|--------------------------|-------------------------------------------------------------------|---------------------------|--------------------------|-----------------------------------------------------------------|----------------------|--------------------------|------------------------------------------------------------|-----------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    | General                    |  | Attribute Definitions |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    |                            |  | Attribute Grouping    |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <b>Object Type 'KlarnaCountries'</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                    |                            |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| This page lists the attribute definitions of your object type. Use the search to find attribute definitions by ID and name.<br>Click New to create new attribute definitions. Click Delete to delete existing attribute definitions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                    |                            |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <table border="1"> <thead> <tr> <th colspan="3">Search Attribute Definitions</th> </tr> <tr> <th>ID or Name:</th> <th>Find:</th> <th></th> </tr> </thead> <tbody> <tr> <td>Select All</td> <td>ID</td> <td>Name</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">UUID</a></td> <td>UUID</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">country</a></td> <td>Country Code</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">creationDate</a></td> <td>Creation Date</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">credentialID</a></td> <td>Service Credential ID</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">klarnaLocale</a></td> <td>Klarna Locale</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">lastModified</a></td> <td>Last Modified</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">osmCartEnabled</a></td> <td>Cart Placement Tag Enabled</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">osmCartTagId</a></td> <td>Cart Placement Tag ID</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">osmLibraryId</a></td> <td>Library URL</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">osmPDPEnabled</a></td> <td>PDP Placement Tag Enabled</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">osmPDPTagId</a></td> <td>PDP Placement Tag ID</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> <a href="#">osmUCI</a></td> <td>On-site messaging UCI</td> </tr> </tbody> </table> |                                                                    |                            |  |                       |  |  | Search Attribute Definitions |  |  | ID or Name: | Find: |  | Select All | ID | Name | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">UUID</a> | UUID | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">country</a> | Country Code | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">creationDate</a> | Creation Date | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">credentialID</a> | Service Credential ID | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">klarnaLocale</a> | Klarna Locale | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">lastModified</a> | Last Modified | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">osmCartEnabled</a> | Cart Placement Tag Enabled | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">osmCartTagId</a> | Cart Placement Tag ID | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">osmLibraryId</a> | Library URL | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">osmPDPEnabled</a> | PDP Placement Tag Enabled | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">osmPDPTagId</a> | PDP Placement Tag ID | <input type="checkbox"/> | <input checked="" type="checkbox"/> <a href="#">osmUCI</a> | On-site messaging UCI |
| Search Attribute Definitions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                    |                            |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| ID or Name:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Find:                                                              |                            |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| Select All                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | ID                                                                 | Name                       |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">UUID</a>           | UUID                       |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">country</a>        | Country Code               |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">creationDate</a>   | Creation Date              |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">credentialID</a>   | Service Credential ID      |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">klarnaLocale</a>   | Klarna Locale              |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">lastModified</a>   | Last Modified              |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">osmCartEnabled</a> | Cart Placement Tag Enabled |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">osmCartTagId</a>   | Cart Placement Tag ID      |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">osmLibraryId</a>   | Library URL                |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">osmPDPEnabled</a>  | PDP Placement Tag Enabled  |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">osmPDPTagId</a>    | PDP Placement Tag ID       |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> <a href="#">osmUCI</a>         | On-site messaging UCI      |  |                       |  |  |                              |  |  |             |       |  |            |    |      |                          |                                                          |      |                          |                                                             |              |                          |                                                                  |               |                          |                                                                  |                       |                          |                                                                  |               |                          |                                                                  |               |                          |                                                                    |                            |                          |                                                                  |                       |                          |                                                                  |             |                          |                                                                   |                           |                          |                                                                 |                      |                          |                                                            |                       |

**Figure 117 KlarnaCountries Attributes**

The table below describes attributes of the **KlarnaCountries** custom object:

| Attribute Name                        | Attribute ID   | Description                                                                                           |
|---------------------------------------|----------------|-------------------------------------------------------------------------------------------------------|
| Country Code                          | country        | Two-letter country code                                                                               |
| On-site Messaging Data Default Locale | klarnaLocale   | Fallback, if the request locale can't be dynamically resolved, i.e., when using "default" SFCC locale |
| Service Credential ID                 | credentialID   | The ID of service credentials for this locale.                                                        |
| On-site messaging Data Client ID      | osmUCI         | The Klarna On-site Messaging "data-client-id" applicable for a given country                          |
| Cart Placement Tag Enabled            | osmCartEnabled | To enable Cart Placement for a given locale.                                                          |
| Cart Placement Tag ID                 | osmCartTagId   | The Klarna On-site Messaging "data-key" of placement applicable for Cart Page for a given locale.     |

| Attribute Name                                          | Attribute ID           | Description                                                                                                  |
|---------------------------------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------|
| Cart Placement Theme                                    | osmCartTheme           | The theme for cart placement tag. It could be default or dark.                                               |
| Cart Placement Custom Styling (#osm-cart-placement)     | osmCartCustomStyling   | Custom styling for cart placement. The css should be wrapped in <style>...customCss...</style> element.      |
| PDP Placement Tag Enabled                               | osmPDPEnabled          | To enable PDP Placement for a given locale.                                                                  |
| PDP Placement Tag ID                                    | osmPDPTagId            | The Klarna On-site Messaging “data-key” of placement applicable for Product Display page for a given locale. |
| PDP Placement Theme                                     | osmPDPTheme            | The theme for pdp placement tag. It could be default or dark.                                                |
| PDP Placement Custom Styling (#osm-pdp-placement)       | osmPDPCustomStyling    | Custom styling for pdp placement. The css should be wrapped in <style>...customCss...</style> element.       |
| Header Placement Tag Enabled                            | osmHeaderEnabled       | To enable Klarna Header Placement in a given storefront                                                      |
| Header Placement Data Key                               | osmHeaderTagId         | The Klarna On-site Messaging “data-key” of placement applicable for the Header                               |
| Header Placement Theme                                  | osmHeaderTheme         | The theme for header placement tag. It could be default or dark.                                             |
| Header Placement Custom Styling (#osm-header-placement) | osmHeaderCustomStyling | Custom styling for header placement. The css should be wrapped in <style>...customCss...</style> element.    |
| Footer Placement Tag Enabled                            | osmFooterEnabled       | To enable Klarna footer Placement in a given storefront                                                      |
| Footer Placement Data Key                               | osmFooterTagId         | The Klarna On-site Messaging “data-key” of placement applicable for the footer                               |
| Footer Placement Theme                                  | osmFooterTheme         | The theme for footer placement tag. It could be default or dark.                                             |
| Footer Placement Custom Styling (#osm-footer-placement) | osmFooterCustomStyling | Custom styling for footer placement. The css should be wrapped in <style>...customCss...</style> element.    |
| Info Page Placement Tag Enabled                         | osmInfoPageEnabled     | To enable Klarna Info Page Placement in a given storefront                                                   |
| Info Page Placement Data Key                            | osmInfoPageTagId       | The Klarna On-site Messaging “data-key” of placement applicable for the Info Page                            |

| Attribute Name                                                | Attribute ID             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Info Page Placement Theme                                     | osmInfoPageTheme         | The theme for info page placement tag. It could be default or dark.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Info Page Placement Custom Styling (#osm-info-page-placement) | osmInfoPageCustomStyling | Custom styling for info page placement. The css should be wrapped in <style>...customCss...</style> element.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Data Inline Enabled on PDP/Cart placement (Canada only)       | osmDataInlineEnabled     | Enable this when using PayBright payment method in Canada                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| URL to On-Site Messaging Library URL                          | osmLibraryUrl            | <p>URL for On-Site Messaging library, applicable for testing or production must be saved.</p> <p>Please use only Klarna production URL in live storefront. Verify test environment URL which includes "playground" in URL For production or live environment, ensure URL includes "production". E.g: Old library Test URL&gt;</p> <p><a href="https://na-library.playground.klarnaservices.com/lib.js">https://na-library.playground.klarnaservices.com/lib.js</a></p> <p>, e.g: Live URL&gt;<a href="https://na-library.production.klarnaservices.com/lib.js">https://na-library.production.klarnaservices.com/lib.js</a></p> <p>New library - <a href="https://js.klarna.com/web-sdk/v1/klarna.js">https://js.klarna.com/web-sdk/v1/klarna.js</a></p> |
| On-Site Messaging Environment                                 | osmEnvironment           | Environment on which the OSM is used. It could be playground or production.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Express Button Environment                                    | kebEnvironment           | The express button environment. Default is playground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Express Button Merchant ID                                    | kebMerchantID            | The merchant ID used to display the button                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Express Button Library URL                                    | kebLibraryUrl            | URL of the express button library                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Express Button Cart Enabled                                   | kebCartEnabled           | To enable the Klarna Express Button on cart page                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Express Button Theme                                          | kebTheme                 | The theme of the button. Options include default, light & dark                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Express Button Category                                       | kebCategory              | The Klarna category to be pre-selected on Checkout Page, e.g., "pay_over_time"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Klarna Express Checkout Client Key                            | expressCheckoutClientKey | The Klarna Express client key used for express checkout                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**Table 6 KlarnaCountries Attributes**

---

**Note:** The data-client-id and data-key values used in the OSM placements are available in the Klarna Merchant Portal (Europe/US (CA included)/Oceania) within the On-site Messaging App. When selecting the data-key values, ensure that the filter is set to the right country and language.

---

### 5.1.3. Session Attributes & Cookies

The following session custom attributes are saved in “**session.privacy**” storage and accessible in checkout. The attributes are retained for the session lifetime & cleared when the customer logs out of their profile.

| Attribute                                                                                     | Description                                                                                          |
|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| KlarnaLocale                                                                                  | The Klarna locale in use                                                                             |
| KlarnaPaymentsSessionID<br><b>(Not applicable since version 21.2.0)</b>                       | The Klarna session ID returned after “Create Session” API endpoint is called                         |
| KlarnaPaymentsClientToken<br><b>(Not included as session attributes since version 21.2.0)</b> | Client token returned by “Create Session” API endpoint and used to initialize the JS SDK             |
| KlarnaPaymentMethods                                                                          | The available payment method categories for the respective Klarna session; Saved in JSON format      |
| SelectedKlarnaPaymentMethod                                                                   | The selected payment method on checkout (e.g., “pay_later”)                                          |
| KlarnaPaymentsAuthorizationToken                                                              | The authorization token returned by JS SDK “Authorize” call                                          |
| KlarnaPaymentsFinalizeRequired                                                                | Whether finalization is required for the payment method; Returned by JS SDK “Authorize” call         |
| KlarnaExpressCategory                                                                         | The KEB payment category; Currently applicable for US and defaults to “pay_over_time”                |
| KlarnaPaymentsOrderID                                                                         | The Klarna order ID returned by the “Create Order” API call                                          |
| KlarnaPaymentsRedirectURL                                                                     | The URL to redirect the customer to after placing the order; Returned by the “Create Order” API call |
| KlarnaPaymentsFraudStatus                                                                     | The fraud status of the order returned by the “Create Order” API call                                |

**Table 7 Klarna Session Attributes**



The following cookies are being set by Klarna integration:

| Cookie Name                   | Description                                                |
|-------------------------------|------------------------------------------------------------|
| selectedKlarnaPaymentCategory | The selected payment method on checkout (e.g. "pay_later") |

Table 8 Klarna Cookies

#### 5.1.4. Library

In addition to the configurations, the following 2 library assets will be added:

- “**footer-about**” – Updated OOTB asset including link to Klarna OSM dedicated page in the footer.
- “**klarna-email-info**” – Asset containing links to review the Klarna Payment information. Used in the confirmation email sent to the customers.

#### 5.1.5. Services

An HTTP service “**klarna.http.defaultendpoint**” has been added with “**klarna.http.service**” profile and service credentials for each country (described in **KlarnaCountries** custom object).

---

*Please, note that up until version 21.2.0 of the cartridge, the **KlarnaCountries** custom object was replicable. To avoid issues with service credentials during replication, merchants should use the same service credential name in staging, development, and production environments!*

*Please, review section 9.4 Update KlarnaCountries Definition on possible ways to update the definition in your instances.*

---

## 5.2. Logs

The integration includes the following logs:

- Service communication logs – starts with “service-klarna-\*\*\*”. These logs contain every request and response to the Klarna endpoints. Personal information, i.e. emails & names required for the Klarna API calls are masked in the logs.
- Custom errors and debug info are logged under “customerror-\*\*\*”, “custodebug-\*\*\*” & “custominfo-\*\*\*” files depending on the case.

### 5.3. Availability

Cartridge functionality will be dependent on the availability of the Klarna API service. Current Klarna operational status can be viewed here - <http://status.klarna.com/>

### 5.4. Failover/Recovery Process

If Klarna API is not available, Klarna is not presented as a payment option. In case of any failure within the Klarna API, contact Klarna for support.

### 5.5. Support

Klarna's service center is responsible for handling operational tasks. The service center is divided into the following two teams: Customer Service and Merchant Support.

#### 5.5.1. *Customer Service*

A customer service workshop can be conducted during the implementation process before going live to align the operational processes and ensure customer satisfaction. Klarna provides all customers with the possibility to log into Klarna App via website: <https://app.klarna.com/login> or download the Klarna App (free) on a mobile (Android/iOS). The customers can contact support, view their statements, pay for their purchase, track delivery updates, and prolong the due dates if they have chosen to pay after delivery.

#### 5.5.2. *Merchant Support*

Reporting core SFCC functionality issues in the Klarna cartridge technical integration – please contact [commercecloud@klarna.com](mailto:commercecloud@klarna.com)

For production issue related to Klarna API availability, merchant representative should reach their Klarna Account manager after reviewing the current operational status at <http://status.klarna.com/>. Report the problem in Production (Post Go-live) if you have a suspicion about degraded performances or issues with Klarna's service. The Klarna contact would then be able to report this internally to the incident management team who have established routines to handle and resolve

reported incidents. The Klarna contact may request additional information from the individual reporting the problem to help internal team ascertain and identify the issue. The KAM may also advise the merchant to follow the updates on the status page if it is a known incident with on-going updates.

Pre-requisite information to be provided by merchant when reporting incident to help with speedy investigation and resolution:

- Merchant's affected MID or market
- Impact and examples of customer orders (order\_id or Klarna session\_id if available)
- Screenshots, timeframe, additional information as required

## 6. User Guide

### 6.1. Cartridge upgrade

Regular updates to our cartridge code include bug fixes, performance enhancements, security patches, and new features. It's essential to stay up to date with these changes to ensure compatibility, security, and optimal functionality of your integration.

### 6.2. Upgrade Process

Follow these steps to upgrade your custom code with the latest version of our cartridge:

#### 6.2.1. Review Release Notes

Start by reviewing the release notes for the latest version of the cartridge. The release notes outline the changes, improvements, and any potential compatibility considerations associated with the upgrade.

#### 6.2.2. Assess Custom Code Changes

Identify any customizations or modifications you have made to the SFCC cartridge code in your custom files. These may include storefront customizations, controller adjustments, or custom business logic built on top of our cartridge.

#### 6.2.3. *Backup Custom Files*

Before proceeding with the upgrade, ensure that you have a backup of your custom files, including any modifications made to the SFCC cartridge code. This backup will serve as a safety net in case any issues arise during the upgrade process.

#### *6.2.4. Compare Code Differences*

Use a version control system or a file comparison tool to compare the differences between your custom code and the latest version of the SFCC cartridge code. Pay close attention to areas where changes have been made to ensure compatibility and maintain functionality.

#### *6.2.5. Update Integration Code*

Integrate the latest version of the SFCC cartridge code into your custom files, replacing any outdated or deprecated code with the new implementations. Follow the migration guides and best practices provided to ensure a smooth transition.

#### *6.2.6. Test and Validate*

After updating your custom code, thoroughly test the integration to ensure that all functionality works as expected. Test various scenarios, including user interactions, data processing, and third-party integrations, to identify any potential issues or regressions.

#### *6.2.7. Address Compatibility Issues*

If you encounter any compatibility issues or conflicts with your existing custom code, troubleshoot and resolve them accordingly. Consult our support resources or reach out to our team for assistance in addressing compatibility concerns.

#### *6.2.8. Deploy Changes*

Once you are satisfied with the upgrade and have validated its functionality, deploy the changes to your production environment. Monitor the integration closely following deployment to ensure ongoing stability and performance.


### **6.3. Roles, Responsibilities**

There are no recurring tasks required by the merchant. Once configurations are set up, the functionality runs on demand.

### **6.4. Storefront Functionality**


When Klarna has been setup, the Klarna Payments options and iframe widgets will be shown on the billing step. All the SFCC OOTB checkout functionality remains in place, such as but not limited to cart updates during checkout, checkout with applied coupon(s) code(s), checkout with applied product level promotion, checkout with applied order level promotion, checkout with applied shipping level promotion, checkout with applied order level promotion with bonus product.

Select one of Klarna's payment options as the payment method on billing step of checkout process and click the “Next: Place Order” button:

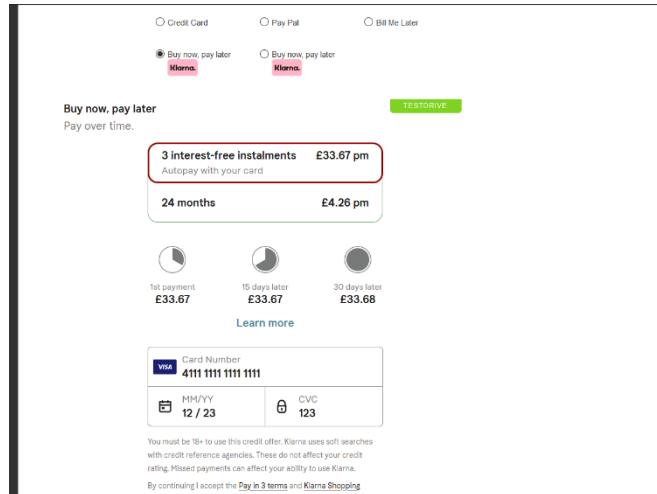

**Figure 118 Payment Options on Checkout**

Depending on the payment method selected and the region, you will see one of Klarna's popup windows to provide the details. Follow the steps on the screen:

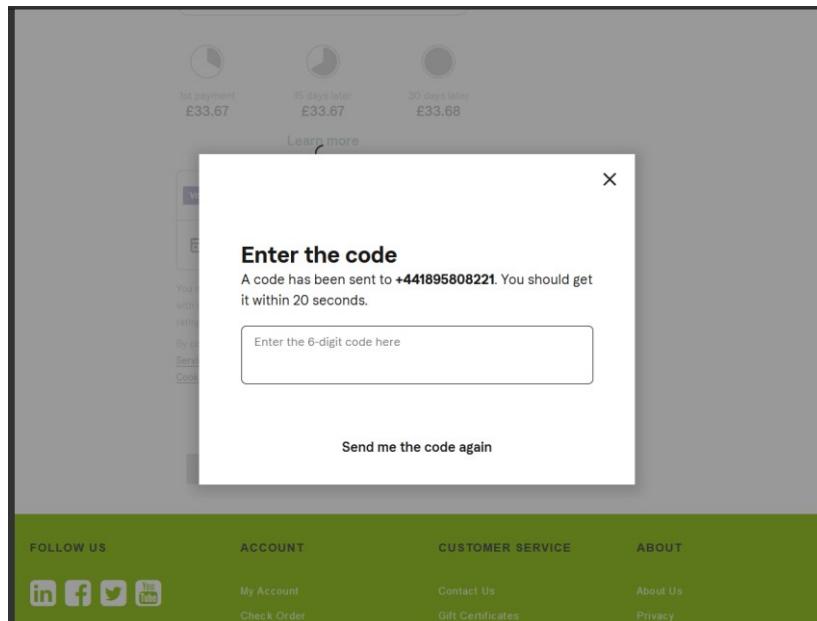

**Figure 119 Klarna Popup Screen**

On the Review step click on “Place Order” button:

STEP 1: Shipping > STEP 2: Billing > **STEP 3: Place Order**

**PRODUCT**

|                                                                                          | QTY        | TOTAL  |
|------------------------------------------------------------------------------------------|------------|--------|
| <b>Sleeveless Cowl Neck Top</b><br>Item No. 701643571284<br>Colour White Multi<br>Size S | 1 In Stock | £42.23 |
| <b>Classic Skirt</b><br>Item No. 701643488872<br>Colour Chino<br>Size 6                  | 1 In Stock | £63.36 |

Order Discount: TestOFF

**ORDER SUMMARY** Edit

|                    |                |
|--------------------|----------------|
| Subtotal           | £105.59        |
| Order Discount     | - £10.56       |
| Shipping Ground    | £5.99          |
| <b>Order Total</b> | <b>£101.02</b> |

**SHIPPING ADDRESS** Edit

|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| John Doe<br>13 New Burlington St<br>Apt 214<br>London, W13 3BG<br>United Kingdom<br>Method: Ground |
|----------------------------------------------------------------------------------------------------|

**BILLING ADDRESS** Edit

|                                                                                  |
|----------------------------------------------------------------------------------|
| John Doe<br>13 New Burlington St<br>Apt 214<br>London, W13 3BG<br>United Kingdom |
|----------------------------------------------------------------------------------|

**PAYMENT METHOD** Edit

|                                    |
|------------------------------------|
| Klarna Payments<br>Amount: £101.02 |
|------------------------------------|

**PLACE ORDER**

Figure 120 Payment Review Screen

The customer’s browser is sent to the “`redirect_url`” and immediately thereafter shown the Commerce Cloud Order Confirmation page.

If you have questions about your order, we're happy to take your call (800-555-0199) Monday - Friday, 8AM - 8PM

**Order Number:** 00055607

Order Placed: 4 Mar 2021

**PAYMENT METHOD**  
Klarna Payments  
Amount: £101.02

**BILLING ADDRESS**  
John Doe  
13 New Burlington St  
Apt 214  
London, W13 3BG  
United Kingdom  
Phone: 01895808221

**SHIPMENT NO. 1**

| SHIPPING STATUS: | ITEM                                                                                       | QTY | PRICE  |
|------------------|--------------------------------------------------------------------------------------------|-----|--------|
| Not Shipped      | <b>Sleeveless Cowl Neck Top</b><br>ITEM NO: 701643571284<br>COLOUR: White Multi<br>SIZE: S | 1   | £42.23 |
|                  | <b>Classic Skirt</b><br>ITEM NO: 701643488872<br>COLOUR: Chino<br>SIZE: 6                  | 1   | £63.36 |

**PAYMENT TOTAL**

|                     |                |
|---------------------|----------------|
| Subtotal            | £105.59        |
| Order Discount      | - £10.56       |
| Shipping Ground     | £5.99          |
| <b>Order Total:</b> | <b>£101.02</b> |

**SHIPPING TO**  
John Doe  
13 New Burlington St  
Apt 214  
London, W13 3BG  
United Kingdom  
01895808221

**CREATE ACCOUNT**

Creating an account is easy. Just fill out the form below and enjoy the benefits of being a registered customer.

**First Name:** John

**Last Name:** Doe

**Email:** john@doe.com

**Confirm Email:**

**Password:**

**Confirm Password:**

**Create Account**

[Return to Shopping](#)

Figure 121 Order Confirmation Page

The newly created order can be inspected in Business Manager:

You're using the new Search service.

This page allows you to search for orders by order number. Select **Advanced** to use more search options. Select **By Number** to see or newline. Entered text is treated as case-sensitive; substring matching isn't supported.

**Order Search**

| Number                   | Order Date                 | Site              | Created By | Registration Status |
|--------------------------|----------------------------|-------------------|------------|---------------------|
| <a href="#">00055607</a> | 3/4/21 3:00:52 pm Etc/UTC  | SiteGenesisGlobal | Customer   | Unregistered        |
| <a href="#">00055606</a> | 3/4/21 2:58:25 pm Etc/UTC  | SiteGenesisGlobal | Customer   | Unregistered        |
| <a href="#">00055605</a> | 3/4/21 2:52:27 pm Etc/UTC  | SiteGenesisGlobal | Customer   | Registered          |
| <a href="#">00055604</a> | 3/4/21 12:51:34 pm Etc/UTC | SiteGenesisGlobal | Customer   | Registered          |
| <a href="#">00055603</a> | 3/4/21 12:49:03 pm Etc/UTC | SiteGenesisGlobal | Customer   | Registered          |
| <a href="#">00055602</a> | 3/4/21 11:08:50 am Etc/UTC | SiteGenesisGlobal | Customer   | Unregistered        |
| <a href="#">00055505</a> | 3/3/21 5:58:33 pm Etc/UTC  | SiteGenesisGlobal | Customer   | Unregistered        |
| <a href="#">00055405</a> | 3/2/21 8:41:39 am Etc/UTC  | SiteGenesisGlobal | Customer   | Registered          |
| <a href="#">00055404</a> | 3/2/21 8:35:37 am Etc/UTC  | SiteGenesisGlobal | Customer   | Registered          |
| <a href="#">00055403</a> | 3/2/21 7:46:22 am Etc/UTC  | SiteGenesisGlobal | Customer   | Registered          |

Showing 1 - 10 of 506 items

Show [50](#) [100](#) [All](#) items

**Figure 122 Orders List in BM**

Klarna Payments order id can be inspected in the Attributes tab of the order:

Merchant Tools > [Ordering](#) > [Orders](#) > Order: 00055607(SiteGenesisGlobal)

[General](#) **Attributes** [Payment](#) [Notes](#) [History](#)

**Attributes for Order '00055607'**

On this page you can edit the attributes of the order. Fields with a red asterisk (\*) are mandatory. Click **Apply** to save changes. Click **Reset** to |

**Klarna Payments**

Klarna Payments Order ID:

Is VCN Used:

VCN Card ID:

[<< Back to List](#)

**Figure 123 Order Attributes**

Payment method details can be inspected on the Payment tab of the order, and it should be Klarna:

Merchant Tools > Ordering > Orders > Order: 00055607(SiteGenesisGlobal)

General Attributes **Payment** Notes History

**Payment Information for Order '00055607'**

|                 |                                                                                                                         |
|-----------------|-------------------------------------------------------------------------------------------------------------------------|
| Order Total:    | £101.02                                                                                                                 |
| Amount Paid:    | £0.00                                                                                                                   |
| Balance Due:    | £101.02                                                                                                                 |
| Invoice Number: | 00242007                                                                                                                |
| Payment Status: | Paid                                                                                                                    |
| Payment Method: | Klarna<br>Processor: KLARNA_PAYMENTS<br>Transaction: 77aa252d-70fa-2719-957b-b047a82b3343<br>Amount: £101.02            |
|                 | Klarna Payment Category ID: pay_over_time<br>Klarna Payment Category Name: Buy now, pay later<br>Fraud Status: ACCEPTED |

<< Back to List

**Figure 124 Order Payment Detail**

Order can be further inspected in Klarna Merchant Portal:

- EU: eu.portal.klarna.com
- US: us.portal.klarna.com
- OC: us.portal.klarna.com

The screenshot shows the Klarna Portal Order View for an order with reference #BW6DKM8G. The total amount is £101.02. The order was created on Mar 4, 2021, at 5:00 PM and expires on Apr 1, 2021, at 3:00 AM. The merchant ID is K500726. The customer information includes a shipping address for John Doe at 13 New Burlington St, Apt 214, London, W13 3BG, GB, with a tel number 01895808221 and email john@doe.com. The order lines show three items: a Sleeveless Cowl Neck Top (701643571284), a Classic Skirt (701643488872), and a Ground (GBP001). The payment details show an initial capture of £101.02 via API. The activity log shows two events: an order placement at 5:00 PM and a capture at 5:00 PM. The currency is GBP.

| Customer                 |                                                                                                                                                   | Order lines (3)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            |          |             |                   |                                                                                                                     | Currency: GBP |                  |     |            |          |     |        |                          |                                          |   |       |      |             |                   |                          |                               |   |       |      |             |                   |                          |                  |   |      |      |             |                  |         |  |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|-------------|-------------------|---------------------------------------------------------------------------------------------------------------------|---------------|------------------|-----|------------|----------|-----|--------|--------------------------|------------------------------------------|---|-------|------|-------------|-------------------|--------------------------|-------------------------------|---|-------|------|-------------|-------------------|--------------------------|------------------|---|------|------|-------------|------------------|---------|--|
| Shipping address         | John Doe<br>13 New Burlington St<br>Apt 214<br>London<br>W13 3BG<br>GB<br>Tel<br>01895808221<br>Email<br>john@doe.com                             | <input type="button" value="Refund"/> <input type="button" value="Print packing slip"/> <table border="1"> <thead> <tr> <th></th> <th>Item / Reference</th> <th>Qty</th> <th>Unit price</th> <th>Discount</th> <th>Tax</th> <th>Amount</th> </tr> </thead> <tbody> <tr> <td><input type="checkbox"/></td> <td>Sleeveless Cowl Neck Top<br/>701643571284</td> <td>1</td> <td>42.23</td> <td>4.22</td> <td>20%<br/>6.34</td> <td>38.01<br/>Captured</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Classic Skirt<br/>701643488872</td> <td>1</td> <td>63.36</td> <td>6.34</td> <td>20%<br/>9.50</td> <td>57.02<br/>Captured</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Ground<br/>GBP001</td> <td>1</td> <td>5.99</td> <td>0.00</td> <td>20%<br/>1.00</td> <td>5.99<br/>Captured</td> </tr> </tbody> </table> |            |          |             |                   |                                                                                                                     |               | Item / Reference | Qty | Unit price | Discount | Tax | Amount | <input type="checkbox"/> | Sleeveless Cowl Neck Top<br>701643571284 | 1 | 42.23 | 4.22 | 20%<br>6.34 | 38.01<br>Captured | <input type="checkbox"/> | Classic Skirt<br>701643488872 | 1 | 63.36 | 6.34 | 20%<br>9.50 | 57.02<br>Captured | <input type="checkbox"/> | Ground<br>GBP001 | 1 | 5.99 | 0.00 | 20%<br>1.00 | 5.99<br>Captured | £101.02 |  |
|                          | Item / Reference                                                                                                                                  | Qty                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Unit price | Discount | Tax         | Amount            |                                                                                                                     |               |                  |     |            |          |     |        |                          |                                          |   |       |      |             |                   |                          |                               |   |       |      |             |                   |                          |                  |   |      |      |             |                  |         |  |
| <input type="checkbox"/> | Sleeveless Cowl Neck Top<br>701643571284                                                                                                          | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 42.23      | 4.22     | 20%<br>6.34 | 38.01<br>Captured |                                                                                                                     |               |                  |     |            |          |     |        |                          |                                          |   |       |      |             |                   |                          |                               |   |       |      |             |                   |                          |                  |   |      |      |             |                  |         |  |
| <input type="checkbox"/> | Classic Skirt<br>701643488872                                                                                                                     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 63.36      | 6.34     | 20%<br>9.50 | 57.02<br>Captured |                                                                                                                     |               |                  |     |            |          |     |        |                          |                                          |   |       |      |             |                   |                          |                               |   |       |      |             |                   |                          |                  |   |      |      |             |                  |         |  |
| <input type="checkbox"/> | Ground<br>GBP001                                                                                                                                  | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 5.99       | 0.00     | 20%<br>1.00 | 5.99<br>Captured  |                                                                                                                     |               |                  |     |            |          |     |        |                          |                                          |   |       |      |             |                   |                          |                               |   |       |      |             |                   |                          |                  |   |      |      |             |                  |         |  |
| Billing address          | <b>PAYMENT DETAILS</b><br>Initial Payment Method<br>Pay later in parts<br>VISA 411111*****1111<br><input type="button" value="Resend statement"/> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            |          |             |                   | <b>ORDER TOTAL</b><br>Captured £101.02<br>Refunded £0.00<br>Not Captured £0.00<br><b>CUSTOMER BILLED</b><br>£101.02 |               |                  |     |            |          |     |        |                          |                                          |   |       |      |             |                   |                          |                               |   |       |      |             |                   |                          |                  |   |      |      |             |                  |         |  |
| Additional Info          |                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            |          |             |                   |                                                                                                                     |               |                  |     |            |          |     |        |                          |                                          |   |       |      |             |                   |                          |                               |   |       |      |             |                   |                          |                  |   |      |      |             |                  |         |  |

**Activity Log**

- Mar 4, 2021 7 minutes ago 5:00 PM **Captured: £101.02** Via API
- 5:00 PM **Order placed: £101.02** By Klarna

**Klarna.** Copyright © 2005-2021 Klarna Bank AB (publ). All rights reserved

[Terms & Conditions](#)

**Figure 125 Klarna Portal Order View**

## 7. Known Issues

The LINK Cartridge has no known issues.

## 8. Release History

| Version | Date | Changes                                                                                                                                                                                                                                          |
|---------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 18.1.0  |      | Initial release of Klarna Payments                                                                                                                                                                                                               |
| 19.1.0  |      | Added SFRA version                                                                                                                                                                                                                               |
| 19.1.1  |      | Updated VCN to use the newest API version                                                                                                                                                                                                        |
| 19.1.2  |      | Fix auto capture for the pipelines cartridge                                                                                                                                                                                                     |
| 19.1.4  |      | New country locales added.<br><br>Minor bug fixes.<br><br>Cartridge templates and forms updated for latest SFRA.                                                                                                                                 |
| 19.1.5  |      | Added additional verification for all notifications.<br><br>Minor fixes around the configuration objects. Added Canadian support.<br><br>Documentation updates.                                                                                  |
| 19.1.6  |      | New country locales added.<br><br>Updated VCN to store encrypted card details                                                                                                                                                                    |
| 21.1.0  |      | Fixes around discounts taxation & VCN error handling.<br><br>Added VCN improvements, additional On-site Messaging placements, BOPIS support. New IT, CA, FR & NZ country locales.<br><br>Removed acknowledge call.<br><br>Documentation updates. |
| 21.1.1  |      | New On-Site Messaging setting for Canada.<br><br>Remove not required locale templates for SG Spain & Belgium.<br><br>Documentation updates.                                                                                                      |
| 21.1.2  |      | Fixed core file naming convention issues in 21.1.0 and 21.1.1.<br>Please upgrade to the latest version if you are currently using 21.1.0 or 21.1.1.<br><br>Removed deprecated “scripts/util/Builder.js” file.                                    |
| 21.2.0  |      | Added Klarna Express Button.                                                                                                                                                                                                                     |

| <b>Version</b> | <b>Date</b> | <b>Changes</b>                                                                                                                                                                                                    |
|----------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |             | <p>Moved Klarna session ID &amp; client token from SFCC session privacy to Basket attributes.</p> <p>Changed KlarnaCountries definition to not replicable.</p> <p>Code cleanup.</p> <p>Documentation updates.</p> |
| 21.3.0         |             | <p>Improvements for create_session errors</p> <p>Expired user session issues related to empty shipment.shippingMethod</p> <p>Additional locale (PL) included in config files</p>                                  |
| 21.3.1         |             | Documentation updates.                                                                                                                                                                                            |
| 22.1.0         |             | <p>Improvements for create and update session errors</p> <p>Add Klarna Express Button in mini-cart</p> <p>Support for long running basket</p> <p>Rate-limits by operations</p>                                    |
| 22.2.0         |             | <p>One Klarna Optimisation</p> <p>Mexico locale support</p>                                                                                                                                                       |
| 22.2.1         |             | Rollback of One Klarna Optimisation                                                                                                                                                                               |
| 22.3.0         |             | Rollback hide VAT from Checkout functionality                                                                                                                                                                     |
| 22.3.1         |             | Fix User-agent version sent to Klarna services                                                                                                                                                                    |
| 22.4.0         |             | <p>Intent field addition in Klarna Payment session creation</p> <p>Combine Klarna Authorization and Create Order in Checkout Review Step</p>                                                                      |
| 22.5.0         |             | OMS support                                                                                                                                                                                                       |
| 23.1.0         |             | <p>Fix issue with incorrect values for EMD</p> <p>Improvement Klarna Auto Capture and error handling</p> <p>Logging information for troubleshooting bugs</p>                                                      |

| <b>Version</b> | <b>Date</b> | <b>Changes</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |             | Add Auto_finalise=True to the review checkout flow                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 23.1.1         |             | <p>Fixed an issue where sessions with negative order_tax_amount occurred due to SFCC session expiration</p> <p>Compatibility mode 21.2 support</p> <p>Replace deprecated window.KlarnaOnsiteService.push with window.Klarna.OnsiteMessaging.refresh.</p>                                                                                                                                                                                                                                                                                                       |
| 23.2.0         |             | <p>Subscription Payments support: recurring payments and subscription handling directly within the SFCC environment. This update includes configuration options, subscription management in the cart and checkout pages, and a customer dashboard for subscription oversight.</p> <p>Klarna Bank Transfer payments: added a new server-side authorization callback feature for Klarna Bank Transfer payments, enhancing reliability across EU markets and supporting all existing KP cartridge functionalities.</p>                                            |
| 24.1.0         |             | <p>Klarna Express Checkout: a new feature introduced in Storefront where Express Checkout Button will be displayed in PDP, Cart and Mini Cart and user will be redirected to Klarna after clicking Express Checkout button. Klarna Express Checkout enabled quick and easy checkout where Shipping Address, Billing Address and Payment details will be preselected so that Checkout can be completed in fewer clicks.</p> <p>Fix for create order service calls with 500 status response: now orders are not created and error is thrown for these cases.</p> |
| 24.2.0         |             | <p>Update of OSM functionality that is more aligned with current web standards, provides a consistent identifier system as used in KEC, and offers enhanced customization options to our merchants. This will not only improve the user experience but also reinforce Klarna's commitment to providing versatile and state-of-the-art e-commerce solutions. CSS customizations are available only in the new library version.</p> <p>Documentation update - new section added for cartridge upgrade process.</p>                                               |

## 9. Additional Information

### 9.1. Klarna API Information

The Klarna Payments API is accessible through different endpoint based on the context of the webstore. There are separate endpoints for testing and live and the Klarna merchant identifier (MID) is configured for respective markets in regions (EU, NA, OC) by endpoint.

#### 9.1.1. Live Environment

The API for the European production environment can be found at

- <https://api.klarna.com/>

The API for the North America production environment can be found at

- <https://api-na.klarna.com/>

The API for the Oceania production environment can be found at

- <https://api-oc.klarna.com/>

#### 9.1.2. Testing Environment

The API for the European Playground/testing environment can be found at

- <https://api.playground.klarna.com/>

The API for the North America Playground/testing environment can be found at

- <https://api-na.playground.klarna.com/>

The API for the Oceania Playground/testing environment can be found at

- <https://api-oc.playground.klarna.com/>

### 9.2. Generate Key Pair and Key Id for Virtual Card Settlements (VCN)

The recommend RSA keypair size of 4096 bits. This key pair must be associated with a key\_id (UUIDv4). The public key must be shared in JWK format with Klarna contact. Note that for production and playground, the key\_id and keypair combination shared are different and must be configured prior to testing/go-live of the virtual card product.

To generate an RSA keypair with a 4096-bit private key you can use the following ***openssl*** command:

```
openssl genpkey -algorithm RSA -out private_key.pem -pkeyopt
rsa_keygen_bits:4096
```

To extract the public key from an RSA keypair, you can use the following ***openssl*** command:

```
openssl rsa -pubout -in private_key.pem -out public_key.pem
```

In the folder where you have executed the above commands two new files will be created - **public\_key.pem** and **private\_key.pem**.

The contents of the files should look something like:

#### **public\_key.pem**

```
-----BEGIN PUBLIC KEY-----
MIICIJANBgkqhkiG9w0BAQEFAOCg8AMIIICCgKCAGEAoNYG712G8nZa+22oBYZk
tV2281w3UE9W04oxfknJtKEdHn84x55ULT8KQTh9NVtdeKC8nTfTgyvMt/GNCa18
xuZV/1GYDftKt85hbV5EjOum+StAIufEXv1BX7nMOMc1KyWm9kp2kbqd88mFIX63
KV94OoNEXcNatRDFYR+qz53+iPadDQtQ1s1VNStdroCZDJ1+LxtBy9V+BdmsBK1E
RLsKh/JLXyWE24FJKV+z00s7TQkdWW/5ET12OGQYZsWo1yqgi9HplNvrise8vWP
xaL4m8iz3I/9yYdg7yANQbTxSJccbRCgaaagPo30CNxeqU6qafY5g8vY3E52CoXH
DdO4Us1X1qcuYIDhqaDzey6W+b8m755xLi+rqQyM4PBWL0J0dM3FVid8+4YKILex
3AKBFciqRCMHSGaEeyrXKTj1Asghr9RS8PifvQRrl440cHzqw2vX0DvpjSWcmUJ
tW4wUq5RNssobrxnVm0V6fj1z67Q/1P+15Ie+oowdahR5ztVqJ1O+2PN0X4I5VDs
/Pkz3f8wWVc3Mp2oNT244o+/NIiyRfPFaJJx7JAgrcvZt2nFAmY4QApXLFJCpgEM
wYucE4AH4gJKsh3KZbxRERrrO72bL2rxvWqBp/0h7DcMsV9sQs4BvxxIl6CF506F
ThzmclaKLBAyd5LALiXiPfkCAwEAAQ==
-----END PUBLIC KEY-----
```

#### **private\_key.pem**

```
-----BEGIN PRIVATE KEY-----
MIIJQQIBADANBgkqhkiG9w0BAQEFAASCCSswggknAgEAAoICAQCg1gbuXYbydlr7
bagFhmS1XbbyXDdQT1Y7ijF+Scm0oR0efjzHn1Qu3wpBOH01W114oLydN9ODK8y3
8Y0JrXzG51X+UzgN+0q3zmFtXkSM66b5K0Ai58Re+UFFucw4xzUrJab2SnaRup3z
yYUhfrCPX3g6g0Rdw1q1EMVhH6rPnf6J9p0NC1DWyVU1K12ugJkMnX4vG0HL1X4F
2awErUREuwqH8ktfJYTbgUkpX7PTSzNCR1Zb/kRPXY4ZBhmxajXKqCL0emU2+uK
y97y9Y/FovibyJncj/3Jh2DvIA1BtPFI1xttEKBppqA+jfQI3F6pTqpp9jmDy9jc
TnYKhccN07hSyVfWpy5ggOGpoPN7Lpb5vybvnnEuL6upDIzg8FYvQnR0zcVWJ3z7
hgogt7HcAoEVyKpEIwdI4ZoR7KtcpOOUCyCGv1FLw+J+9BGsvjjRwfOrDa9fQO+m
NJZyZQmlbjBSr1E1KyhuvGdWahXp+PXPrTD/U/6Xkh76ijB1qFHnO1WomU77Y82h
fgj1UOz8+TPd/zBZVzcynag1Pbjij780iLJF88VoknHskCCty9m3acUCZjhAClcs
UkKmAQzBi5wTgAfIAkqyHcplvFERGus7vZsvavG9aoGn/SHsNwyxX2xCzgG/HEiX
oIXnToVOHOZyVoosEDJ3ksAuJeI9+QIDAQABoICACRkaUsUNI22RB3yEPu3DiCP
pO6v+QAeA4gTW+GUDqR9dcZLaSCZ7bhVVouoX4qPzs106hjUmOyzG6upFgVPk+P
HNQfyEUZoC148Eib9OziAXUN2URMpvlKbwVm+BO814X8zguai7uru0PHTG1oy677
4Ct1OknxAxxHQDIaxT6XJFo5SA4EinUfnz2Bo3/xry/QjxW/mCK0GwDd4PNp9TGM
```

```

FPTv2SgdSDOWzGQ1OH5N3owuzMpI8NV6z74wv+i5Ptv4lDzu8WhyXpiYSsk00SRK
HPC68j2bAzTPghp5aSZ9976SGm2SPonJXyboxIhbI/osdyqDxeIT3iB9GmrHX/i
kHPGJCh7fRZvqj39Hc+IxYjabwW3rDeDIPB7ab9z1KLF4z1D6AZOKCPyTaDRdQ1Q
eDi7LwDmk7NHEPrmF/nIcgQdqbIbmFO2zEs0TOe6y4uBMndRsbQprTNSMJDkBkrA
lNaYVSTQ1Z0Y/8DZDpGcyS1OnJv74F15uDjKN6/ov991mZ1JrZ+V2sdS3EDUlmvP
6thQKwI7Ln6h+ApHtWUG1NmVQe5gJE0qAeJ9b45clUzIRUwhVmEp8NoIJh0kAjaN
d4lk7xy9ZRDUY5yekPeYrJPShjsAHayEoktJIjRufI2UUq3uxNjjjCoQcOVGFNDIS
YTTPwpulpmC0C+rh2fgBAoIBAQDRultRArvtc2JKhVOUyZk88zd9kvrI6fNiYKmi
HgiWF7qkTPD9xh0QWDw3iwRFQAD+YkgV5MCB08wp8o08GEsOCI+XZWExOcPT0Vfj
PZHiQrtFnlfG/+fAO14xLf3j3ED4YQXdHOKI3xoLknQx/EydLoctxgkpgWLrsA7
DwdSAg1/0sBvaHY27ogAfdimHdaKZ50Ae4a9k1qP3xVZBuOe8Sd65unBavUJLDuv
ikeNmksVgW1sm55/729J1r63USHF76It+vE1cdZ+vKg5vYotsQgPzvNBmUO/E8Gj
zMXQRfqfvED1NXEX0rCupTkw1G6AGTwQc/NPzyr/LTpLe6UBAoIBAQDEUjTiG11V
hf7WjdG3gctRlr+mYapQHgXdVLx2QSaqUYid+0QXK11YfJlsRB6nwa+OED83RfP0
1IFqxpzudSLPmoDuIBT7D15c/aleyKs/siuUsP8QVDXk6OAR84XSytC35sIRV7pE
VMuBL91jfKQ0Lf/Pres1K/k16Yvwwp4qrHK6/f9TgciHc1Ytf+/oti4ky6GJgfmP
fmuCqjxmUKbXXFPd5RbL2THGoowlb8zDLjf3Rlbj1QFqogAk6H9hp2V0VZLiJhp
UWM3z3zxDWedaqJ08sHuk/rA9QpsVTu8IGTQsxdj8JwluN1Q+YZiOuPiSENbqPzT
V3exexzo3sD5AoIBAGU3qEyPojz1+9D1SaI8LW2CABz1q4z9g84ABAZOs1xX5q7W
x1PinZyDSQSRXg1B13jt29ZdIR79ygnQlg1YOBjcvtgVQHPuafk3R1BQbbCh+vaI
9dn/tUxMGqhnunKabylrovJHfdqnPpKwzNAjYUqaGkJ822xhmmke/fEyAanIPa4
stDRvIPEWPLx5xcOCdx13khpkSnkgRvaLEfpwkVX7Vr7hK/2OSFaYTNmrzXYBQ7
c6D/9d3o04nLb/mu+Tq67S19t53Qg/GEgTfkpuRoVPi0KyhUnKKCGW1BMZLTwyIG
S9eTFDKoJ0cSTGipjW7bPua93wZ8eEbRABpf4QECggEANNhQBeEJ0aCdBVHtdrEI
crDaa8X0W1aJi5dol4hYCRajaKsfHAF/QfdgMQVxHwUC5YG4En/Q+DAVWhGWYpXD
RhC3zeFy5FVszyk0sx/fA01KGvRn5BRW4YRR9GMRzbjsT+RcruBnckdE9ERXGpX9
c/JB3rxZB1t+oIiFM8yfWKtMwsrmNKtFuDftvJeok4KejycFF4eWDqsf828xjPT+
xA/FP4CQD1UqkcpmuFSIwAwXo6LXVY7NTS0nKMiUnTLkLlTIHtLnO9+9jmNapWRP
Tc+hZUuHKlpI8DHfmx2j87LgkFD05eD5lynY4RgZtU1W1C1RdVYwoA72WB7knEaB
uQKCAQAH9s67P/7fFX9dfEans3PHU4nGjD8dJ8eoNQ6DhBMydZpGWI5ZUeEBZDRk
0cBOeRs5B0cS43Em9kETpzawyCwxmnwz1+CzoPzMqcTw9tXomF9HG6RJ9XBdJfGA
ALAwd4bASxmFM6guSP5GKnZ9aY3tR3tWWDFr7f9z8wOewzzpPclwRh009fPe4TC
NXoEm1MELJVeUiедSLKZgjgCw8WHGqLItONpa0/fwSM2gIcxETVV7qx3aPuJzCVh
LQZoBLqk3UMKsWDdpzeBdiERe66NAgVk92Xe7SY9EY2vymaq761i1x1vlprT27qp
240LDJawqM0IraKmdCvWjofWSaOU
-----END PRIVATE KEY-----

```

### 9.3. Decrypt VCN Card Details

To decrypt the virtual card details stored on order level and authorize the credit card processor you can use the following code snippet. You can find more information about the decryption process [here](#).

```

var OrderMgr = require('dw/order/OrderMgr');
var Cipher = require('dw/crypto/Cipher');
var Encoding = require('dw/crypto/Encoding');
var Site = require('dw/system/Site');

var Order = OrderMgr.getOrder("order_id");
var VCNPrivateKey = Site.getCurrent().getCustomPreferenceValue(
 'vcnPrivateKey');
var cipher = new Cipher();

var keyEncryptedBase64 = Order.custom.kpVCNAESKey;

```

```

var keyEncryptedBytes = Encoding.fromBase64(keyEncryptedBase64);
var keyDecrypted = cipher.decryptBytes(keyEncryptedBytes, VCNPrivateKey,
"RSA/ECB/PKCS1PADDING", null, 0);
var keyDecryptedBase64 = Encoding.toBase64(keyDecrypted);
var cardDataEncryptedBase64 = Order.custom.kpVCNPCIData;
var cardDataEncryptedBytes = Encoding.fromBase64(cardDataEncryptedBase64);
var cardDecrypted = cipher.decryptBytes(cardDataEncryptedBytes,
keyDecryptedBase64, "AES/CTR/NoPadding", Order.custom.kpVCNIV, 0);

var cardDecryptedUtf8 = decodeURIComponent(cardDecrypted);
var cardObj = JSON.parse(cardDecryptedUtf8);
var expiryDateArr = cardObj.expiry_date.split("/");

// Retrieve encrypted card details
var cardPAN = cardObj.pan, cardCVV = cardObj.cvv,
 cardExpiryMonth = expiryDateArr[0], cardExpiryYear = expiryDateArr[1];

```

#### 9.4. Update KlarnaCountries Definition

With version 21.2.0 of the cartridge, the KlarnaCountries custom object definition changed to non-replicable. If you are using an earlier version, to mitigate any issues that may be present in your environments, please follow these steps to update the definitions:

5. Back-up KlarnaCountries configurations per country for each site as changing the definition will remove all configurations on your environment!
  - a. For merchant with one site - Go to "**Merchant Tools > Custom Objects > Import & Export**", select KlarnaCountries & export the data.
  - b. For merchant with multiple sites using Klarna – You can export the configurations via "**Admin > Site Development > Site Import & Export**" and select each site that uses Klarna to be included in the export zip file. This section requires Account Manager access for users and will export all custom objects, not just Klarna ones.
6. Export custom object definitions from "**Admin > Site Development > Import & Export**". This action will export all custom object definitions that you have.
7. Update KlarnaCountries.xml definitions in file exported in step 2 and set "**<staging-mode>source-to-target</staging-mode>**" to "**<staging-mode>no-staging</staging-mode>**"
8. Import the updated KlarnaCountries.xml definition in "**Admin > Site Development > Import & Export**".
9. Import the KlarnaCountries configs exported in step 1 (manually or via bulk import)

- a. If you've followed step 1.b with multiple sites, you may want to edit the zip file and remove everything else apart from KlarnaCountries.xml