

**САНКТ-ПЕТЕРБУРГСКИЙ НАЦИОНАЛЬНЫЙ
ИССЛЕДОВАТЕЛЬСКИЙ УНИВЕРСИТЕТ ИТМО**

Дисциплина: Фронт-энд разработка

Отчет

Домашняя работа 5

Выполнила:
Клемяционок Полина
j3213

Проверил:
Добряков Д. И.

Санкт-Петербург


2026 г.

Задача

Создать приложение для работы с заметками на vue.js

Ход работы

0. Инициализация проекта

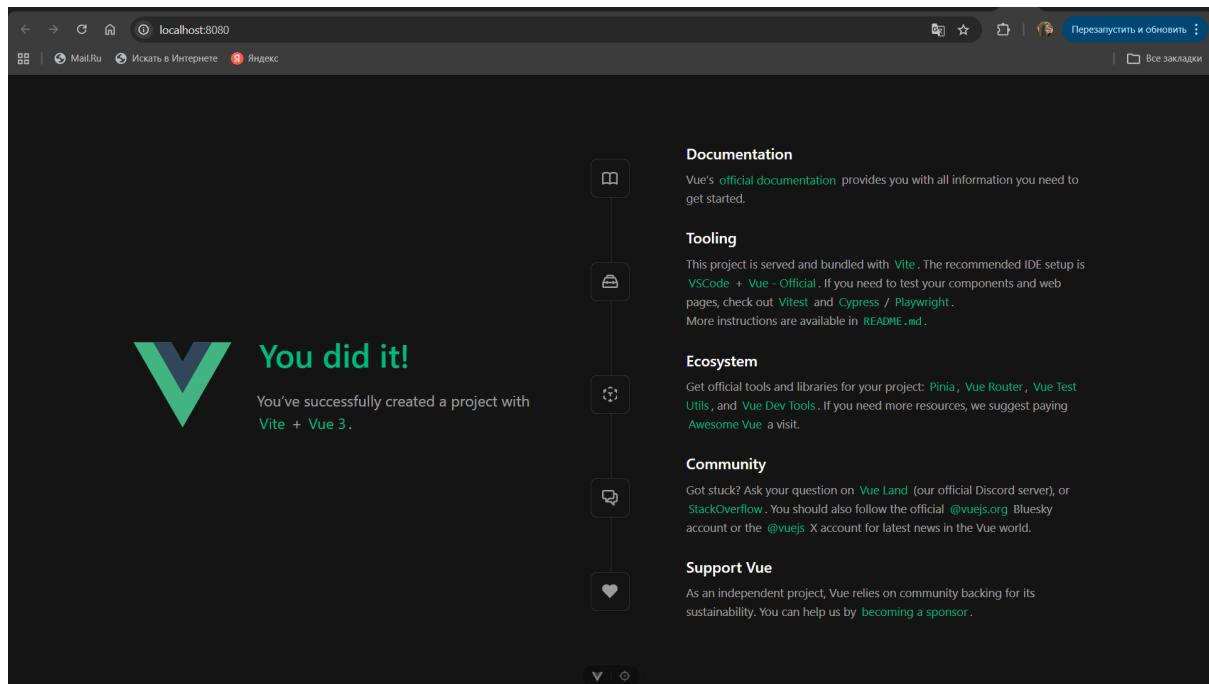


С измененным `package.json`:

```
"scripts": {  
  
  "start": "vite --port 8080",  
  
  "dev": "vite",  
  
  "build": "vite build",  
  
  "preview": "vite preview",  
  
  "lint": "eslint --ext .vue,.js,.jsx,.cjs,.mjs --fix --ignore-path  
.gitignore"  
  
},
```

1. Преднастройка: axios, pinia, bootstrap

Добавила:


- `src/api/instance.js`

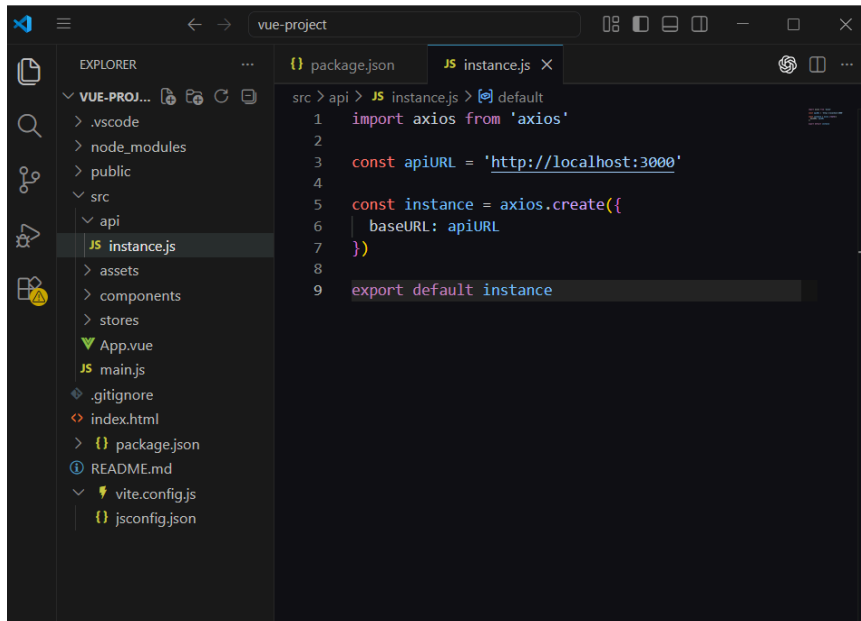

The screenshot shows the VS Code interface with a project named 'vue-project'. The Explorer sidebar on the left shows the file structure, with 'src/api/instance.js' selected. The main editor displays the code for 'instance.js'.

```
1 import axios from 'axios'
2
3 const apiURL = 'http://localhost:3000'
4
5 const instance = axios.create({
6   baseURL: apiURL
7 })
8
9 export default instance
```


- `src/api/notes.js`

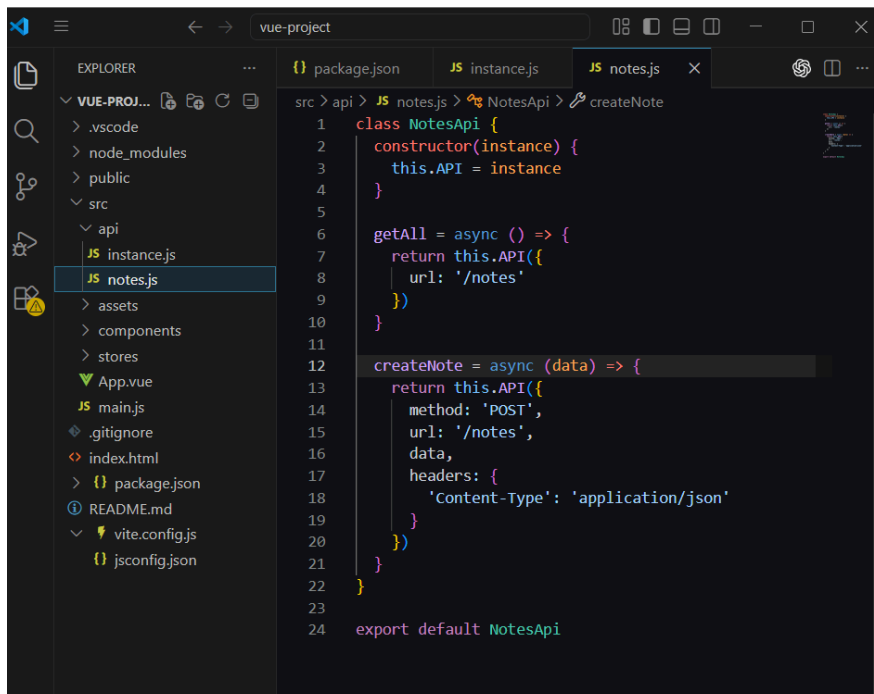

The screenshot shows the VS Code interface with the same 'vue-project'. The Explorer sidebar now shows 'src/api/notes.js' selected. The main editor displays the code for 'notes.js'.


```
1 class NotesApi {
2   constructor(instance) {
3     this.API = instance
4   }
5
6   getAll = async () => {
7     return this.API({
8       url: '/notes'
9     })
10  }
11
12  createNote = async (data) => {
13    return this.API({
14      method: 'POST',
15      url: '/notes',
16      data,
17      headers: {
18        'Content-Type': 'application/json'
19      }
20    })
21  }
22 }
23
24 export default NotesApi
```

- src/api/index.js

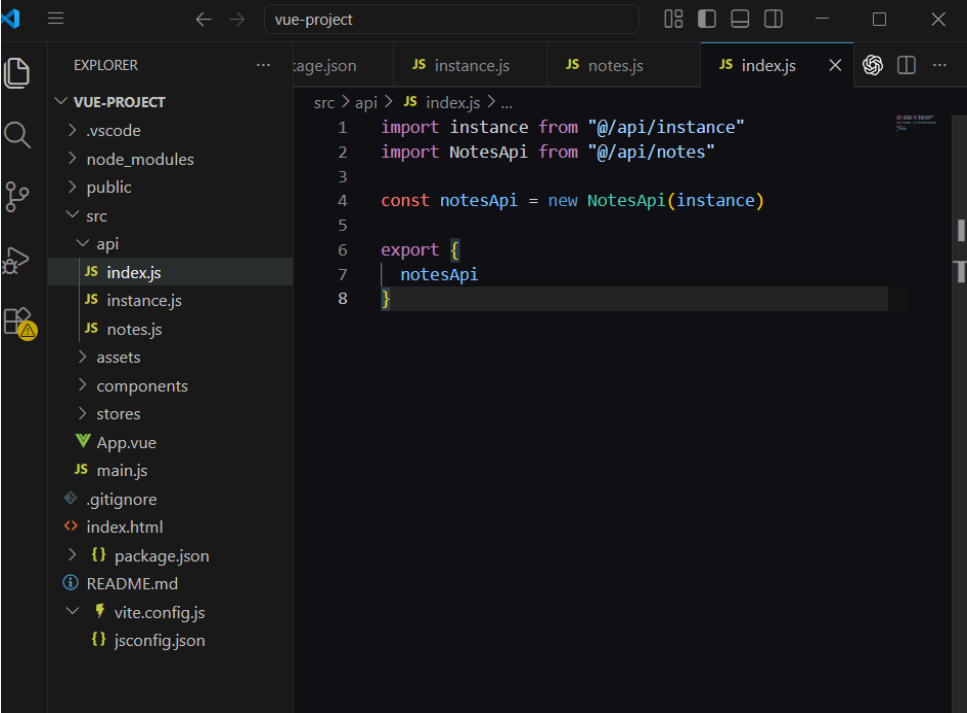


```
src > api > JS index.js > ...
1  import instance from "@api/instance"
2  import NotesApi from "@api/notes"
3
4  const notesApi = new NotesApi(instance)
5
6  export {
7    notesApi
8  }
```

- src/stores/index.js

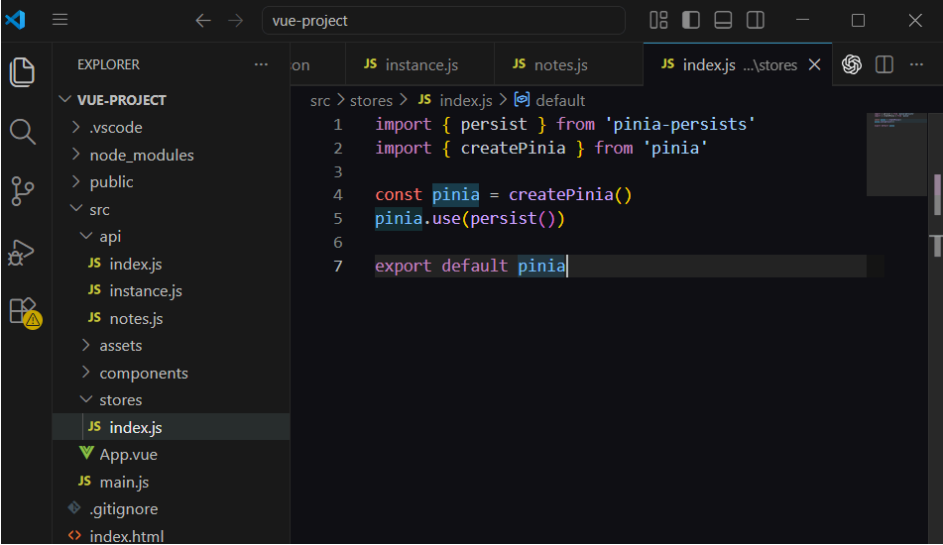

```
src > stores > JS index.js > default
1  import { persist } from 'pinia-persists'
2  import { createPinia } from 'pinia'
3
4  const pinia = createPinia()
5  pinia.use(persist())
6
7  export default pinia
```


- src/stores/[notes.js](#)

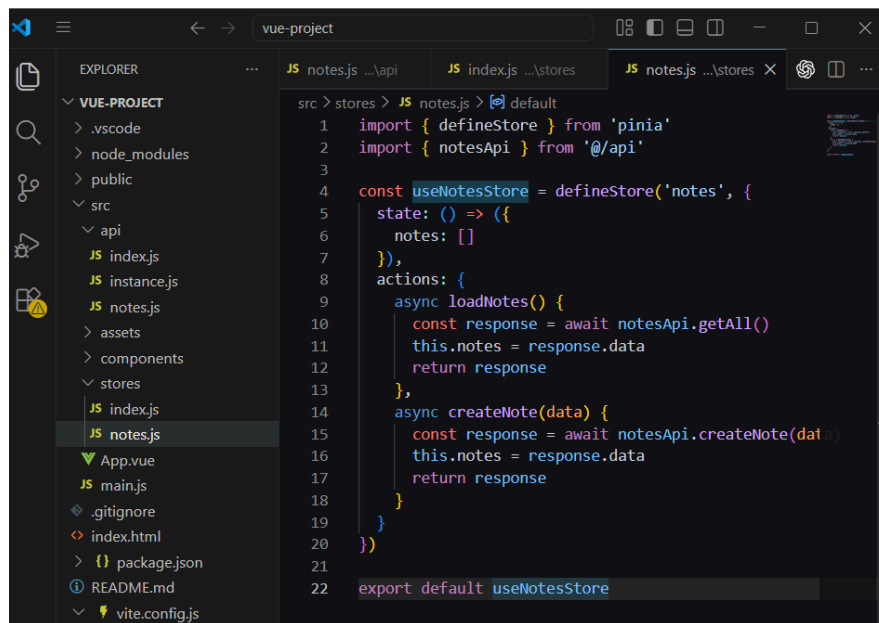


```
src > stores > JS notes.js > default
1  import { defineStore } from 'pinia'
2  import { notesApi } from '@api'
3
4  const useNotesStore = defineStore('notes', {
5    state: () => ({
6      notes: []
7    }),
8    actions: {
9      async loadNotes() {
10        const response = await notesApi.getAll()
11        this.notes = response.data
12        return response
13      },
14      async createNote(data) {
15        const response = await notesApi.createNote(data)
16        this.notes = response.data
17        return response
18      }
19    }
20  })
21
22  export default useNotesStore
```

- src/router/[notes.js](#)

2. Подключение модулей в [main.js](#)

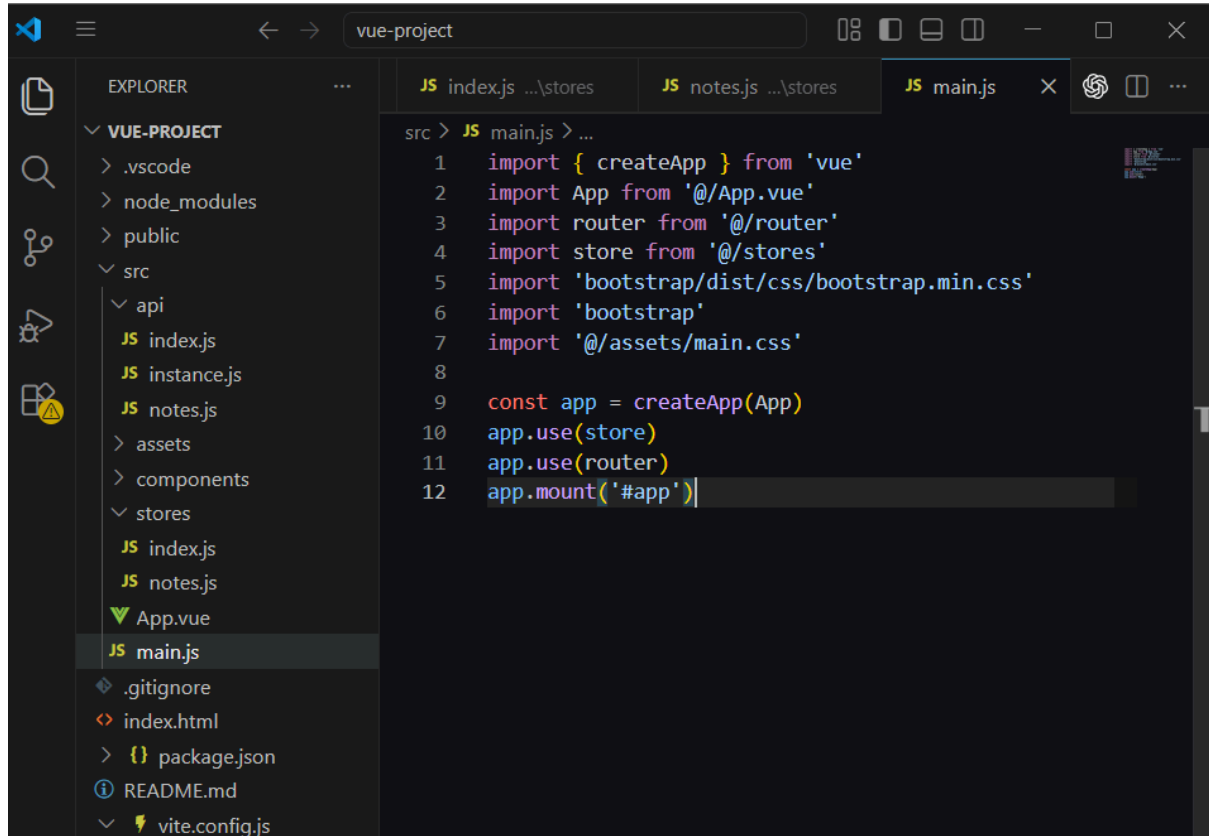


```
src > JS main.js > ...
1  import { createApp } from 'vue'
2  import App from '@App.vue'
3  import router from '@router'
4  import store from '@stores'
5  import 'bootstrap/dist/css/bootstrap.min.css'
6  import 'bootstrap'
7  import '@assets/main.css'
8
9  const app = createApp(App)
10 app.use(store)
11 app.use(router)
12 app.mount('#app')
```

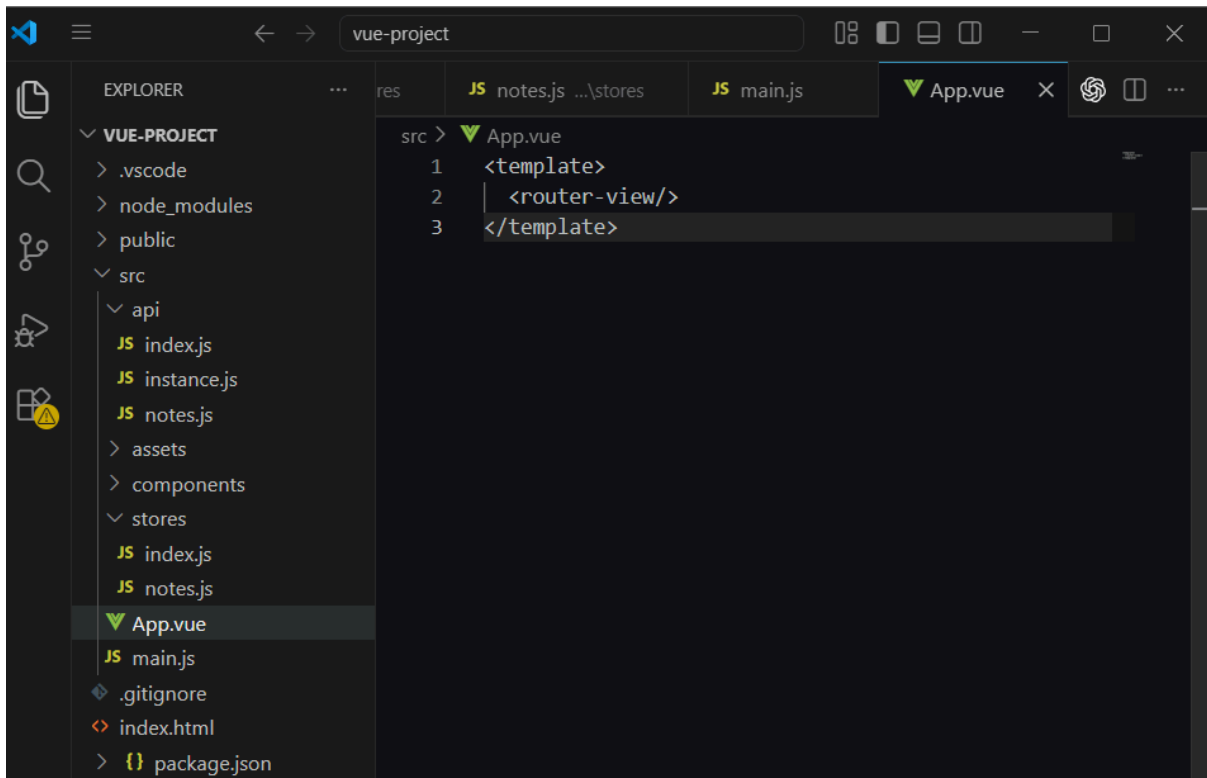


3. Компоненты, роутинг

1) Компонент NoteCard.vue+

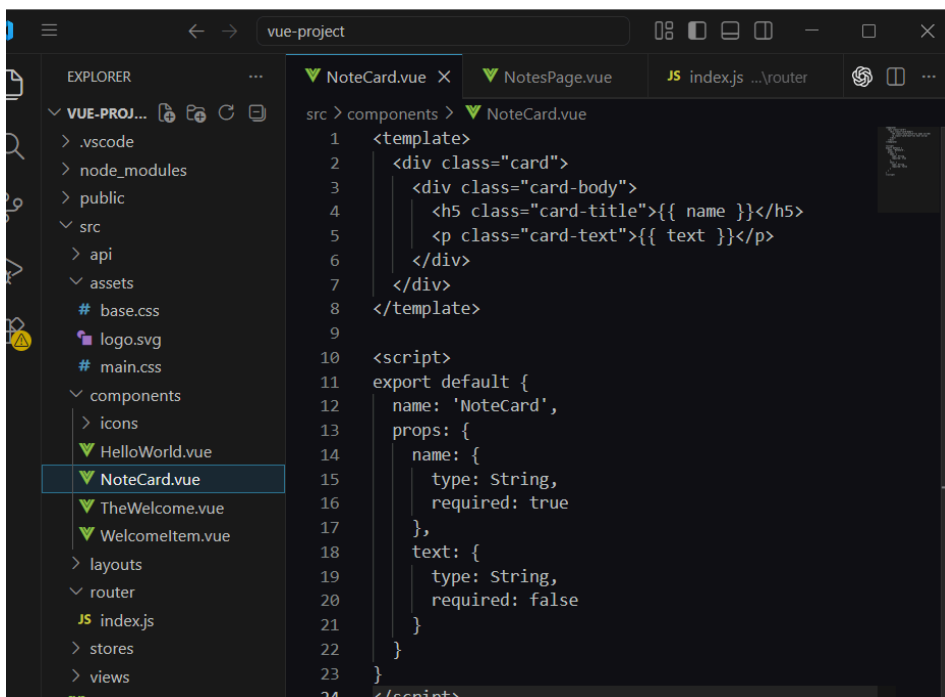


2) Создание Router+

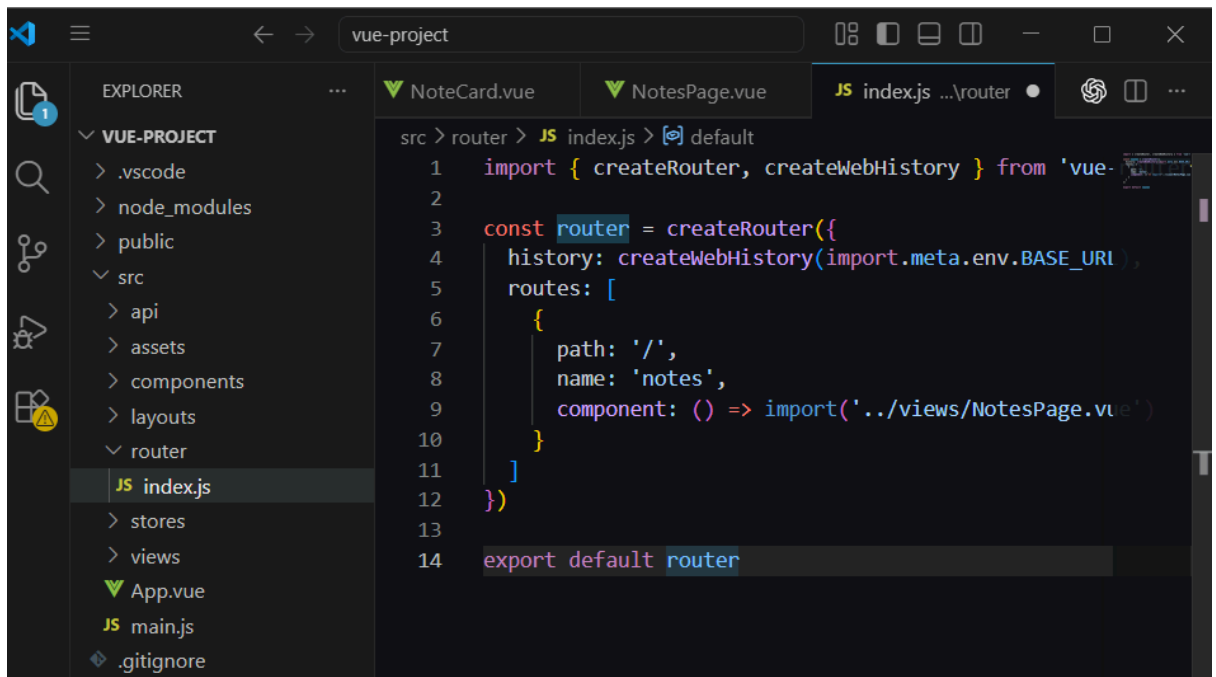

The screenshot shows the Visual Studio Code editor with a project named 'vue-project'. The Explorer sidebar on the left shows the file structure, with 'src > router > JS index.js' selected. The main editor window displays the code for 'index.js' with the following content:

```
src > router > JS index.js > default
1  import { createRouter, createWebHistory } from 'vue-router'
2
3  const router = createRouter({
4    history: createWebHistory(import.meta.env.BASE_URL),
5    routes: [
6      {
7        path: '/',
8        name: 'notes',
9        component: () => import('../views/NotesPage.vue')
10     }
11   ]
12 })
13
14 export default router
```

3) Создание Layout +

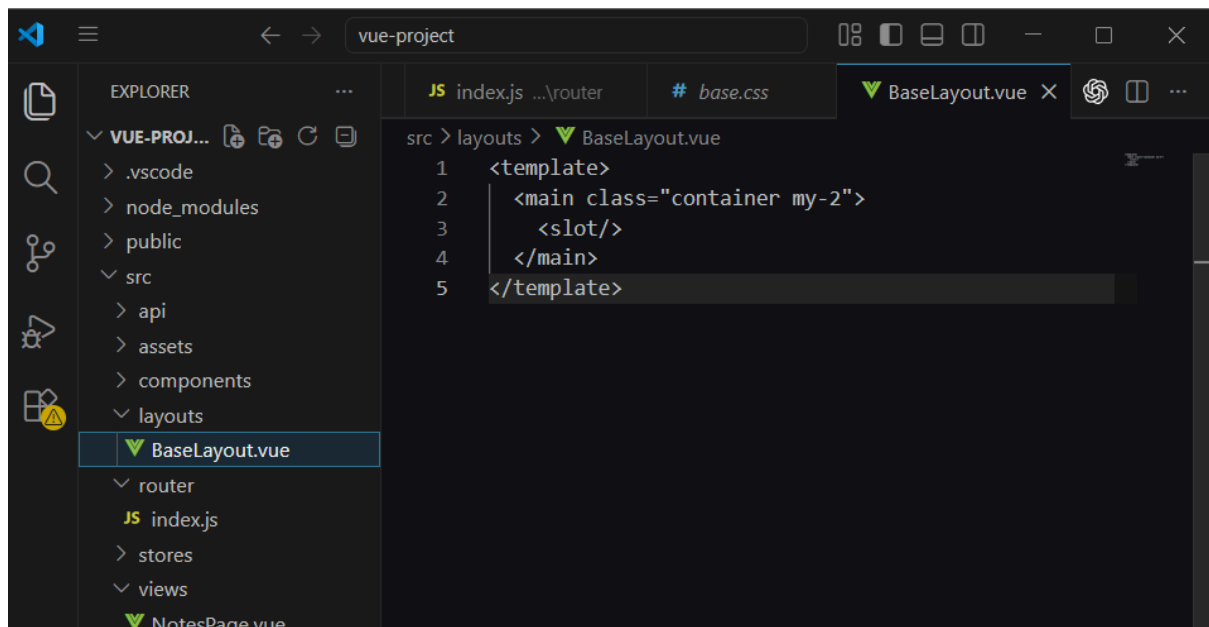

The screenshot shows the Visual Studio Code editor with the same 'vue-project'. The Explorer sidebar shows 'src > layouts > BaseLayout.vue' selected. The main editor window displays the code for 'BaseLayout.vue' with the following content:


```
src > layouts > BaseLayout.vue
1  <template>
2    <main class="container my-2">
3      <slot/>
4    </main>
5  </template>
```

4) NotesPage+



```
1 <template>
2 <base-layout>
3 <h1>Notes app</h1>
4 <form
5   ref="noteForm"
6   @submit.prevent="createCard"
7   class="d-flex flex-column my-5"
8 >
9   <input
10    type="text"
11    v-model="form.name"
12    class="my-1"
13    placeholder="Заголовок заметки"
14  >
15  <textarea
16    cols="30"
17    rows="10"
18    v-model="form.text"
19    class="my-1"
20    placeholder="Текст заметки"
21  />
22  <button type="submit" class="btn btn-primary">Отправить
23 </form>
24
25  <div class="row row-cols-1 row-cols-md-2 g-4 mt-5" id="notes">
26    <div class="col" v-for="note in notes" :key="note.id">
27      <note-card :name="note.name" :text="note.text"/>
28    </div>
29  </div>
30 </base-layout>
```

```
1 <template>
2 <base-layout>
29 </div>
30 </base-layout>
31 </template>
32
33 <script>
34 import BaseLayout from '@layouts/BaseLayout.vue'
35 import NoteCard from '@components/NoteCard.vue'
36 import { mapActions, mapState } from 'pinia'
37 import useNotesStore from '@stores/notes'
38
39 export default {
40   name: 'NotesPage',
41   components: { BaseLayout, NoteCard },
42   data() {
43     return {
44       form: {
45         name: '',
46         text: '',
47         userId: 1
48       }
49     }
50   },
51   computed: {
52     ...mapState(useNotesStore, ['notes'])
53   },
54   methods: {
55     ...mapActions(useNotesStore, ['loadNotes', 'createNote']),
56     async createCard() {
57       await this.createNote(this.form)
58       await this.loadNotes()
59       this.$refs.noteForm.reset()
60     }
61   },
62   mounted() {
63     this.loadNotes()
64   }
65 }
66 </script>
```


5) Обновила App.vue

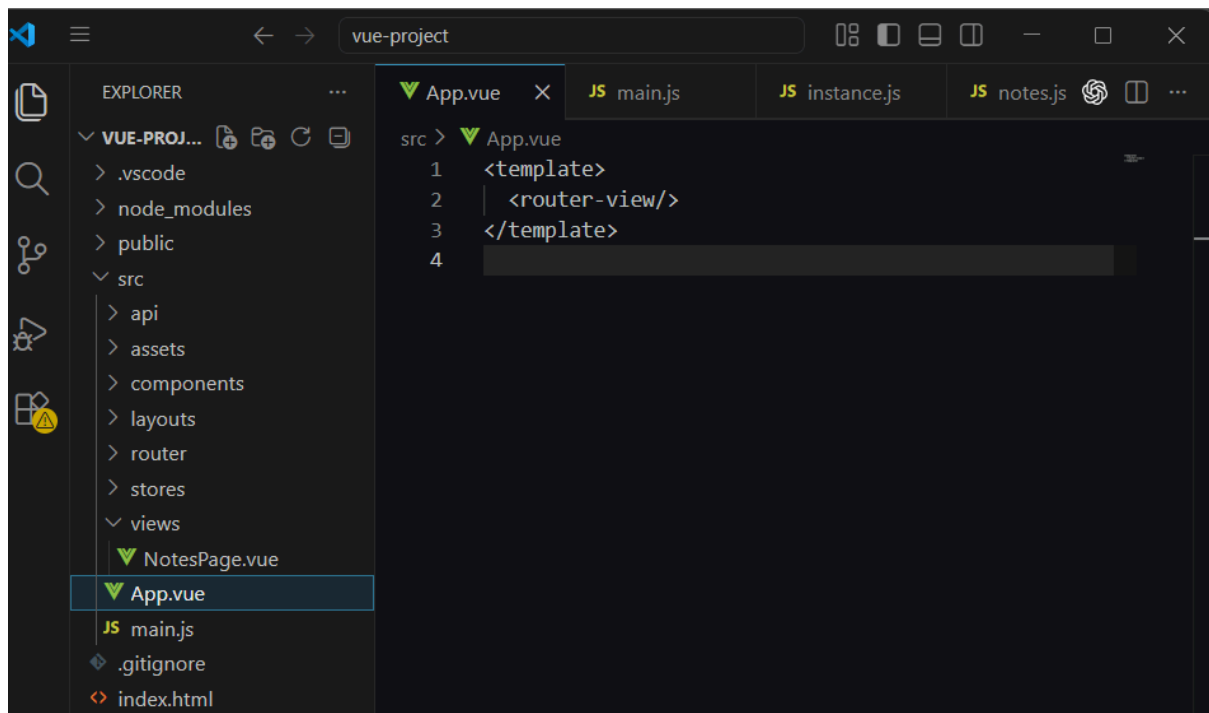


6) Обновила [main.js](#)

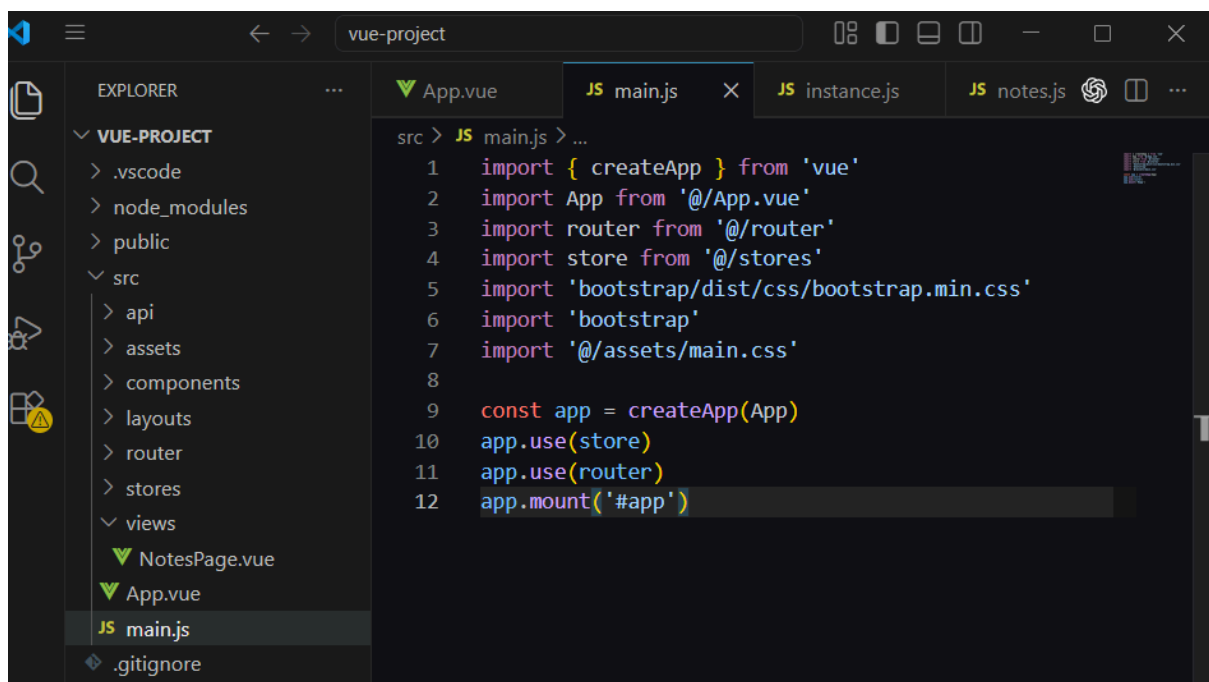

7) Интерфейс приложения

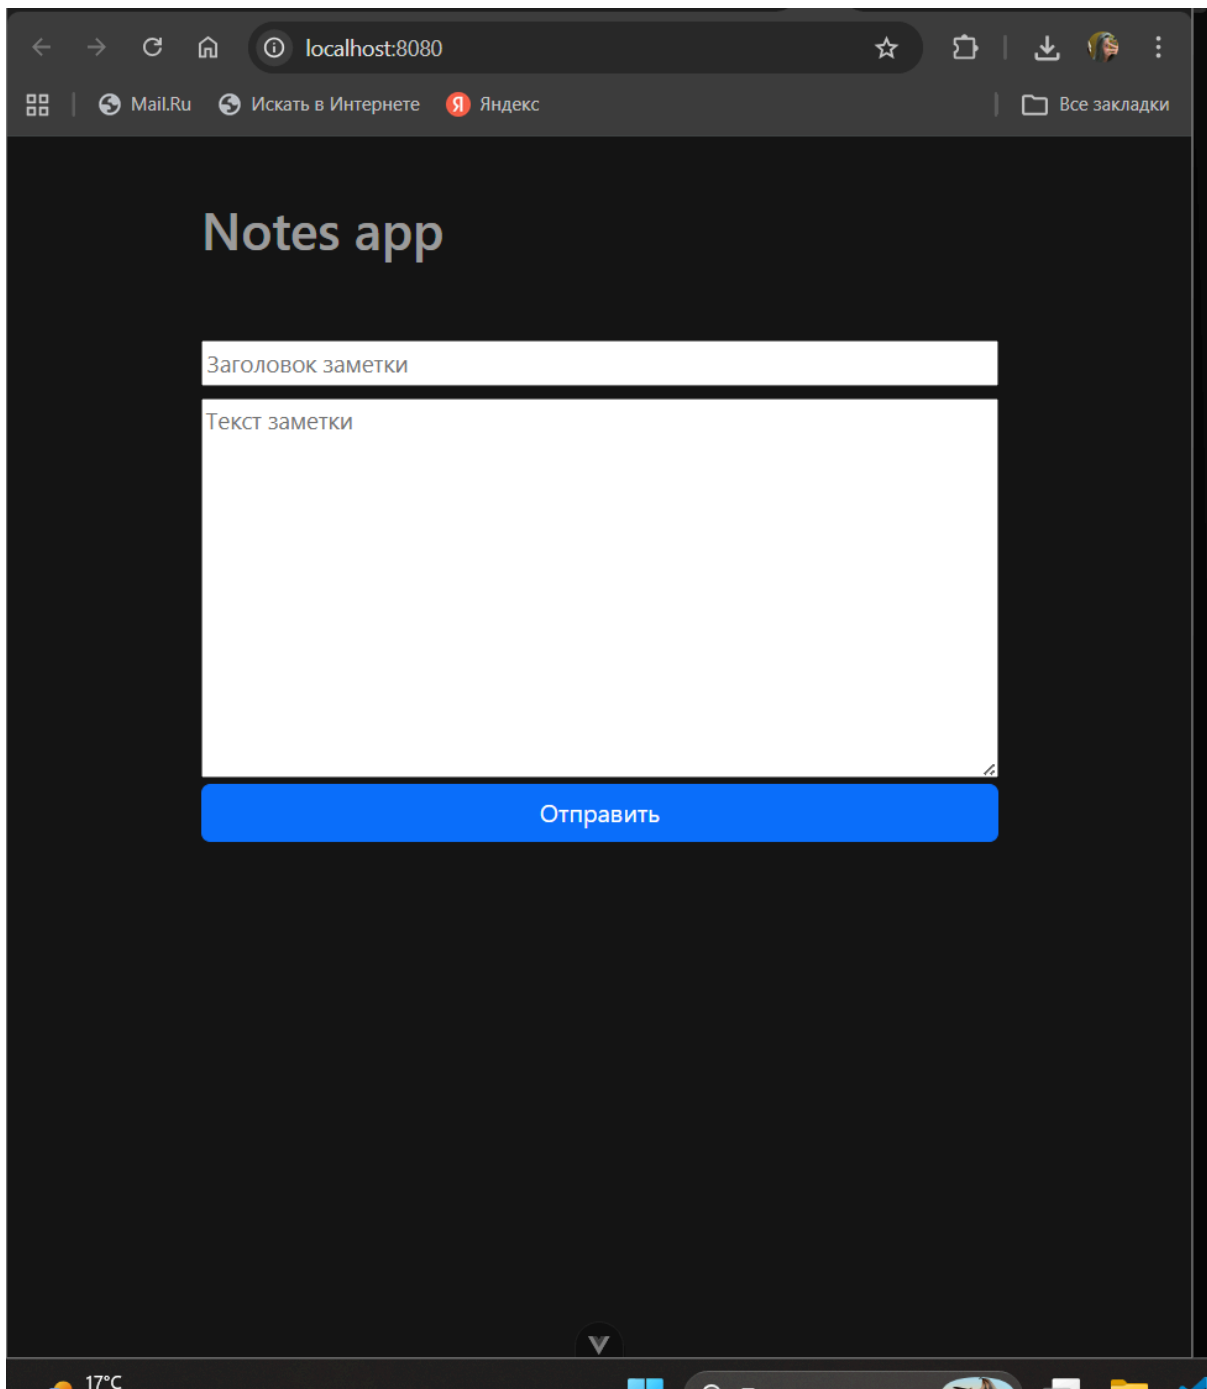

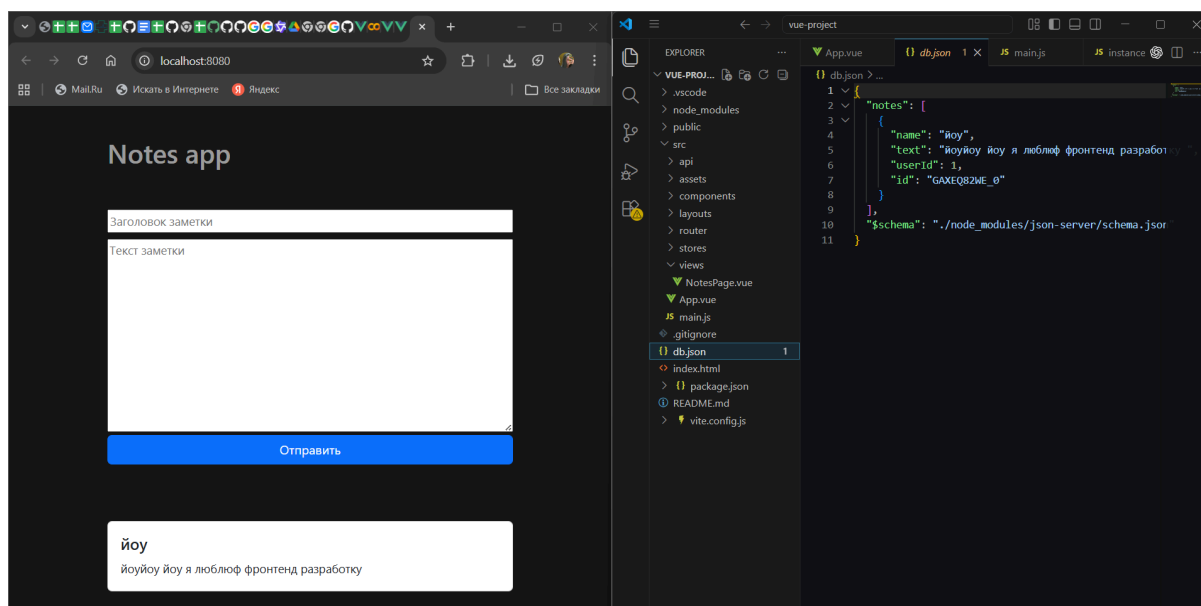

все гуд работает

Вывод

За выполнение работы я изучила основные команды пакетного менеджера npm и освоила инициализацию проекта на vue.js.

Были реализованы:

- Настройка проекта с добавлением зависимостей (axios, bootstrap, vue-router, pinia)
- Создание модульной структуры с разделением на api, хранилища, компоненты
- Создание формы с двусторонним связыванием данных и обработкой отправки

В результате было сделано одностраничное приложение для работы с заметками

