

all_steps_activity_recognition_final_version_scaling

January 12, 2021

```
[1]: from helpers import math_helper
from sensors.activpal import *
from utils import read_functions
from scipy import signal
from sklearn.model_selection import train_test_split
from sklearn import tree
from sklearn.metrics import f1_score, plot_confusion_matrix, confusion_matrix,
    ↳accuracy_score, precision_score, recall_score, confusion_matrix,
    ↳classification_report
from sklearn.ensemble import RandomForestClassifier
from sklearn.preprocessing import StandardScaler

import pandas as pd
import numpy as np
import statistics
import os
import pickle
import matplotlib.pyplot as plt
```

Adnan Akbas # Feature Extraction

```
[2]: activpal = Activpal()
standard_scaler = StandardScaler()

features_columns = ['standard_deviation_x', 'mean_x', 'standard_deviation_y',
    ↳'mean_y', 'standard_deviation_z', 'mean_z', 'activiteit']
#activity_columns = ['activity_cycling', 'activity_walking',
    ↳'activity_running', 'activity_jumping', 'activity_standing',
    ↳'activity_traplopen', 'activity_sitten']
#activities = ['fietsen licht', 'fietsen zwaar', 'lopen', 'rennen', 'springen',
    ↳'staan', 'traplopen', 'zitten']

activity_columns = ['activity_cycling', 'activity_walking', 'activity_running',
    ↳'activity_standing', 'activity_sitten']
activities = ['fietsen licht', 'fietsen zwaar', 'lopen', 'rennen', 'staan',
    ↳'zitten']
```

```
test_users = ['BMR004', 'BMR034', 'BMR097']
segment_size = 9.4
```

```
[3]: def extract_features_from_correspondent(correspondent):
    features_df = pd.DataFrame(columns=features_columns, index=pd.
    ↳to_datetime([]))

    # Getting dataset for a correspondent
    activities_df = read_functions.read_activities(correspondent)

    for activity_name in activities:
        activity = activities_df.loc[activity_name]
        if not activity.empty:
            start_time = activity.start
            stop_time = activity.stop
            activpal_df = activpal.read_data(correspondent, start_time,
            ↳stop_time)

            # denormalizing dataset
            activpal_df['x'] = math_helper.
            ↳convert_value_to_g(activpal_df['pal_accX'])
            activpal_df['y'] = math_helper.
            ↳convert_value_to_g(activpal_df['pal_accY'])
            activpal_df['z'] = math_helper.
            ↳convert_value_to_g(activpal_df['pal_accZ'])

            date_range = pd.date_range(start_time, stop_time,
            ↳freq=str(segment_size) + 'S')

            for time in date_range:
                segment_time = time + pd.DateOffset(seconds=segment_size)
                activpal_segment = activpal_df[(activpal_df.index >= time) &
                ↳(activpal_df.index < segment_time)]

                stdev_x = statistics.stdev(activpal_segment['x']) if
                ↳len(activpal_segment['x']) >= 2 else 0
                mean_x = activpal_segment['x'].mean()

                stdev_y = statistics.stdev(activpal_segment['y']) if
                ↳len(activpal_segment['y']) >= 2 else 0
                mean_y = activpal_segment['y'].mean()

                stdev_z = statistics.stdev(activpal_segment['z']) if
                ↳len(activpal_segment['z']) >= 2 else 0
                mean_z = activpal_segment['z'].mean()
```

```

        features_df.loc[segment_time] = [stdev_x, mean_x, stdev_y,
↪mean_y, stdev_z, mean_z, activity_name]

    return features_df

```

```

[4]: def extract_features_from_correspondents(correspondents):
    all_features_df = pd.DataFrame(index=pd.to_datetime([]))

    for correspondent in correspondents:
        print("Extracting " + correspondent)

        features_df = extract_features_from_correspondent(correspondent)
        all_features_df = pd.concat([all_features_df, features_df])

    print("Done extracting features")

    return all_features_df

def extract_features_from_all_correspondents(exclude_test_correspondent = True):

    exclude_directory = ['output', 'throughput', 'Test data', '
↪ipynb_checkpoints']
    exclude_respondents = ['BMR015', 'BMR025', 'BMR027', 'BMR035', 'BMR051',
↪'BMR054', 'BMR060', 'BMR099', 'BMR100']

    exclude = exclude_respondents + exclude_directory

    if (exclude_test_correspondent):
        exclude = exclude + test_users

    correspondents = []

    for directory in os.walk('../..//data'):
        if directory[0] == '../..//data':
            correspondents = directory[1]

    for exclude_item in exclude:
        if exclude_item in correspondents:
            correspondents.remove(exclude_item)

    return extract_features_from_correspondents(correspondents)

```

```

[5]: features_dataset = extract_features_from_all_correspondents()

```

Extracting BMR012

Extracting BMR030

```
Extracting BMR044
Extracting BMR043
Extracting BMR011
Extracting BMR098
Extracting BMR014
Extracting BMR036
Extracting BMR052
Extracting BMR002
Extracting BMR031
Extracting BMR008
Extracting BMR033
Extracting BMR064
Extracting BMR055
Extracting BMR041
Extracting BMR053
Extracting BMR042
Extracting BMR018
Extracting BMR058
Extracting BMR040
Extracting BMR032
Done extracting features
```

1 model preperation

```
[6]: features_dataset[activity_columns] = 0

#features_dataset.loc[(features_dataset['activiteit'] == 'springen'),
↳ 'activity_jumping'] = 1
#features_dataset.loc[(features_dataset['activiteit'] == 'traplopen'),
↳ 'activity_traplopen'] = 1
features_dataset.loc[(features_dataset['activiteit'] == 'lopen'),
↳ 'activity_walking'] = 1
features_dataset.loc[(features_dataset['activiteit'] == 'rennen'),
↳ 'activity_running'] = 1
features_dataset.loc[(features_dataset['activiteit'] == 'staan'),
↳ 'activity_standing'] = 1
features_dataset.loc[(features_dataset['activiteit'] == 'zitten'),
↳ 'activity_sitten'] = 1
features_dataset.loc[(features_dataset['activiteit'] == 'fietsen licht'),
↳ 'activity_cycling'] = 1
features_dataset.loc[(features_dataset['activiteit'] == 'fietsen zwaar'),
↳ 'activity_cycling'] = 1

features_dataset.drop('activiteit', axis=1, inplace=True)
features_dataset.dropna(how='any', inplace=True)
```

```
features_dataset.head()
```

```
[6]:
```

	standard_deviation_x	mean_x	standard_deviation_y	\
2019-10-14 09:44:09.400	0.469460	-0.799782	0.178449	
2019-10-14 09:44:18.800	0.475820	-0.835328	0.174250	
2019-10-14 09:44:28.200	0.504157	-0.822037	0.188928	
2019-10-14 09:44:37.600	0.489660	-0.822526	0.195269	
2019-10-14 09:44:47.000	0.501598	-0.843972	0.188185	

	mean_y	standard_deviation_z	mean_z	\
2019-10-14 09:44:09.400	0.101537	0.219465	0.803141	
2019-10-14 09:44:18.800	0.113403	0.221300	0.798150	
2019-10-14 09:44:28.200	0.108004	0.230099	0.783237	
2019-10-14 09:44:37.600	0.109591	0.234475	0.780564	
2019-10-14 09:44:47.000	0.120230	0.240469	0.792553	

	activity_cycling	activity_walking	activity_running	\
2019-10-14 09:44:09.400	1	0	0	
2019-10-14 09:44:18.800	1	0	0	
2019-10-14 09:44:28.200	1	0	0	
2019-10-14 09:44:37.600	1	0	0	
2019-10-14 09:44:47.000	1	0	0	

	activity_standing	activity_sitten
2019-10-14 09:44:09.400	0	0
2019-10-14 09:44:18.800	0	0
2019-10-14 09:44:28.200	0	0
2019-10-14 09:44:37.600	0	0
2019-10-14 09:44:47.000	0	0

1.1 Preparing feature dataset for learning

1.1.1 Splitting in x and y

```
[37]: x = features_dataset[features_columns[:-1]]
      y = features_dataset[activity_columns]

      ## split
      x_train, x_valid, y_train, y_valid = train_test_split(x, y, test_size=0.2,
      ↪random_state=0, stratify=y)

      ## scaling
      x_train = standard_scaler.fit_transform(x_train)
```

```
x_valid = standard_scaler.transform(x_valid)
```

2 Random tree forest

```
[38]: ftc = RandomForestClassifier(n_estimators=53, random_state=0)
      ftc.fit(x_train, y_train)
```

```
[38]: RandomForestClassifier(n_estimators=53, random_state=0)
```

2.1 Validation result

```
[39]: predictions = ftc.predict(x_valid)
```

Accuracy

```
[40]: accuracy_score(y_valid, predictions, normalize=True)
```

```
[40]: 0.9858823529411764
```

Classification report

```
[41]: print(classification_report(y_valid, predictions,
      ↪target_names=activity_columns, zero_division=0))
```

	precision	recall	f1-score	support
activity_cycling	1.00	1.00	1.00	282
activity_walking	0.99	0.98	0.99	145
activity_running	0.98	0.97	0.98	141
activity_standing	0.96	0.99	0.97	141
activity_sitten	1.00	0.98	0.99	141
micro avg	0.99	0.99	0.99	850
macro avg	0.99	0.98	0.98	850
weighted avg	0.99	0.99	0.99	850
samples avg	0.99	0.99	0.99	850

2.1.1 Confusion matrix


```
[42]: import seaborn as sn

#confusion_matrix(valid_y, prediction_y)
cm = confusion_matrix(y_valid.values.argmax(axis=1), predictions.
    ↪argmax(axis=1), normalize='true')

df_cm = pd.DataFrame(cm, index=activity_columns, columns=activity_columns)
df_cm.head()
plt.figure(figsize = (10,7))
sn.heatmap(df_cm, annot=True, cmap='Blues')

plt.title("Validation dataset")
plt.xlabel("predicted label")
plt.ylabel("true label")
```

```
[42]: Text(68.09375, 0.5, 'true label')
```

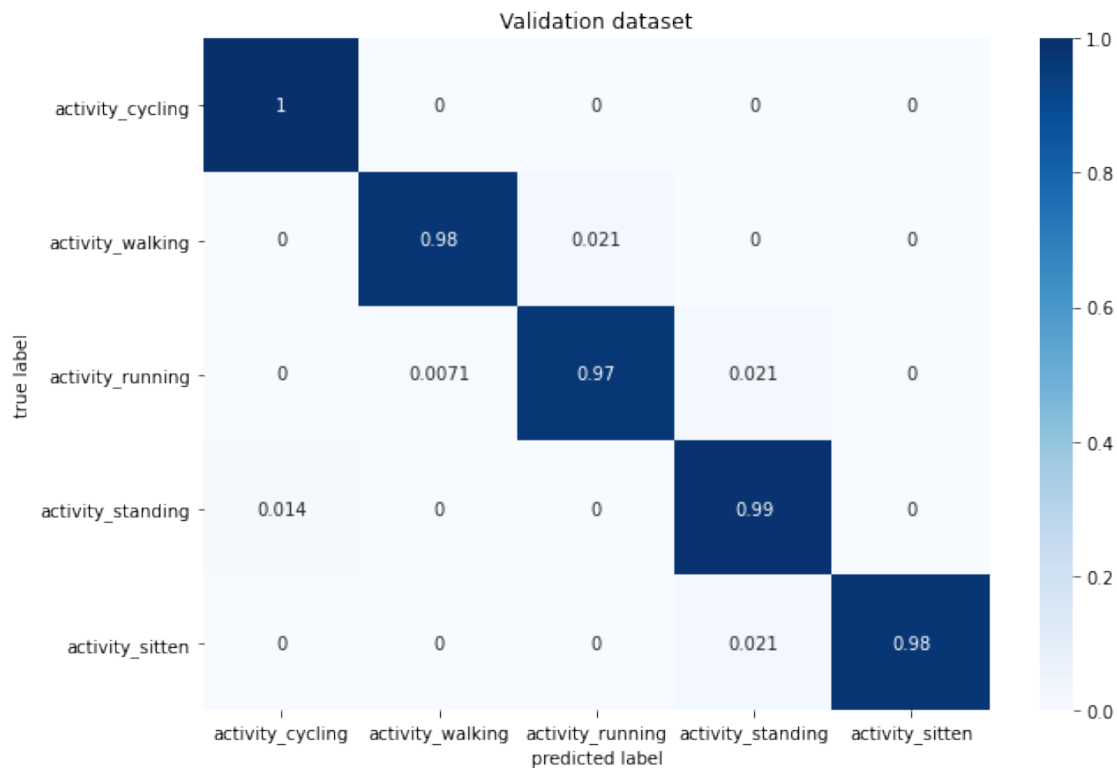

2.2 Test result

```
[43]: test_dataset = extract_features_from_correspondents(test_users)

test_dataset[activity_columns] = 0

#features_dataset.loc[(features_dataset['activiteit'] == 'springen'),
↳ 'activity_jumping'] = 1
#features_dataset.loc[(features_dataset['activiteit'] == 'traplopen'),
↳ 'activity_traplopen'] = 1
test_dataset.loc[(test_dataset['activiteit'] == 'lopen'), 'activity_walking'] =
↳ 1
test_dataset.loc[(test_dataset['activiteit'] == 'rennen'), 'activity_running']
↳ = 1
test_dataset.loc[(test_dataset['activiteit'] == 'staan'), 'activity_standing']
↳ = 1
test_dataset.loc[(test_dataset['activiteit'] == 'zitten'), 'activity_sitten'] =
↳ 1
test_dataset.loc[(test_dataset['activiteit'] == 'fietsen licht'),
↳ 'activity_cycling'] = 1
test_dataset.loc[(test_dataset['activiteit'] == 'fietsen zwaar'),
↳ 'activity_cycling'] = 1

test_dataset.drop('activiteit', axis=1, inplace=True)
test_dataset.dropna(how='any', inplace=True)

x = test_dataset[features_columns[:-1]]
y = test_dataset[activity_columns]
```

```
Extracting BMR004
Extracting BMR034
Extracting BMR097
Done extracting features
```

```
[44]: ## scaling
x = standard_scaler.transform(x)
```

```
[45]: test_prediction_y = ftc.predict(x)
```

```
[46]: accuracy_score(y, test_prediction_y, normalize=True)
```

```
[46]: 0.9846153846153847
```

```
[47]: print(classification_report(y, test_prediction_y, target_names=activity_columns,
↳ zero_division=0))
```

	precision	recall	f1-score	support
--	-----------	--------	----------	---------

activity_cycling	1.00	1.00	1.00	192
activity_walking	0.95	1.00	0.97	97
activity_running	1.00	0.92	0.96	104
activity_standing	0.97	0.99	0.98	96
activity_sitten	1.00	1.00	1.00	96
micro avg	0.99	0.98	0.99	585
macro avg	0.98	0.98	0.98	585
weighted avg	0.99	0.98	0.99	585
samples avg	0.98	0.98	0.98	585

3 save model

```
[48]: from joblib import dump
      dump(ftc, 'activity.dat')
```

```
[48]: ['activity.dat']
```

```
[49]: # implemented scaling but it does not affect model result not or very very
      ↪ little
```

```
[ ]:
```