



SCRIPTING SELECTION STATES v0.4

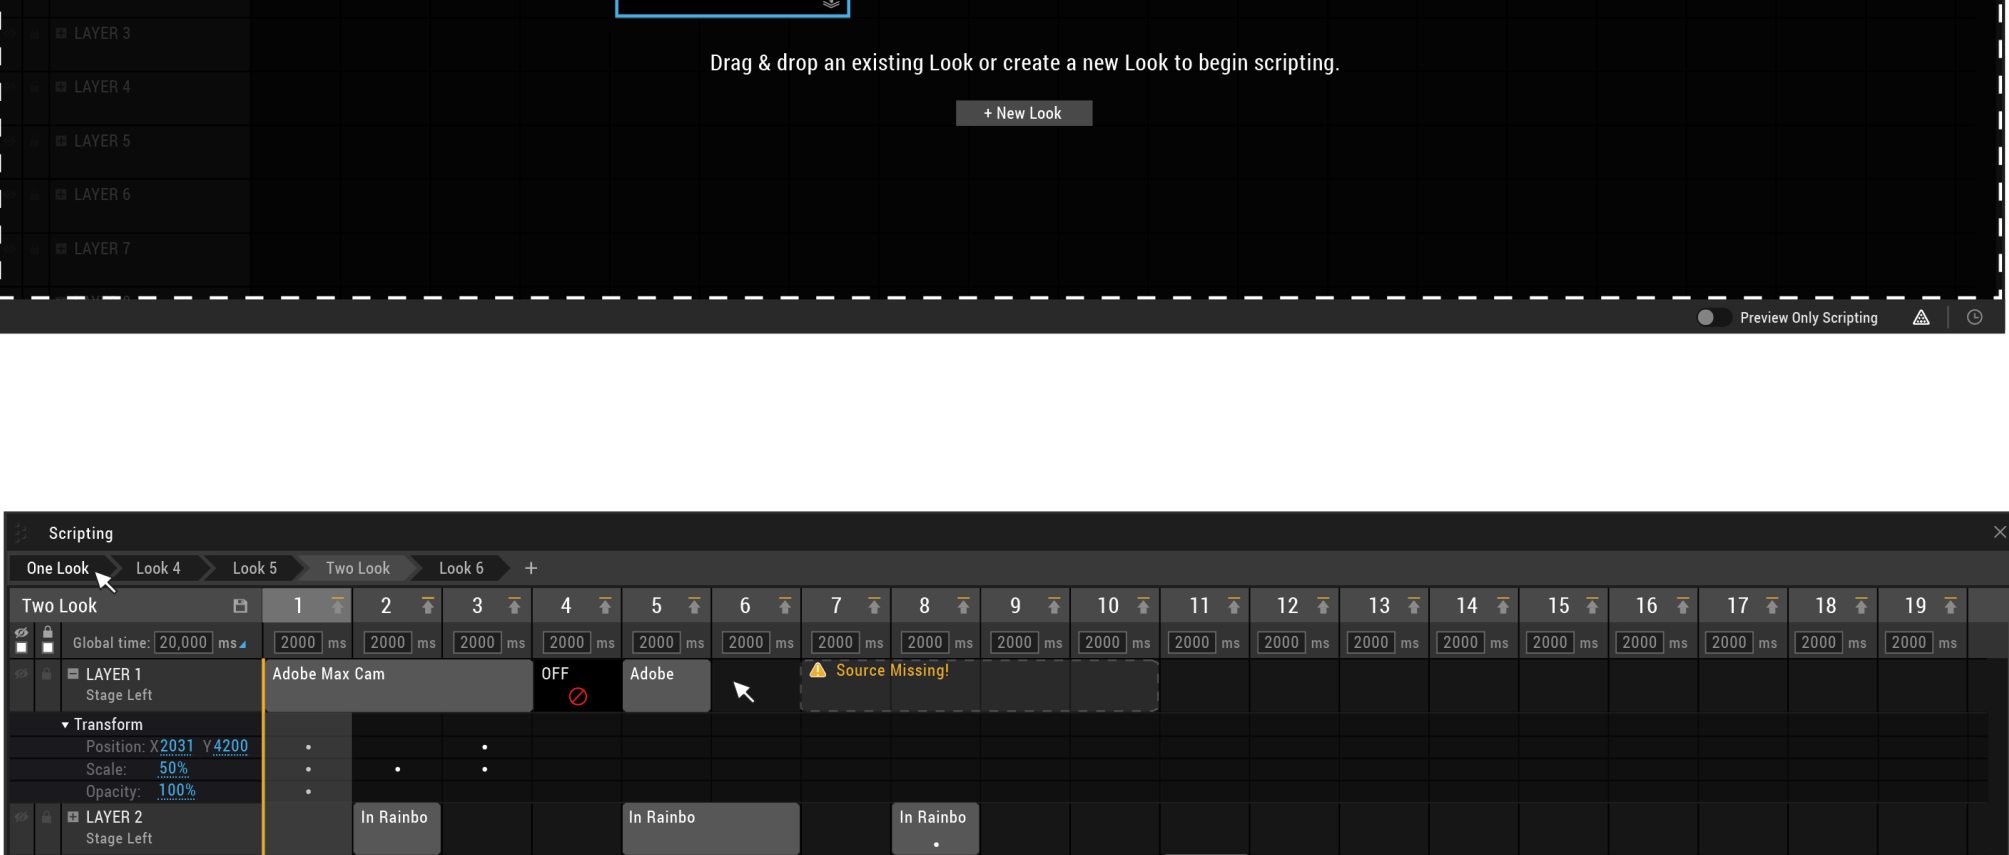

A. LOADING A PRESET

The user can drag a preset into an empty scripting tab to populate it with the preset's layer information.

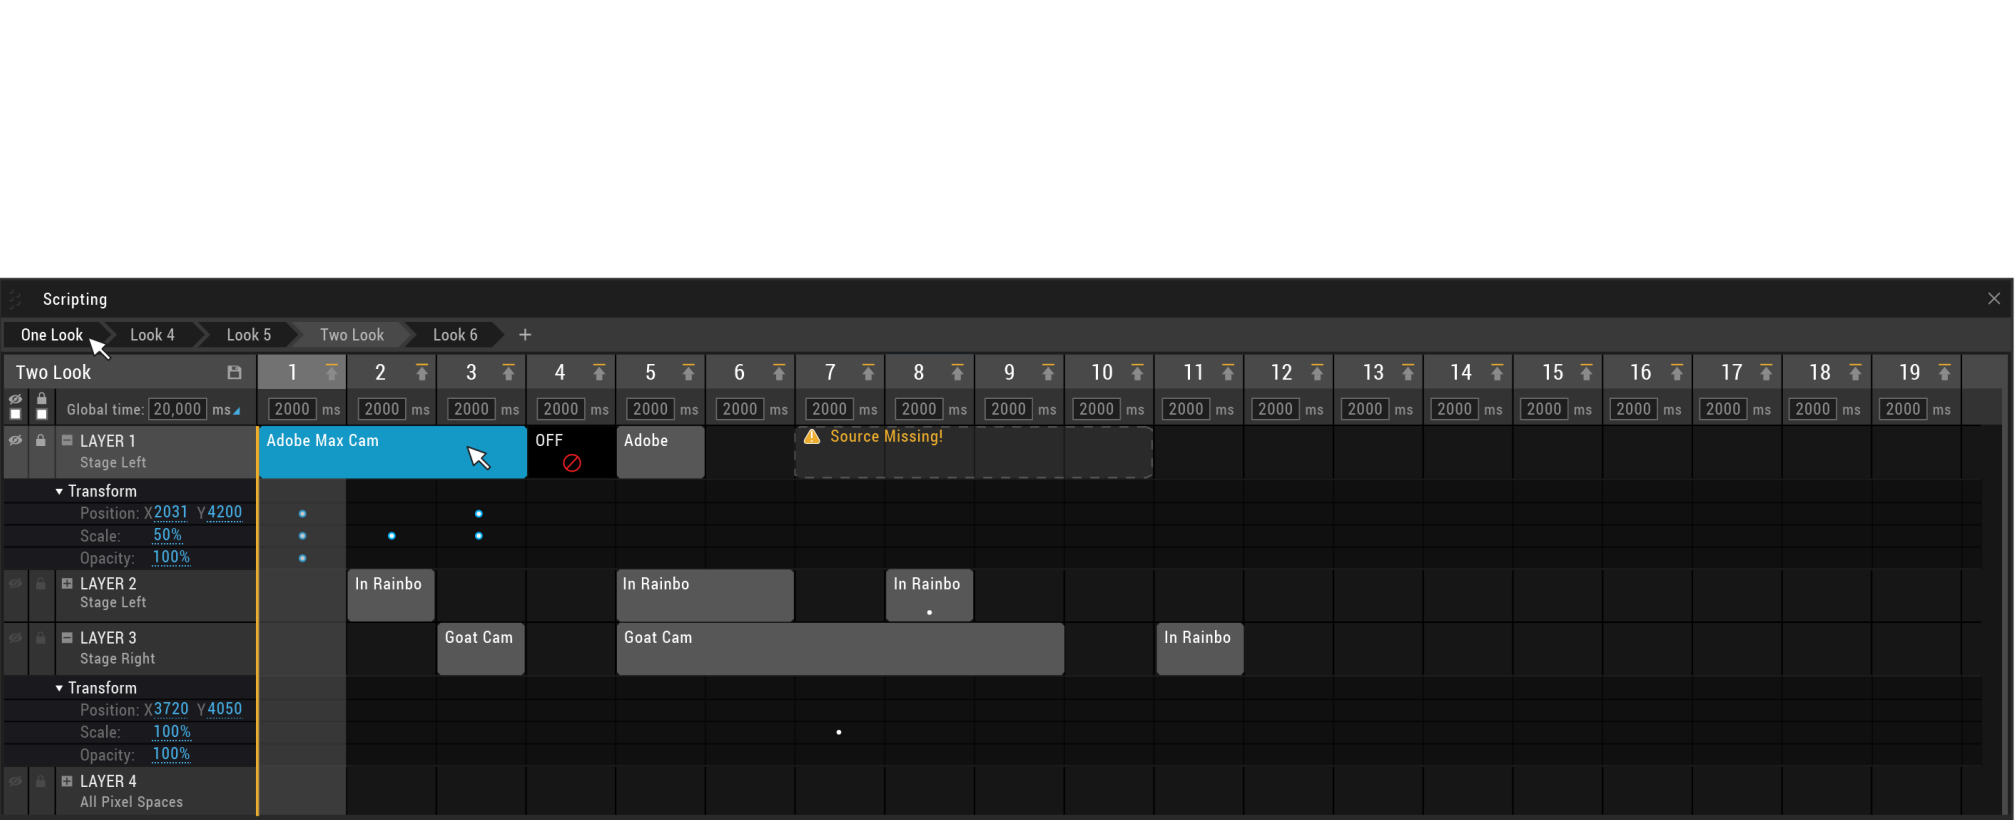

B. DEFAULT - CUE SELECTION

Once the preset is loaded, the selection should be applied to cue 1 by default. If the user expands the layer, the keyframe properties should represent the values of the currently selected cue (there must always be a selected cue).

Keyframe indicators (dots) should only appear on the lowest child node in the tree view structure. For example, if the layer is fully collapsed (i.e. no keyframe categories or keyframes properties showing), the keyframe indicators should appear on the source element. Once the user expands the layer, the keyframe indicators should be removed from the source element and displayed on the corresponding child nodes—either the keyframe category if it is collapsed, or on the keyframe properties themselves. Keyframe indicators should not be duplicated across multiple tiers of the tree view structure.

C. SOURCE ELEMENT SELECTED

If the user selects a source element, the cue selection position should not change but the corresponding row (shown here as the Layer 1 header) should enter a selection state. Keyframes belonging to the source element should be selected when the source element is selected. The user can CTRL+Click to deselect individual keyframes.

The user should be able to right-click on a source element in order to Cut, Copy, Paste, and Remove it. Anytime one of these operations is performed, all corresponding selected keyframes should become part of the operation.

Pasting a source element with keyframes into a position that has an existing source element/keyframes should overwrite the old data.

D. LAYER SELECTED

If a layer is selected from the margin (i.e. the left side of the screen), all source elements and corresponding keyframes in that row should become selected. If the row is expanded, all the keyframe categories and keyframes should also appear selected. The user can CTRL+Click to deselect individual objects.

The user should be able to right-click on a layer in order to Cut, Copy, Paste, and Remove it. Anytime one of these operations is performed, all corresponding selected source elements and keyframes should become part of the operation.

Anytime something is pasted into a layer by using the context-menu from the margin, the data should be pasted into the first cue, overwriting anything that is already in place.

E. KEYFRAME CATEGORY SELECTED

If a keyframe category is selected, all keyframes that belong to parameters in the category should be selected.

The user should be able to right-click on a keyframe category in order to Cut, Copy, Paste, and Remove it. Anytime one of these operations is performed, all corresponding selected keyframes should become part of the operation.

Anytime keyframes are pasted into the keyframe category by using the context-menu from the margin, they should be pasted into the first cue, overwriting anything that is already in place.

F. KEYFRAME ROW(S) SELECTED

The user should be able to select one or multiple keyframe properties from the margin with a CTRL+click. Selecting keyframe properties from the margin should select all corresponding row and keyframes in the table.

The user should be able to right-click on a keyframe row heading in order to Cut, Copy, Paste, and Delete it. Anytime one of these operations is performed, all corresponding selected keyframes should become part of the operation.

Anytime keyframes are pasted into the keyframe heading by using the context-menu from the margin, they should be pasted into the first cue, overwriting anything that is already in place.

G. INDIVIDUAL KEYFRAME SELECTED IN TABLE

When the user selects an individual keyframe in the table, the selection of the cue should move to the corresponding cue and the corresponding keyframe label in the margin should be highlighted.

H. MULTIPLE KEYFRAMES SELECTED IN TABLE

When the user selects multiple keyframes in the table (via CTRL-click or marquee selection), the last selected cue column should appear selected (e.g. if the user starts the selection on a keyframe in cue 1 and ends the selection on a keyframe in cue 3, column 3 should appear selected). All corresponding keyframe labels in the margin should also be selected.

The user should be able to select one or more keyframes in order to Cut, Copy, Paste, and Delete them.

Anytime keyframes are pasted into the table, they should be pasted into the same arrangement they were cut or copied. If a user pastes into an incorrect row (i.e. pasting a position value into the opacity row), the software should automatically correct the mistake and paste all data into the correct row).

I. CUT/COPY AND PASTING A SOURCE ELEMENT

Whenever a source element is moved (dragged) or cut/copied and pasted, the existing keyframes that are attached to the source element should be moved with it.

J. CUT/COPY AND PASTING A SOURCE ELEMENT TO A SMALLER DESTINATION

When cut/copying and pasting a source element into a destination that is smaller than the source element itself, the source element and corresponding keyframes being pasted should overwrite any existing source element and/or keyframes in the destination.

K. CUT/COPY AND PASTING KEYFRAMES TO A SHORT SOURCE ELEMENT

Keyframes can be copied and pasted independently of source elements. When pasting a keyframe into a destination that has existing keyframes, the old keyframes should be overwritten.

J. CUT/COPY AND PASTING A SOURCE ELEMENT TO A SMALLER DESTINATION

When cut/copying and pasting a source element into a destination that is smaller than the source element itself, the source element and corresponding keyframes being pasted should overwrite any existing source element and/or keyframes in the destination.