
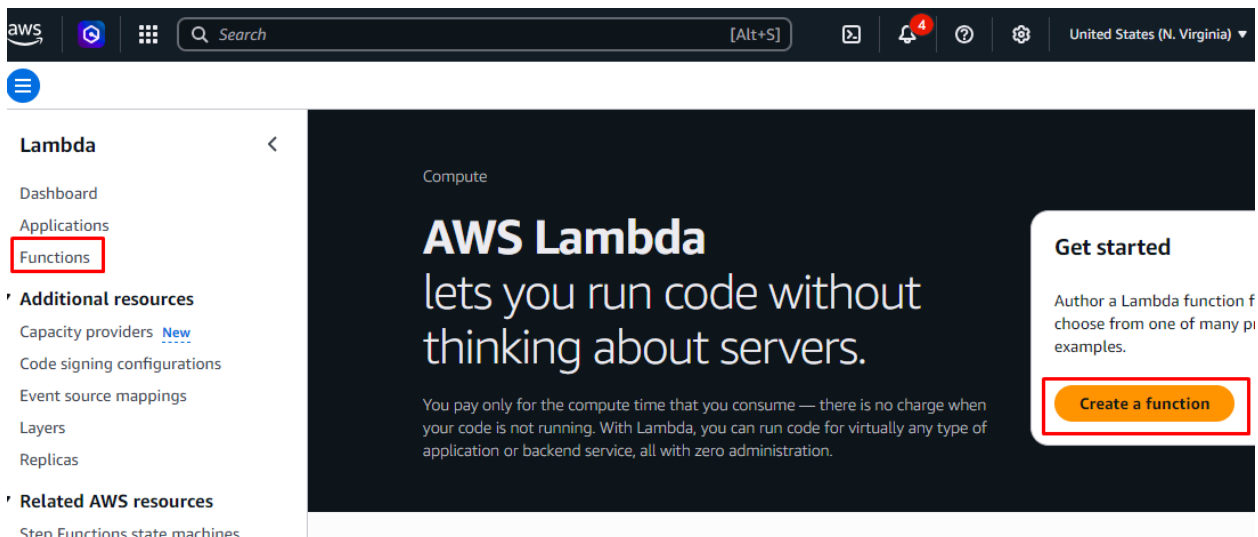


1. Creating a lambda function

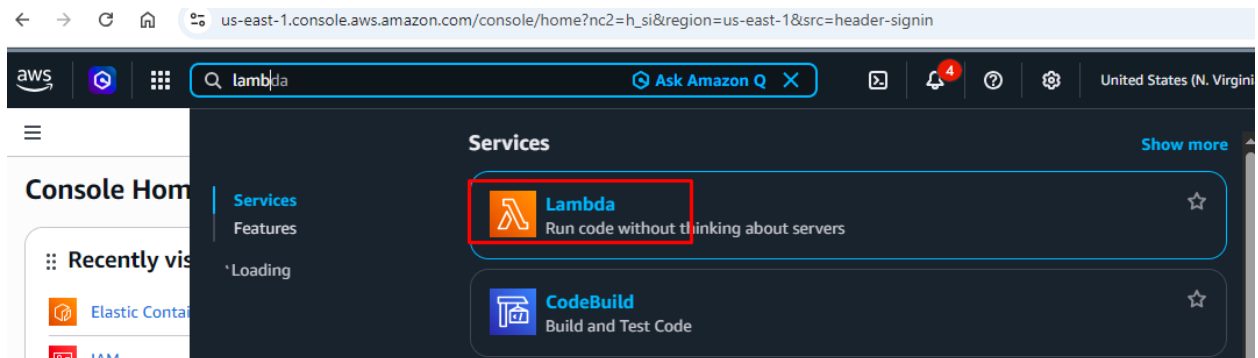

Create function [Info](#)

Choose one of the following options to create your function.

☒ **Author from scratch**
Start with a simple Hello World example.

☐ **Use a blueprint**
Build a Lambda application from sample code and config presets for common use cases.

Basic information

Function name

Enter a name that describes the purpose of your function.

basic-function

Function name must be 1 to 64 characters, must be unique to the Region, and can't include spaces. Valid characters are a-z, A-Z, 0-9, hyphen

[Runtime](#) | [Info](#)

Considering your requirement you can give any name

Runtime [Info](#)

Choose the language to use to write your function. Note that the console code editor supports only Node.js, Python, and Ruby.

nodejs24.x

🔍 Search Runtime

Latest supported

.NET 10 (C#/F#/PowerShell)

Java 25

Node.js 24.x

Python 3.14

Ruby 3.4

Amazon Linux 2023

Basic information

Function name

Enter a name that describes the purpose of your function.

basic-function

Function name must be 1 to 64 characters, must be unique to the Region, and can't include spaces. Valid characters a

Runtime | Info

Choose the language to use to write your function. Note that the console code editor supports only Node.js, Python,

Python 3.12

Durable execution - new | Info

Enable durable execution to simplify building resilient multi-step applications that checkpoint progress and resume a

☐ Enable

≡ [Lambda](#) > [Functions](#) > Create function

ⓘ | 📄

Durable execution - new | Info

Enable durable execution to simplify building resilient multi-step applications that checkpoint progress and resume after interruptions. Supports Python and Node.js runtimes. [View pricing](#) [🔗](#).

☐ Enable

Architecture | Info

Choose the instruction set architecture you want for your function code.

☐ arm64

☒ x86_64

Permissions | Info

By default, Lambda will create an execution role with permissions to upload logs to Amazon CloudWatch Logs. You can customize this default role later when adding triggers.

▶ Change default execution role

▶ Additional configurations

Use additional configurations to set up networking, security, and governance for your function. These settings help secure and customize your Lambda function deployment.

[Cancel](#)

Create function

Getting started

Now that you created your function, choose a path to continue developing.

Set up local development



Console credentials - new

You can now use your console credentials to securely access your AWS resources locally. [Learn more](#)

Code and test

Download your function code, edit locally, install dependencies, and test changes on your computer.

Deploy and invoke

Package your local changes into a ZIP file, deploy back to AWS Lambda in one step, and see it work in the cloud.

Connect to other services

Let other AWS services automatically run your function when events happen. [Add trigger](#)

Write a test

Send test data to your function and see how it responds. [Add test](#)

☐ Don't show again [Dismiss](#)

Lambda > Functions > basic-function

Successfully created the function **basic-function**. You can now change its code and configuration. To invoke your function with a test event, click [Test](#).

Function overview

[Diagram](#) | [Template](#)

**basic-function**

 Layers (0)

[+ Add trigger](#)


[+ Add destination](#)

Function
arn:aws:lambda:us-east-1:123456789012:func:**basic-function**

Description
-


Last modified
11 seconds ago


[Code](#) | [Test](#) | [Monitor](#) | [Configuration](#) | [Aliases](#) | [Versions](#)

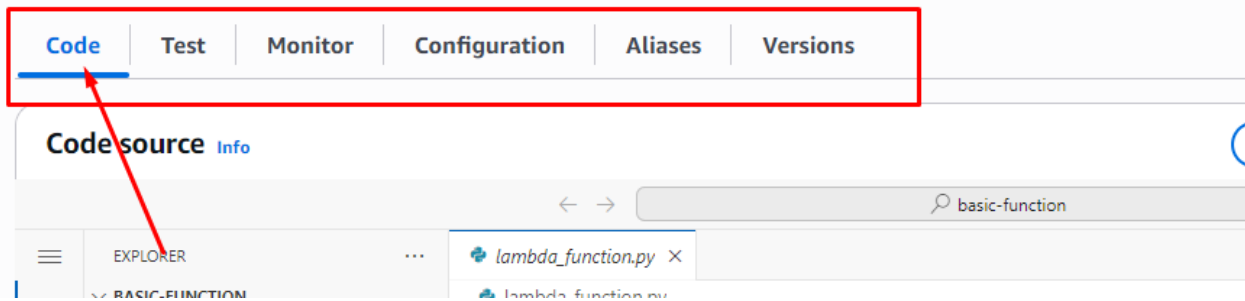


```
import json
```


```
def lambda_handler(event, context):  
    # Sample name variable  
    name = "DVS-TECHNOLOGIES"  
    print(event)  
    # You can also get name dynamically from event (optional)  
    if 'name' in event:  
        name = event['name']  
    message = f"Hi {name} welcome to Dvs GenAI Cloud Sessions"  
    # Response  
    return {  
        "statusCode": 200,  
        "body": message  
    }
```

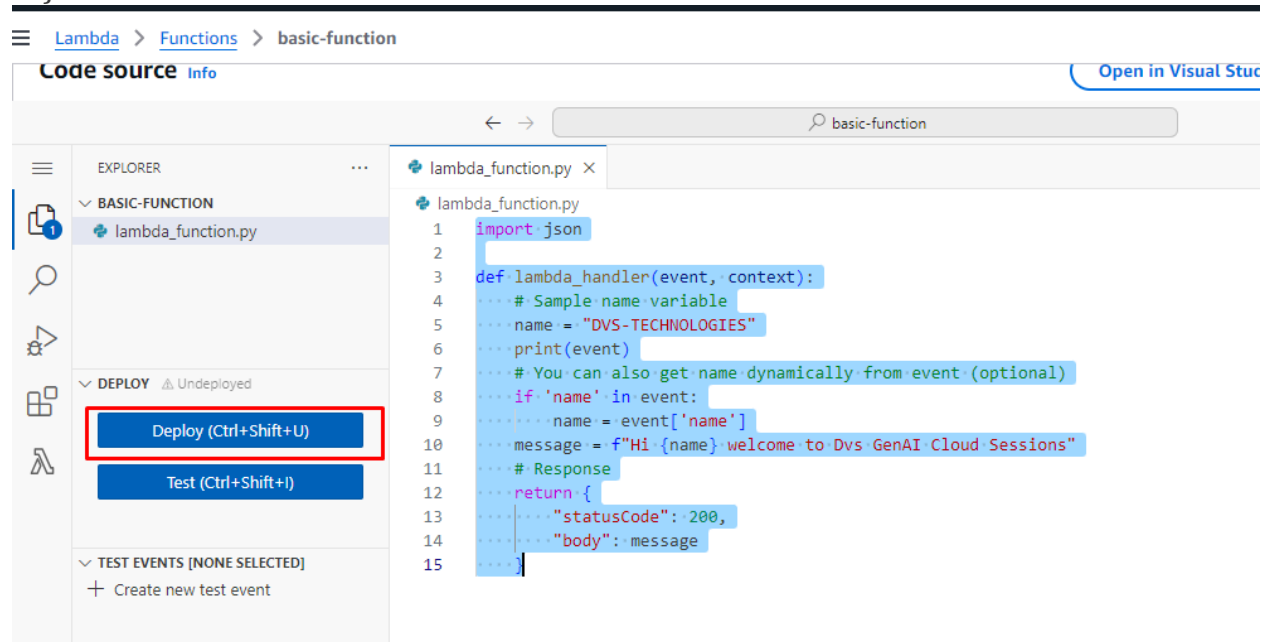

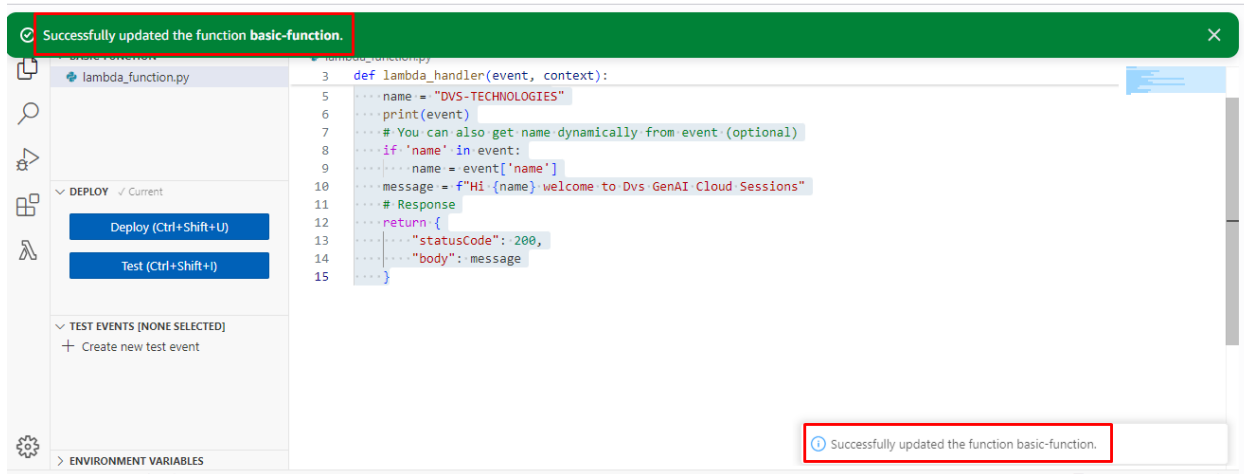

2. Testing the application code

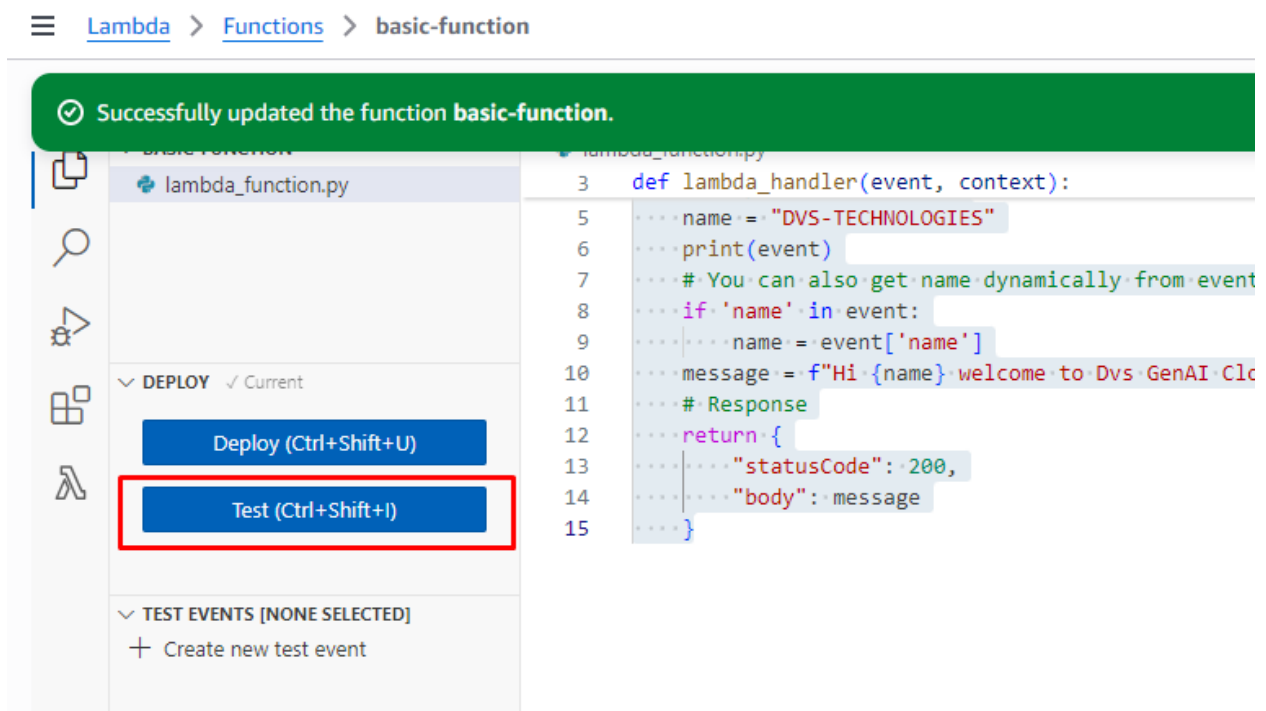

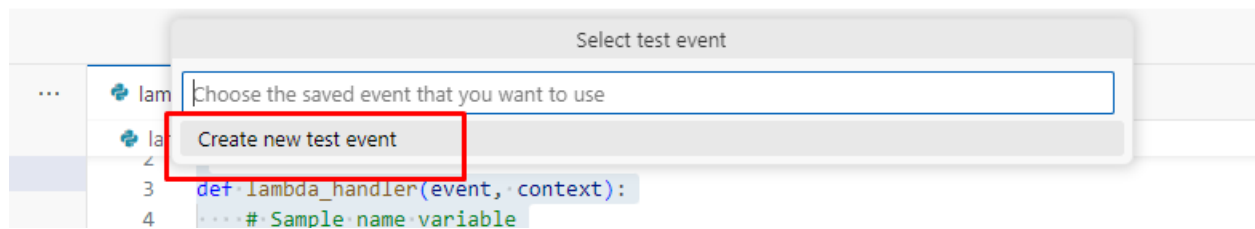

Create new test event X

Create new test event

Invoke Save

Event Name

TEST-MY-APP

Maximum of 25 characters consisting of letters, numbers, dots, hyphens and underscores.

Invocation type

☒ Synchronous
Executes the Lambda function and blocks until receiving the function's response, with a

☐ Shareable
This event is available to IAM users within the same account who have permissions to access and use shareable events. [Learn more](#)

Template - optional

Hello World

Event JSON

```
1 {  
2  
3 }
```

Lambda Layout: US

[Open in Visual Studio Code](#) [Upload from](#)

Create new test event X

Create new test event

Invoke Save

Event Name

TEST-MY-APP

Maximum of 25 characters consisting of letters, numbers, dots, hyphens and underscores.

Invocation type

☒ Synchronous

Executes the Lambda function and blocks until receiving the function's response, with a maximum timeout of 15 minutes. Returns function output or error details directly to the calling application.

Lambda > Functions > basic-function

✓ The test event "TEST-MY-APP" was successfully saved.



Code source info

EXPLORER

BASIC-FUNCTION

lambda_function.py

lambda function.py

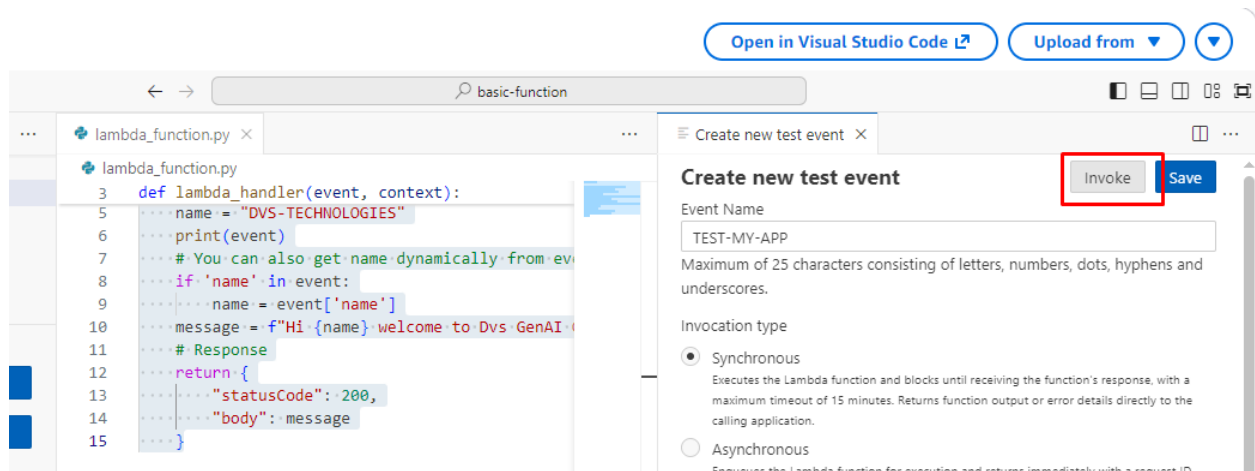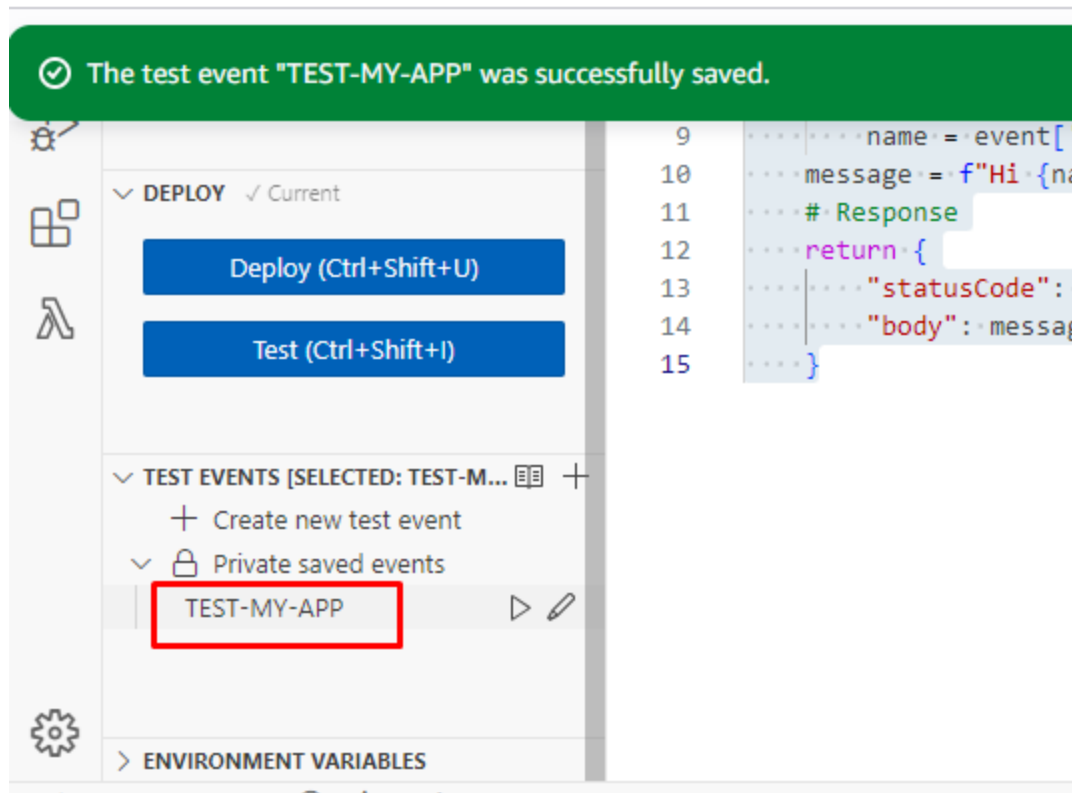

Lambda > Functions > basic-function

The test event "TEST-MY-APP" was successfully saved.

DEPLOY ✓ Current

Deploy (Ctrl+Shift+U)

Test (Ctrl+Shift+I)

TEST EVENTS [SELECTED: TEST-MY-APP]

+ Create new test event

Private saved events

TEST-MY-APP

ENVIRONMENT VARIABLES

```
7 ... # You can also get name dynamically from event
8 ... if 'name' in event:
9 ...     name = event['name']
10 ... message = f"Hi {name} welcome to Dvs GenAI Cloud Sessions"
11 ... # Response
12 ... return {
13 ...     "statusCode": 200,
14 ...     "body": message
15 ... }
```

PROBLEMS OUTPUT CODE REFERENCE LOG TERMINAL

Status: Succeeded

Test Event Name: TEST-MY-APP

Response:

"statusCode": 200,

"body": "Hi DVS-TECHNOLOGIES welcome to Dvs GenAI Cloud Sessions"

Execution Results

Test event is saved successfully.

The area below shows the last 4 KB of the execution log.

lambda Deployed 0 0 0 Amazon Q

Since we provided default value for our variable name as “DVS-TECHNOLOGIES” we are receiving the output as same.

Lambda > Functions > basic-function

EXPLORER

BASIC-FUNCTION

lambda_function.py

DEPLOY ✓ Current

Deploy (Ctrl+Shift+U)

Test (Ctrl+Shift+I)

TEST EVENTS [SELECTED: TEST-MY-APP]

+ Create new test event

Private saved events

TEST-MY-APP

lambda_function.py

```
3 def lambda_handler(event, context):
4     # Sample name variable
5     name = "DVS-TECHNOLOGIES"
6     print(event)
7     # You can also get name dynamically from event
8     if 'name' in event:
9         name = event['name']
10    message = f"Hi {name} welcome to Dvs GenAI Cloud Sessions"
11    # Response
12    return {
13        "statusCode": 200,
14        "body": message
15    }
```

Create new test event

Enqueues the Lambda function for execution and returns immediately with a request ID. Function processes independently, with results optionally sent to a configured destination like SQS, SNS, or EventBridge.

Event sharing settings

Private



Shareable

Template - optional


TEST-MY-APP

Event JSON

"name": "RAMESH"

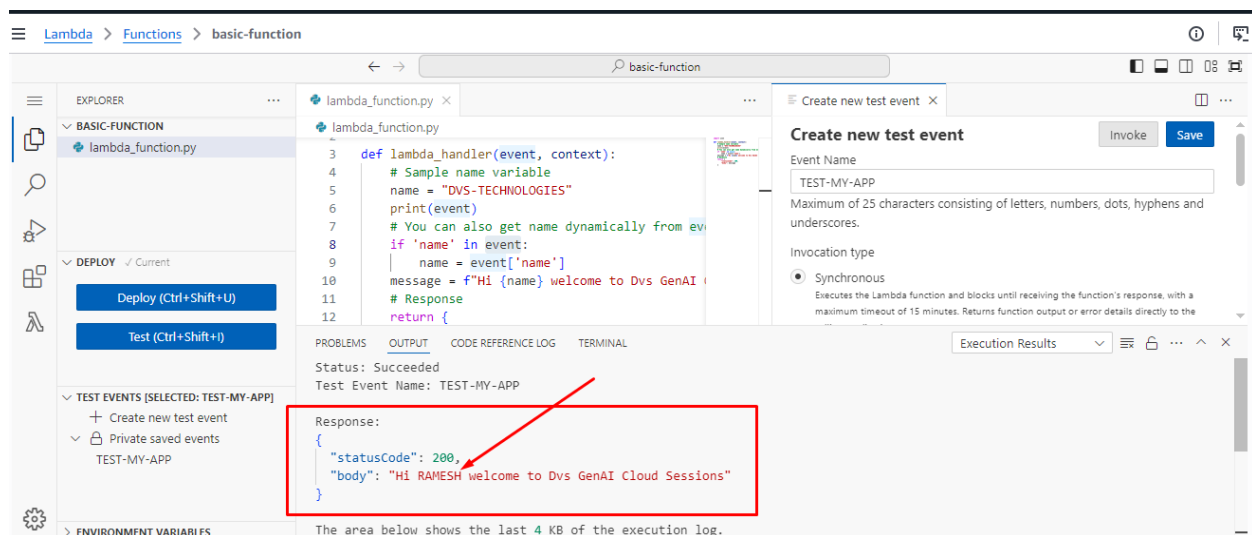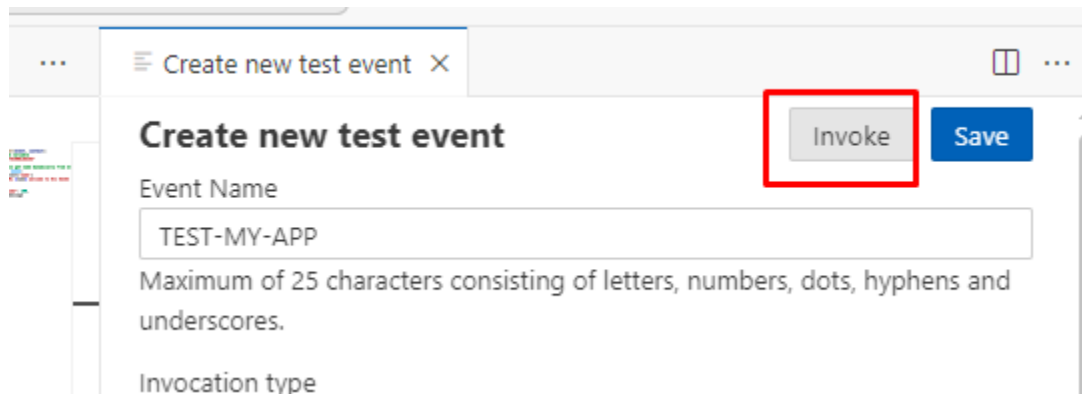

3. Debugging/Code Execution output

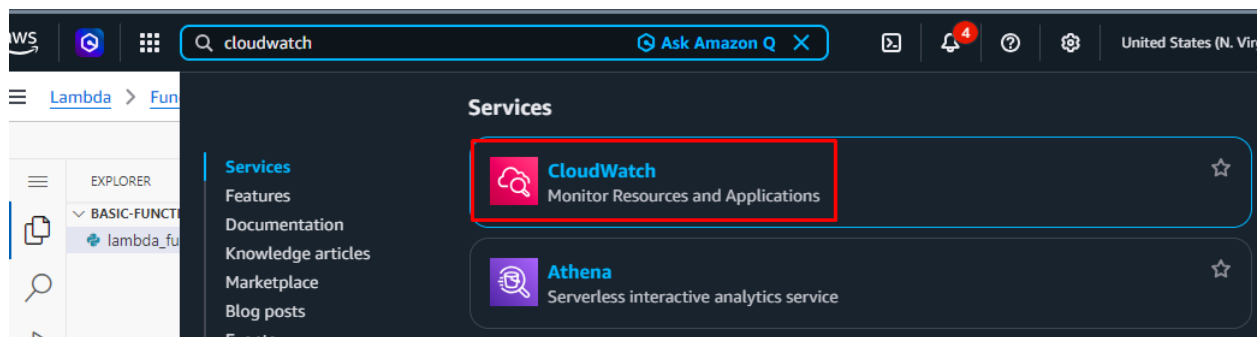

CloudWatch

Overview [info](#)

Overview [Filter by resource group](#) [info](#)

Get started with CloudWatch [View getting started page](#)

You don't have any alarms, metrics or default dashboard. Once you set them up they will be displayed.

Set alarms on any of your metrics to receive notification when your metric crosses your specified threshold.
[Create alarms](#)

Create and name any CloudWatch dashboard CloudWatch-Default to display it here.
[Create a default dashboard](#)

Get started with Observability solutions

CloudWatch > Log management

Log groups | Data sources - new | Summary

Get-set-go with unified data store

Log groups (1) [Actions](#) [View in Logs Insights](#) [Start](#)

By default, we only load up to 10,000 log groups.

☒ Exact match

☐	Log group	Log class	Anomaly d...	Del...	E
☐	/aws/lambda/basic-function	Standard	Configure	Off	

Above log group will get created with same name as your lambda function

CloudWatch

Favorites and recents

Application Signals (APM)

Infrastructure Monitoring

Logs

Log Management

Log Anomalies

Live Tail

Logs Insights

Contributor Insights

Metrics

Network Monitoring

Setup

7 minutes ago

Retention

Never expire

Stored bytes

-

Metric filters

0

Deletion protection

Off

Data protection

-

Sensitive data count

-

Bearer token au

Off

Log streams

Tags

Data protection

Anomaly detection

Metric filters

Subscripti

Log streams (1)

By default, we only load the most recent log streams.

Filter log streams or try prefix search

Exact match

Show expi

Log stream

2026/03/26/[\$LATEST]50842c0cf2a74e6d9bde59bbc4b386b0

2026-03-26 02:29:59 (UTC)

CloudWatch

Log management

/aws/lambda/basic-function

2026/03/26/[\$LATEST]50842c0cf2a74e6d9bde59bbc4b386b0

Log events

Actions

Start tailing

Filter events - press enter to search

Clear

1m

30m

1h

12h

Custom

Display

Timestamp

Message

2026-03-26T02:29:59.445Z

2026-03-26T02:29:59.465Z

END RequestId: db7ba7ba-8b03-4650-b3d2-44dc17c5fcc7

2026-03-26T02:29:59.465Z

REPORT RequestId: db7ba7ba-8b03-4650-b3d2-44dc17c5fcc7 Duration: 1.78 ms Billed Duration: 87 ms Memory Size: 128 MB Max Memo

2026-03-26T02:32:28.506Z

START RequestId: f73082e0-fc7b-4700-a583-b41e30fde23f Version: \$LATEST

2026-03-26T02:32:28.507Z

{'name': 'RAMESH'}

4. Exposing our lambda to outside world

The screenshot shows the AWS Lambda console interface. At the top, there's a navigation bar with the AWS logo, a search bar containing 'cloudwatch', and a 'United States (N. Virginia)' region selector. Below the navigation bar, the breadcrumb trail reads 'Lambda > Functions > basic-function'. The main content area has a tabbed interface with 'Code', 'Test', 'Monitor', 'Configuration' (highlighted with a red box), 'Aliases', and 'Versions'. On the left side, under the 'Configuration' section, there's a list of sub-sections: 'General configuration' (selected), 'Triggers', 'Permissions', 'Destinations', 'Function URL' (highlighted with a red box), 'Environment variables', 'Tags', 'VPC', and 'RDS databases'. The main panel displays the 'General configuration' details, including 'Description' (empty), 'Memory' (128 MB), 'Ephemeral storage' (512 MB), 'Timeout' (0 min 3 sec), and 'SnapStart' (None).

This screenshot shows the 'Function URL' configuration page in the AWS Lambda console. The breadcrumb trail is 'Lambda > Functions > basic-function'. The tabs 'Code', 'Test', 'Monitor', 'Configuration' (selected), 'Aliases', and 'Versions' are visible. On the left, the 'Function URL' sub-section is selected. The main panel shows the 'Function URL' configuration with a message: 'No Function URL' and 'No Function URL is configured.' Below this message is a button labeled 'Create function URL' (highlighted with a red box). A 'Create f' button is also visible in the top right corner of the main panel.

Lambda > Functions > basic-function > Configure Function URL

Choose the auth type for your function URL. [Learn more](#)

☐ AWS_IAM

Only authenticated IAM users and roles can make requests to your function URL.

☒ NONE

Lambda won't perform IAM authentication on requests to your function URL. The URL endpoint will be public unless you implement your own authentication.

Function URL permissions

When you choose auth type **NONE**, Lambda automatically creates the following resource-based policy and attaches it to your function URL. You can edit the policy later. To limit access to authenticated IAM users and roles, choose auth type **AWS_IAM**.

View policy statement

1 {

2 "Version": "2012-10-17",

3 "Statement": [

Lambda > Functions > basic-function > Configure Function URL

11 {

12 "lambda:FunctionUrlAuthType": "NONE"

13 }

14 },

15 {

16 "StatementId": "FunctionURLAllowInvokeAction",

17 "Effect": "Allow",

18 "Principal": "*",

19 "Action": "lambda:InvokeFunction",

20 "Resource": "arn:aws:lambda:us-east-1:472008046327:function:basic-function",

21 "Condition": {

22 "Bool": {

23 "lambda:InvokedViaFunctionUrl": "true"

24 }

25 }

26 }

27 }

28]

29 }

1:1 JSON

Additional settings

Cancel

Save

☰ [Lambda](#) > [Functions](#) > basic-function

✔ Your changes have been saved.

Code | Test | Monitor | **Configuration** | Aliases | Versions

Configuration

- General configuration
- Triggers
- Permissions
- Destinations
- Function URL**
- Environment variables
- Tags
- VPC

Function URL Info

ⓘ Your function URL is public. Anyone with the URL can access your function.

Function URL  https://3zawq5h5dwkfmz3nfocqojvvxi0ykvwh.lambdUrl.us-east-1.on.aws/ 	Auth type NONE
Creation time 1 second ago	Last modified 1 second ago
CORS (Not enabled)	

<https://3zawq5h5dwkfmz3nfocqojvvxi0ykvwh.lambdUrl.us-east-1.on.aws/>

5. Working with postman

Now we can invoke our lambda directly without above url. In order to work with backend urls we need to have software's like "postman". We have a web version available you can sign up using below

<https://blog.postman.com/announcing-postman-for-the-web-now-in-open-beta/>



← → ↺ 🏠 [blog.postman.com/announcing-postman-for-the-web-now-in-open-beta/](#) ☆ 📌 ⓘ

 Product ▾ Solutions ▾ Pricing Enterprise Resources ▾ [Contact Sales](#) [Sign In](#) [Sign Up for Free](#)

Blog ▾ AI API-First Product Updates Engineering Company News Tutorials



Click on signin

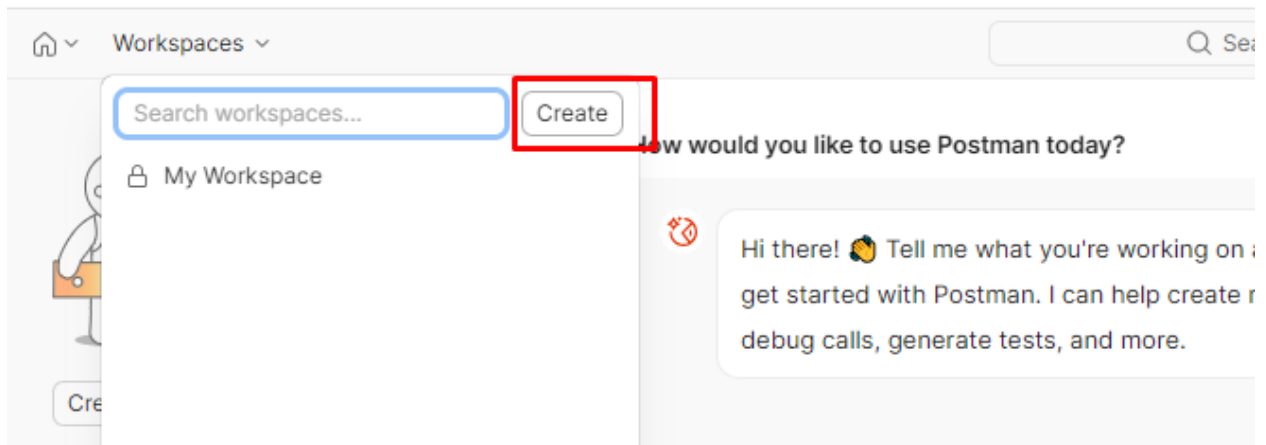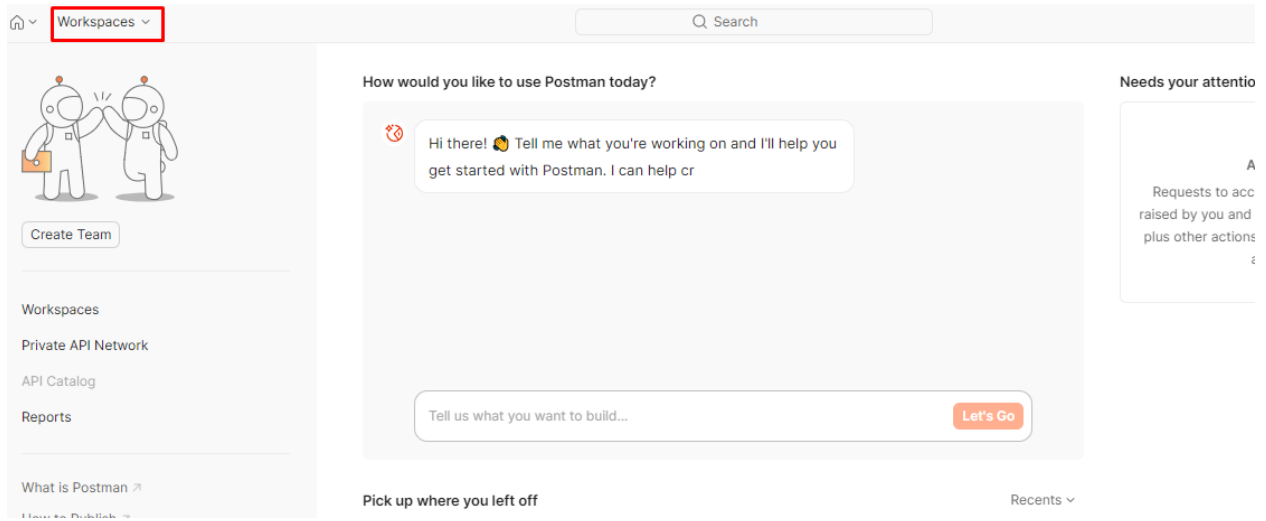

Create your workspace

Workspace name

DVS-GENAI

Select workspace type



Internal

Share APIs with your team.



Partner

[Upgrade plan](#)

Public

Everyone can access your APIs.

Who can access



Everyone in your team ▾

❖ Create with Postman AI

Ask AI to set up collections, specs, and environments for your API.

Describe what you want to build (e.g., "Payments API").

Since you don't have a team, we will create one for you along with this workspace.

[Cancel](#)[Create Workspace](#)

DVS-GENAI

Set up your team

What is your team's name?

DVS-GENAI



What will your team work on?



Other ▾

Invite people via email (optional)

Enter an email address

[Copy invite link](#)[Confirm](#)

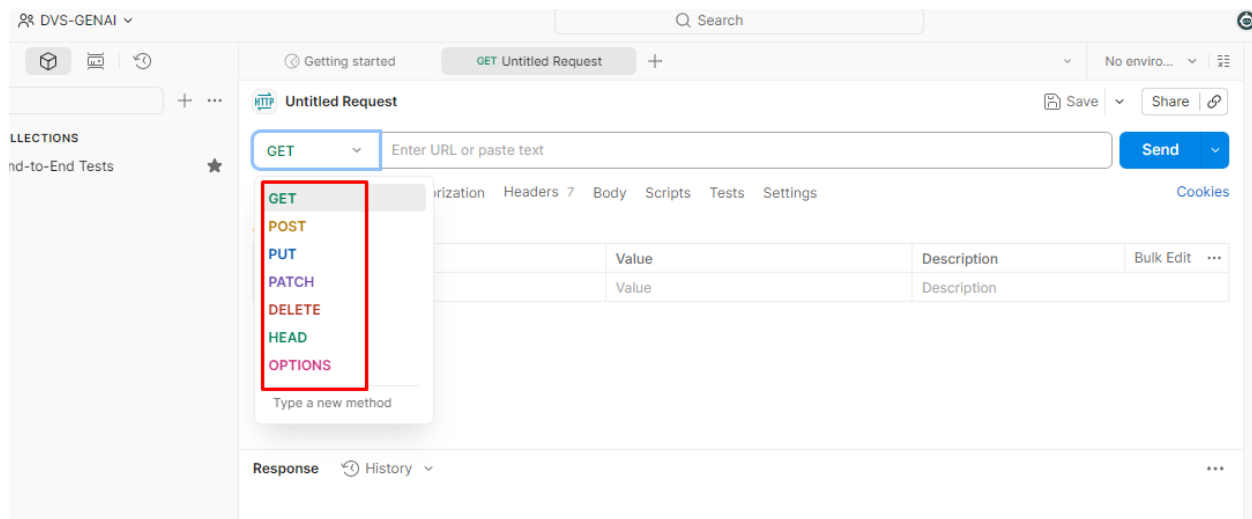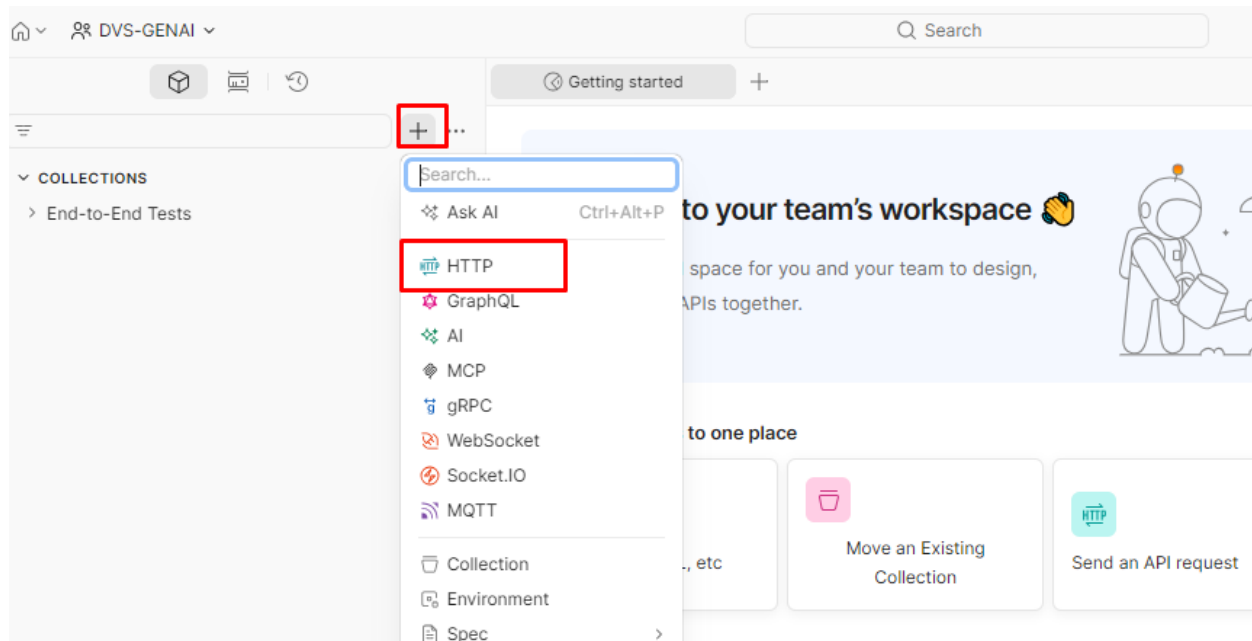

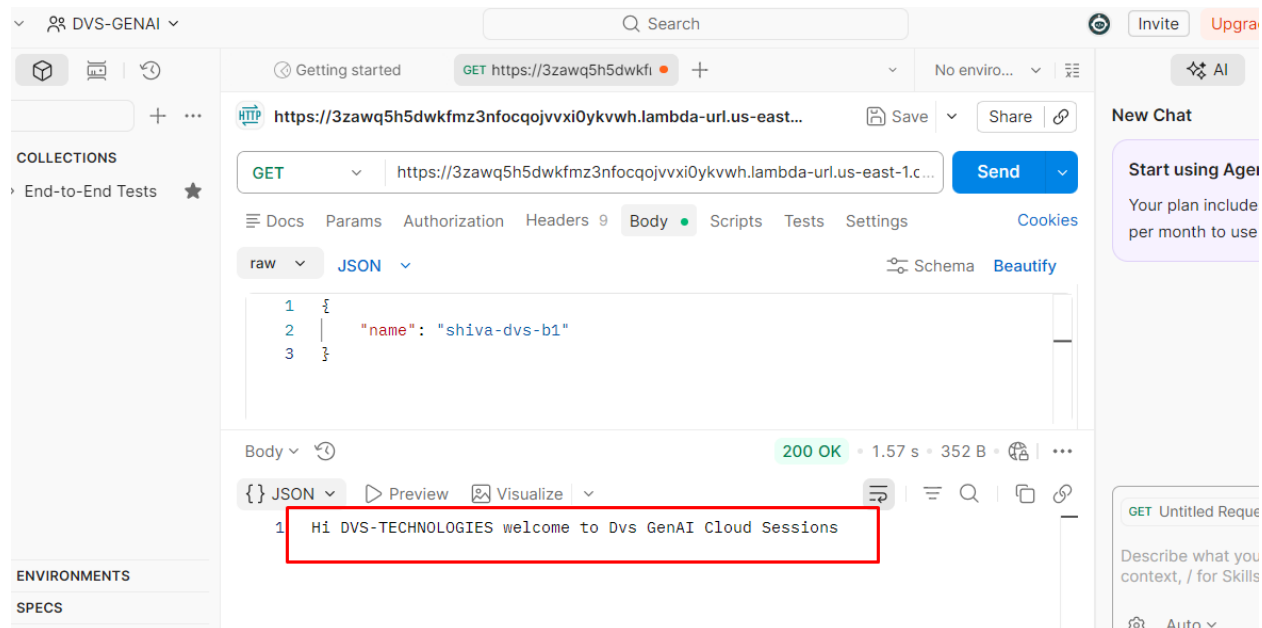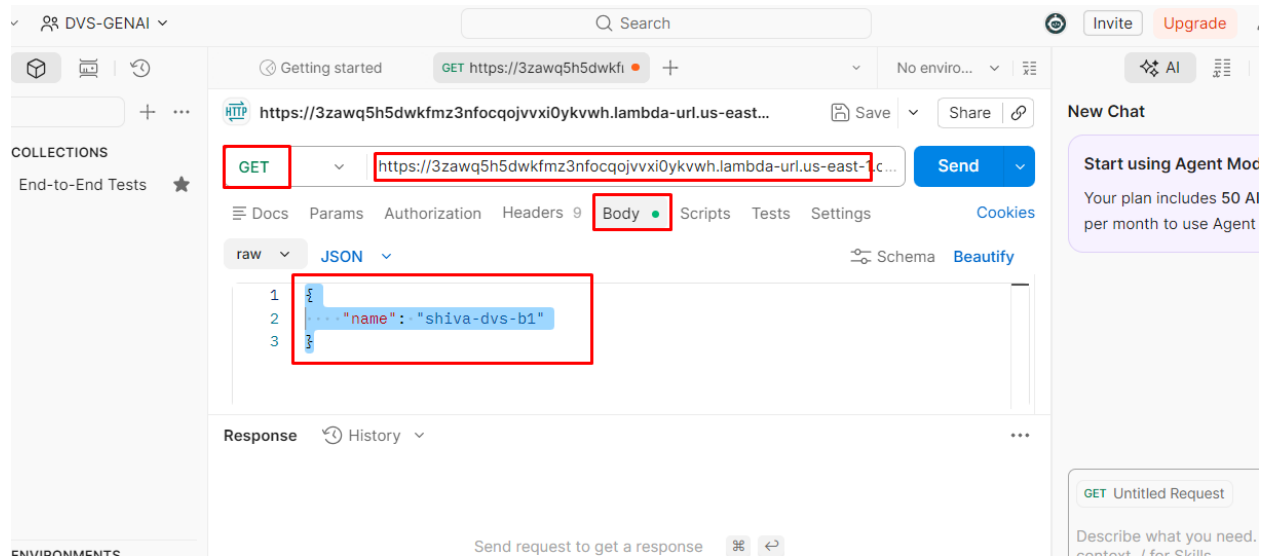

We are not getting our desired result. Let's do the trouble shooting with cloud watch logs

CloudWatch > Log management > /aws/lambda/basic-function

CloudWatch

- Log Management
- Log Anomalies
- Live Tail
- Logs Insights
- Contributor Insights

Log streams (2)

By default, we only load the most recent log streams.

Filter log streams or try prefix search

Exact match Show expired Info 1

Log stream	Last event time
2026/03/26/[LATEST]ffd33fee57a47fdbbc5a85dcf9695be	2026-03-26 02:50:41 (UTC)
2026/03/26/[LATEST]50842c0cf2a74e6d9bde59bbc4b386b0	2026-03-26 02:32:28 (UTC)

CloudWatch > Log management > /aws/lambda/basic-function > 2026/03/26/[LATEST]ffd33fee57a47fdbbc5a85dcf9695be

Log events

You can use the filter bar below to search for and match terms, phrases, or values in your log events. [Learn more about filter patterns](#)

Filter events - press enter to search

1m 1h UTC timezone

Display

Timestamp	Message
2026-03-26T02:50:41.907Z	<pre>{ "version": "2.0", "routeKey": "\$default", "rawPath": "/", "rawQueryString": "", "headers": { "content-length": "32", "x-amzn-tls-version": "TLSv1.3", "x-forwarded-proto": "https", "postman-token": "687f562f-910b-488b-8e77-5e38e69f2b02", "x-forwarded-port": "443", "x-forwarded-for": "2001:8f8:1735:2f0b:f4d5:d9e451:f763", "accept": "/*/*", "x-amzn-tls-cipher-suite": "TLS_AES_128_GCM_SHA256", "x-amzn-trace-id": "Root=1-69c49f01-049e2e991798ad796f068a52", "host": "3zawq5h5dwkfmz3nfocqjvxxi0ykvwh.lambda-url.us-east-1.on.aws", "content-type": "application/json", "cache-control": "no-cache", "accept-encoding": "gzip, deflate, br", "user-agent": "PostmanRuntime/7.52.0", "requestContext": { "accountId": "anonymous", "apiId": "3zawq5h5dwkfmz3nfocqjvxxi0ykvwh", "domainName": "3zawq5h5dwkfmz3nfocqjvxxi0ykvwh.lambda-url.us-east-1.on.aws", "domainPrefix": "3zawq5h5dwkfmz3nfocqjvxxi0ykvwh", "http": { "method": "GET", "path": "/", "protocol": "HTTP/1.1", "sourceIp": "54.86.50.139", "userAgent": "PostmanRuntime/7.52.0", "requestId": "c1980582-16d6-4eec-9b17-edc90d23bff8", "routeKey": "\$default", "stage": "\$default", "time": "26/Mar/2026:02:50:41 +0000", "timeEpoch": 1774493441639, "body": { "name": "shiva-dvs-b1" }, "isBase64Encoded": false } } } }</pre>
2026-03-26T02:50:41.909Z	END RequestId: c1980582-16d6-4eec-9b17-edc90d23bff8

Back to top

```
import json
```



```
def lambda_handler(event, context):
    # Sample name variable
    print(event)
    body_str = event.get("body", {})
    body = json.loads(body_str)
    print(body)
    # You can also get name dynamically from event (optional)
    name = body.get('name', "DVS-TECHNOLOGIES")
    message = f"Hi {name} welcome to Dvs GenAI Cloud Sessions"
```


```
# Response
return {
    "statusCode": 200,
    "body": message
}
```

Successfully updated the function **basic-function**.

code source [Info](#)

[Open in Visual Studio Code](#)

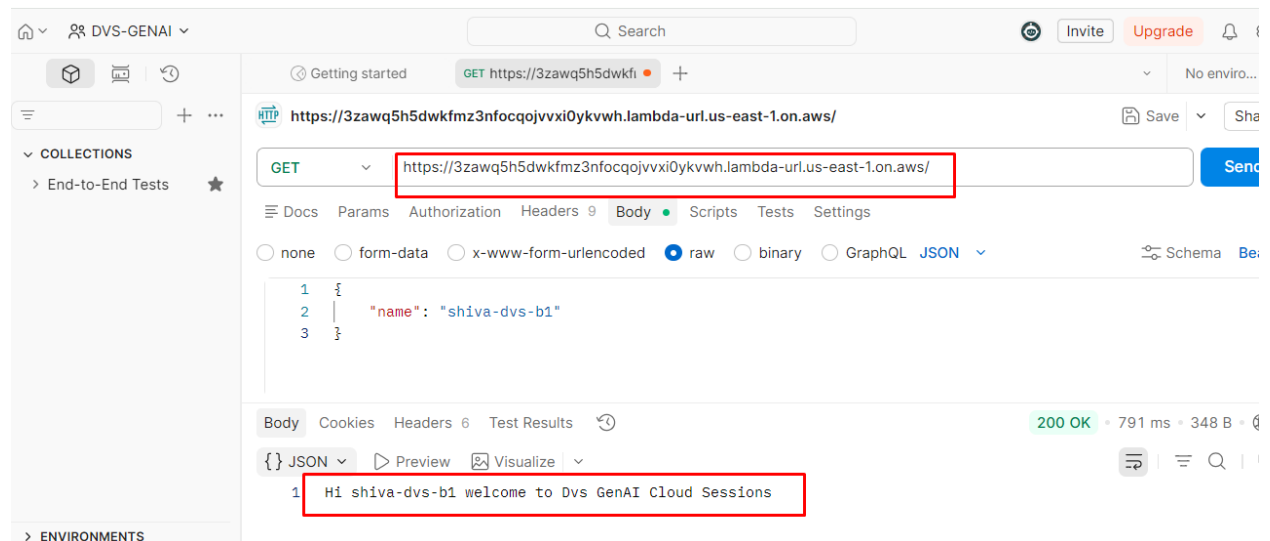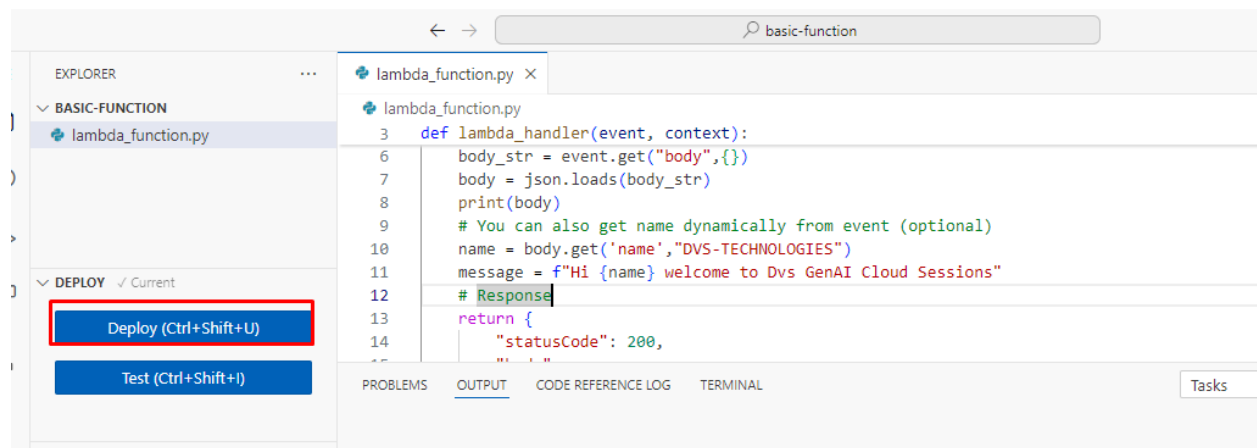

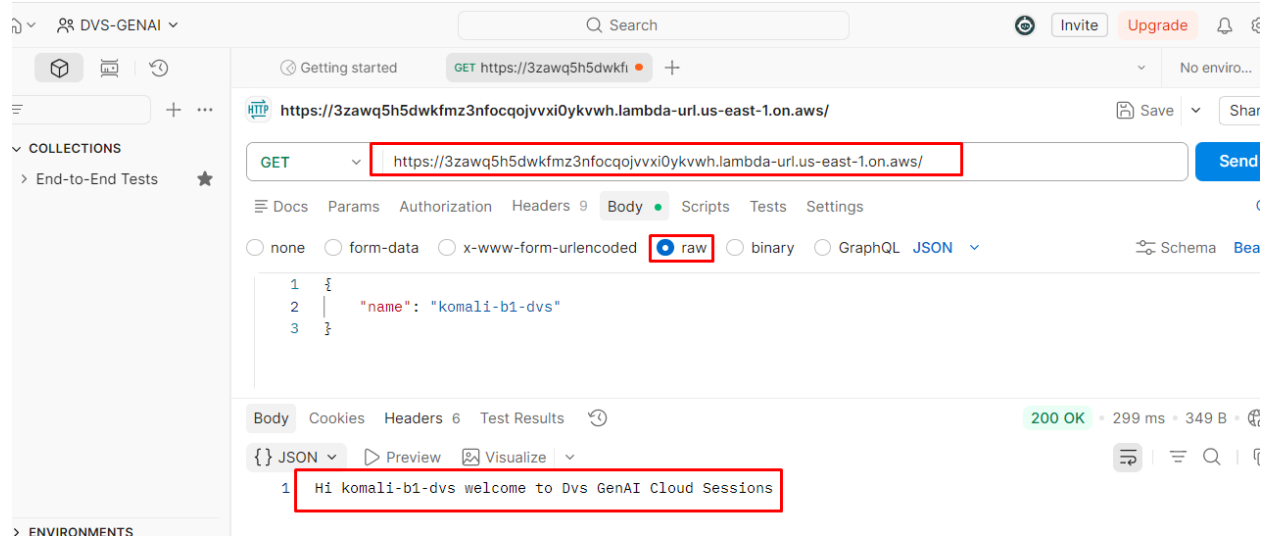

NOTE: Just for testing purpose we use GET, you can try POST as well it doesn't matter for this code.

