


1. Creating a lambda function

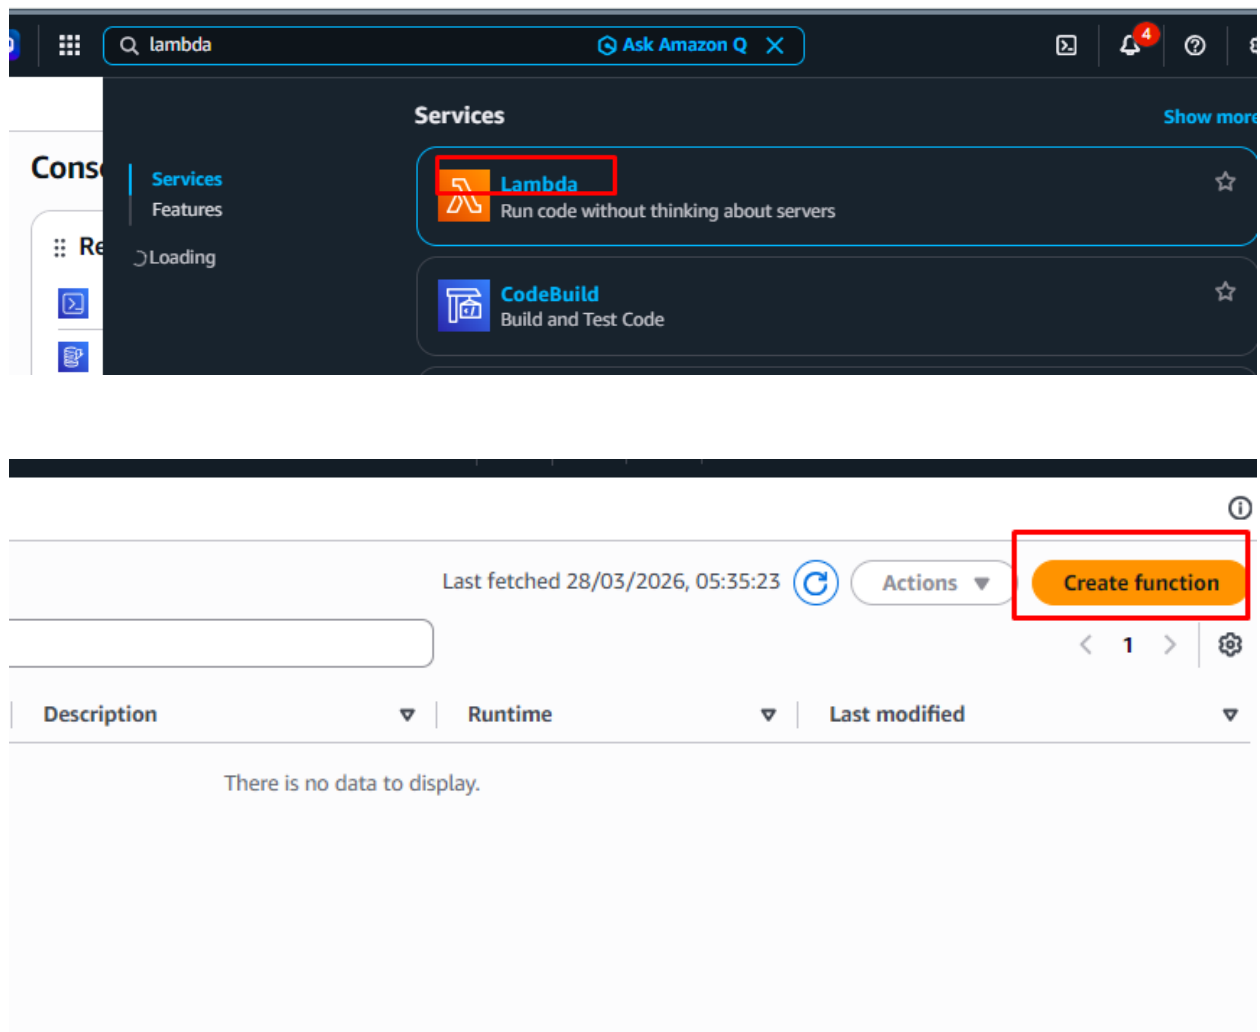

Create function [Info](#)

Choose one of the following options to create your function.

☒ **Author from scratch**
Start with a simple Hello World example.

☐ **Use a blueprint**
Build a Lambda application from sample code and common use cases.

Basic information

Function name

Enter a name that describes the purpose of your function.

APP-GW-FN

Function name must be 1 to 64 characters, must be unique to the Region, and can't include spaces. Valid characters are a-z, A-Z, 0-9, hyphens (

Runtime [Info](#)

Choose the language to use to write your function. Note that the console code editor supports only Node.js, Python, and Ruby.

Python 3.12

Durable execution - new [Info](#)

Enable durable execution to simplify building resilient multi-step applications that checkpoint progress and resume after interruptions. Support

☐ Enable

Architecture [Info](#)

Choose the instruction set architecture you want for your function code.

[Info](#)
on set architecture you want for your function code.

[Info](#)
da will create an execution role with permissions to upload logs to Amazon CloudWatch Logs. You can customize this default role later when adding triggers.

ult execution role

al configurations

il configurations to set up networking, security, and governance for your function. These settings help secure and customize your Lambda function deployment.

[Cancel](#)

[Create function](#)

Lambda > Functions > APP-GW-FN

✓ Successfully created the function **APP-GW-FN**. You can now change its code and configuration. To invoke your function with a test event, choose "Test".

+ Add trigger

+ Add destination

Code

Test

Monitor

Configuration

Aliases

Versions

Code source [Info](#)


EXPLORER

APP-GW-FN


- lambda_function.py

DEPLOY Undeployed

```
1 import json
2
3 def lambda_handler(event, context):
4     # TODO implement
5     print(event)
6     return {
7         'statusCode': 200,
8         'body': json.dumps('Hello from Lambda!')
9     }
10
```

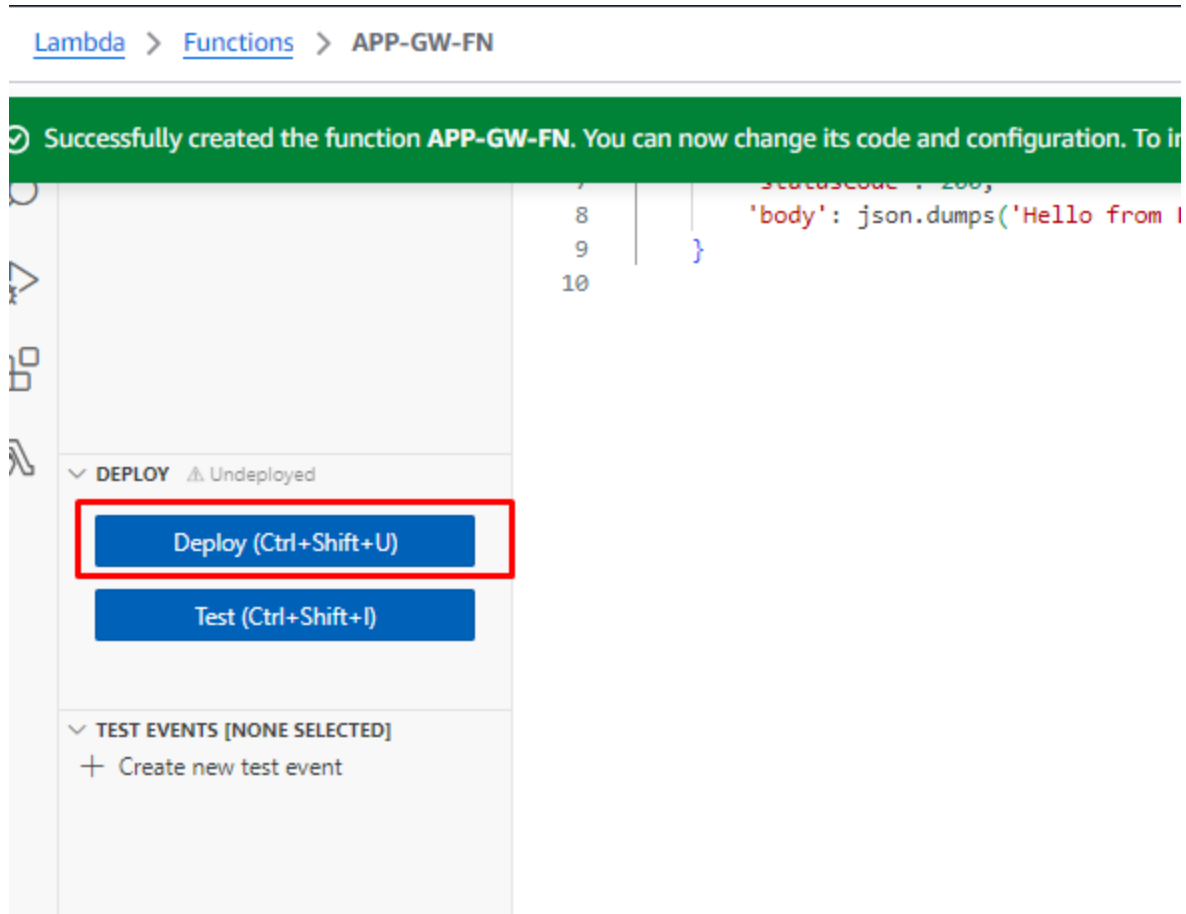

2. Creating api gateway

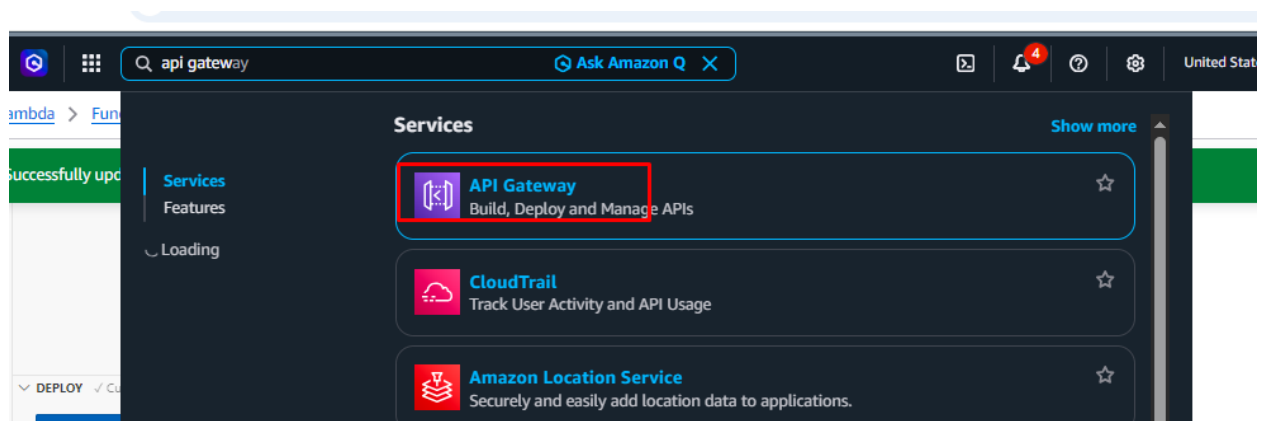

Networking & Content Delivery

API Gateway

Create and manage APIs at scale

Amazon API Gateway is a fully managed service that makes it easy for developers to create, publish, maintain, monitor, and secure APIs.

Get started

Create a new API to begin exploring API Gateway. You can also import an external definition file into API Gateway.

Create an API

How it works



Pricing

With Amazon API Gateway, you only pay when your APIs are in use. There are no minimum fees or upfront commitments. For HTTP and REST APIs, you pay based on API calls received and amount of data.

☰ [Lambda](#) > [Functions](#) > [Create function](#)

Create function [Info](#)

Choose one of the following options to create your function.



Author from scratch

Start with a simple Hello World example.



Use a blueprint

Build a Lambda application from sample code and common use cases.

Basic information

Function name

Enter a name that describes the purpose of your function.

APP-GW-FN

Function name must be 1 to 64 characters, must be unique to the Region, and can't include spaces. Valid characters are a-z, A-Z, 0-9, hyphens (

Runtime [Info](#)

Choose the language to use to write your function. Note that the console code editor supports only Node.js, Python, and Ruby.

Python 3.12

Durable execution - new [Info](#)

Enable durable execution to simplify building resilient multi-step applications that checkpoint progress and resume after interruptions. Support

☐ Enable

Architecture [Info](#)

Choose the instruction set architecture you want for your function code.

REST API

Develop a REST API where you gain complete control over the request and response along with API management capabilities.

Works with the following:

Lambda, HTTP, AWS Services

Import

Build

API Gateway > APIs > Create API > Create REST API

New API

Create a new REST API

Clone existing API

Create a copy of an API in this AWS account.

Import API

Import an API from an OpenAPI definition.

Example API

Learn about API Gateway with an example API.

API name

MYAPP-GW

Description - optional

API endpoint type

Regional APIs are deployed in the current AWS Region. Edge-optimized APIs route requests to the nearest CloudFront Point of Presence. Private APIs are only accessible from VPCs.

Regional

Security policy - new

[Info](#)

Transport Layer Security (TLS) protects data in transit between a client and server. The security policy also determines the cipher suite options that clients can use with your API.

Cancel

Create API

3. Creating context paths

API Gateway > APIs > Resources - MYAPP-GW (y6u4f9rh19)

✓ Successfully created REST API 'MYAPP-GW (y6u4f9rh19)'.

Resources

[Create resource](#)

/

Resource details

Path	/	Resource ID	qlmhadl31h
------	---	-------------	------------

Methods (0)

Method type	Integration type	Authorization
No methods		
No methods defined.		

API Gateway > APIs > Resources - MYAPP-GW (y6u4f9rh19) > Create resource

✓ Successfully created REST API 'MYAPP-GW (y6u4f9rh19)'.

Create resource

Resource details

☐ Proxy resource [Info](#)
Proxy resources handle requests to all sub-resources. To create a proxy resource use a path parameter that ends with a plus sign, for example {proxy*}.

Resource path

☐ CORS (Cross Origin Resource Sharing) [Info](#)
Create an OPTIONS method that allows all origins, all methods, and several common headers.

Resource name

[Cancel](#) [Create resource](#)

Click on create resource

Successfully created resource '/read'

Resources

Create resource

/

/read

Resource details

Path

/read

Resource ID

jre9dk

Delete

Update documentation

Enable CORS

Methods (0)

Delete

Create method

Method type

Integration type

Authorization

API key

No methods

No methods defined.

Create method

Method details

Method type

Select a method type

ANY

DELETE

GET

HEAD

OPTIONS

PATCH

POST

PUT

aws

Method details

Method type

GET

Integration type

- ☒ **Lambda function**
Integrate your API with a Lambda function.



- ☐ **HTTP**
Integrate with an existing HTTP endpoint.



- ☐ **Mock**
Generate a response based on API G transformations.



- ☐ **AWS service**
Integrate with an AWS Service.



- ☐ **VPC link**
Integrate with a resource that isn't accessible over the public internet.



- ☒ **Lambda proxy integration**
Send the request to your Lambda function as a structured event.

Response transfer mode

- ☒ **Buffered**
Wait to receive the complete response before beginning transmission.
- ☐ **Stream**

Lambda function

Provide the Lambda function name or alias. You can also provide an ARN from another account.

us-east-1

arn:aws:lambda:us-east-1:472008046327:function:APP-GW-

Grant API Gateway permission to invoke your Lambda function

When you save your changes, API Gateway updates your Lambda function's resource-based policy to allow this API to invoke it.

Integration timeout

By default, you can enter an integration timeout of 50 - 29,000 milliseconds. You can use Service Quotas to raise the integration timeout to greater than 29,000 ms

29000

Method request settings

Deploy API

Create or select a stage where your API will be deployed. You can use the deployment history to revert or change the active deployment for a stage. [Learn more](#)

Stage

New stage

Stage name

dev

Deployment description

[Cancel](#) [Deploy](#)

API Gateway

APIs

Custom domain names

Domain name access associations

VPC links

AgentCore targets

API: MYAPP-GW

Resources

Stages

Authorizers

Gateway responses

Stages

dev

/

/read

GET

Method overrides



This method inherits its settings from the 'dev' stage.

Invoke URL

https://y6u4f9rh19.execute-api.us-east-1.amazonaws.com/dev/read

4. Now you can use postman to call your application

<https://y6u4f9rh19.execute-api.us-east-1.amazonaws.com/dev/read>

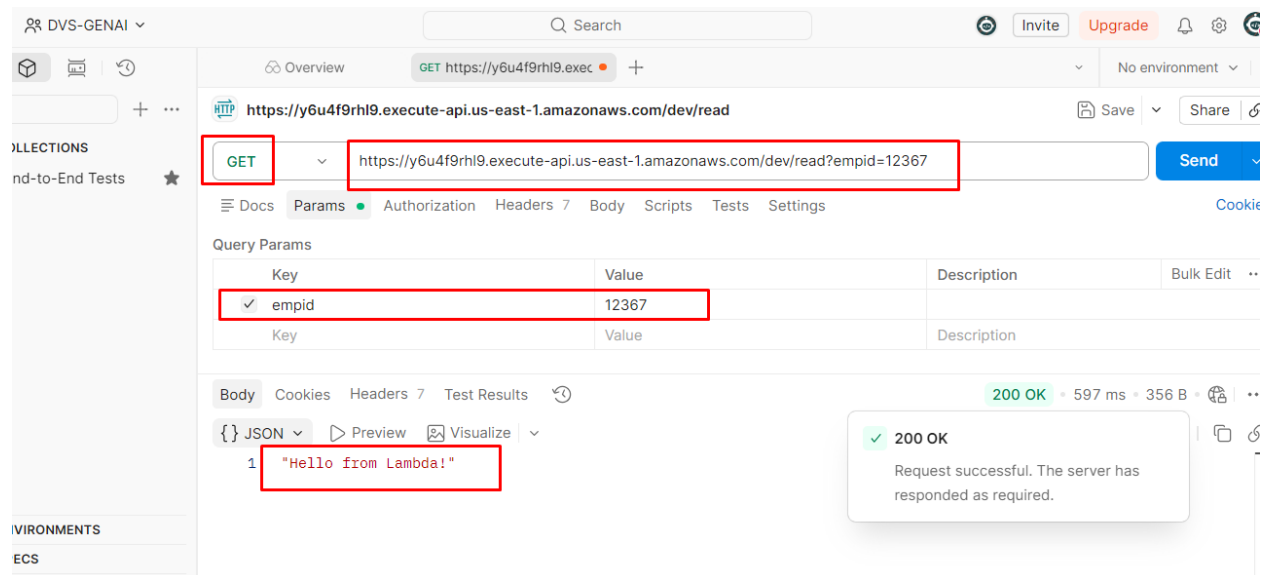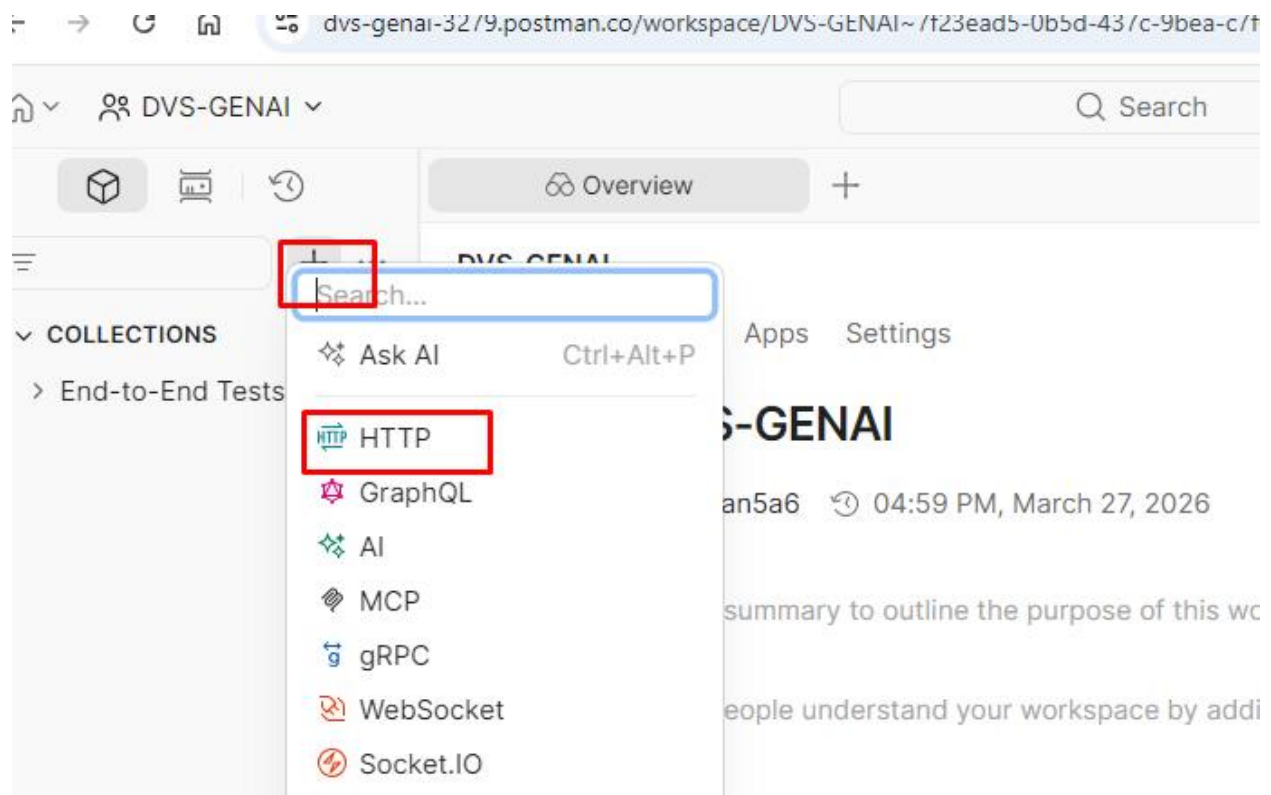

5. Let's verify what is the data that my api gateway is sending to my application

The screenshot shows the AWS CloudWatch console. The top navigation bar includes a search bar with 'cloudwatch' and an 'Ask Amazon Q' button. The left sidebar contains a menu with 'Log Management' highlighted. The main content area shows the 'Log groups' tab, which lists a single log group: '/aws/lambda/APP-GW-FN'. This log group is highlighted with a red box. The console also displays a 'Get-set-go with unified data store' section and a table of log groups.

Log group	Log class	Anomaly d...	Deleti...
/aws/lambda/APP-GW-FN	Standard	Configure	Off

<

Log streams

Tags

Data protection

Anomaly detection

Metric filters

Subscription filters

Log streams (1)

🔄

Delete

Create log

By default, we only load the most recent log streams.

🔍 Filter log streams or try prefix search

☐ Exact match ☐ Show expired

☐

Log stream

▼

☐

2026/03/28/[[\\$LATEST](#)]3160644000274cdd8b5de53f17444ef9

2026-03-28 01:51:26 (UTC)

CloudWatch > Log management > /aws/lambda/APP-GW-FN > 2026/03/28/[[\\$LATEST](#)]3160644000274cdd8b5de53f17444ef9

CloudWatch

<

Favorites and recents

>

Ingestion

Dashboards

Alarms 1

AI Operations

GenAI Observability

Application Signals (APM)

Infrastructure Monitoring

Logs

Log Management

Log Anomalies

Live Tail

Logs Insights

Contributor Insights

Log events

🔄

Actions

Start tailing

Create metric filter

You can use the filter bar below to search for and match terms, phrases, or values in your log events. [Learn more about filter patterns](#)

🔍 Filter events - press enter to search

Clear

1m

30m

1h

12h

Custom

UTC timezone

Display

⌵

Timestamp

Message

2026-03-28T01:51:26.434Z

{ "resource": "/read", "path": "/read", "httpMethod": "GET", "headers": { "Accept": "*/*", "Accept-Encoding": "gzip, deflate, br", ...

{ "resource": "/read", "path": "/read", "httpMethod": "GET", "headers": { "Accept": "*/*", "Accept-Encoding": "gzip, deflate, br", "Cache-Control": "no-cache", "Host": "y6u4f9rh19.execute-api.us-east-1.amazonaws.com", "Postman-Token": "f6d77799-7433-4741-90ea-2bd3b170d203", "User-Agent": "PostmanRuntime/7.52.0", "X-Amzn-Trace-Id": "Root=1-69c7341e-58d587d232771fe466709e05", "X-Forwarded-For": "2001:8f8:1735:2f0b:d17a:70a:ee50:c2ba, 54.86.50.139", "X-Forwarded-Port": "443", "X-Forwarded-Proto": "https", "multivalueHeaders": { "Accept": ["/*/*"], "Accept-Encoding": ["gzip, deflate, br"], "Cache-Control": ["no-cache"], "Host": ["y6u4f9rh19.execute-api.us-east-1.amazonaws.com"], "Postman-Token": ["f6d77799-7433-4741-90ea-2bd3b170d203"], "User-Agent": ["PostmanRuntime/7.52.0"], "X-Amzn-Trace-Id": ["Root=1-69c7341e-58d587d232771fe466709e05"], "X-Forwarded-For": ["2001:8f8:1735:2f0b:d17a:70a:ee50:c2ba, 54.86.50.139"], "X-Forwarded-Port": ["443"], "X-Forwarded-Proto": ["https"], "queryStringParameters": { "empId": "12367" }, "multivalueQueryStringParameters": { "empId": ["12367"] }, "pathParameters": None, "stageVariables": None, "requestContext": { "resourceId": "jre90k", "resourcePath": "/read", "httpMethod": "GET", "extendedRequestId": "a6UuH7doAMeVhQw", "requestTime": "28/Mar/2026:01:51:26 +0000", "path": "/dev/read", "accountId": "472008046327", "protocol": "HTTP/1.1", "stage": "dev", "domainPrefix": "y6u4f9rh19", "requestTimeEpoch": 1774662686092, "requestId": "3c42fb54-5566-4d4b-b1e0-350e528d32d9", "identity": { "cognitoIdentityPoolId": None, "accountId": None, "cognitoIdentityId": None, "caller": None, "sourceIp": "54.86.50.139", "principalOrgId": None, "accessKey": None, "cognitoAuthenticationType": None, "cognitoAuthenticationProvider": None, "userArn": None, "userAgent": "PostmanRuntime/7.52.0", "user": None }, "domainName": "y6u4f9rh19.execute-api.us-east-1.amazonaws.com", "deploymentId": "cb526x", "apiId": "y6u4f9rh19", "body": None, "isBase64Encoded": False }

2026-03-28T01:51:26.436Z

END RequestId: 521c9597-67f8-4d11-8bde-f467896e6e8e

Where should we begin?

can you pretty print the data below

```
{'resource': '/read', 'path': '/read', 'httpMethod': 'GET', 'headers': {'Accept': '*/*', 'Accept-Encoding': 'gzip, deflate, br', 'Cache-Control': 'no-cache', 'Host': 'y6u4f9rh19.execute-api.us-east-1.amazonaws.com', 'Postman-Token': 'f6d77799-7433-4741-90ea-2bd3b170d203', 'User-Agent': 'PostmanRuntime/7.52.0', 'X-Amzn-Trace-Id': 'Root=1-69c7341e-58d587d232771fe466709e05', 'X-Forwarded-For': '2001:8f8:1735:2f0b:d17a:7a0:ee50:c2ba, 54.86.50.139', 'X-Forwarded-Port': '443', 'X-Forwarded-Proto': 'https'}, 'multiValueHeaders': {'Accept': ['*/*'], 'Accept-Encoding': ['gzip, deflate, br']},
```

+

🔊

↗

https://chatgpt.com/g/g-69c7341e-58d587d232771fe466709e05



ChatGPT

Get Plus

Share

JSON



```
{
  "resource": "/read",
  "path": "/read",
  "httpMethod": "GET",
  "headers": {
    "Accept": "*/*",
    "Accept-Encoding": "gzip, deflate, br",
    "Cache-Control": "no-cache",
    "Host": "y6u4f9rh19.execute-api.us-east-1.amazonaws.com",
    "Postman-Token": "f6d77799-7433-4741-90ea-2bd3b170d203",
    "User-Agent": "PostmanRuntime/7.52.0",
    "X-Amzn-Trace-Id": "Root=1-69c7341e-58d587d232771fe466709e05",
    "X-Forwarded-For": "2001:8f8:1735:2f0b:d17a:7a0:ee50:c2ba, 54.86.50.139",
    "X-Forwarded-Port": "443",
    "X-Forwarded-Proto": "https"
  },
  "multiValueHeaders": {
    "Accept": ["*/*"],
```



If you want, I can also give you a Python one-liner to pretty print automatically inside

Python one-liner

```
"path": "/read",
"httpMethod": "GET",

"queryStringParameters": {
  "empid": "12367"
},

"body": null,
```

Modified code:

```
import json

def lambda_handler(event, context):
    # TODO implement
    print(event)
    path = event.get('path', '')
    method = event.get('httpMethod', '')
    params = event.get('queryStringParameters', {})
    body = event.get('body', {})

    #read
    if path == "/read" and method == "GET":
        message = f"Calling GET method with parameters as {params}"
        #create

    elif path == "/create" and method == "POST":
        message = f"Calling POST method with parameters as {params}"
        #delete
    elif path == "/delete" and method == "DELETE":
        message = f"Calling DELETE method with parameters as {params}"
        #update
    elif path == "/update" and method == "PUT":
        message = f"Calling PUT method with parameters as {params}"
    else:
        message = "Default message , welcome to DVS GENAI Cloud Sessions"

    return {
        'statusCode': 200,
        'body': json.dumps(message)
    }
```

☰ [Lambda](#) > [Functions](#) > APP-GW-FN

✔ Successfully updated the function APP-GW-FN.

🔍
⚙️
📁
🔗

📄 lambda_function.py

DEPLOY ⚠ Undeployed
Deploy (Ctrl+Shift+U)
Test (Ctrl+Shift+I)
TEST EVENTS [NONE SELECTED]
+ Create new test event

```
3 def lambda_handler(event, context):
26
27
28     return {
29         'statusCode': 200,
30         'body': json.dumps(message)
31     }
32
```

6. Now let's update our api gateway to support /read,/create,/update,/delete

READ - GET

CREATE - POST

UPDATE - PUT

DELETE - DELETE

API Gateway > APIs > Resources - MYAPP-GW (y6u4f9rh19)

API Gateway
APIs
Custom domain names
Domain name access
associations
VPC links
AgentCore targets [New](#)

API: MYAPP-GW
[Resources](#)
Stages
Authorizers
Gateway responses
Models
Resource policy

Resources

Create resource

/

/read
GET

Resource details

Path / Resource ID qlmhadi31h

Methods (0)

Method type	Integration type	Authorization	API key
No methods			
No methods defined.			

Create resource

Resource details

☒ Proxy resource [Info](#)

Proxy resources handle requests to all sub-resources. To create a proxy resource use a path parameter that ends with a plus sign, for example {proxy+}.

Resource path

/

Resource name

create

☐ CORS (Cross Origin Resource Sharing) [Info](#)

Create an OPTIONS method that allows all origins, all methods, and several common headers.

Cancel

Create resource

Resources

Create resource



/

/create



/read

GET

Resource details

Path

/create

Methods (0)

Method type



Create resource

Resource details

☒ Proxy resource [Info](#)

Proxy resources handle requests to all sub-resources. To create a proxy resource use a path parameter that ends with a plus sign, for example {proxy+}.

Resource path

/

Resource name

delete

☐ CORS (Cross Origin Resource Sharing) [Info](#)

Create an OPTIONS method that allows all origins, all methods, and several common headers.

Cancel

Create resource

15

Resources

Create resource



/

/create

/delete



/read

GET

Resource details

Path

/delete

Methods (0)

Method type



Create resource

Resource details

☒ Proxy resource [Info](#)

Proxy resources handle requests to all sub-resources. To create a proxy resource use a path parameter that ends with a plus sign, for example (proxy+).

Resource path

/

Resource name

update

☐ CORS (Cross Origin Resource Sharing) [Info](#)

Create an OPTIONS method that allows all origins, all methods, and several common headers.

Cancel

Create resource

Resources

Create resource

/

/create

/delete

/read

GET

/update

Resources - MYAPP-GW (y6u4f9rh19)

Successfully created resource '/update'

Resources

Create resource

/

/create

/delete

/read

GET

/update

Resource details

Path

/create

Resource ID

vluxxl

Methods (0)

Method type

Integration type

Authorization

API key

No methods

No methods defined.

Create method

Create method

Method details

Method type

POST

Integration type

☒ Lambda function

Integrate your API with a Lambda function.



☐ HTTP

Integrate with an existing HTTP endpoint.



☐ Mock

Generate transform

☐ AWS service

Integrate with an AWS Service.

☐ VPC link

Integrate with a resource that isn't accessible over the public internet.

☒ Lambda proxy integration

Send the request to your Lambda function as a structured event.

Response transfer mode [Info](#)

☒ Buffered

Wait to receive the complete response before beginning transmission.

☐ Stream

Send portions of the response without waiting for the complete response.

Lambda function

Provide the Lambda function name or alias. You can also provide an ARN from another account.

us-east-1

arn:aws:lambda:us-east-1:472008046327:function:APP-GW-FN

Cancel

Create method

Resources

[API actions](#) ▼[Deploy API](#)[Create resource](#)[/](#)[/create](#)

POST

[/delete](#)[/read](#)

GET

[/update](#)

Resource details

[Delete](#)[Update documentation](#)[Enable CORS](#)Path
/deleteResource ID
dlgy5p

Methods (0)

[Delete](#)[Create method](#)

Method type	Integration type	Authorization	API key
-------------	------------------	---------------	---------

No methods

No methods defined.

[API Gateway](#) > [APIs](#) > [Resources - MYAPP-GW \(y6u4f9rhl9\)](#) > [Create method](#)

Method details

Method type

DELETE

Integration type



Lambda function

Integrate your API with a Lambda function.



HTTP

Integrate with an existing HTTP endpoint.



AWS service

Integrate with an AWS Service.



VPC link

Integrate with a resource that isn't accessible over the public internet.





☒ **Lambda proxy integration**
Send the request to your Lambda function as a structured event.

Response transfer mode | [Info](#)
☒ **Buffered**
Wait to receive the complete response before beginning transmission.
☐ **Stream**
Send portions of the response without waiting for the complete response.

Lambda function
Provide the Lambda function name or alias. You can also provide an ARN from another account.

us-east-1 ▼

X

Grant API Gateway permission to invoke your Lambda function
When you save your changes, API Gateway updates your Lambda function's resource-based policy to allow this API to invoke it.



[Cancel](#) [Create method](#)

Resources - MYAPP-GW (y6u4f9rh19)

Resources [API actions](#) [Deploy API](#)

[Create resource](#)

/

/create
POST

/delete
DELETE

/read
GET

/update

Resource details [Delete](#) [Update documentation](#) [Enable CORS](#)
Path
/update
Resource ID
u4xm8w

Methods (0) [Delete](#) [Create method](#)

Method type	Integration type	Authorization	API key
No methods			
No methods defined.			

PUT

Integration type



Lambda function

Integrate your API with a Lambda function.



HTTP

Integrate with an existing HTTP endpoint



AWS service

Integrate with an AWS service



VPC link

Integrate with a resource that isn't a service

Send portions of the response instead of waiting for the complete response.

Lambda function

Provide the Lambda function name or alias. You can also provide an ARN from another account.

us-east-1



arn:aws:lambda:us-east-1:472008046327:function:APP-GW-FN



Lambda proxy integration

Send the request to your Lambda function as a structured event.

Response transfer mode | [Info](#)

Cancel

Create method

Resources

Create resource

/

/create

POST

/delete

DELETE

/read

GET

/update

PUT

API actions

Deploy API

/update - PUT - Method execution

ARN

arn:aws:execute-api:us-east-1:472008046327:y6u4f9rh19/*/*PUT/update

Resource ID

u4xm8w

Update documentation

Delete

Client

Method request

Integration request

Method response

Integration response
Proxy integration

Lambda integration

Deploy API

Create or select a stage where your API will be deployed. You can use the deployment history to revert or change the active deployment for a stage. [Learn more](#)

⚠

When you deploy an API to an existing stage, you immediately overwrite the current stage configuration with a new active deployment.

Stage

dev

Deployment description

Cancel

Deploy

✓ Successfully created deployment for MYAPP-GW. This deployment is active for dev.

Stages

dev

/

/create

/delete

/read

/update

Stage actions

Create stage

Stage details

Stage name

dev

Rate

10000

Cache cluster

Inactive

Burst

5000

Default method-level caching

Inactive

Web ACL

-

Client certificate

-

Invoke URL

<https://y6u4f9rh19.execute-api.us-east-1.amazonaws.com/dev>

7. Verify

https://y6u4f9rh19.execute-api.us-east-1.amazonaws.com/dev/create

POST

https://y6u4f9rh19.execute-api.us-east-1.amazonaws.com/dev/create

Send

Docs Params Authorization Headers 9 Body Scripts Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "empid": "13458"
3 }
```

Body Cookies Headers 7 Test Results

502 Bad Gateway • 627 ms • 315 B

JSON Preview Debug with AI

```
1 {
2   "message": "Internal server error"
3 }
```

Log events

[Actions](#)[Start tailing](#)[Create metri](#)

You can use the filter bar below to search for and match terms, phrases, or values in your log events. [Learn more about filter patterns](#)

1m

1h



UTC timezone

[Display](#)

Timestamp	Message
2026-03-28T02:20:34.974Z	[WARNING] 2026-03-28T02:20:34.974Z LAMBDA_WARNING: Unhandled exception. The most likely cause is an
2026-03-28T02:28:34.974Z	[ERROR] Runtime.UserCodeSyntaxError: Syntax error in module 'lambda_function': inconsistent use of t
	[ERROR] Runtime.UserCodeSyntaxError: Syntax error in module 'lambda_function': inconsistent use of tabs and spaces in indentation
	(lambda_function.py, line 12)
	Traceback (most recent call last):
	File "/var/task/lambda_function.py" Line 12
	if path == "/read" and method == "GET":
2026-03-28T02:28:35.007Z	INIT_REPORT Init Duration: 73.91 ms Phase: invoke Status: error Error Type: Runtime.UserCodeSyntaxEr
	INIT_REPORT Init Duration: 73.91 ms Phase: invoke Status: error Error Type: Runtime.UserCodeSyntaxError

8.Updated Code

```
import json
```

```
def lambda_handler(event, context):
```

```
    # TODO implement
```

```
    print(event)
```

```
    path = event.get('path', '')
```

```
    method = event.get('httpMethod', '')
```

```
    params = event.get('queryStringParameters', {})
```

```
    body = event.get('body', {})
```

```
    # read
```

```
    if path == "/read" and method == "GET":
```

```
        message = f"Calling GET method with parameters as {params}"
```

```
    # create
```

```
    elif path == "/create" and method == "POST":
```

```
        message = f"Calling POST method with parameters as {body}"
```

```
    # delete
```

```
    elif path == "/delete" and method == "DELETE":
```

```
        message = f"Calling DELETE method with parameters as {params}"
```

```
    # update
```


```

elif path == "/update" and method == "PUT":
    message = f"Calling PUT method with parameters as {body}"

else:
    message = "Default message , welcome to DVS GENAI Cloud Sessions"

return {
    'statusCode': 200,
    'body': json.dumps(message)
}

```

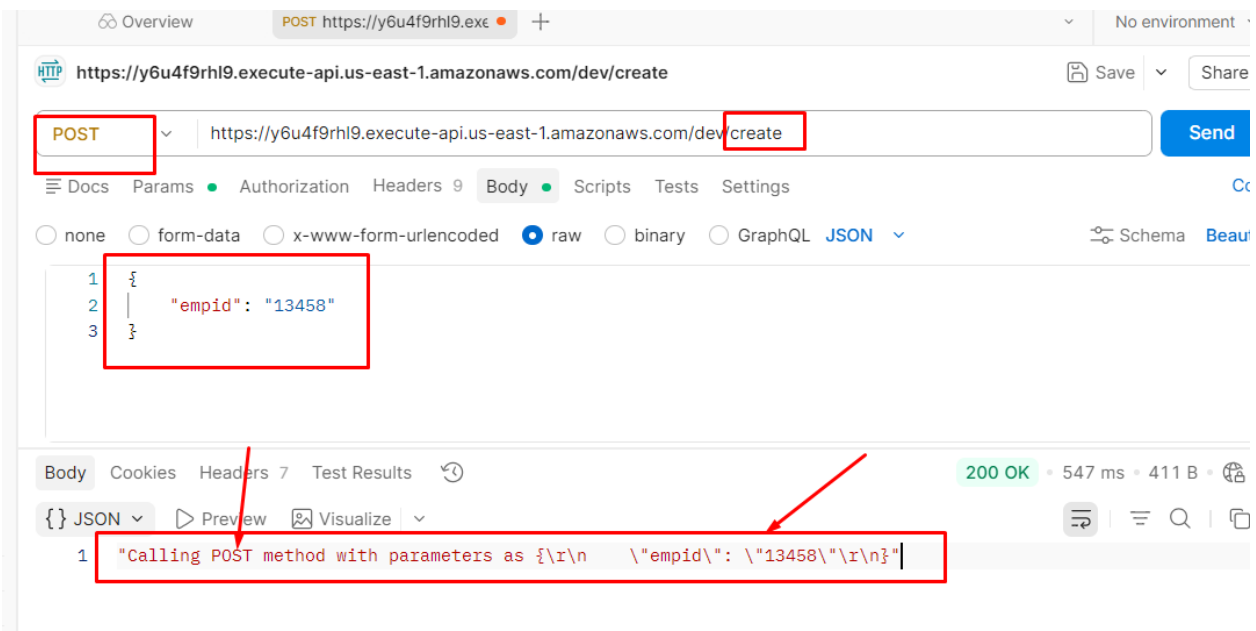

DELETE https://y6u4f9rh19.execute-api.us-east-1.amazonaws.com/dev/delete?empid=12367

Query Params

Key	Value	Description
empid	12367	

200 OK • 284 ms • 397 B

1 "Calling DELETE method with parameters as {'empid': '12367'}"

9. Updating with Logging

```
import json
import logging
# create logger
logger = logging.getLogger()
logger.setLevel(logging.INFO)

def lambda_handler(event, context):
    # TODO implement
    print(event)

    path = event.get('path', '')
    method = event.get('httpMethod', '')
    params = event.get('queryStringParameters', {})
    body = event.get('body', {})

    # read
    if path == "/read" and method == "GET":
        logger.info(f'Read the data')
        message = f"Calling GET method with parameters as {params}"

    # create
    elif path == "/create" and method == "POST":
        logger.info(f'Create the data')
        message = f"Calling POST method with parameters as {body}"

    # delete
```

```

elif path == "/delete" and method == "DELETE":
    logger.info(f'delete the data')
    message = f"Calling DELETE method with parameters as {params}"

# update
elif path == "/update" and method == "PUT":
    logger.info(f'update the data')
    message = f"Calling PUT method with parameters as {body}"

else:
    message = "Default message , welcome to DVS GENAI Cloud Sessions"

return {
    'statusCode': 200,
    'body': json.dumps(message)
}

```

https://y6u4f9rh19.execute-api.us-east-1.amazonaws.com/dev/read

GET https://y6u4f9rh19.execute-api.us-east-1.amazonaws.com/dev/read?empid=12367 Send

Docs Params Authorization Headers 7 Body Scripts Tests Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
✓ empid	12367			
Key	Value	Description		

Body Cookies Headers 7 Test Results 200 OK • 293 ms • 394 B • ...

{ } JSON Preview Visualize

1 "Calling GET method with parameters as {'empid': '12367'}"

CloudWatch > Log management > /aws/lambda/APP-GW-FN > 2026/03/28/[\$LATEST]bf0dda1cfb2e4fb2af1c62ae3110cde4

Log events

Filter events - press enter to search

Clear1m30m1h12hCustomUTC time:

Display

▶ | Timestamp | Message

▶ 2026-03-28T02:37:44.342ZEND RequestId: 88ed86f0-8c11-4880-8241-e564c04f51cd

▶ 2026-03-28T02:37:44.342ZREPORT RequestId: 88ed86f0-8c11-4880-8241-e564c04f51cd Duration: 2.39 ms Billed Duration: 92 ms Memory Size: 128 MB Max Memory Used: 37

▶ 2026-03-28T02:37:47.854ZSTART RequestId: 20f71049-a75c-41c6-b2ed-c01af68123b7 Version: \$LATEST

▶ 2026-03-28T02:37:47.855Z{'resource': '/delete', 'path': '/delete', 'httpMethod': 'DELETE', 'headers': {'Accept': '*/*', 'Accept-Encoding': 'gzip, deflate, br',

▶ 2026-03-28T02:37:47.855Z[INFO] 2026-03-28T02:37:47.855Z 20f71049-a75c-41c6-b2ed-c01af68123b7 delete the data

▶ 2026-03-28T02:37:47.862ZEND RequestId: 20f71049-a75c-41c6-b2ed-c01af68123b7

▶ 2026-03-28T02:37:47.862ZREPORT RequestId: 20f71049-a75c-41c6-b2ed-c01af68123b7 Duration: 1.86 ms Billed Duration: 2 ms Memory Size: 128 MB Max Memory Used: 37

▶ 2026-03-28T02:37:57.822ZSTART RequestId: 79be0aea-0177-4251-82cf-32e26847f909 Version: \$LATEST

Log events

Filter events - press enter to search

Clear1m30m1h12hCustom

Display

▶ | Timestamp | Message

▶ 2026-03-28T02:37:57.823Z[INFO] 2026-03-28T02:37:57.823Z 79be0aea-0177-4251-82cf-32e26847f909 Read the data

▶ 2026-03-28T02:37:57.824ZEND RequestId: 79be0aea-0177-4251-82cf-32e26847f909

▶ 2026-03-28T02:37:57.824ZREPORT RequestId: 79be0aea-0177-4251-82cf-32e26847f909 Duration: 1.69 ms Billed Duration: 2 ms Memory Size: 128 MB

▶ 2026-03-28T02:38:00.739ZSTART RequestId: 0e5b4897-b1cd-4c58-a112-809ca98f5b9a Version: \$LATEST

▶ 2026-03-28T02:38:00.739Z{'resource': '/read', 'path': '/read', 'httpMethod': 'GET', 'headers': {'Accept': '*/*', 'Accept-Encoding': 'gzip, c

▶ 2026-03-28T02:38:00.739Z[INFO] 2026-03-28T02:38:00.739Z 0e5b4897-b1cd-4c58-a112-809ca98f5b9a Read the data

▶ 2026-03-28T02:38:00.742ZEND RequestId: 0e5b4897-b1cd-4c58-a112-809ca98f5b9a

▶ 2026-03-28T02:38:00.742ZREPORT RequestId: 0e5b4897-b1cd-4c58-a112-809ca98f5b9a Duration: 2.76 ms Billed Duration: 3 ms Memory Size: 128 MB