



PHAZZER

Vs

Taser-X26P

About the **ENFORCER**

The PHAZZER® Enforcer is a Conducted Energy Weapon (CEW) which immobilizes a target by firing two dart projectiles and delivering a safe but effective combination of voltage and amperage at 21-24 pulses per second when delivered into the body. The electric charge is delivered through a pair of conductive insulated wires. The PHAZZER® Enforcer will also deploy all other forms of PHAZZER® Ammunition cartridges and is compatible with TASER® Ammunition in use and function. Both TASER® Ammunition and PHAZZER® Ammunition will function in either weapon as they have been tested as functionally compatible.

See for yourself why many agencies in the United States and around the world are making the change to the PHAZZER® Enforcer!

“In my opinion after carrying and having used another device for many years, Phazzer is far superior.”

Shield Defense Systems, Inc.
7/26/2016

ZERO FATALITIES

PhaZZer has **NEVER**
had a reported incident
that has taken life!

PRODUCT COMPARISON

	PhaZZer® Enforcer	Taser® X-26P
		
Gas Propelled Projectiles	YES N-2 (Nitrogen)	YES N-2 (Nitrogen)
Safety Shutdown Technology to prevent death due to over exposure	YES Prevents unintentional over exposure	NO Reported associated Taser® deaths due to over exposure
High Intensity LED Light	YES	NO
Laser Pointer	YES	YES
Rechargeable Battery	YES	YES / NO With purchase of additional equipment
Recording Device Available	YES	YES
Static Guard for Ammo	YES Prevents static discharge & approved by DOT unregulated	YES / NO Plastic guard, does NOT prevent discharge
Multiple Dart Distances Available	YES (3) 4.57 Meters / 15 Feet 6.4 Meters / 21 Feet 7.62 Meters / 25 Feet	YES (3) 4.57 Meters / 15 Feet 6.4 Meters / 21 Feet 7.62 Meters / 25 Feet
Ammunition Cross Compatible with PhaZZer/Taser® CEW's	YES	YES



PRODUCT COMPARISON

	PhaZZer® Enforcer	Taser® X-26P
Controls Subject By Causing NMI (Nero Muscular Incapacitation)	YES	YES
Ergonomic 3 finger hand grip	YES	NO
Multiple alternative ammunition solutions	YES	NO
REPORTED TO HAVE TAKEN LIFE	NO	YES! 1004 deaths according to Reuters News

Weapons Outputs, Ammunition, Holsters & Camera

Technical Specifications

PhaZZer® Enforcer Output Characteristics:

Pulse Rate: 21-24 (PPS) pulses per seconds (-3 / +1 PPS)

Pulse Duration: 90-110 microseconds (+/- 20%)

Peak Voltage: 55,000 > Volts (V) Loaded Voltage 1400 to 4700 (V) across body nominally

Current: 2.1 - 2.3 Milliampères (mA) Average (+/- 20%)

Microcoulombs Output: Full pulse total charge 70 microcoulombs (µC) (+/- 20%)

Wave Form: Patented Monophasic Non-Sinusoidal Shaped Pulse.

Energy per Pulse Joules: .095 J (joules) < = dependent on body resistance, temperature and battery level. Electrical charge can penetrate up to two cumulative inches of clothing.

Power Source: 7.2v Ion Lithium Rechargeable/Replaceable Red Battery Pack. Approximately 4000 (5 second) discharges per battery.

Light Source: Integrated 3W, 160 Lumen, High Intensity L.E.D. Light. Autonomous from Laser Activation and Ambidextrous.

Laser: Integrated 650nm Red Laser (Used for target acquisition)

Temperature Range Recommended: 32 °F [0°C] to 122 °F [50 °C].

Extreme Temperature Range: -4° F (-20°C) to 155°F (68°C)

Relative Humidity: Up to 95% (non-condensing).

Housing: ABS High Impact Plastic

Physical Dimensions

PhaZZer® Enforcer Physical Dimensions:

Dimensions(Without Cartridge):


15cm(L)x9cm(H)x 3cm (W)

Ammunition Cartridge Dimensions:

2.5cm (L) x 2.5cm (H) x 3.5cm (W)

Weight with Cartridge:

12 oz. (350 g)

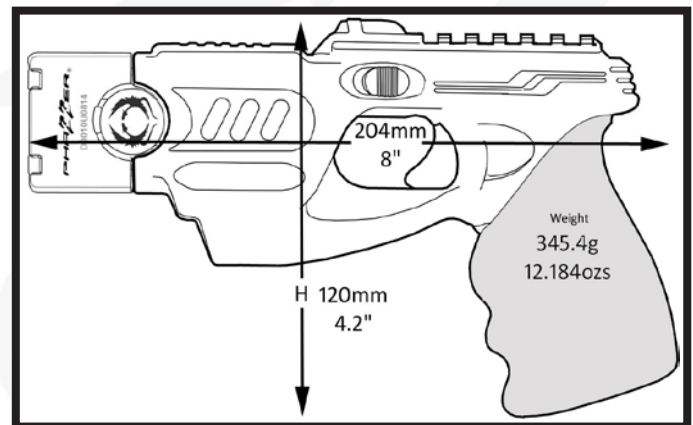

Weapons Outputs, Ammunition, Holsters & Camera

Hand Grip

PhaZZer® Enforcer Hand Grip:

PhaZZer® Enforcer three finger groove with impact/shock resistant rubber sleeve for greater control and comfort promotes a natural grip and feel.

Custom molded grip ensures greater retention in damp and dry conditions. Available in black and yellow.



Holster

PhaZZer® Enforcer Level 2 Ambidextrous Retention Duty Holster:

Level II Retention with thumb-break design

Thumb-break completely covers the activation switch for the Enforcer and Railcam preventing accidental activation.

Slim design utilizes the least amount of space on the belt.

Ambidextrous holster design allows users to quickly switch the holster for a right or left handed user; with no special tools required

180-degree secure belt attachment to fit a variety of belt styles

Extremely lightweight weighing 7.80 ozs (220g)

Non conductive glass fiber with ABS Injection for extreme durability

Drain holes on the bottom of the holster allow for dirt and moisture to easily pass through while protecting the user from un-contained accidental deployments

Designed to fit all PhaZZer CEW cartridges with or without the Static Guard Attached

Available in Matte Black but can be produced in a variety of colors

Holsters belt attachment is designed to quickly attached to any MOLLE-compatible design



Battery

PhaZZer® Enforcer 7.2 Volt Dual Ion Lithium:

Enforcer Battery is a 7.2 volt dual ion lithium rechargeable/replaceable system. Green indicator light located below the safety switch which will change to red when the battery level is depleted by 40% leaving 60% power remaining throughout a given shift. Data information storage uses non volatile

Weapons Outputs, Ammunition, Holsters & Camera

memory and will not be lost or corrupted if powered down or battery is removed!

Battery Gold Contacts

NO Short Circuit Potential:

This is not an issue with the Enforcer because the battery plugs in with an insulated socket rather than having open or exposed electrical contacts.

PhaZZer battery pack has no short circuit potential.



Battery Operation

Programming Issues:

The PhaZZer® Enforcer with Data Port memory can be stored at all times if the battery is left out of the device or detached for over 48 hours. However, the time-stamp clock will need to be reset after reinstall of new battery or temporary removal of existing battery.

Battery Operation

Strength of Charge Readout:

This is not an issue with the Enforcer as the battery is monitored by a single LED indicator, giving quick view of acceptable charge: and allowing the operator to have full attention placed on the perpetrator and not on a digital display.

Battery Operation

Monitoring Capabilities:

The Enforcer will give an immediate battery condition check with the green LED on the rear of weapon hand grip in view for the officer using the weapon when ready to fire. If the Green LED turns red while testing or firing, the Enforcer will still, at this point have a 60% operational charge thus providing plenty of notice during the remainder of the officer's shift.



Battery Operation

Charging Information:

The PhaZZer® Enforcer rechargeable/replaceable red battery allows for approximately 4,000 (5 second

Weapons Outputs, Ammunition, Holsters & Camera

discharges). AC Adapter charger that comes with the Enforcer automatically shuts off when the battery is fully charged. Can be recharged 30-40 times.

Ammunition

PhaZZer® Enforcer Dart and other Ammunition:

PhaZZer® offers greater versatility and various options for more than one less-lethal or non-lethal ammunition option. Options are: electronic dart cartridges at various distances, pepper ball, rubber ball, pepper powder, paintball, as well as dart training cartridges at various distances. (USPTO Patent # US 9,739,578 and B1 US 8,733,251 B1 on all non dart alternative ammunitions)

PhaZZer® Ammunition is classified as “non-firearm based ammunition” as defined in the GCA by U.S. Department of Justice Bureau of Alcohol, Tobacco, Firearms and Explosives (Nitrogen Propelled)

All PhaZZer® ammunition cartridges will effectively deploy from TASER® M26 and X26 series ECD.

PhaZZer® will NOT void its warranty if compatible alternative brand ammunition is used.

Less Lethal Ball projectiles unique to PhaZZer® Enforcer Patented Design US Patent Office #8733251



LED Light

Built in LED Light:

PhaZZer® Enforcer offers an ambidextrous switch access for high intensity 160 lumen 30+ meter beam light. This eliminates the need to use a flashlight in dark areas leaving the officer's other hand free to keep on his side arm as a backup. Light is autonomous to the Laser Activation, minimizing the chance of unintentional deployment.



Operation

Simplicity: Ease of Use and Control:

The Enforcer with its simplicity is compared to the reliable Revolver of the old West. Simple quick LED visual indicator of PhaZZer® battery condition allows the officer to maintain complete sight on the perpetrator while operating the PhaZZer®. PhaZZer® offers simple draw, safety off, point and deploy operation with ambidextrous LED light.

PhaZZer® Enforcer offers a three finger hand grip for greater comfort and control of the CEW.

Weapons Outputs, Ammunition, Holsters & Camera

Laser Sight

What Is Lit is What You Hit:

PhaZZer® Enforcer has 650nm red diode (laser). This laser will better assist the users accuracy.

- Top mounted laser for better target acquisition.
- Top mounted laser compensates for dart alignment over greater distance.



Safety Shut Down Technology

LIFE SAVING Technology:

PhaZZer® Enforcer has implemented and is in the process of Patenting a “safety shutdown technology circuit” which effectively shuts the weapon down if aggregate exposure to the body exceeds 15 seconds. This precautionary safety circuit allows for three separate full 5 second trigger applications before the CEW is disarmed. The Operator can recycle the safety back switch if additional force is reasonable and necessary. Most up to date medical studies have indicated that the 15 second rule established by the AAEM is the new bench mark for safety when using a CEW into a live target in a 24 hour period. This PhaZZer® designed safety shut down circuit can be overridden by the operator if he/she feels the need to use additional force by simply recycling the safety switch. This will limit liability to the Manufacturer, Distributor and Agency, creating better awareness for using excessive force to the officer, and save lives when training guidelines are followed.

Data Port Features & Functions

Data Storage for usage of the PhaZZer® Enforcer (with Data Port):

PhaZZer® Enforcer data port system contains an assigned operator selectable identification number that is programmable via a 924 MHz wireless USB interface. No need for cable connections or removal of the battery. All initial setup, programming and downloads are completed via wireless, enabling several Enforcers on the bench at one time to be programmed, thus saving time for larger agencies and allows for ease of operation. This also avoids possible corruption of data due to battery removal and / or shorting of battery connections that could lead to misfire or complete failure of deployment. Wireless download software is supported by Windows® 98se, NT, 2000, XP, Vista, Windows 7® and Windows 10® both 32 and 64 bit compatible:





Weapons Outputs, Ammunition, Holsters & Camera

- Data collected is in standard form and able to load directly into Microsoft Excel, Word or any other formats that allow integration of data.
- Enforcer data can also be uploaded to other secure data storage platforms for court retrieval evidence if necessary
- Software supports time and date stamp, duration of applied CEW force and serial number identification of CEW weapon used and recorded
- Software has security levels for administrative access use only, or standard operation and maintenance support
- More than 999 units can be listed on one single agency database with individual serial number identification of CEW's in inventory
- Wireless interface device utilizes standard PC 2.0 USB connection for Data download and initial program setup

Standard Warranty

With Extended Warranty Options:

Warrants free from defect in workmanship and materials for a period of 1 year from date of receipt

- Failure to provide ALL required warranty return information will NOT result in any further delay for replacement item
- PhaZZer® manufactured accessories are covered under a one year warranty from the date of receipt
- Broken blast doors on ammunition cartridges ARE covered under warranty
- Optional extended warranty may be purchased during POS or any time during the standard 1-year warranty period
- The extended warranty does not cover battery replacement
- The replacement product will have the remaining warranty period of the original product or 90 days from the date of replacement whichever period is longer
- PhaZZer® does not void its warranty if a compatible non-PhaZZer® manufactured cartridge is used in a PhaZZer® CEW
- PhaZZer® extended 2-year or 4-year warranties are available

Weapons Outputs, Ammunition, Holsters & Camera

Standard Warranty

Repair Service:

No waiting period for warranty repair service, PhaZZer® will replace defective unit with a brand new or refurbished unit within 48 hours of received defective product return.

Ammunition Warranty

On all PhaZZer® Enforcer Ammunition:

PhaZZer® offers a full 1 year replacement warranty from the date of purchase and a 5 year shelf-life based on the date of production on all ammunition cartridges in the case it is defective for any reason. The production date is identified in the serial number located on the bottom of each cartridge. PhaZZer® suggests that potential customers check with Country, State, and Local laws pertaining to possession and usage of CEWs.

Evidence Gathering

PhaZZer® Enforcer Rail Cam:

PhaZZer® Rail Cam police and law enforcement video system is an audio-video recording camera with its own internal rechargeable battery capable of external recharge from either 12v vehicle or mains (110v to 240v AV50Hz) power supply via USB 2.0 cable (supplied) downloading directly into laptop or desk PC. PhaZZer® Rail Cam slides onto the top rail of any PhaZZer® Enforcer securely locked into position.

PhaZZer® Rail Cam activates by simply pushing up for ON on the power switch completely independent from the CEW's own ON/OFF functions with 90 minute recording on a 8GB Mini SDHC card. Battery life is 90 minutes.





PhaZZer® Enforcer CEW Models Output Characteristics & Features Data Sheet¹


Model	Model Number	Color
PhaZZer® Enforcer With Data Port (Black)	1-EBLK-DP	Black
PhaZZer® Enforcer With Data Port (Yellow)	1-EYLW-DP	Yellow
PhaZZer® Enforcer (Black)	1-EBLK	Black
PhaZZer® Enforcer (Yellow)	1-EYLW	Yellow

Specifications ^{2, 3}	Features
- Output specifications^{4,5} - Waveform: Patented Non-Sinusoidal Shaped Pulse. - Peak Open Voltage: 55,000 Volts (V) (+/- 20%)** - Pulse rate: 21-24 (PPS) pulses per seconds (-3 / +1 PPS) - Pulse Duration: 90-110 microseconds (+/- 20%). - Peak Loaded Voltage 3,500 to 5,000 (V) into a human body equivalent 600-ohm non-inductive load (+/- 20%). - Current: 2.0 Milliampere (mA) Average (-10% / +5%). - Full pulse total charge 70 microcoulombs (µC) (+/- 20%) - Operating and Storage Temperature Range: 32 °F [0°C] to 122 °F [50 °C]. - Operating relative humidity: Up to 95% (non-condensing). - Estimated useful life: Approximately five years. - Power source: 7.4 V 1000mAh Lithium Ion in-weapon Rechargeable and Replaceable Battery Pack. Battery requires a minimum 3-hour maintenance charge every six months.⁶	- Housing: ABS High Impact Plastic. - Three Finger Grip with non-conductive rubber sleeve overlay offers a greater level of comfort and control of your weapon. 3W, 160 Lumen, High-Intensity L.E.D. Beam Light. 6.5 mW, 650 nm Red Class IIIa Laser for target acquisition. - Ambidextrous and Autonomous LED Activation Switches. (Can be activated independent or simultaneous from weapon/laser activation) - Safety Shut Down Technology: A patent pending over-exposure safety technology which shuts down the weapon system after three consecutive five-second pulse train discharges to avoid overexposure.⁷ - The trigger activates a pulse train of approximately five seconds. Holding the trigger will not continue the discharge. A new trigger pull is required to start a new pulse train for a maximum of three trigger pulls. - The weapon ammunition bay is compatible with TASER® Standard Series Cartridges.⁸ - Static Guard™ a patent pending ammunition cartridge guard which prohibits unintentional discharge of the cartridge. This safety mechanism has been approved by the DOT rendering the ammunition as non-hazardous for shipping by air, land or sea. Special handling is not required. - Fully Rechargeable Battery System with built-in overcharge prevention.

Physical Characteristics⁸

Length (L)	Height (H)	Width (W)	Weight	Length with Dart Cartridge
12.184 oz. (0.7615 lbs.)	4.2 in. 120mm	1.45 in. 38mm	12.184 oz. (0.7615 lbs.) 345.4 g	8 in. 204mm

PhaZZer® Enforcer CEW Models Output Characteristics & Features Data Sheet¹

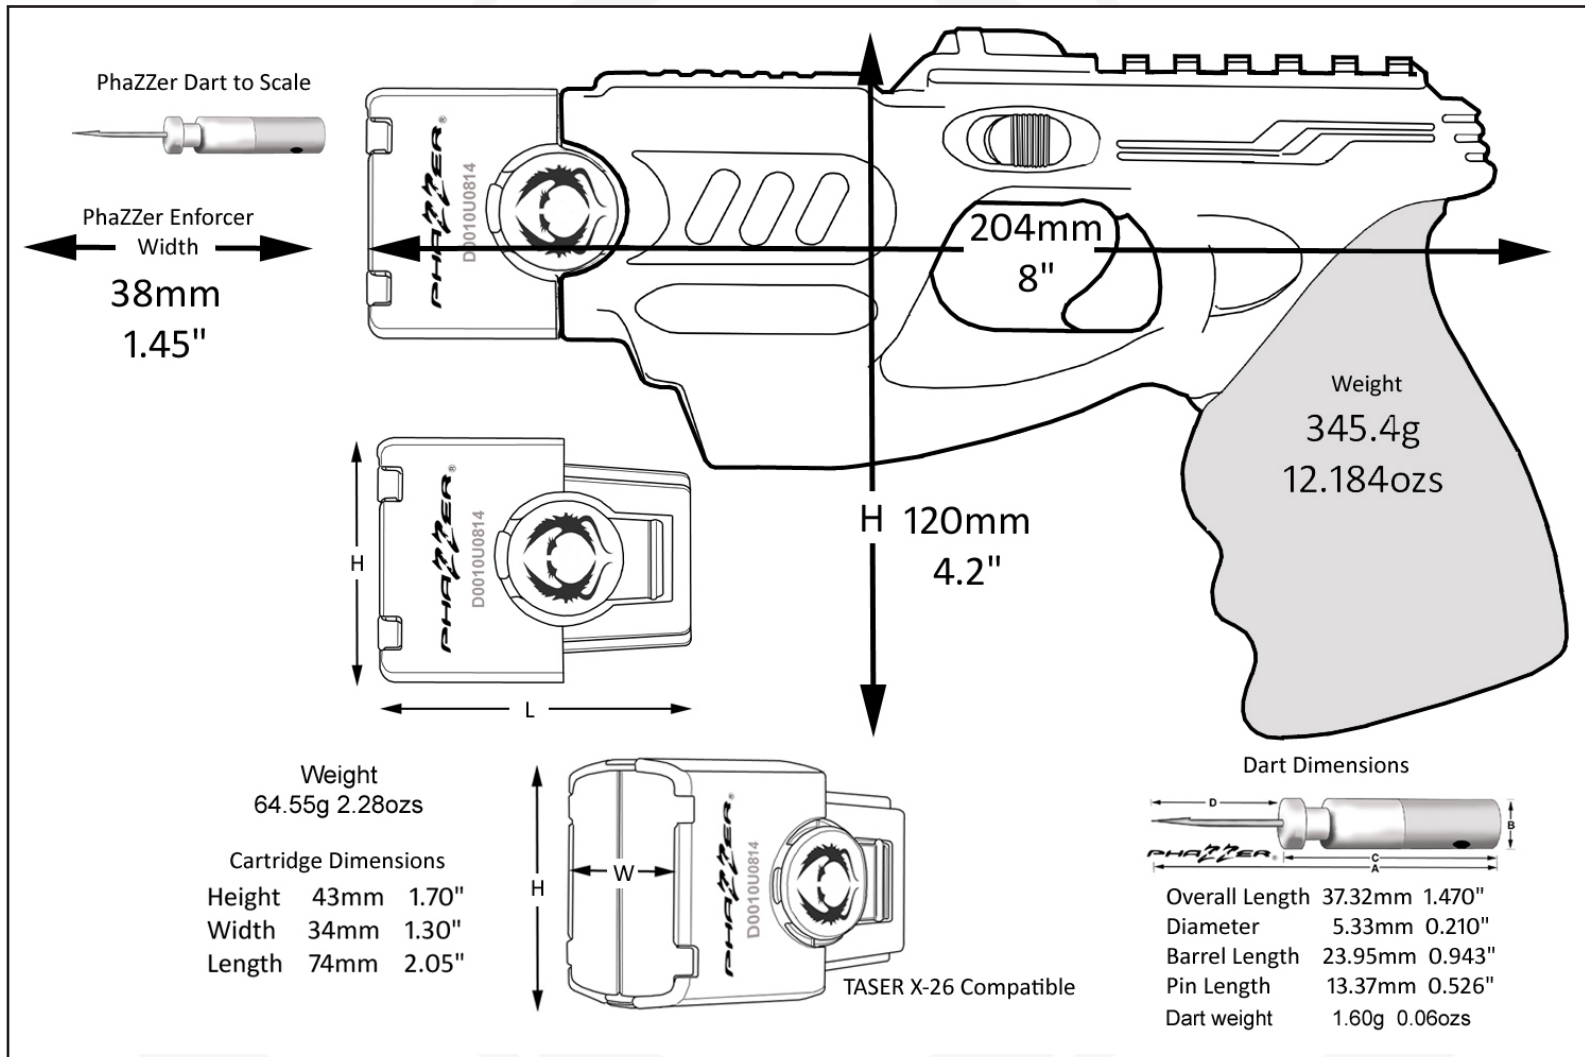

Notes:

1. The design of the PhaZZer Enforcer combines Simplicity, Reliability, Effectiveness and Safety together. This Less Lethal Option is one of the safest and most effective tools available to Law Enforcement Worldwide. PhaZZer® Brand Weapon have no death on record from the use of our weapons as of the date of this publishing.
2. Additional accessories are available. Please contact a PhaZZer® Global sales representative.
3. These products may be covered under one or more of the following: U.S. Pat. No. 7,554,786 B2, U.S. Pat. No. 8,733,251 B1 and/or additional U.S. Pat. Pending which are licensed to Phazzer.
4. Product specifications may change without notice; actual product may vary from picture.
Output specifications may vary depending on temperature, battery charge, or load characteristics. Output specifications derived from 250, 600, and 1,000 Ω resistive loads. The ENFORCER CEW is designed to keep the output charge at $\sim 70 \mu C$ (mean value



PhaZZer Enforcer CEW Models Output Characteristics & Features Data Sheet¹

is based on the measurement of the entire 5-second pulse train) independent of the load (body) impedances and varying from 250 to 1000 Ω .

Pulse rate specifications are at room temperature. Temperatures below 32 °F [0 °C] and extreme output loads can reduce the pulse rate.

5. Battery life expectancy, when properly maintained, is 3 to 6 years and / or 3000-5000 five-second discharge cycles. Although the number of firings between charges will vary due to environmental and usage conditions, we recommend that you charge the battery for 2-3 hrs. every 6-8 weeks. In the opinion of PhaZZer Electronic Inc., this battery system may save the owner of a PhaZZer Enforcer a significant amount of money over time, possibly making its use more environmentally friendly.
6. The weapon's Safety Shut Down Circuit shuts down the weapon system after three consecutive five-second pulse train discharges but can be manually overridden by the user if additional deployments are necessary to control a situation at hand. When safety shutdown is initiated, it creates a mental awareness to the user that he has exposed the suspect to the currently recommended maximum exposures in a 24-hour period. The maximum exposure, at 15 seconds of aggregate exposure over a 24-hour period, has been established by the AAEM medical studies.
7. PhaZZer series cartridge specifications are available by contacting PhaZZer Global. PhaZZer standard series cartridges are available in ranges of 15', 21' and 25'. PhaZZer Global also offers patented alternative ammunition cartridges such as Pepper Powder, Pepper Ball, Paint Ball Marker, and Rubber Ball Impact Round. All PhaZZer® Brand Ammunition is cross compatible with TASER® X26P, X26E, X26C, M26 and M18 CEW weapons.
8. Dimensions and weights are for reference only.

** Subject to many conditions such as but not limited to atmospheric pressure, ambient temperature and measurement methodology.

AMMUNITION

PhaZZer® ammunition was specifically designed to fit PhaZZer Enforcer and Taser® models Air Taser, M18, M26, M26C, X26, X26C, X26E and X26P ECD's.



**4.57 Meters / 15 Feet
Dart Pro**



**6.4 Meters / 21 Feet
Dart Pro**



**7.62 Meters / 25 Feet
Dart Pro**



**Non Conductive
Training Dart Pro**



**2.44 Meters / 8 Feet
Pepper Powder**



**9.14 Meters / 30 Feet
Pepper Ball**

HOLSTERS

PhaZZer® holsters were specifically designed to fit PhaZZer® Enforcer and Taser® X26P. Our ammo pouches will support the PhaZZer® and most Taser® ammo.



**PhaZZer® Enforcer Level 2
Ambidextrous Retention Duty
Holster Rotating Hood**



**PhaZZer® Enforcer Level 2
Ambidextrous Retention Duty
Holster Long Strap**



**Blade-Tech Level 2
Retention Thigh Holster
Available for Right & Left Hand**



**PhaZZer® Single Pouch
Ammunition Holster**



**PhaZZer® Double Pouch
Ammunition Holster**

ACCESSORIES



PhaZZer® RailCam

PhaZZer® RailCam


Easily attaches to the PhaZZer® Enforcer so the officer can record with video and audio if needed. Battery and recording time is at 90 minutes.

PhaZZer® Data Port

PhaZZer® Enforcer With Data Port units are SIMPLE TO USE! No wires needed. This helps keep record of every time the PhaZZer® Enforcer is discharged.



PhaZZer® Data Port

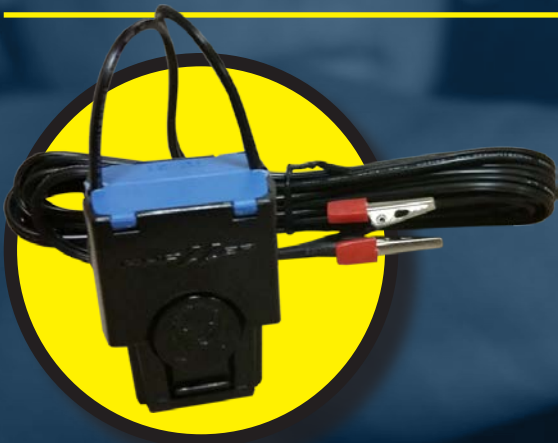

Training Gator Clips

Training Gator Clips

PhaZZer® reusable Training Gator Clips are essential in helping reduce agencies cost. PhaZZer® training clips safely attach completing the circuit to engage NMI without discharging a live dart reducing potential training risks