


- Used when we have to model a relationship involving (entitity sets and) a relationship set.
 - Aggregation allows us to treat a relationship set as an entity set for purposes of participation in (other) relationships.



- Aggregation vs. ternary relationship:
- ❖ Monitors is a distinct relationship, with a descriptive attribute.
- * Also, can say that each sponsorship is monitored by at most one employee.

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

1

Conceptual Design Using the ER Mode

Design choices:

- Should a concept be modeled as an entity or an attribute?
- Should a concept be modeled as an entity or a relationship?
- Identifying relationships: Binary or ternary? Aggregation?

Constraints in the ER Model:

- A lot of data semantics can (and should) be captured.
- But some constraints cannot be captured in ER diagrams.

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke



Entity vs. Attribute

- Should address be an attribute of Employees or an entity (connected to Employees by a relationship)?
- ❖ Depends upon the use we want to make of address information, and the semantics of the data:
 - If we have several addresses per employee, *address* must be an entity (since attributes cannot be set-valued).
 - •If the structure (city, street, etc.) is important, e.g., we want to retrieve employees in a given city, *address* must be modeled as an entity (since attribute values are atomic).


Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

3


Entity vs. Attribute (Contd.)




 Works_In4 does not allow an employee to work in a department for two or more periods.




Similar to the problem of wanting to record several addresses for an employee: We want to record several values of the descriptive attributes for each instance of this relationship. Accomplished by introducing new entity set, Duration.



Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

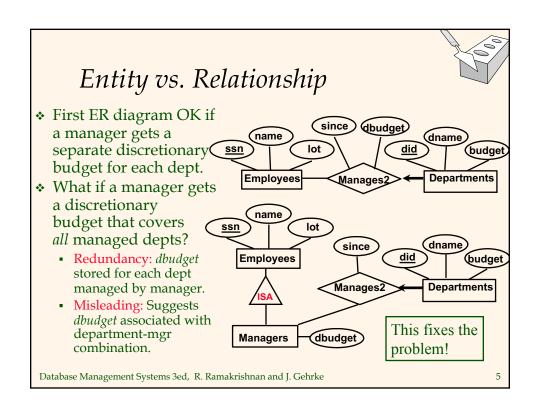

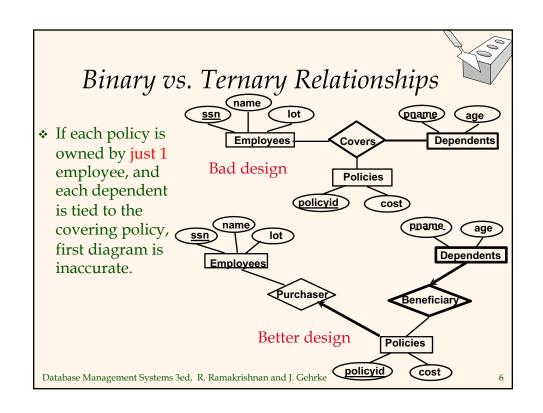

Binary vs. Ternary Relationships (Cont.)



- ❖ A policy cannot be owned jointly by two or more employees.
- Every policy must be owned by some employee.
- Dependent is a weak entity set, and each dependent entity is uniquely identified by taking *pname* in conjunction with the *policyid* of a policy entity.

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke


,

Binary vs. Ternary Relationships (Cont.

- Previous example illustrated a case when two binary relationships were better than one ternary relationship.
- An example in the other direction: a ternary relation Contracts relates entity sets Parts, Departments and Suppliers, and has a descriptive attribute qty. No combination of binary relationships is an adequate substitute:
 - S "can-supply" P, D "needs" P, and D "deals-with" S does not imply that D has agreed to buy P from S.
 - How do we record qty?

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

Aggregation vs. Ternary Relationships



Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

a

Summary of Conceptual Design



- * Conceptual design follows requirements analysis,
 - Yields a high-level description of data to be stored
- ER model popular for conceptual design
 - Constructs are expressive, close to the way people think about their applications.
- * Basic constructs: *entities, relationships*, and *attributes* (of entities and relationships).
- * Some additional constructs: weak entities, ISA hierarchies, and aggregation.
- ❖ Note: There are many variations on ER model.

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke



Summary of ER (Contd.)

- ❖ Several kinds of integrity constraints can be expressed in the ER model: key constraints, participation constraints, and overlap/covering constraints for ISA hierarchies. Some foreign key constraints are also implicit in the definition of a relationship set.
 - Some constraints (notably, *functional dependencies*) cannot be expressed in the ER model.
 - Constraints play an important role in determining the best database design for an enterprise.

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

11

Summary of ER (Contd.)



- ❖ ER design is *subjective*. There are often many ways to model a given scenario! Analyzing alternatives can be tricky, especially for a large enterprise. Common choices include:
 - Entity vs. attribute, entity vs. relationship, binary or nary relationship, whether or not to use ISA hierarchies, and whether or not to use aggregation.
- Ensuring good database design: resulting relational schema should be analyzed and refined further. FD information and normalization techniques (Chapter 19) are especially useful.

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke