

## Hands-on Lab: String Patterns, Sorting and Grouping in MySQL

**Estimated time needed: 30 minutes**

In this lab, you will learn how to create tables and load data in the MySQL database service using the phpMyAdmin graphical user interface (GUI) tool.

## Objectives

After completing this lab, you will be able to:

- Filter the output of a SELECT query by using string patterns, ranges, or sets of values.
- Sort the result set in either ascending or descending order in accordance with a pre-determined column.
- Group the outcomes of a query based on a selected parameter to further refine the response.

## Software Used in this Lab

In this lab, you will use [MySQL](#). MySQL is a Relational Database Management System (RDBMS) designed to efficiently store, manipulate, and retrieve data.



To complete this lab you will utilize MySQL relational database service available as part of IBM Skills Network Labs (SN Labs) Cloud IDE. SN Labs is a virtual lab environment used in this course.

## Database Used in this Lab

The database used in this lab is an internal database. You will be working on a sample HR database. This HR database schema consists of 5 tables called **EMPLOYEES**, **JOB\_HISTORY**, **JOBS**, **DEPARTMENTS** and **LOCATIONS**. Each table has a few rows of sample data. The following diagram shows the tables for the HR database:

## SAMPLE HR DATABASE TABLES

## EMPLOYEES

EMP_ID	F_NAME	L_NAME	SSN	B_DATE	SEX	ADDRESS	JOB_ID	SALARY	MANAGER_ID	DEP_ID
E1001	John	Thomas	123456	1976-01-09	M	5631 Rice, OakPark,IL	100	100000	30001	2
E1002	Alice	James	123457	1972-07-31	F	980 Berry ln, Elgin,IL	200	80000	30002	5
E1003	Steve	Wells	123458	1980-08-10	M	291 Springs, Gany,L	300	50000	30002	5

**JOB\_HISTORY**

EMPL_ID	START_DATE	JOBS_ID	DEPT_ID
E1001	2000-01-30	100	2
E1002	2010-08-16	200	5
E1003	2016-08-10	300	5

## JOBS

JOB_IDENT	JOB_TITLE	MIN_SALARY	MAX_SALARY
100	Sr. Architect	60000	100000
200	Sr. Software Developer	60000	80000
300	Jr. Software Developer	40000	60000

## DEPARTMENTS

DEPT_ID_DEP	DEP_NAME	MANAGER_ID	LOC_ID
2	Architect Group	30001	L0001
5	Software Development	30002	L0002
7	Design Team	30003	L0003

## LOCATIONS

LOCT_ID	DEP_ID_LOC
L0001	2
L0002	5
L0003	7

## Load the database

Using the skills acquired in the previous modules, you should first create the database in MySQL. Follow the steps below:

1. Open the phpMyAdmin interface from the Skills Network Toolbox in Cloud IDE.
2. Create a blank database named 'HR'. Use the script shared in the link below to create the required tables.  
[Script Create Tables.sql](#)
3. Download the files in the links below to your local machine (if not already done in previous labs).  
[Departments.csv](#)  
[Jobs.csv](#)  
[JobsHistory.csv](#)  
[Locations.csv](#)  
[Employees.csv](#)
4. Use each of these files to the interface as data for respective tables in the 'HR' database.

## String Patterns

You can use string patterns to filter the response of a query. Let's look at the following example:

Say you need to retrieve the first names F\_NAME and last names L\_NAME of all employees who live in Elgin, IL. You can use the LIKE operator to retrieve strings that contain the said text. The code will look as shown below.

```
SELECT F_NAME, L_NAME
FROM EMPLOYEES
WHERE ADDRESS LIKE '%Elgin,IL%';
```

Upon execution, the query output should appear as shown below:

Browse

Structure

SQL

Search

Insert

Ex

8

9 SELECT F\_NAME , L\_NAME

10 FROM EMPLOYEES

11 WHERE ADDRESS LIKE '%Elgin,IL%';

Extra options

← T →

F\_NAME

L\_NAME

☐

Edit

Copy

Delete

Alice

Jame

☐

Edit

Copy

Delete

Nancy

Allen

☐

Edit

Copy

Delete

Ann

Jacob

Now assume that you want to identify the employees who were born during the 70s. The query above can be modified to:

```
SELECT F_NAME, L_NAME
FROM EMPLOYEES
WHERE B_DATE LIKE '197%';
```

The output for this query will be:

SELECT F\_NAME , L\_NAME

FROM EMPLOYEES

WHERE B\_DATE LIKE '197%';

← | →

F\_NAME

L\_NAME

☐

Edit

Copy

Delete

John

Thomas

☐

Edit

Copy

Delete

Alice

James

☐

Edit

Copy

Delete

Nancy

Allen

☐

Edit

Copy

Delete

Mary

Thomas

Note that in the first example, % sign is used both before and after the required text. This is to indicate, that the address string can have more characters, both before and after, the required text.

In the second example, since the date of birth in Employees records starts with the birth year, the % sign is applied after 197%, indicating that the birth year can be anything between 1970 to 1979. Further the % sign also allows any possible date throughout the selected years.

Consider a more specific example. Let us retrieve all employee records in department 5 where salary is between 60000 and 70000. The query that will be used is

```
SELECT *
FROM EMPLOYEES
WHERE (SALARY BETWEEN 60000 AND 70000) AND DEP_ID = 5;
```

Output for the query can be seen in the image below.

Server: phpMyAdmin demo - MySQL » Database: HR » Table: EMPLOYEES

BrowseStructureSQLSearchInsertExport

Run SQL query/queries on table HR.EMPLOYEES:

```
1 SELECT *
2 FROM EMPLOYEES
3 WHERE (SALARY BETWEEN 60000 AND 70000) AND DEP_ID = 5;
4
```

	EMP_ID	F_NAME	L_NAME	SSN	B_DATE	SEX	ADDRESS	JOB_ID	SALARY	MANAGER_ID	DEP_ID
Edit  Copy  Delete	E1004	Santosh	Kumar	123456	1985-07-20	M	511 Aurora Av, Aurora, IL	400	60000.00	30004	5
Edit  Copy  Delete	E1010	Ann	Jacob	123415	1982-03-30	F	111 Britany Springs, Elgin, IL	220	70000.00	30004	5

☐ Check all With selected: Edit Copy Delete Export

## Sorting

You can sort the retrieved entries on the basis of one or more parameters.

First, assume that you have to retrieve a list of employees ordered by department ID.

Sorting is done using the ORDER BY clause in your SQL query. By default, the ORDER BY clause sorts the records in ascending order.

```
SELECT F_NAME, L_NAME, DEP_ID
FROM EMPLOYEES
ORDER BY DEP_ID;
```

The output for this query will be as shown below.


```
1 SELECT F_NAME, L_NAME, DEP_ID
2 FROM EMPLOYEES
3 ORDER BY DEP_ID;
```

<input type="checkbox"/>	Edit  Copy  Delete	John	Thomas	2
<input type="checkbox"/>	Edit  Copy  Delete	Ahmed	Hussain	2
<input type="checkbox"/>	Edit  Copy  Delete	Nancy	Allen	2
<input type="checkbox"/>	Edit  Copy  Delete	Alice	James	5
<input type="checkbox"/>	Edit  Copy  Delete	Steve	Wells	5
<input type="checkbox"/>	Edit  Copy  Delete	Santosh	Kumar	5
<input type="checkbox"/>	Edit  Copy  Delete	Ann	Jacob	5
<input type="checkbox"/>	Edit  Copy  Delete	Mary	Thomas	7
<input type="checkbox"/>	Edit  Copy  Delete	Bharath	Gupta	7
<input type="checkbox"/>	Edit  Copy  Delete	Andrea	Jones	7

Now, get the output of the same query in descending order of department ID, and within each department, the records should be ordered in descending alphabetical order by last name. For descending order, you can make use of the DESC clause.

```
SELECT F_NAME, L_NAME, DEP_ID
FROM EMPLOYEES
ORDER BY DEP_ID DESC, L_NAME DESC;
```

The output will be as shown in the image below.

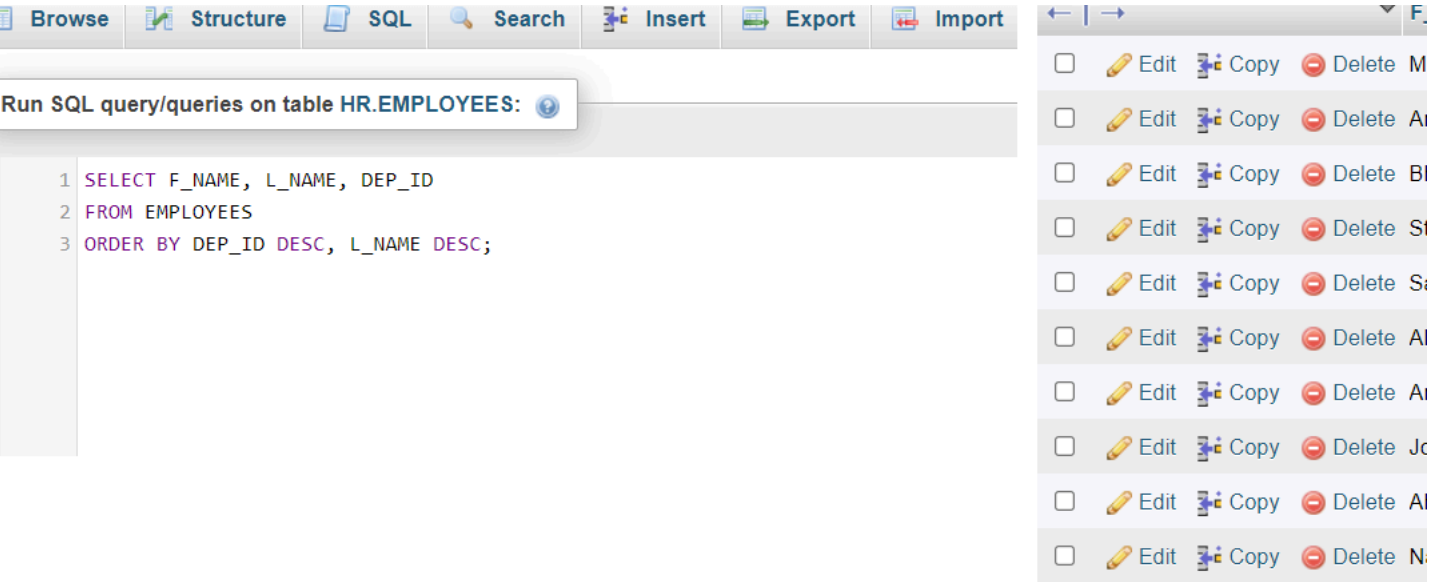

# Grouping

In this exercise, you will go through some SQL problems on Grouping.

**NOTE:** The SQL problems in this exercise involve usage of SQL Aggregate functions AVG and COUNT. COUNT has been covered earlier. AVG is a function that can be used to calculate the Average or Mean of all values of a specified column in the result set. For example, to retrieve the average salary for all employees in the EMPLOYEES table, issue the query: `SELECT AVG(SALARY) FROM EMPLOYEES;`

A good example of grouping would be if For each department ID, we wish to retrieve the number of employees in the department.

```
SELECT DEP_ID, COUNT(*)
FROM EMPLOYEES
GROUP BY DEP_ID;
```

```

1 SELECT DEP_ID, COUNT(*)
2 FROM EMPLOYEES
3 GROUP BY DEP_ID;

```

☐ Profiling [ [Edit inline](#) ] [ [Edit](#) ] [ [Export](#) ]

☐ Show all | Number of rows: 25

Extra options

DEP_ID	COUNT(*)
2	3
5	4
7	3

☐ Show all | Number of rows: 25

Now, for each department, retrieve the number of employees in the department and the average employee salary in the department. For this, you can use COUNT(\*) to retrieve the total count of a column, and AVG() function to compute average salaries, and then GROUP BY.

```

SELECT DEP_ID, COUNT(*), AVG(SALARY)
FROM EMPLOYEES
GROUP BY DEP_ID;

```

Extra options

DEP_ID	COUNT(*)	AVG(SALARY)
2	3	86666.666667
5	4	65000.000000
7	3	66666.666667

You can refine your output by using appropriate labels for the columns of data retrieved. Label the computed columns in the result set of the last problem as NUM\_EMPLOYEES and AVG\_SALARY.

```

SELECT DEP_ID, COUNT(*) AS "NUM_EMPLOYEES", AVG(SALARY) AS "AVG_SALARY"
FROM EMPLOYEES
GROUP BY DEP_ID;

```

```

1
2 SELECT DEP_ID, COUNT(*) AS "NUM_EMPLOYEES", AVG(SALARY) AS "AVG_SALARY"
3 FROM EMPLOYEES
4 GROUP BY DEP_ID;

```

☐ Show all | Number of rows: 25

Extra options

DEP_ID	NUM_EMPLOYEES	AVG_SALARY
2	3	86666.666
5	4	65000.000
7	3	66666.666

You can also combine the usage of GROUP BY and ORDER BY statements to sort the output of each group in accordance with a specific parameter. It is important to note that in such a case, ORDER BY clause must be used after the GROUP BY clause. For example, we can sort the result of the previous query by average salary. The SQL query would thus become

```

SELECT DEP_ID, COUNT(*) AS "NUM_EMPLOYEES", AVG(SALARY) AS "AVG_SALARY"
FROM EMPLOYEES
GROUP BY DEP_ID
ORDER BY AVG_SALARY;

```

The output of the query should look like:

1	SELECT DEP_ID, COUNT(*) AS "NUM_EMPLOYEES", AVG(SALARY) AS "AVG_SALARY"	<input type="checkbox"/> Show all   Number of rows: 25
2	FROM EMPLOYEES	Extra options
3	GROUP BY DEP_ID	
4	ORDER BY AVG_SALARY;	
		DEP_ID   NUM_EMPLOYEES   AVG_SALARY
		5   3   6
		7   3   8
		2   3   8

In case you need to filter a grouped response, you have to use the HAVING clause. In the previous example, if we wish to limit the result to departments with fewer than 4 employees, We will have to use HAVING after the GROUP BY, and use the count() function in the HAVING clause instead of the column label.

```

SELECT DEP_ID, COUNT(*) AS "NUM_EMPLOYEES", AVG(SALARY) AS "AVG_SALARY"
FROM EMPLOYEES
GROUP BY DEP_ID
HAVING count(*) < 4
ORDER BY AVG_SALARY;

```

1		<input type="checkbox"/> Show all   Number of rows: 25
2	SELECT DEP_ID, COUNT(*) AS "NUM_EMPLOYEES", AVG(SALARY) AS "AVG_SALARY"	Extra options
3	FROM EMPLOYEES	
4	GROUP BY DEP_ID	
5	HAVING count(*) < 4	
6	ORDER BY AVG_SALARY;	
		DEP_ID   NUM_EMPLOYEES   AVG_SALARY
		7   3   6
		2   3   8

# Practice Questions

- Retrieve the list of all employees, first and last names, whose first names start with ‘S’.
- Click here for Solution
- Arrange all the records of the EMPLOYEES table in ascending order of the date of birth.
- Click here for Solution
- Group the records in terms of the department IDs and filter them of ones that have average salary more than or equal to 60000. Display the department ID and the average salary.
- Click here for Solution
- For the problem above, sort the results for each group in descending order of average salary.

► [Click here for Solution](#)

## Conclusion

Congratulations! You have completed this lab.

By the end of this lab, you are able to:

- Use string patterns for filtering the data retrieved.
- Sort the data retrieved upon one or more parameters using ORDER BY statement.
- Group the data with respect to a parameter.

## Author(s)

[Abhishek Gagneja](#)

[Lakshmi Holla](#)

[Malika Singla](#)



**Skills** Network

© IBM Corporation 2023. All rights reserved.