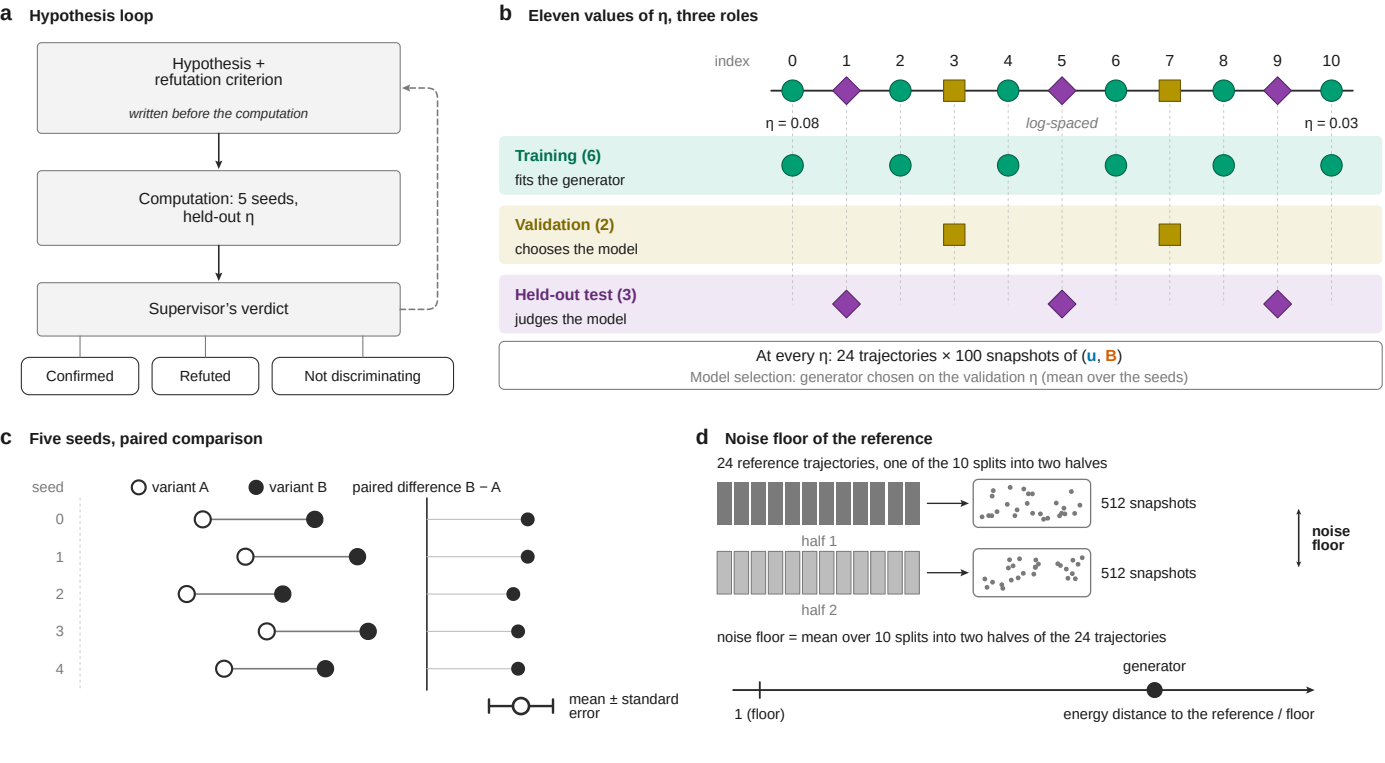

a Hypothesis loop
Hypothesis + refutation criterion
written before the computation
Computation: 5 seeds, held-out η
Supervisor's verdict
Confirmed
Refuted
Not discriminating
b Eleven values of η, three roles
index 0 1 2 3 4 5 6 7 8 9 10
η = 0.08
log-spaced
η = 0.03
Training (6)
fits the generator
Validation (2)
chooses the model
Held-out test (3)
judges the model
At every η: 24 trajectories × 100 snapshots of (u, B)
Model selection: generator chosen on the validation η (mean over the seeds)
c Five seeds, paired comparison
seed
variant A
variant B
paired difference B − A
0
1
2
3
4
mean ± standard error
d Noise floor of the reference
24 reference trajectories, one of the 10 splits into two halves
half 1
512 snapshots
half 2
512 snapshots
noise floor
noise floor = mean over 10 splits into two halves of the 24 trajectories
generator
1 (floor)
energy distance to the reference / floor