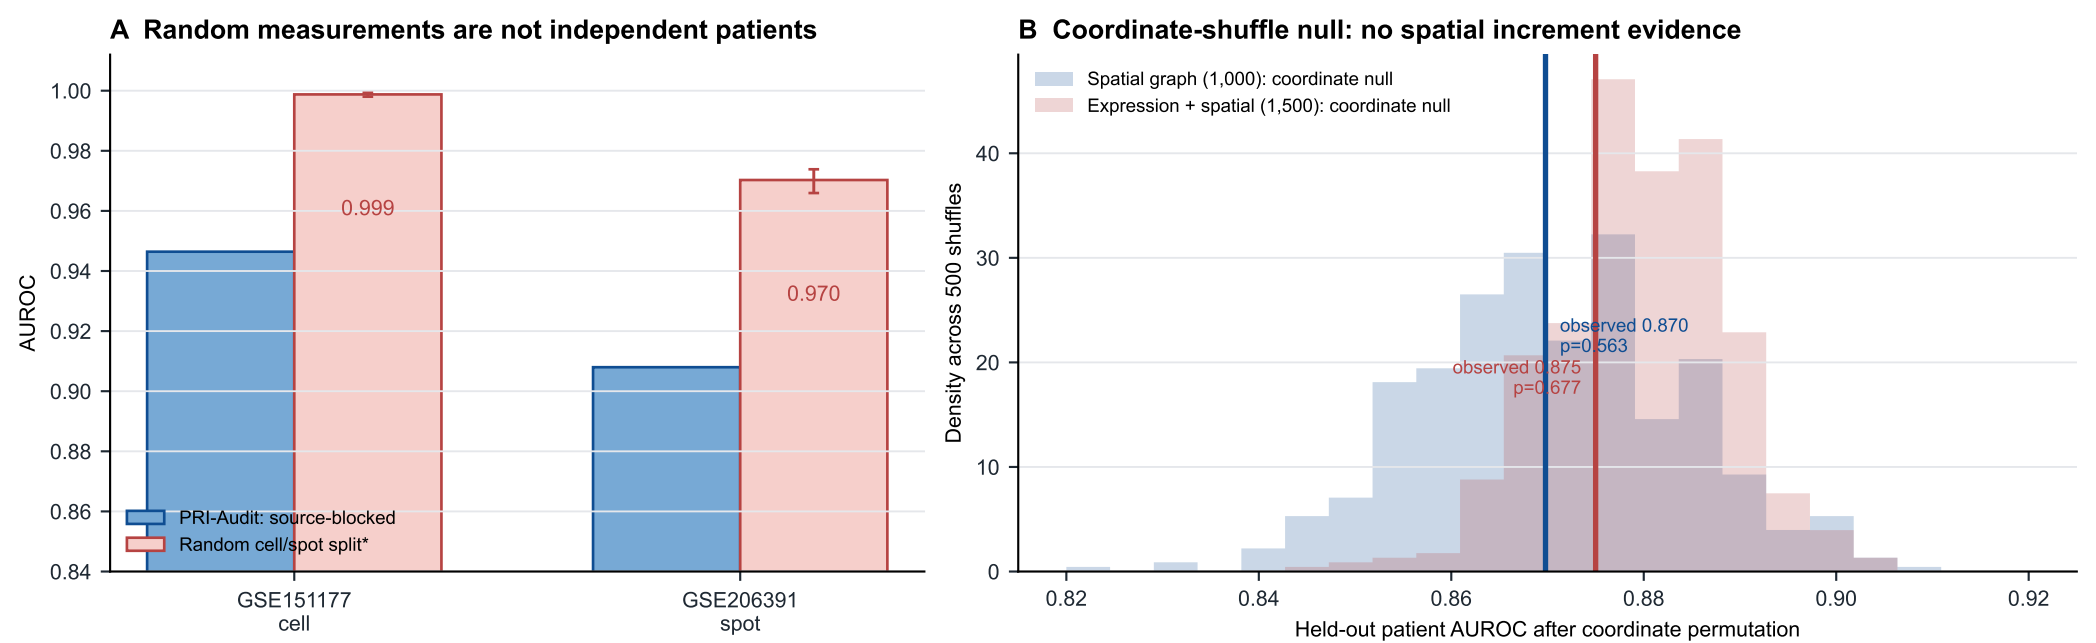

*Global preprocessing; 100% of test cells/spots come from source samples seen in training.
It estimates within-source interpolation, not patient generalisation.

All source-blocked scores use one held-out prediction per independent sample/patient. Coordinate shuffles are within sample; counts, labels, folds and fold-specific HVGs remain fixed.