



Step 1

URL points directly to a static file

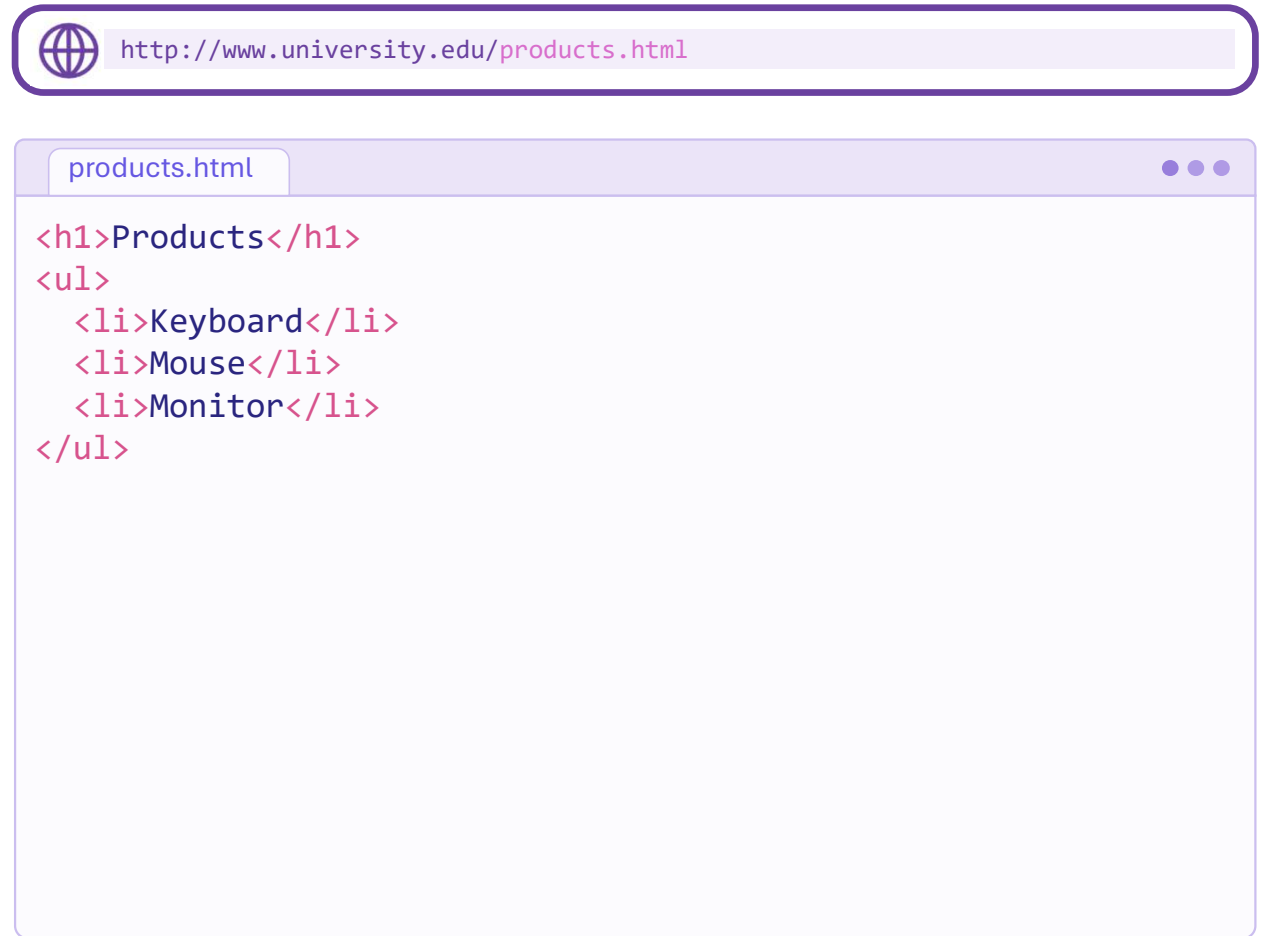

Step 2

URL points to a script that runs

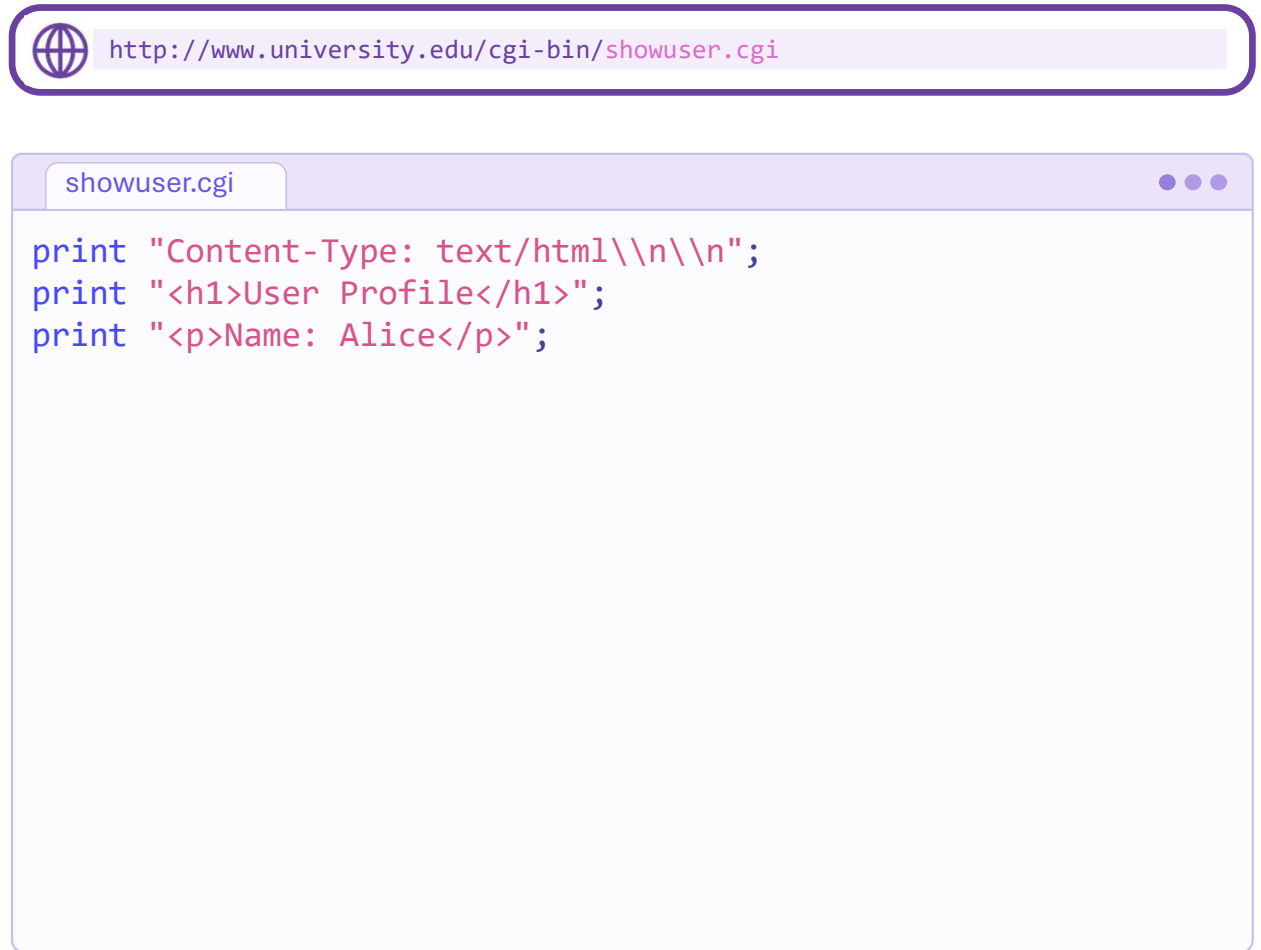

Step 3

URL becomes command-like



Step 4

From string-built HTML to templates




The image shows a browser window with a purple border. The address bar contains the URL `http://www.university.edu/products.php?userid=42`. Below the address bar is a tab labeled `products.php`. The main content area of the browser displays PHP code for a user profile page. The code includes a database query to fetch user data and HTML output using short tags.

```
<?php
    $userid = $_GET['userid'];
    $user = $db
        ->query("SELECT name, bio FROM
            users WHERE id = ?", [$userid])
        ->fetch();
?>

<div class="user-card">
    <h1><?= $user['name'] ?></h1>
    <p><?= $user['bio'] ?></p>
</div>
```

Step 5

Preserve scroll position after full reload

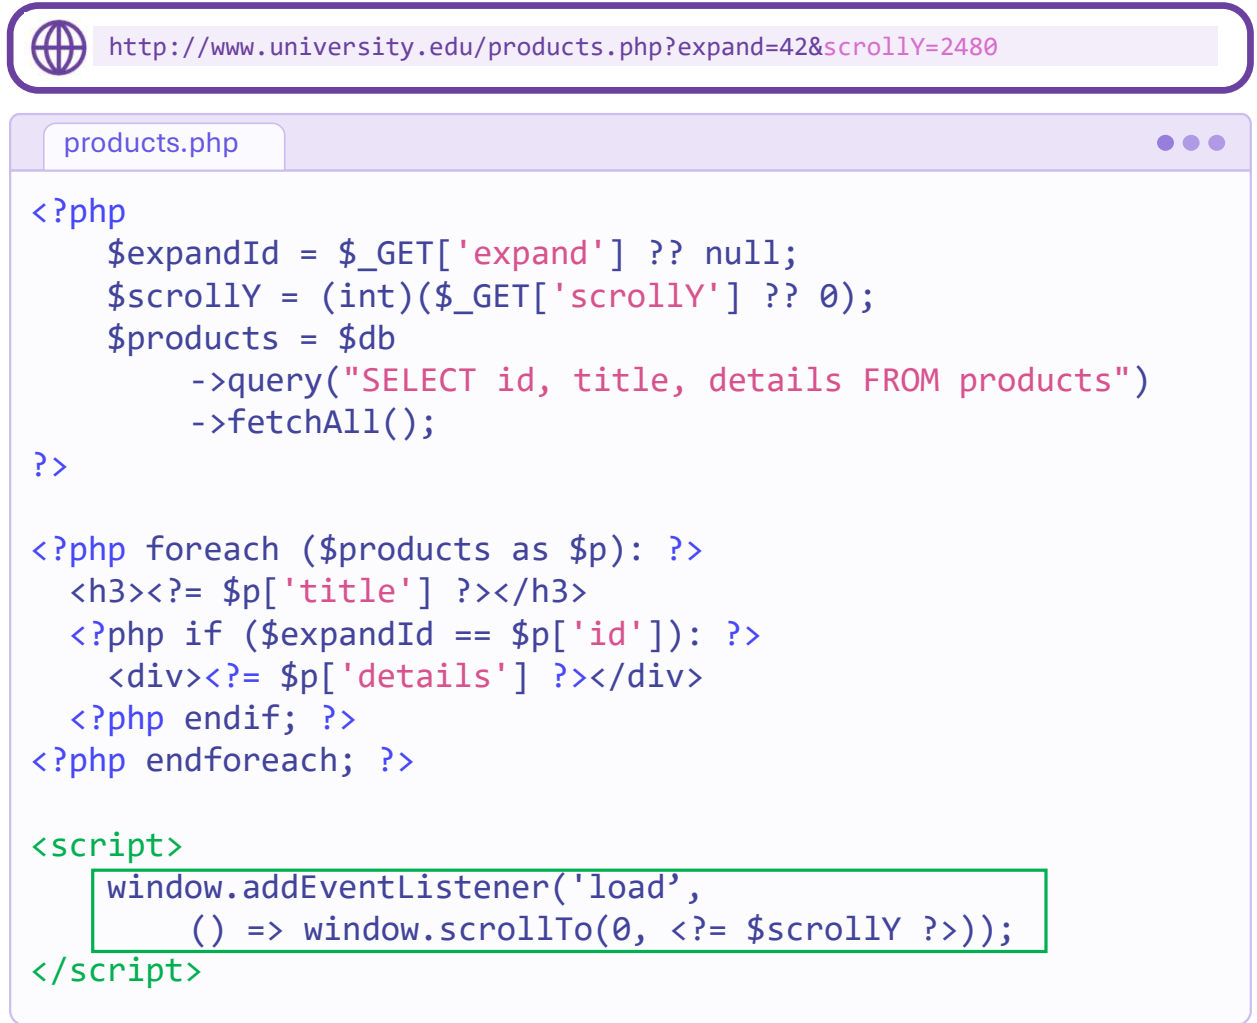

```
<?php
    $expandId = $_GET['expand'] ?? null;
    $scrollY = (int)($_GET['scrollY'] ?? 0);
    $products = $db
        ->query("SELECT id, title, details FROM products")
        ->fetchAll();
?>

<?php foreach ($products as $p): ?>
    <h3><?= $p['title'] ?></h3>
    <?php if ($expandId == $p['id']): ?>
        <div><?= $p['details'] ?></div>
    <?php endif; ?>
<?php endforeach; ?>

<script>
    window.addEventListener('load',
        () => window.scrollTo(0, <?= $scrollY ?>));
</script>
```