Encoder · normal → 90m / 6h / 10h

Frozen MaskGIT, layers 1–3 of 12. The same body reads a target cell with the gradient stopped.

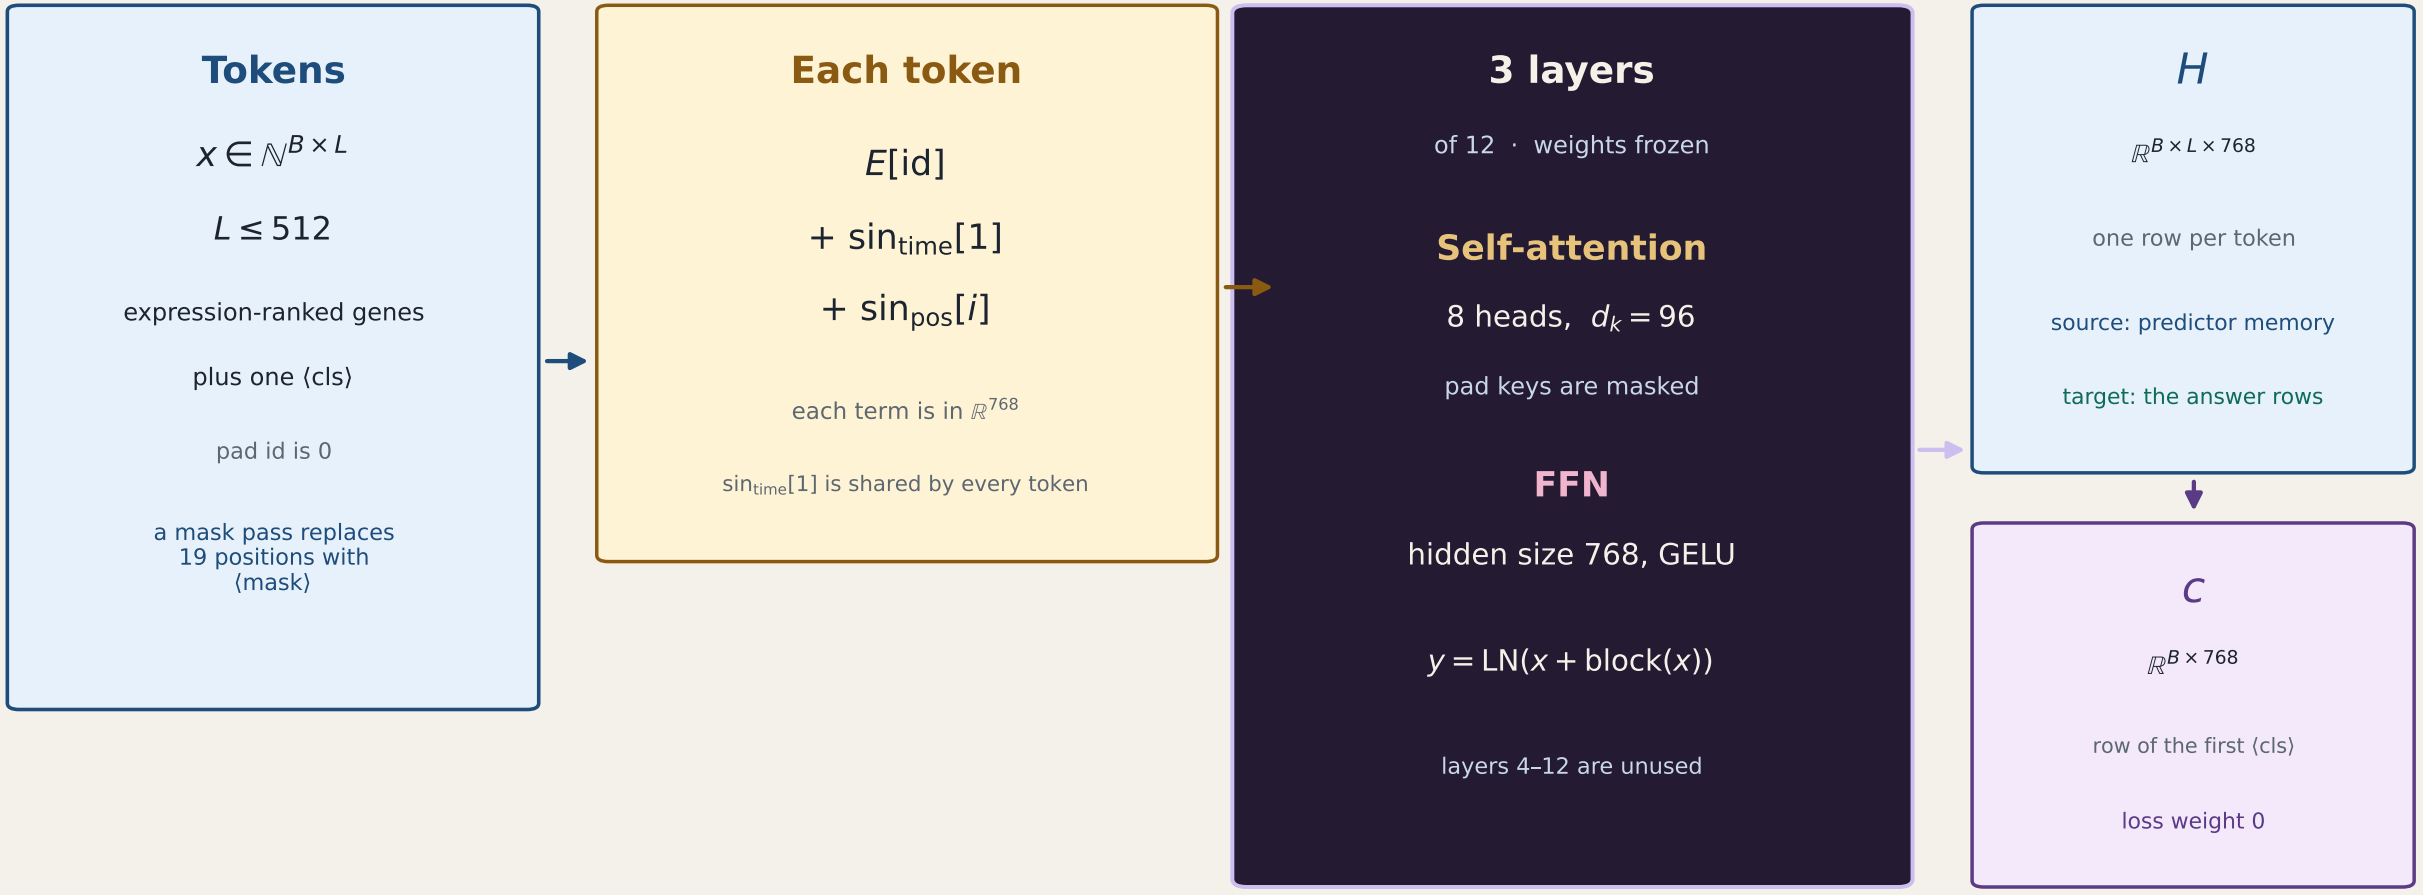

The token table E is also the gene name inside a query. LPS time never enters this encoder: the time sinusoid is always index 1.

Source and target are separate passes. A source pass is rebuilt when its 19 mask positions change.