


Lifting the veil on Meta's microservices

Analysis of topology and request workflows

Darby Huye, Yuri Shkuro, & Raja Sambasivan



Microservices: what are they?

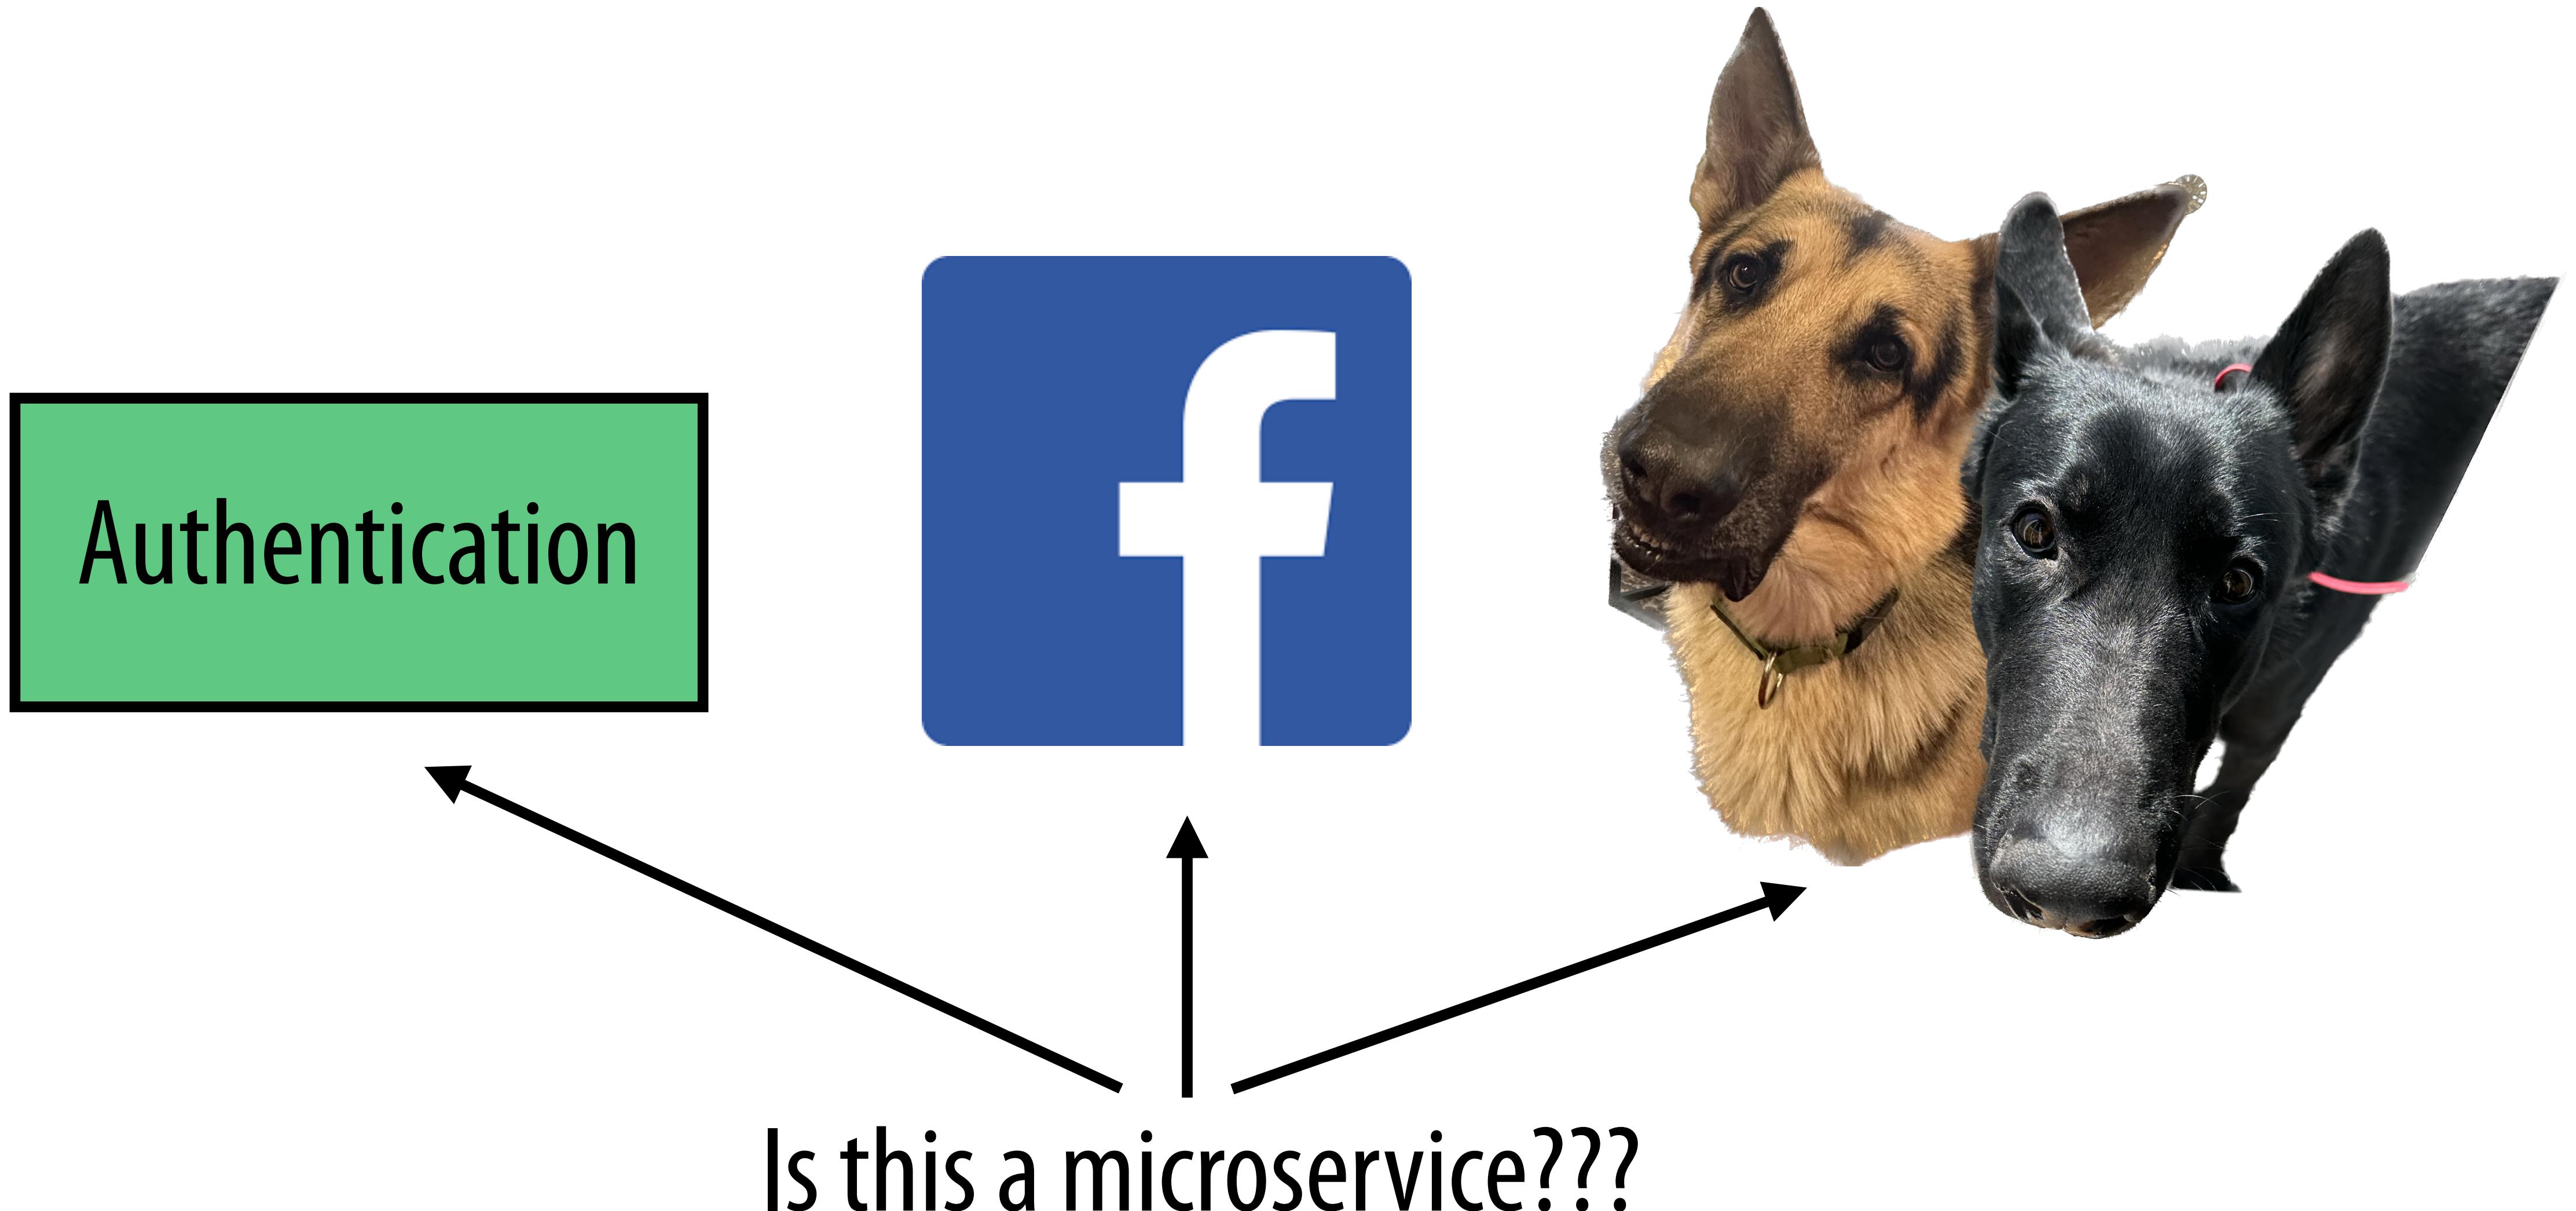


Foundational trends towards microservices

Organizational trends:

- desire for teams to work independently, want quick development, globalization of companies

Hardware trends:

- death of Moore's law leads to need for parallelization

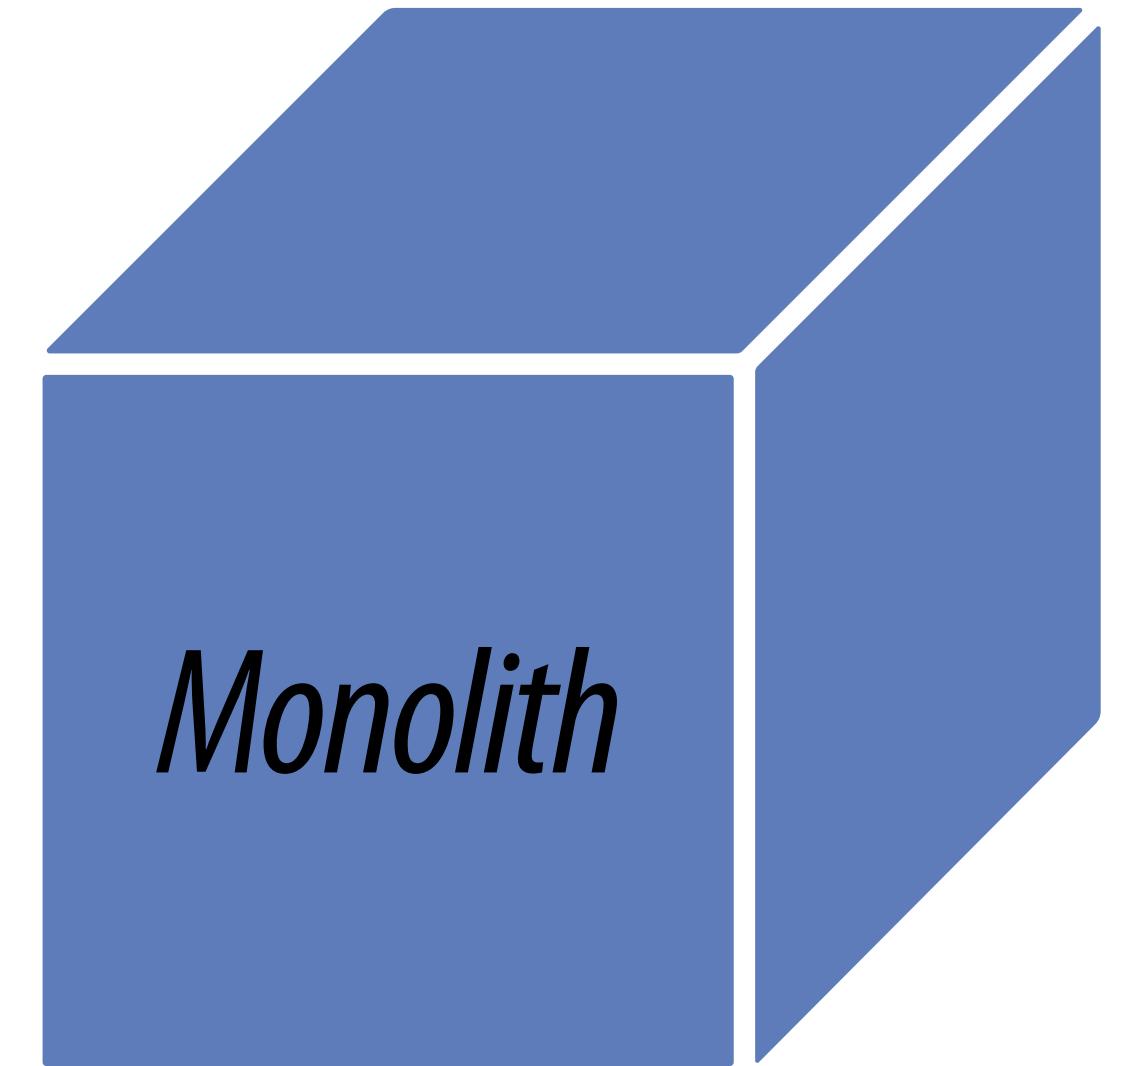

Foundational trends towards microservices


Organizational trends:

- desire for teams to work independently, want quick development, globalization of companies

Hardware trends:


- death of Moore's law leads to need for parallelization

Basic Idea: apps composed of tiny pieces communicating over the network

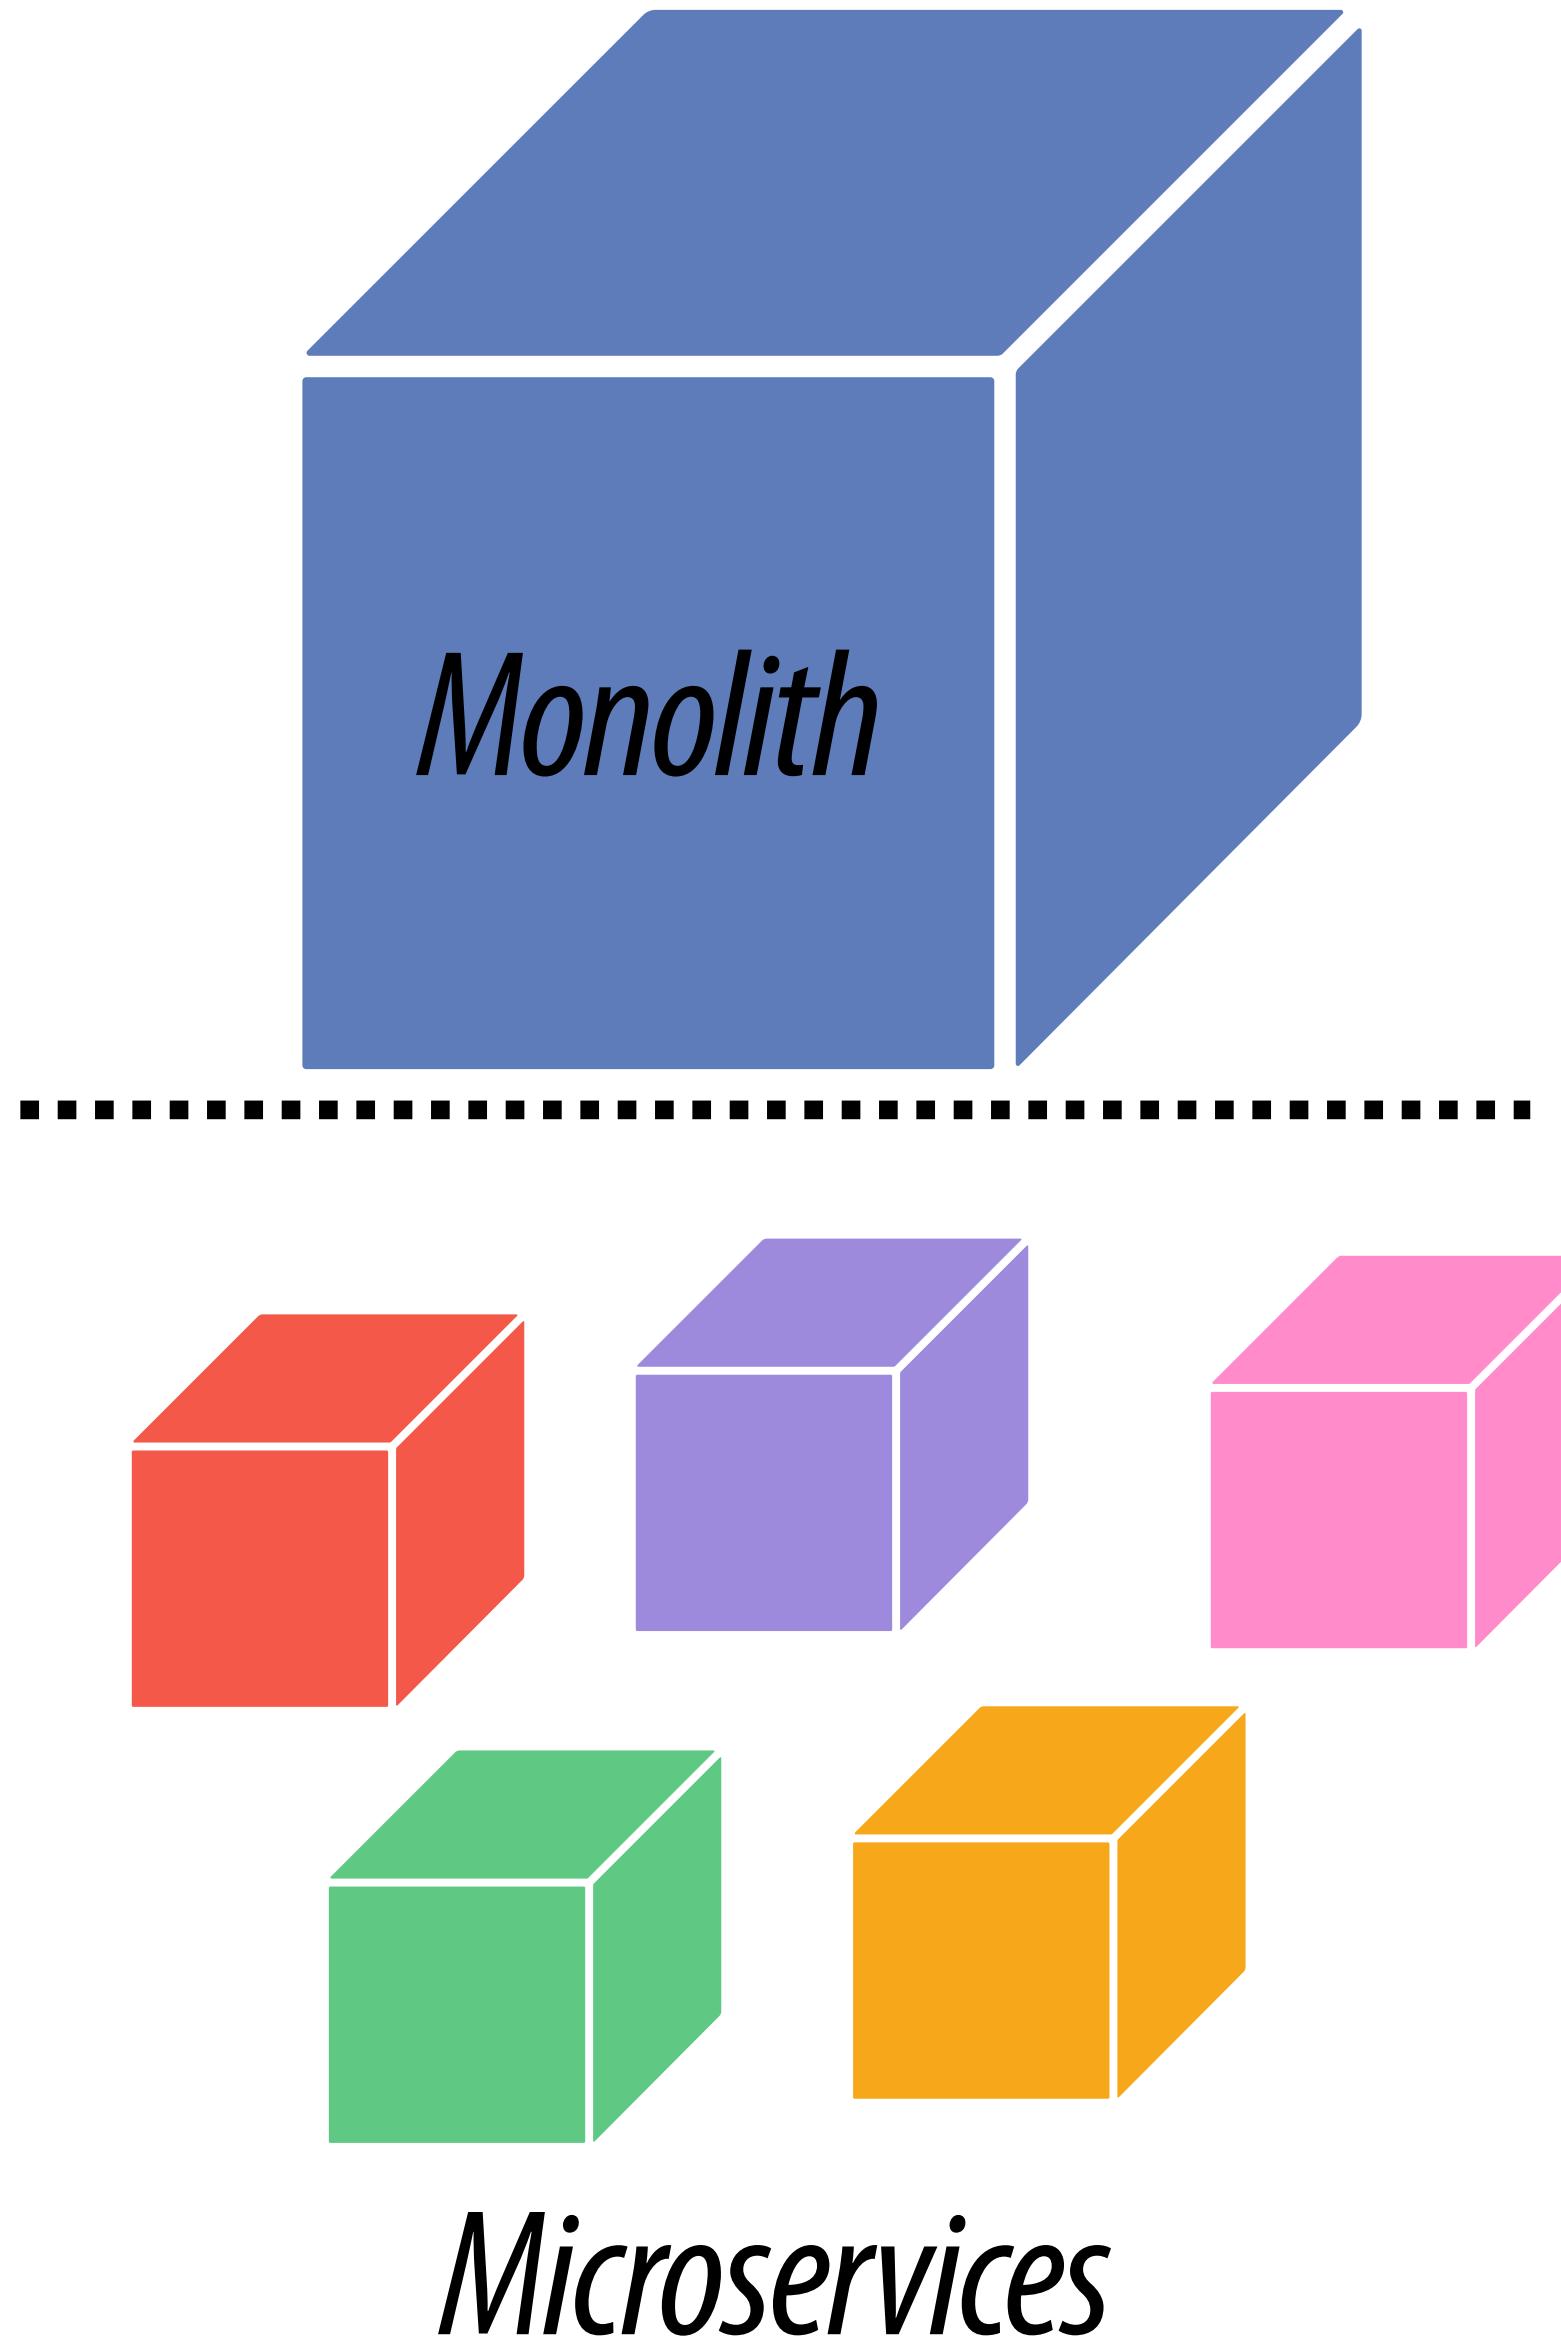


Microservices: current abstraction

- Concept of service is sufficient dimension for deployment, scaling, observability
- Independently deployable units
- Small, represent a single business capability
- Strictly hierarchical architecture
- Relatively stable topologies

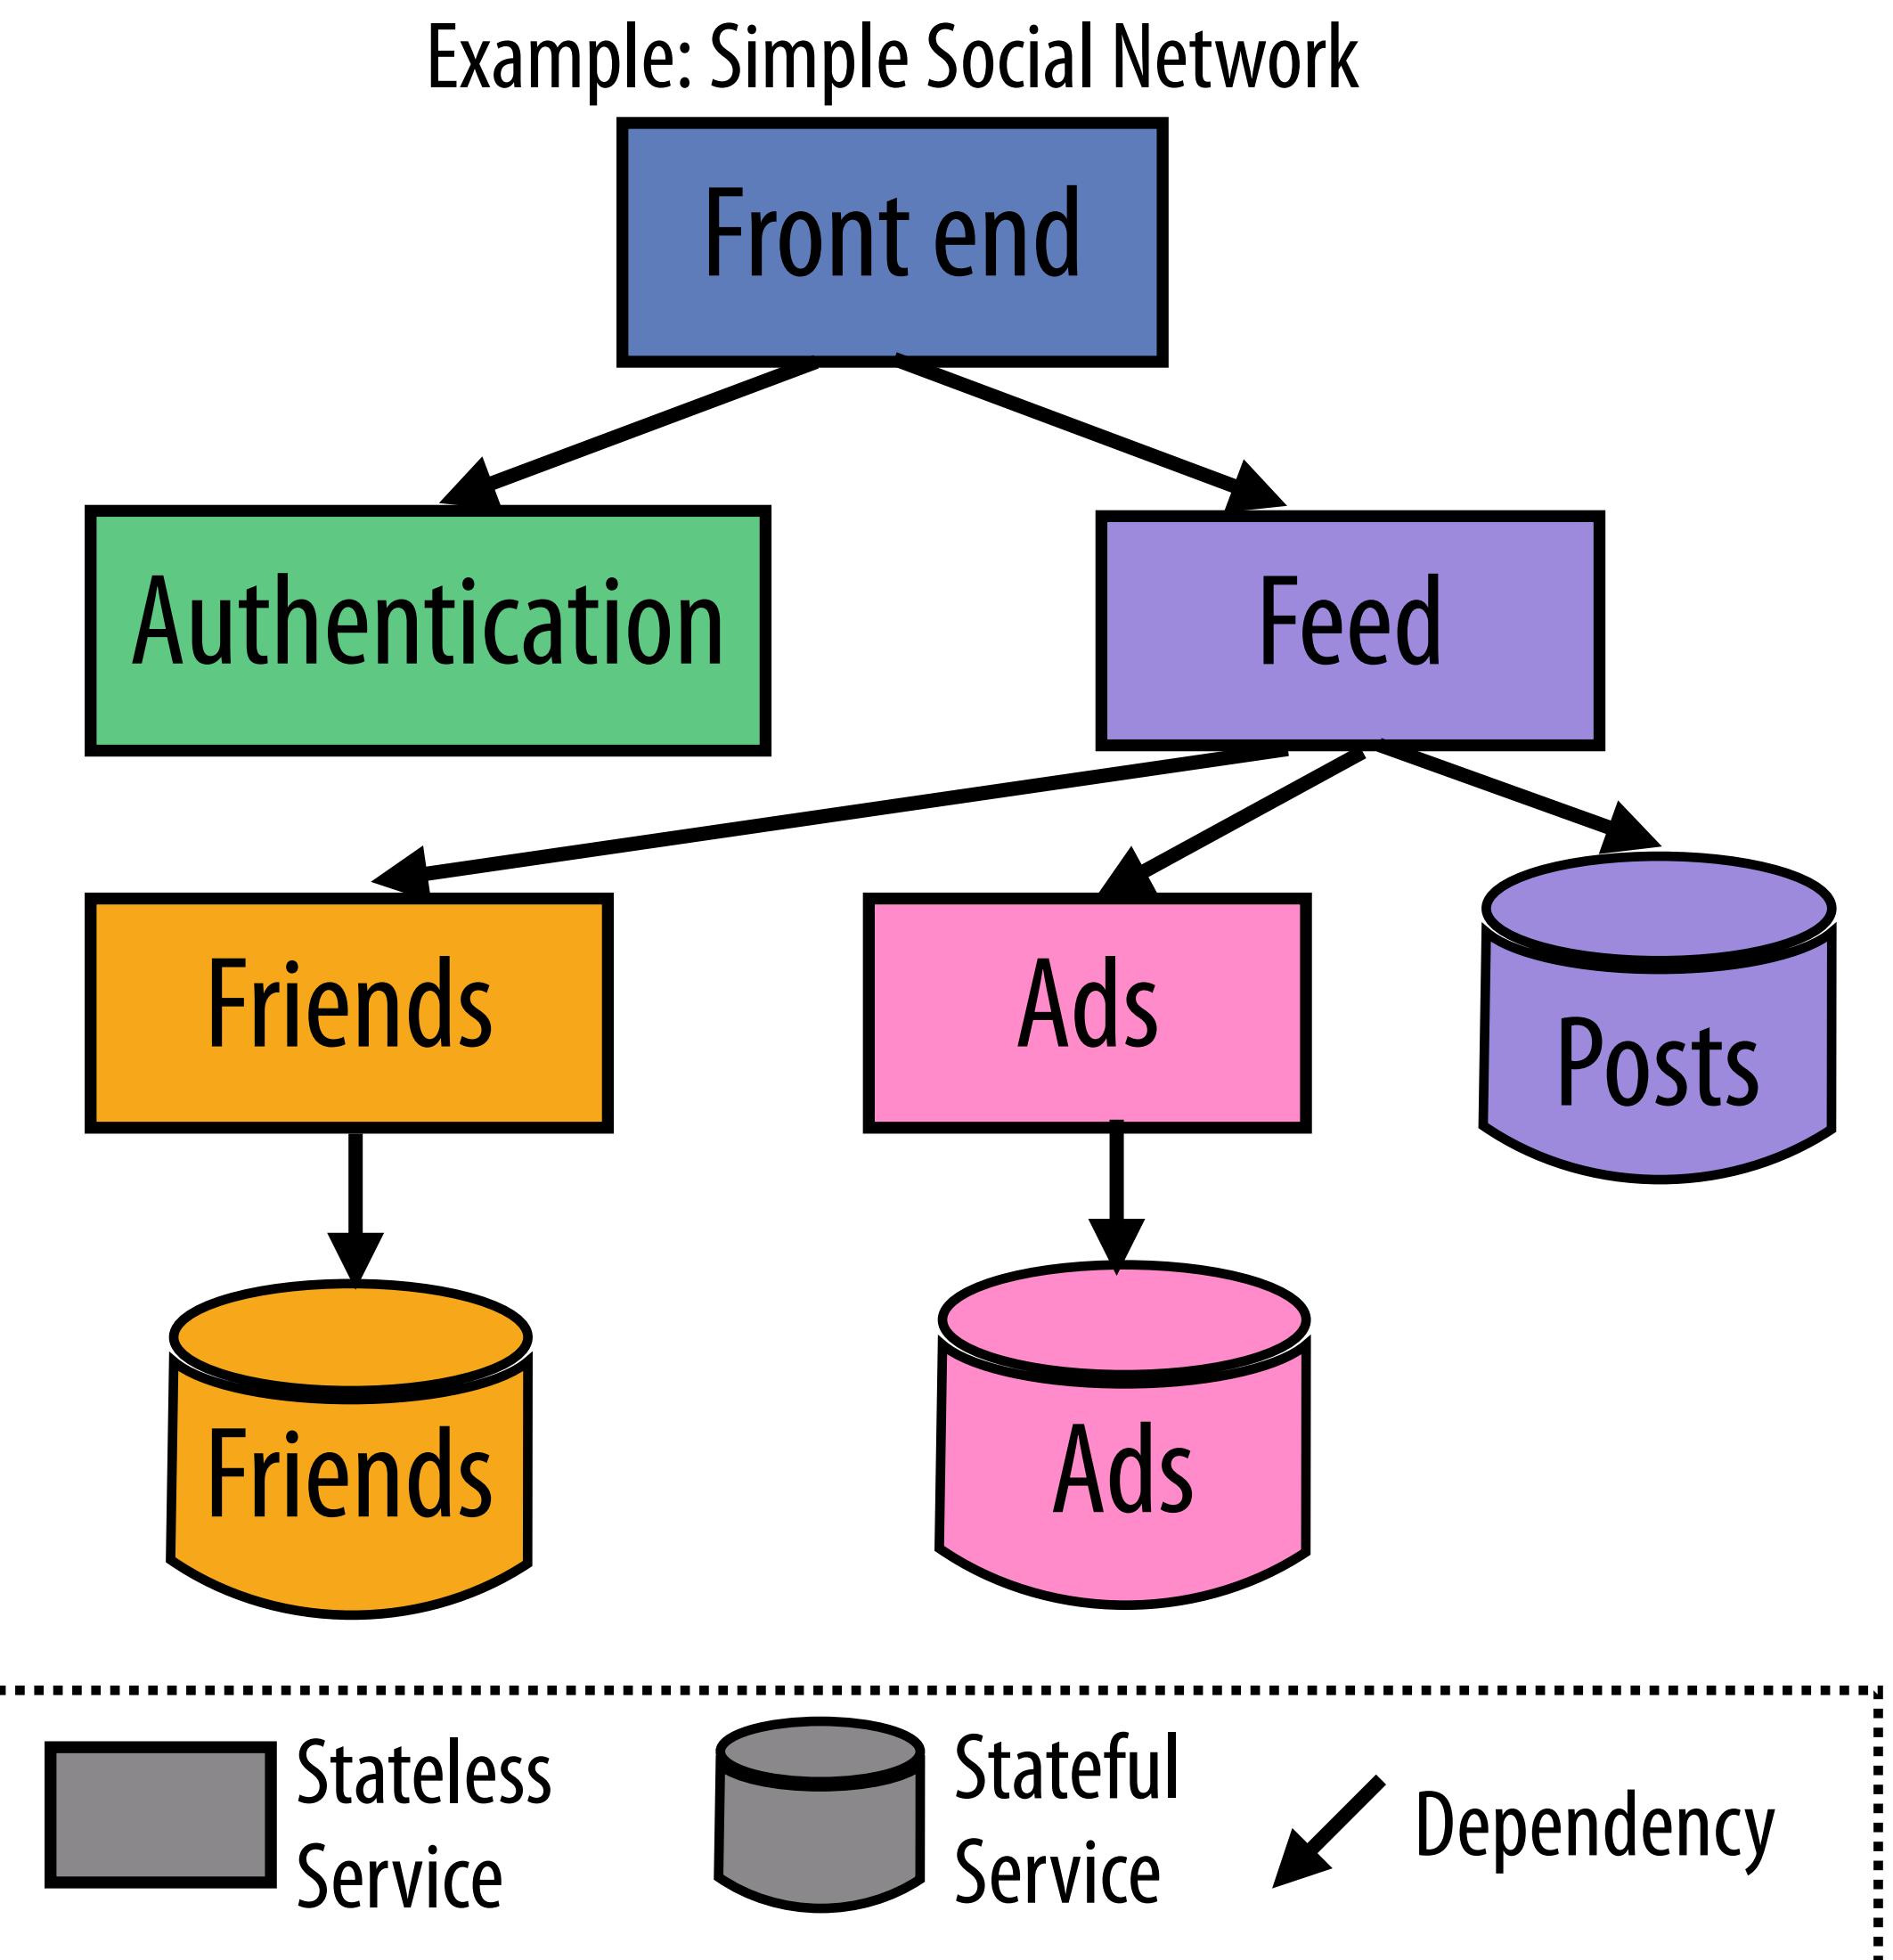


Microservices: current abstraction

- Concept of service is sufficient dimension for deployment, scaling, observability
- Independently deployable units
- Small, represent a single business capability
- Strictly hierarchical architecture
- Relatively stable topologies

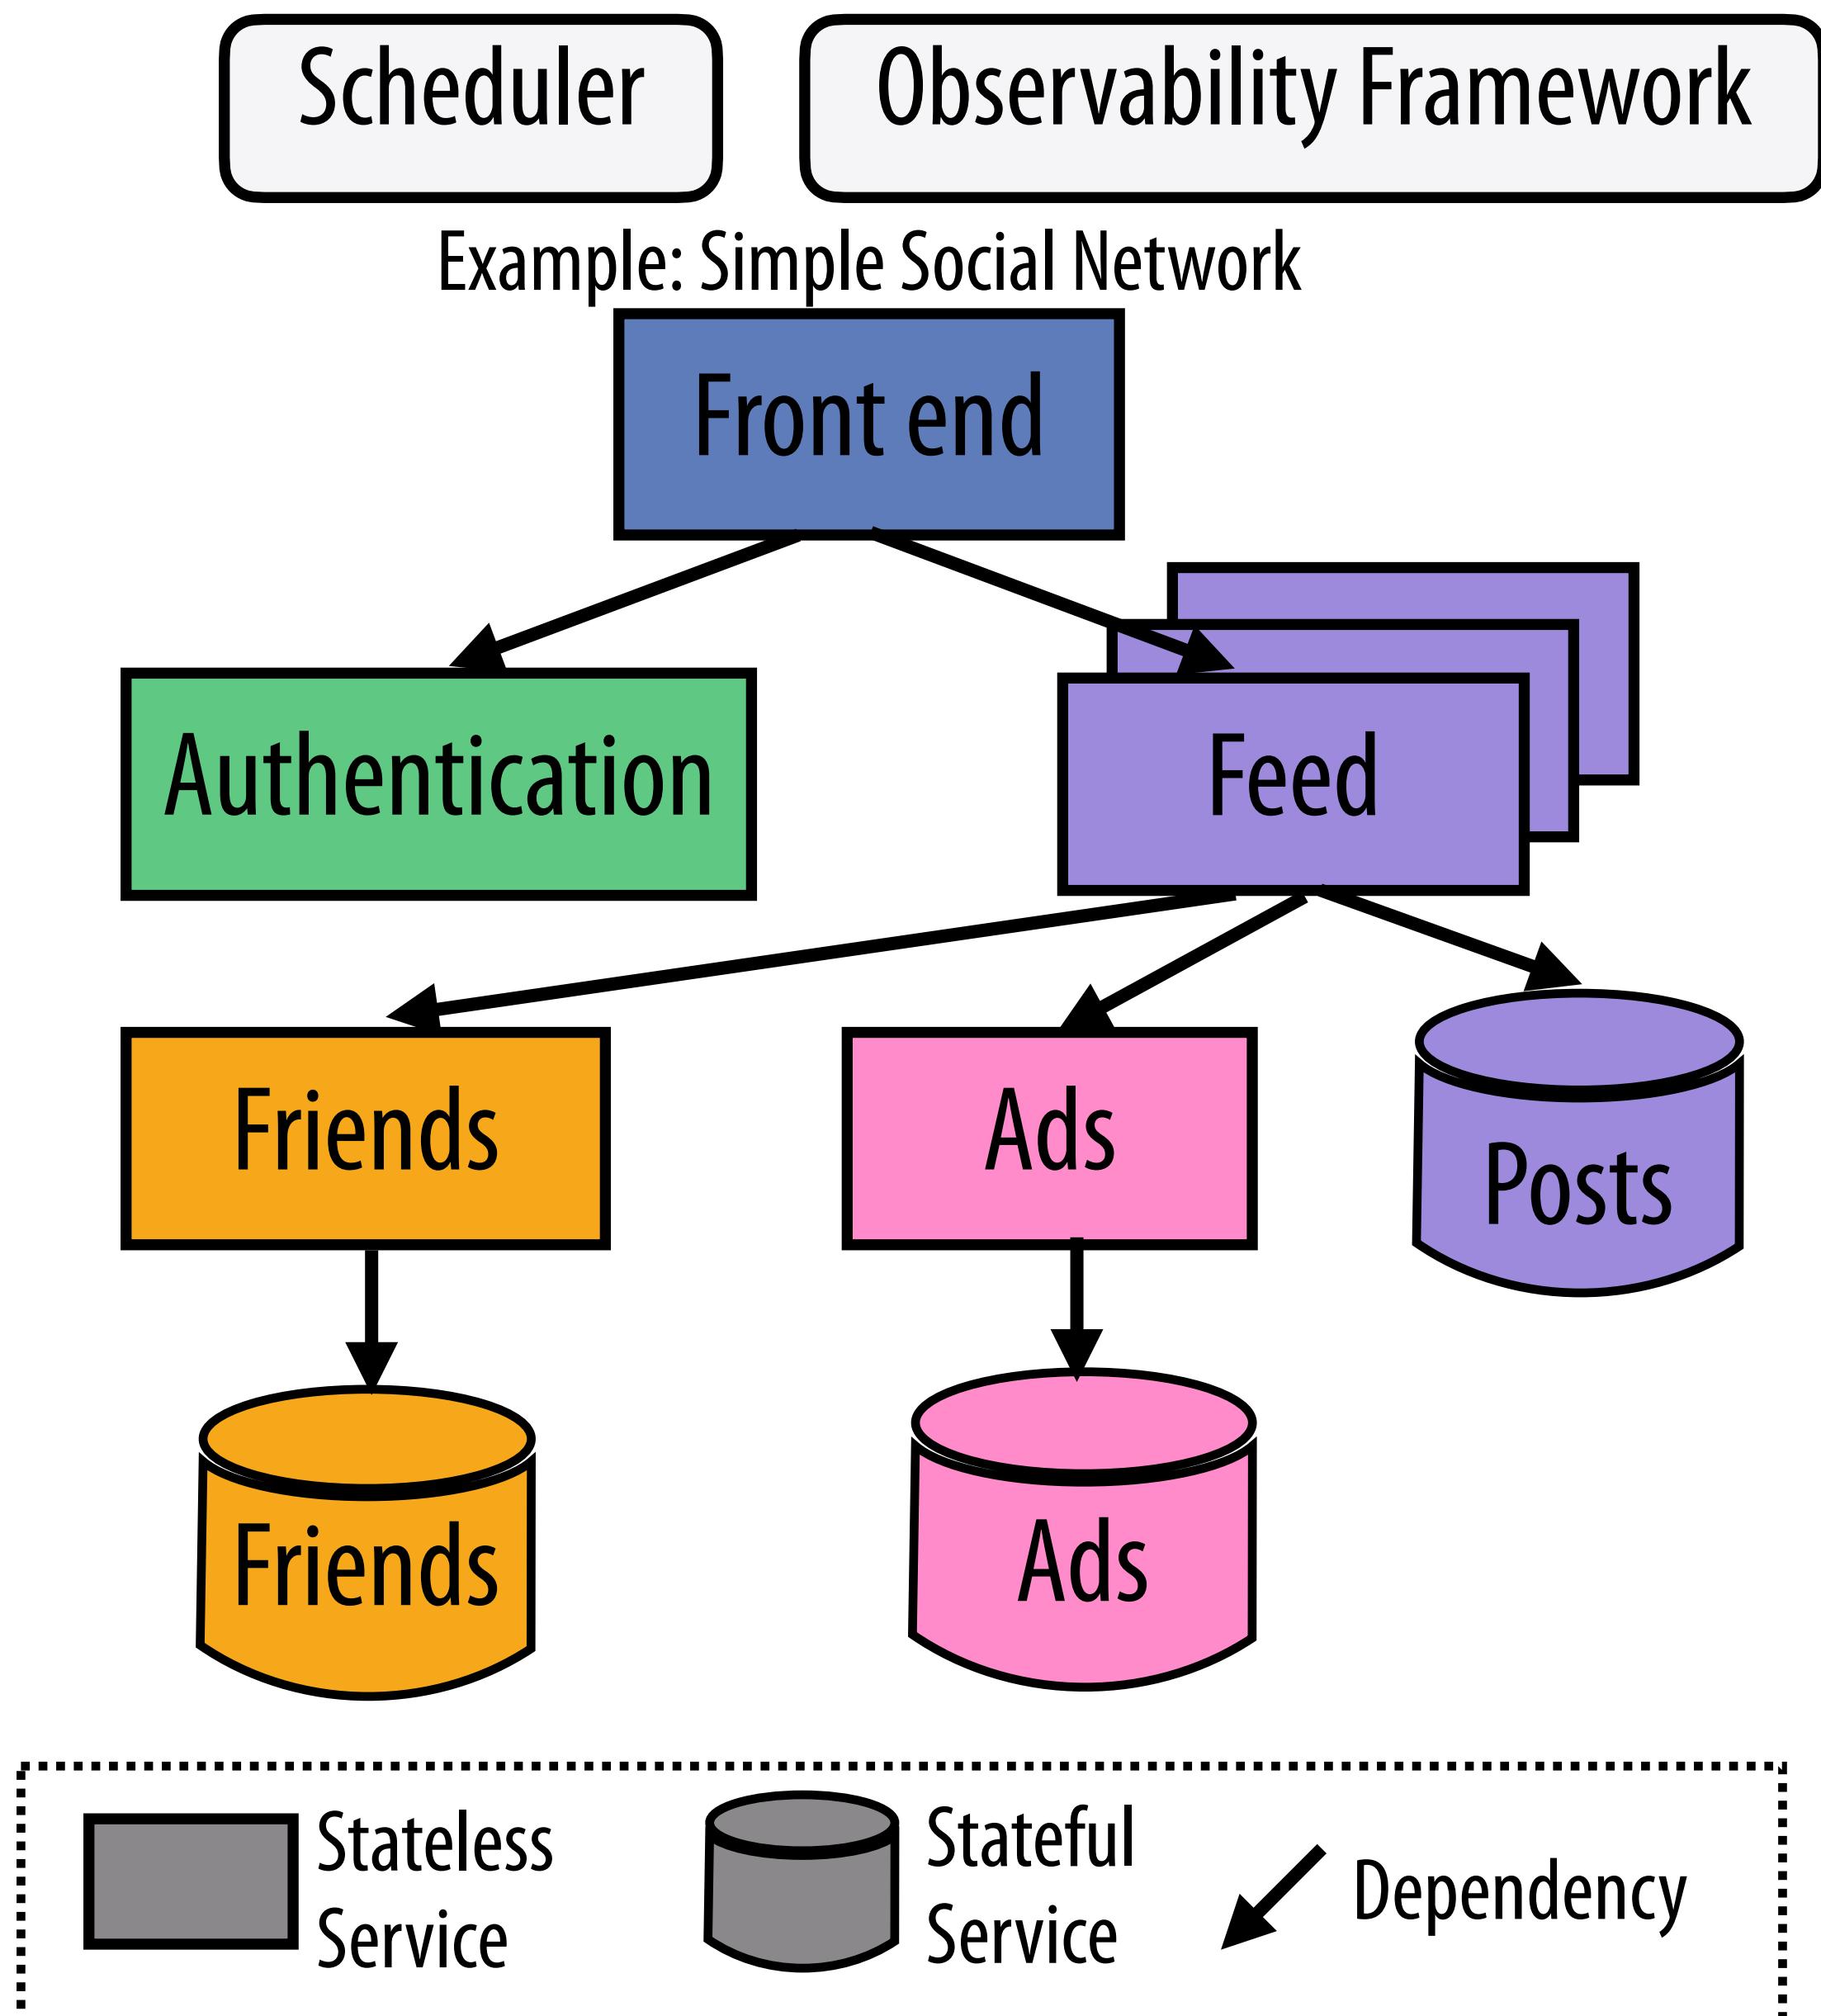

Microservices: request workflow

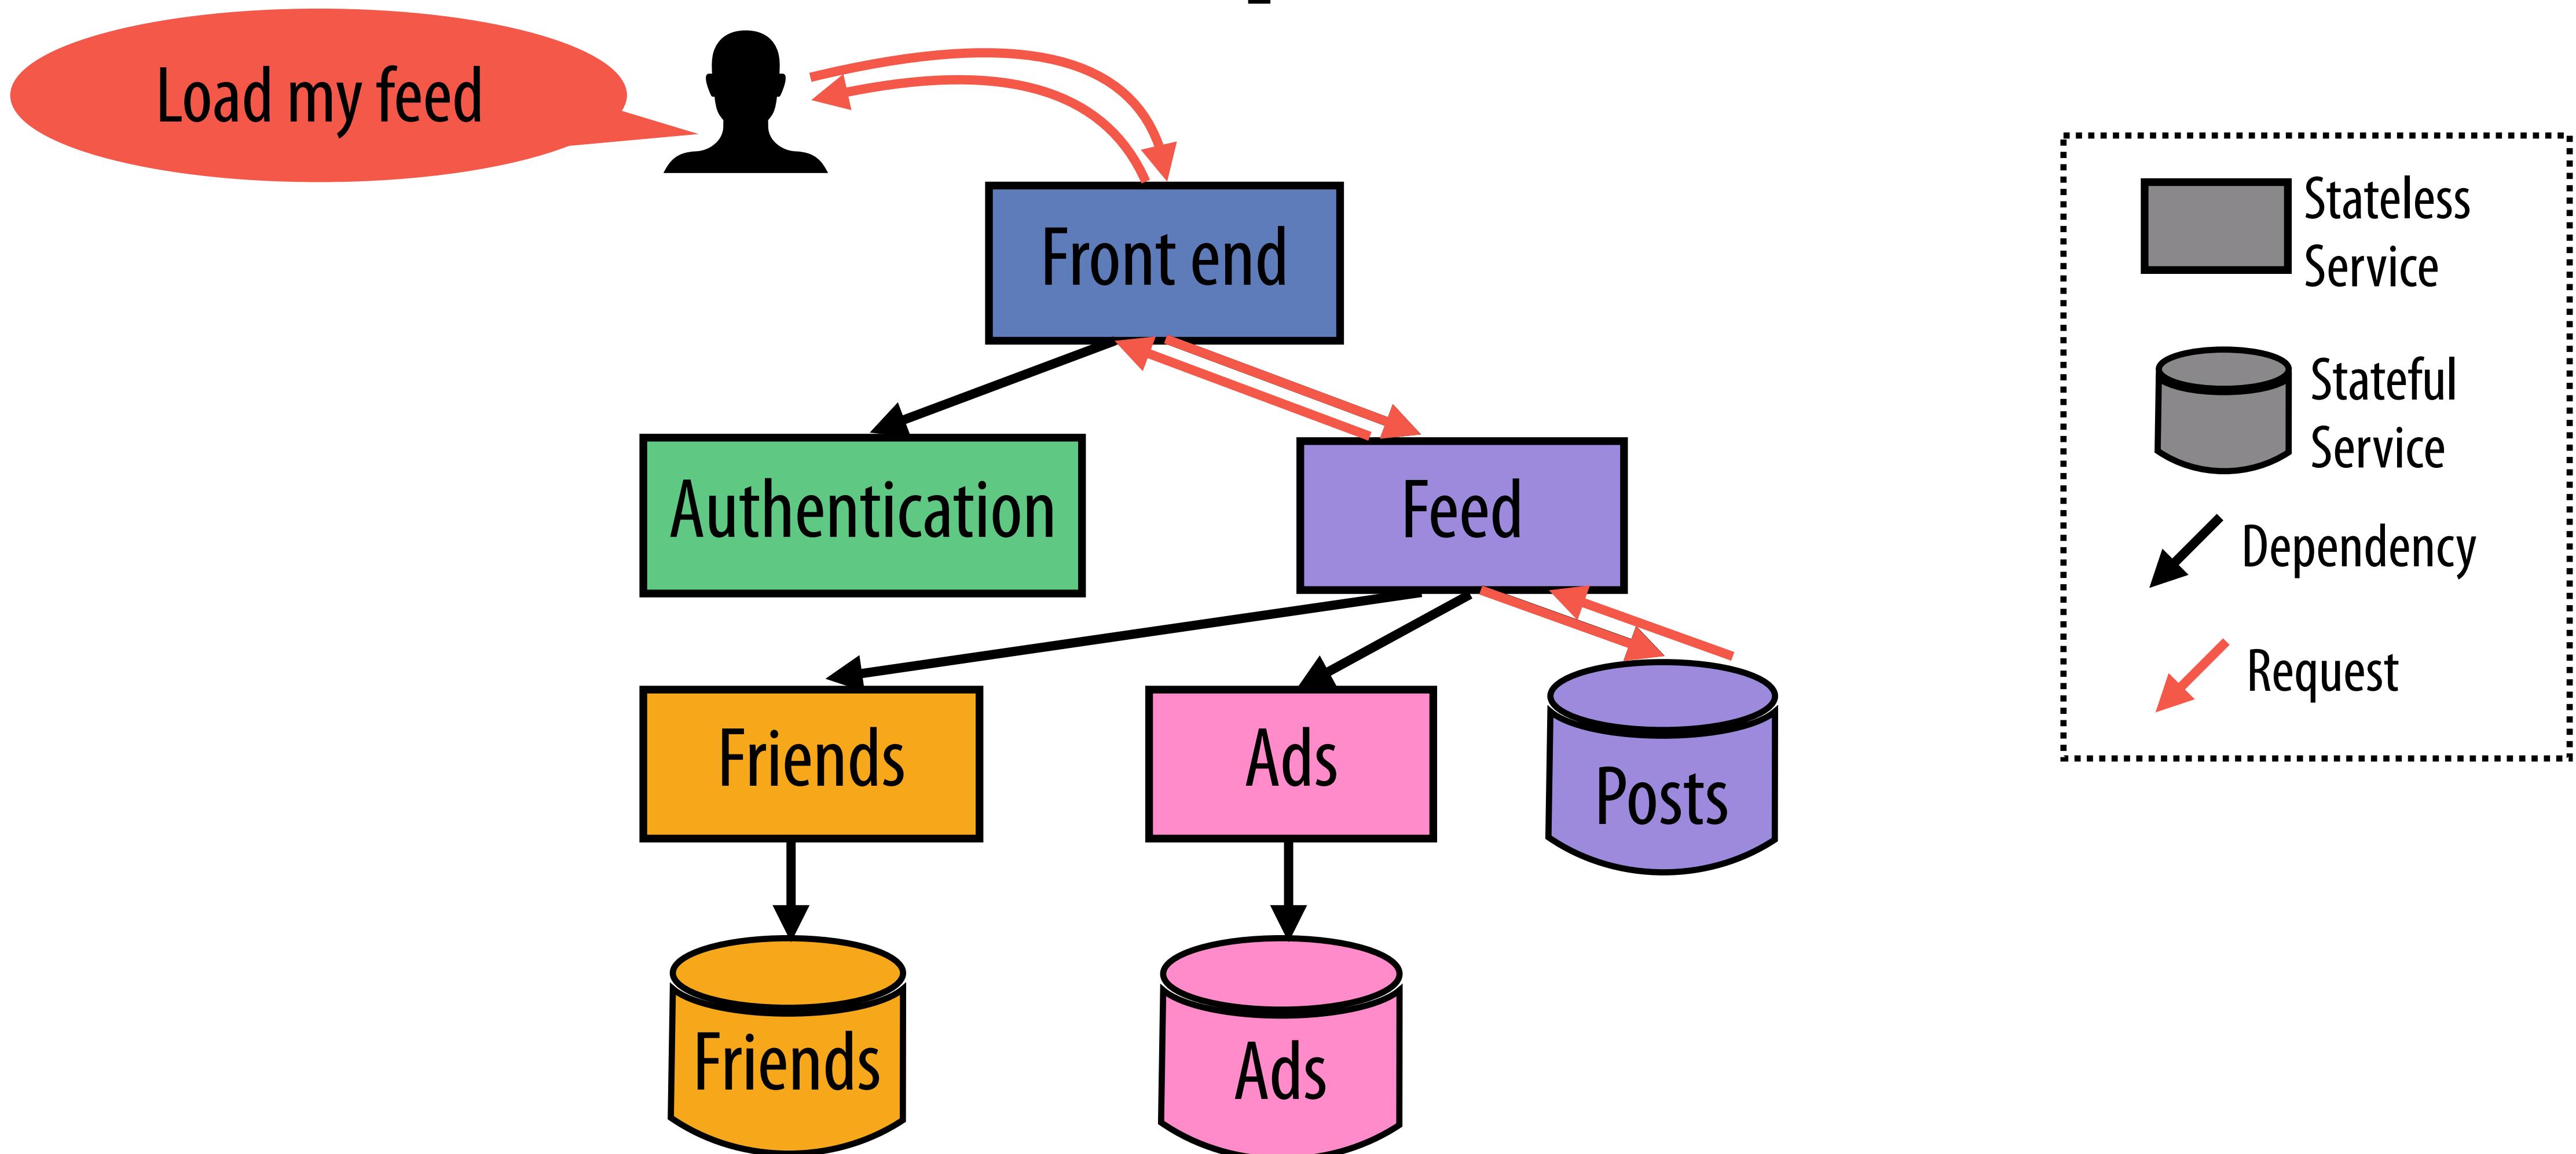

Microservice Topology (Dependency Diagram)

Current state of microservice research

Microservice testbeds [ASPLOS'19, TSE'18, Bookinfo]

- small in scale and complexity

Tools evaluated on testbeds [OSDI'20, SINAN'21, ASPLOS'21]

- Focuses on topology and request workflows
- E.g., Sage: resource management using topological information
- TProf aggregate analysis of request workflows

How realistic is our abstraction?

Analysis of Meta's microservices

Topology

Abstraction



Service is sufficient dimension



Topology is static



Services are simple

Finding

Service is not one size fits all

Long-term growth with daily churn

Long tail of complex services

Workflows

Abstraction

✓ Wide & shallow

✗ Traces rep. of workflows

✗ Depth predicts # calls

✗ Workflows execute consistently

Finding

Wide & shallow

Observability loss impacts deep traces

Variation in # calls, even locally

Variation in conc., decreased by children set

Analysis of Meta's microservices

Topology

Abstraction

Service is sufficient dimension

Topology is static

Services are simple

Finding

Service is not one size fits all

Long-term growth with daily churn

Long tail of complex services

Workflows

Abstraction

Wide & shallow

Traces rep. of workflows

Depth predicts # calls

Workflows execute consistently

Finding

Wide & shallow

Observability loss impacts deep traces

Variation in # calls, even locally

Variation in conc., decreased by children set

Methodology: Topology

Service History (22 months)


- Service deployment and lifetimes

Service Complexity (1 day)

- Endpoints exposed by deployed services, replication factors, and dependencies

Analysis granularity: ***service id***, a unique name assigned to each service (e.g. authentication)

Is service a sufficient dimension?

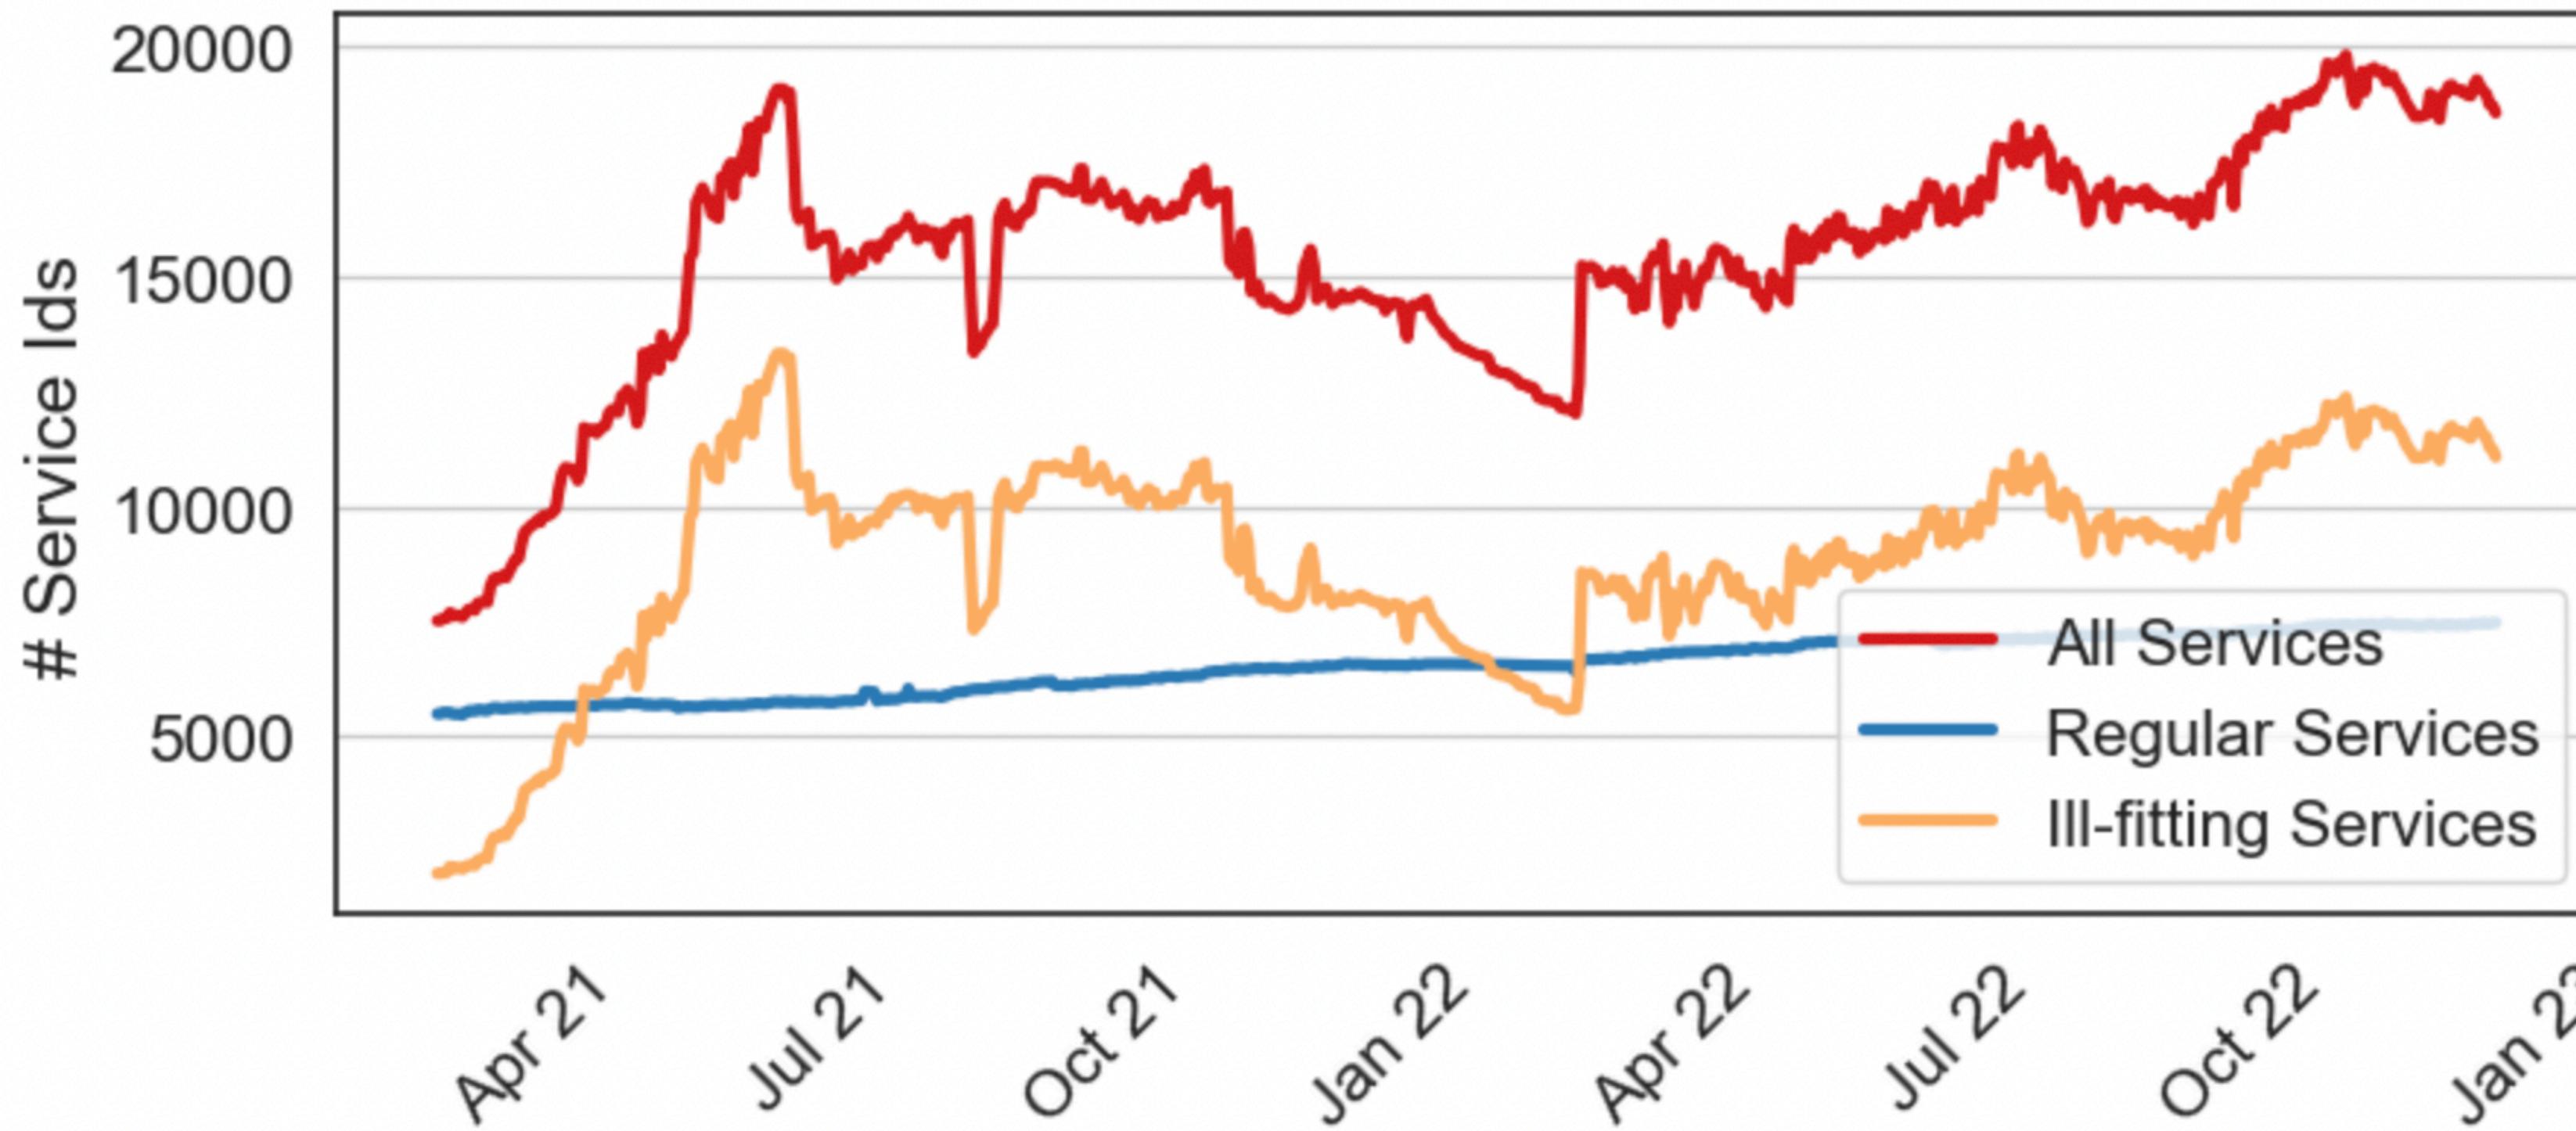

60% of service ids are
inference_platform
+ #####

Inference platform: includes tenant info in service id to utilize infrastructure support

Service granularity is not sufficient for all management tasks: at least multi-tenancy and data placement must be considered

Daily churn of deployed services


Creation:
new service
id deployed
for first time



Deprecation:
last time
service id
deployed

- 89% of new services deployed were also deprecated
- 40% of regular services lived the entire time range

Long-term growth in total deployed instances

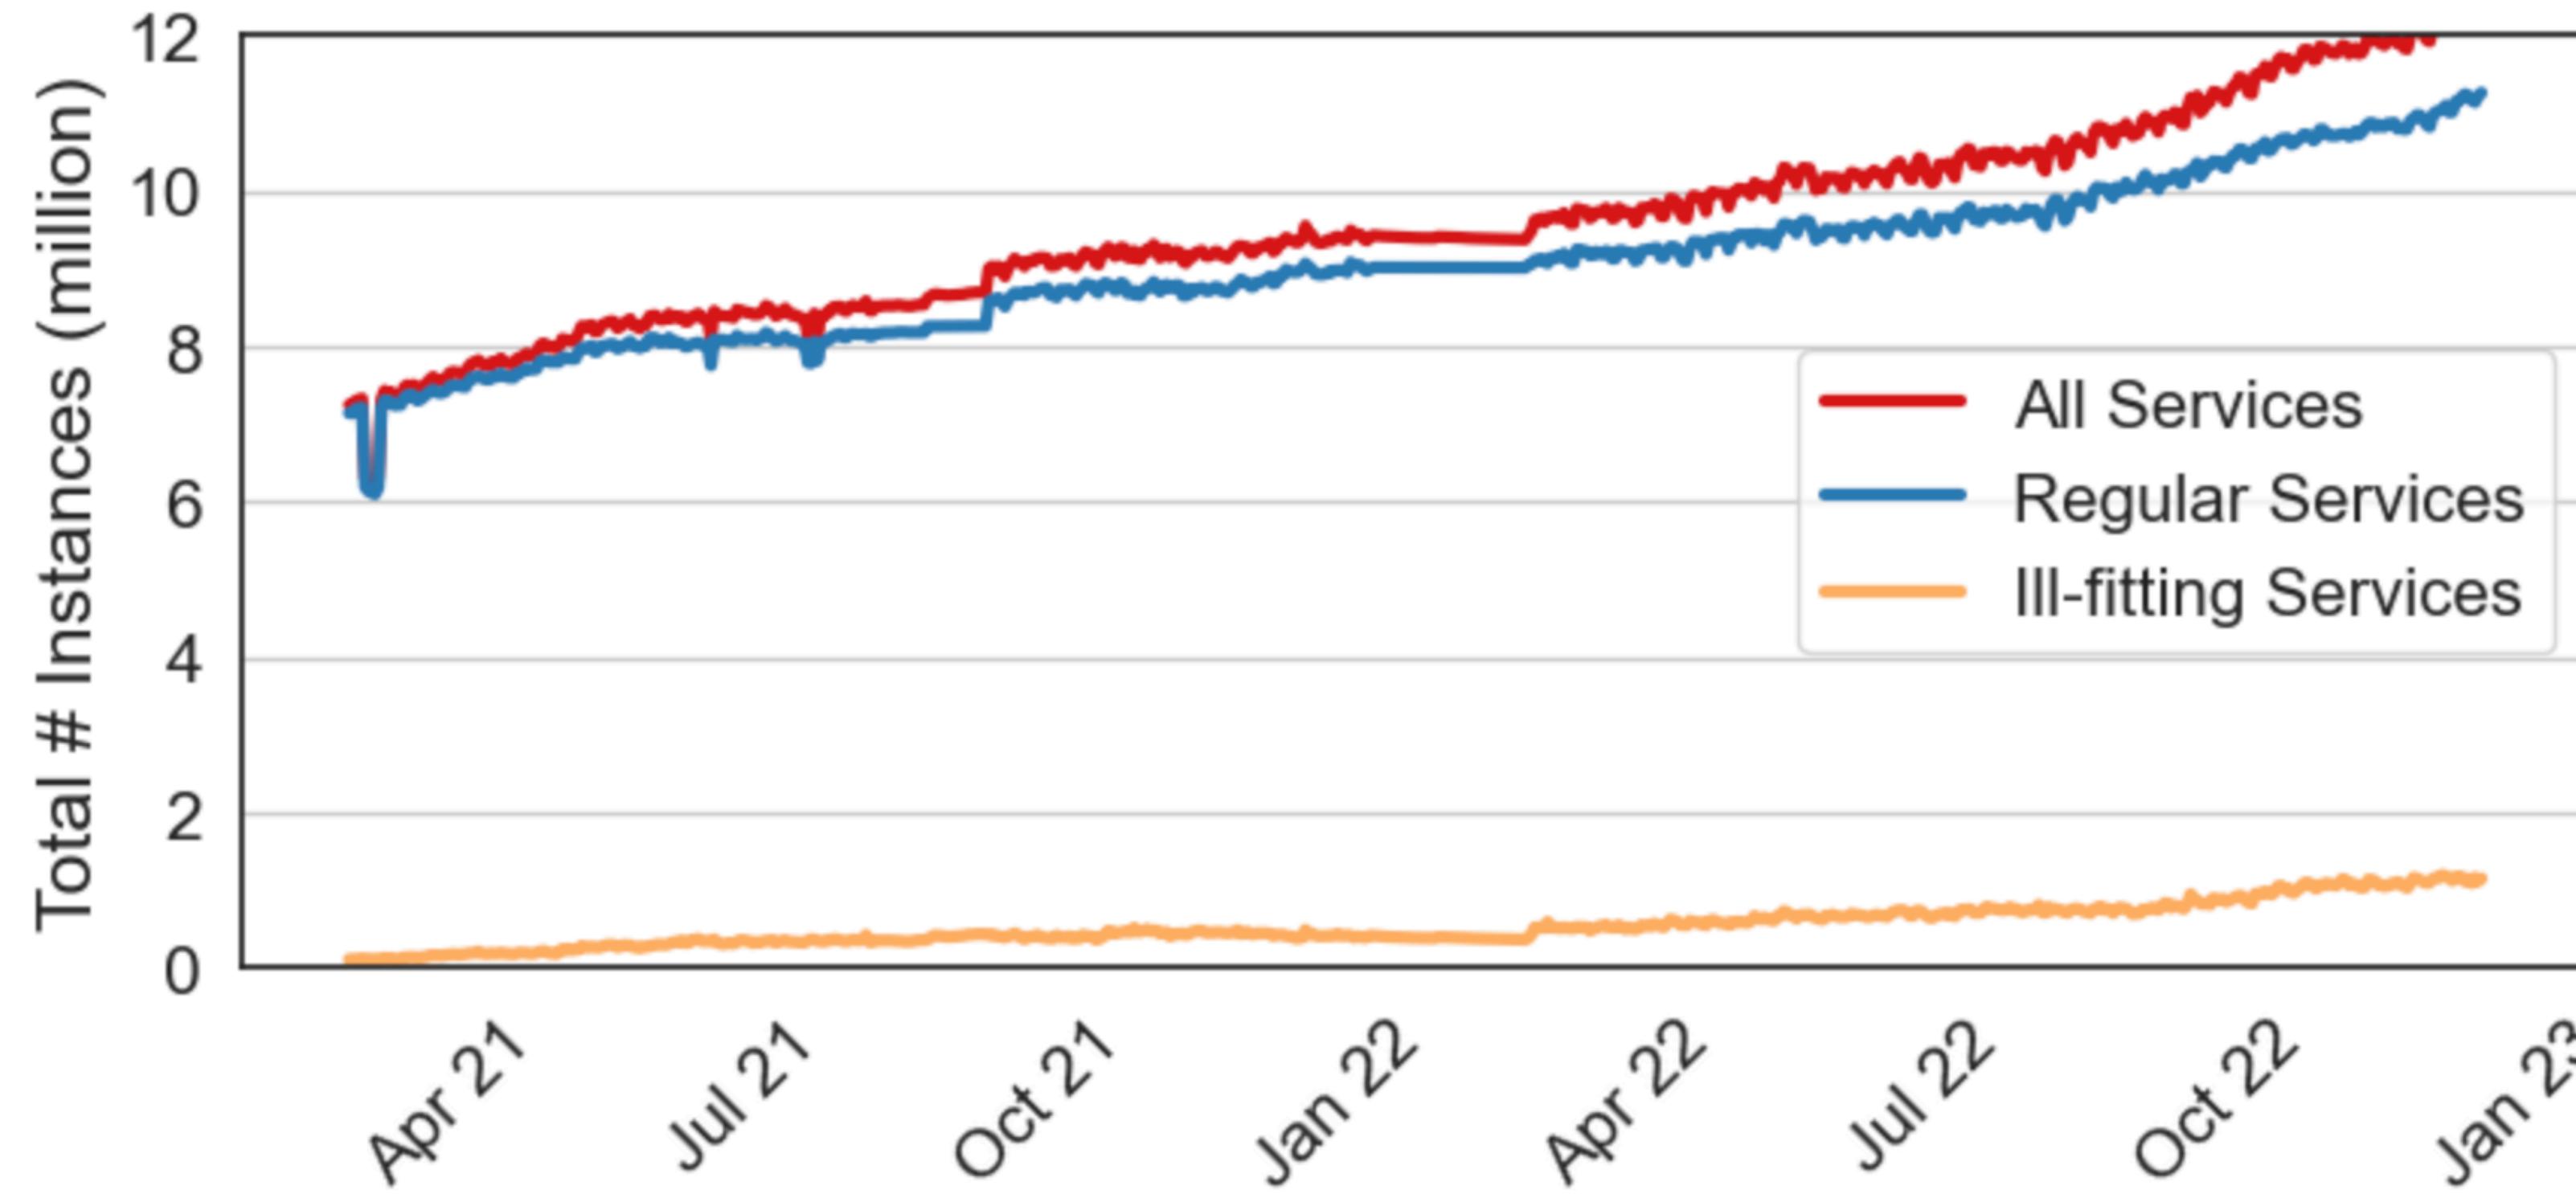

- Total number of deployed service instances nearly doubled
- Growth is due to new (regular) service ids, not an increase in replication factors for existing services

Analysis of Meta's microservices

Topology

Abstraction



Service is sufficient dimension



Topology is static



Services are simple

Finding

Service is not one size fits all

Long-term growth with daily churn

Long tail of complex services

Workflows

Abstraction



Wide & shallow



Traces rep. of workflows



Depth predicts # calls



Workflows execute consistently

Finding

Wide & shallow


Observability loss impacts deep traces

Variation in # calls, even locally

Variation in conc., decreased by children set


Methodology: Workflows

- *Distributed tracing*: graphs capturing the work done on behalf of a request
- Canopy [SOSP'17]: Meta's distributed tracing framework
- Traces can be sampled anywhere in the topology

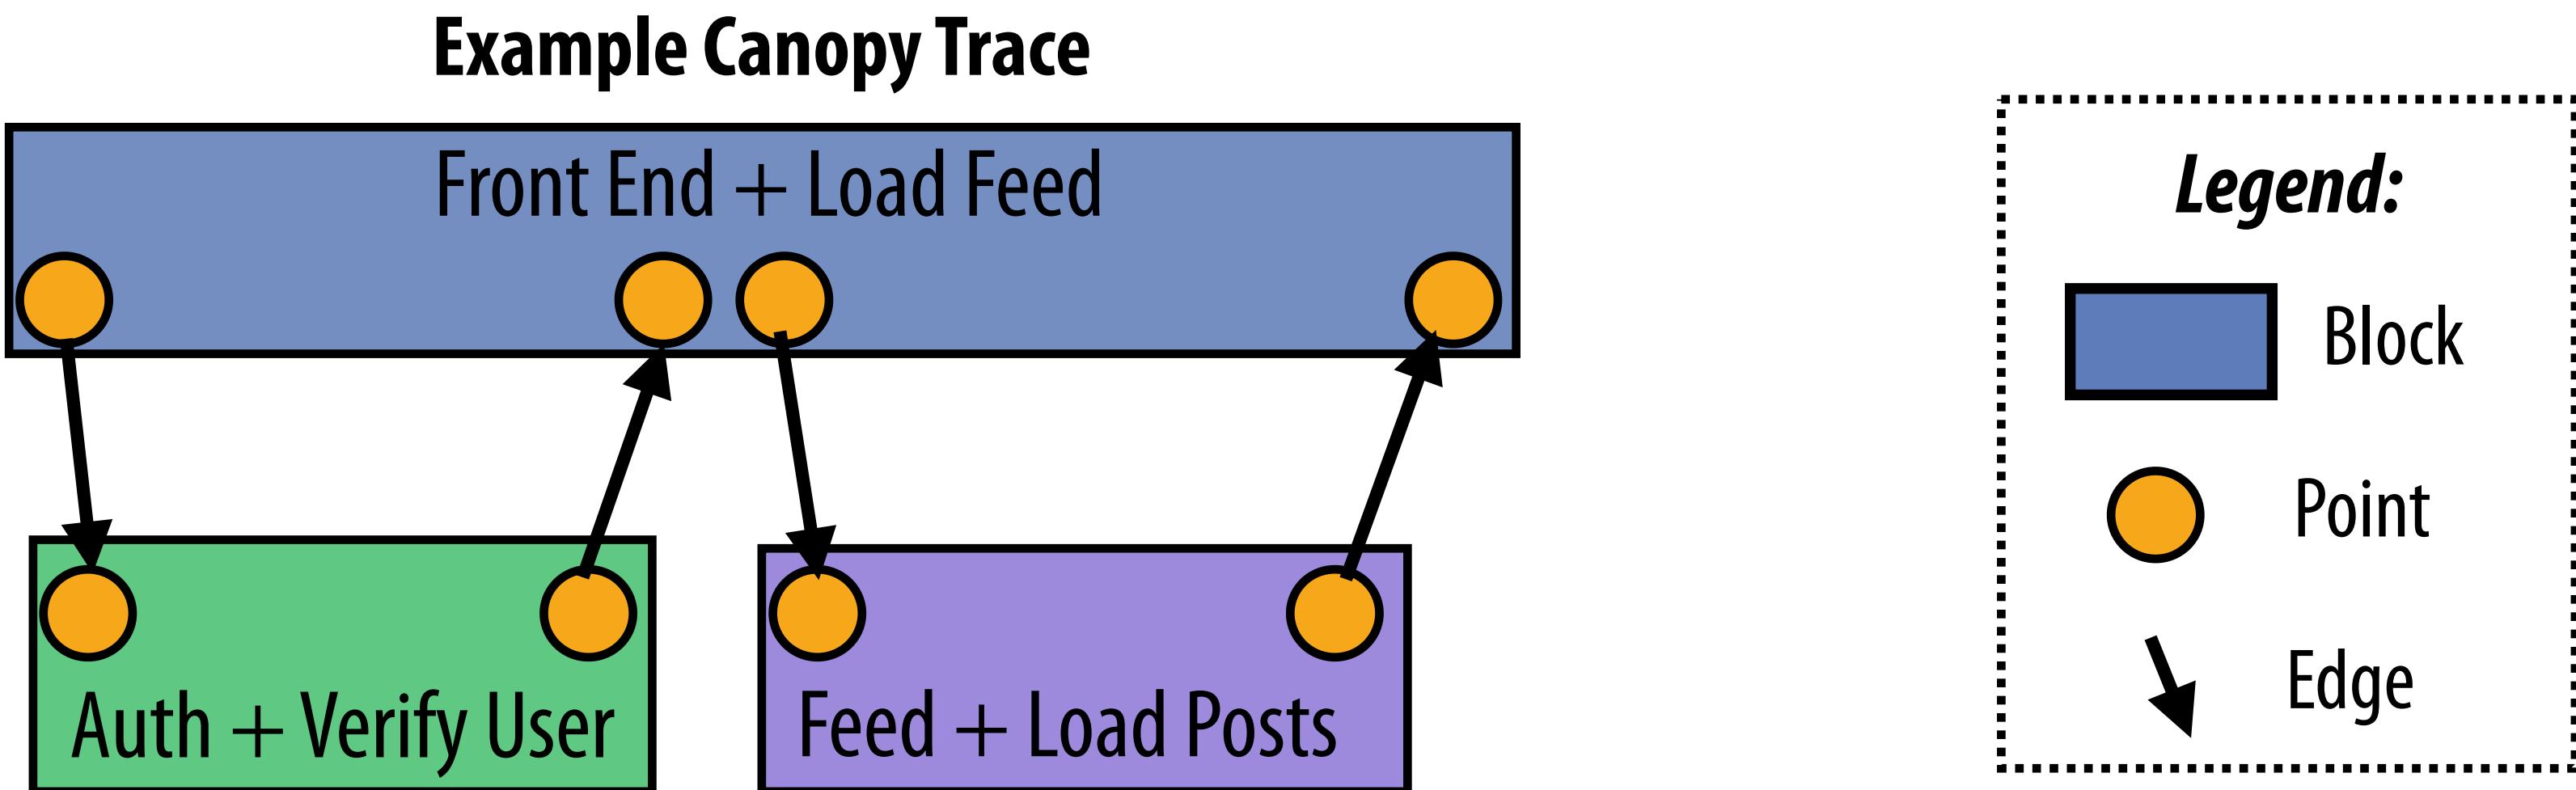

Methodology: Workflows

Used traces collected on a single day from three important trace profiles:

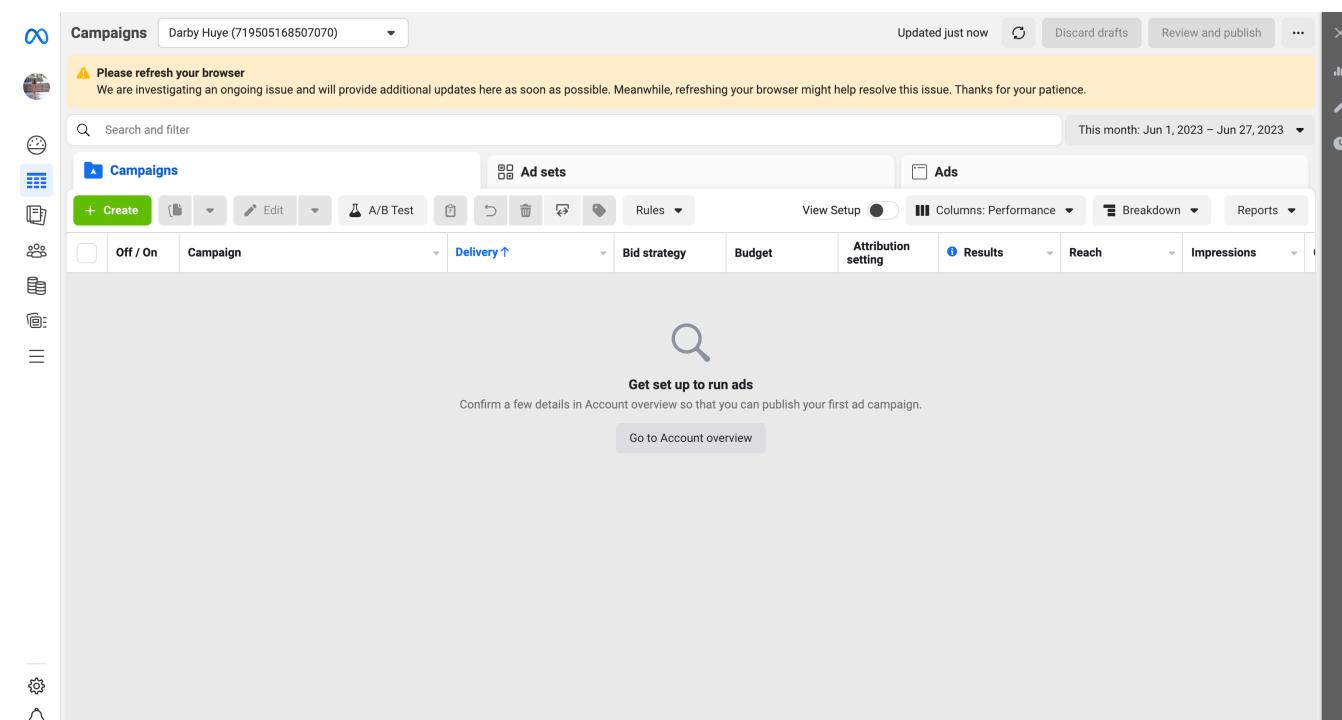

Ads Manager

3.2M traces

Random Sampling
(0.01%)



Fetch Notifications

87,000 traces

Adaptive Sampling
(1 trace/second)




RaaS (Ranking of items)

3.3M traces

Adaptive Sampling
(25 trace/second)

Description of analyzed workflow properties

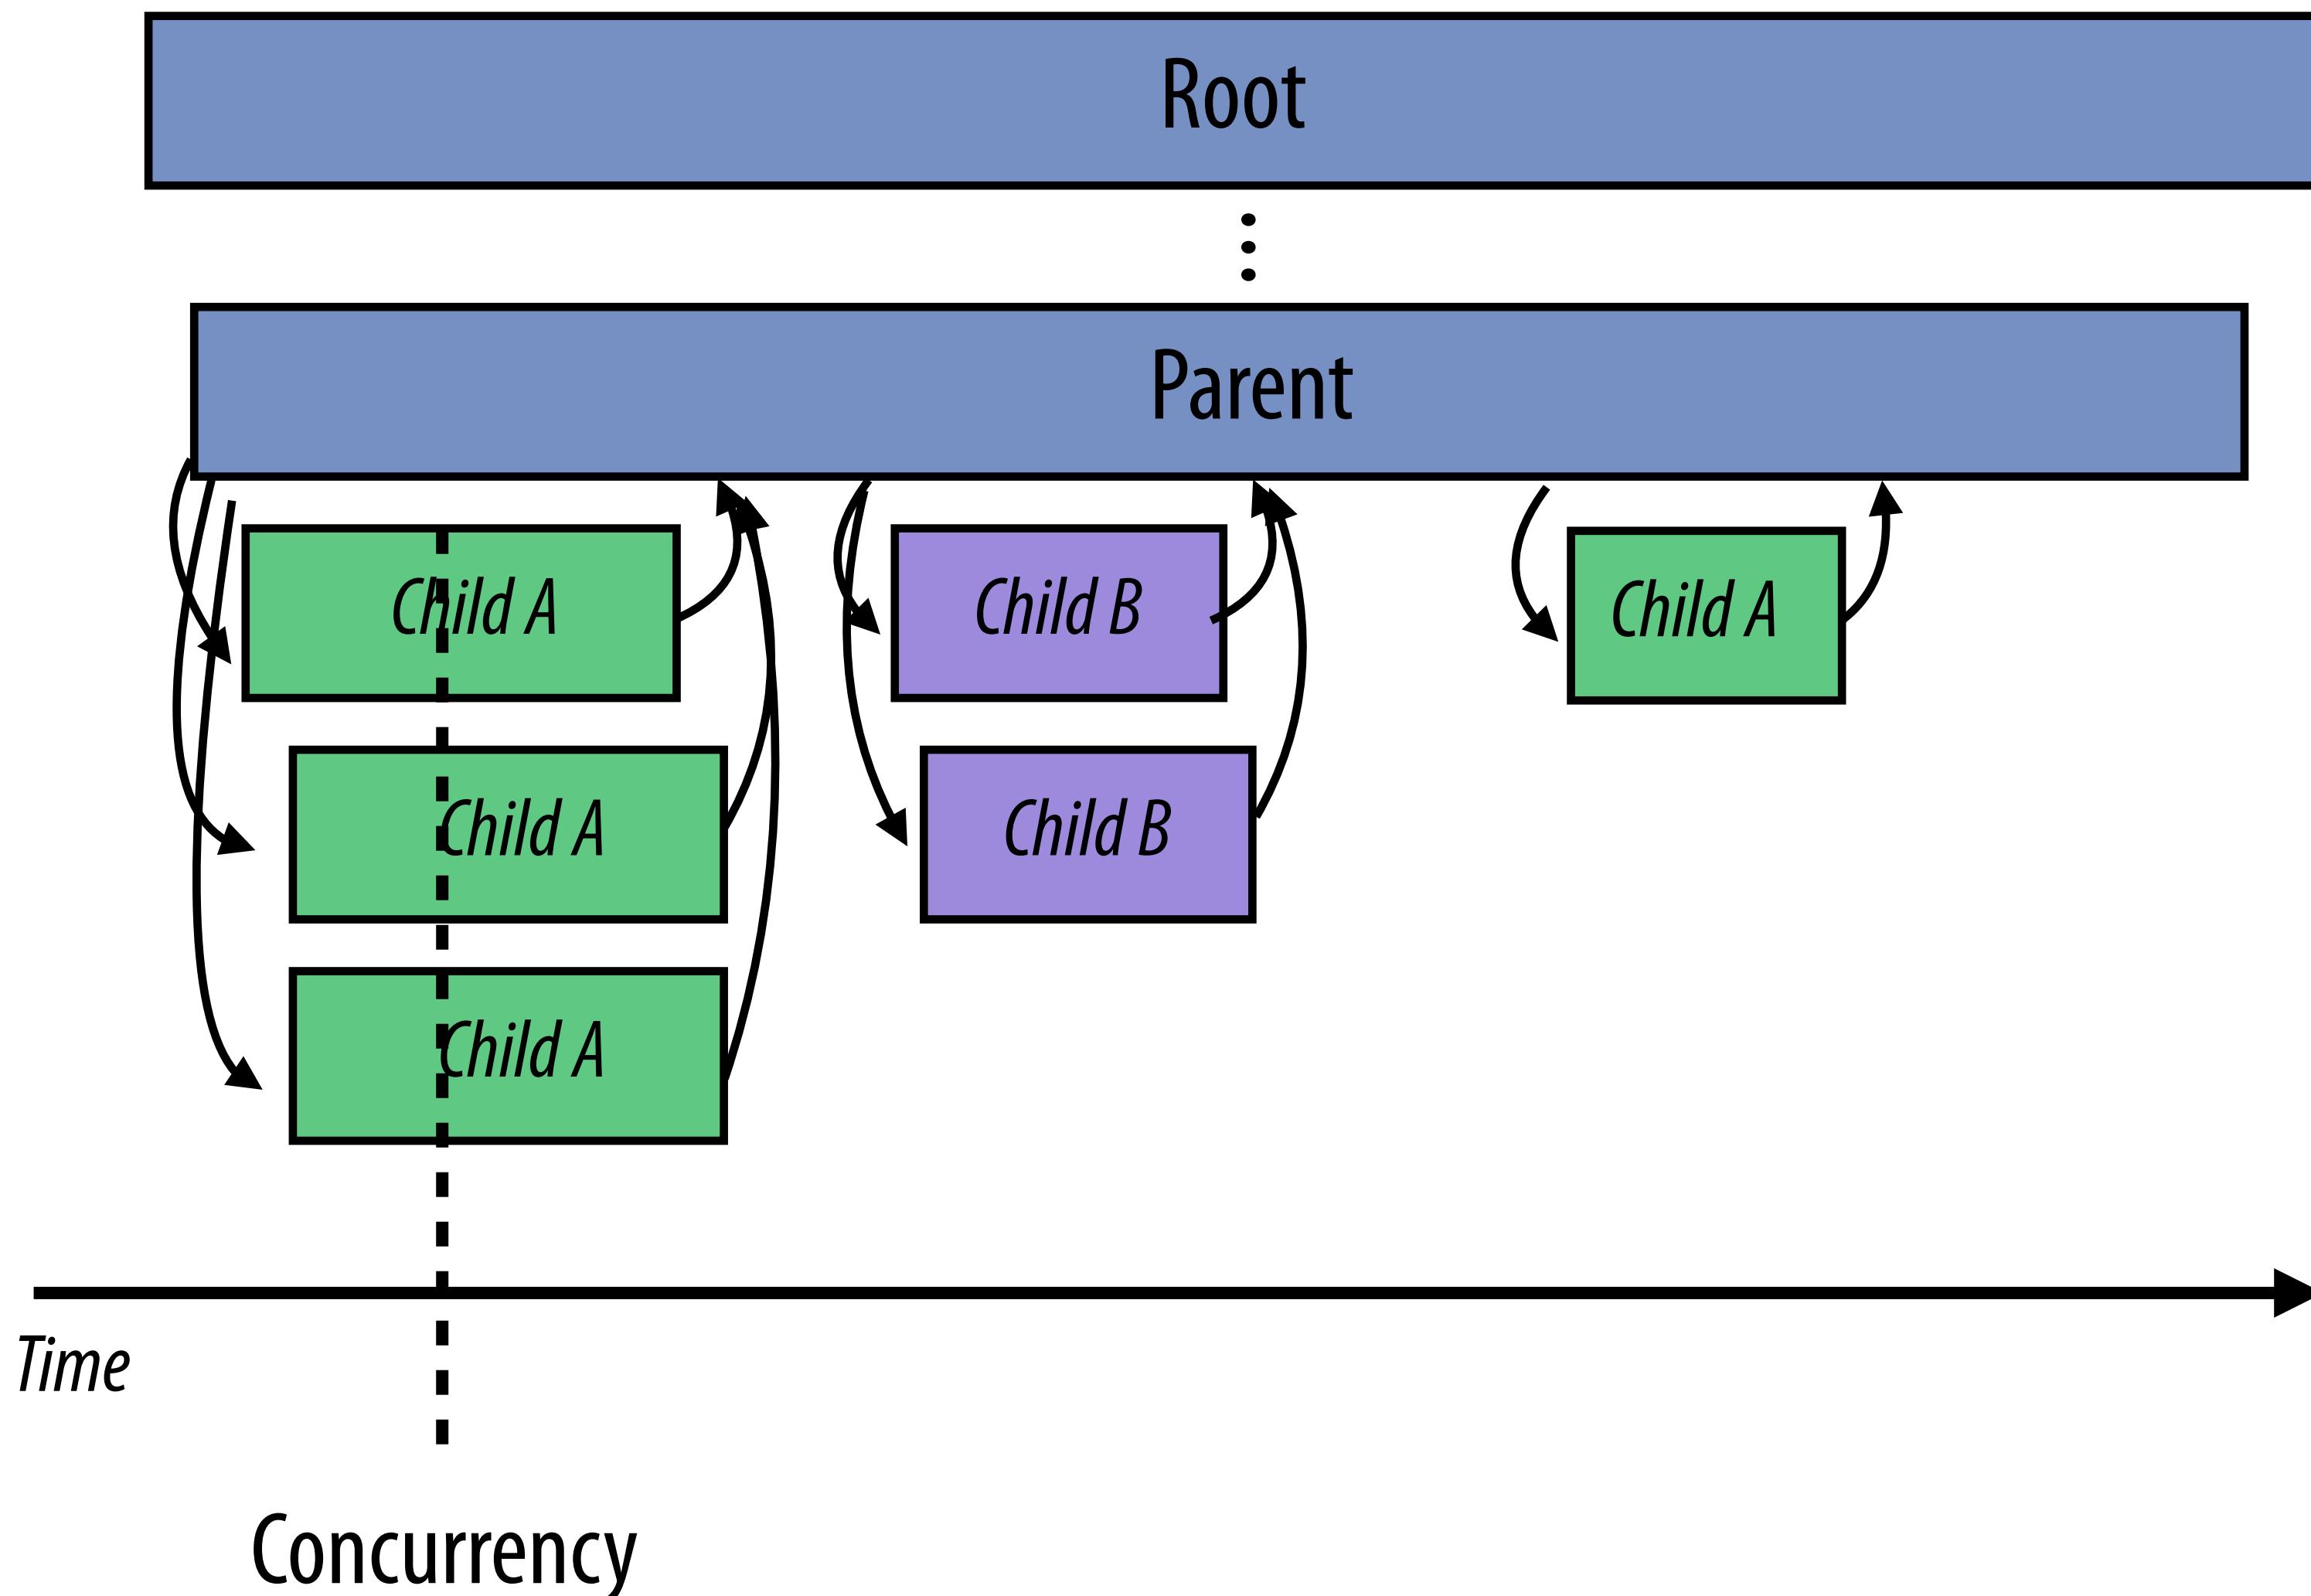

Node names:
service id + endpoint name

Parent's characteristics:


Children set: A B

Number of calls: 6

Max concurrency rate: 0.5 (3/6)

Predicting number of children


Identified three categories of nodes:

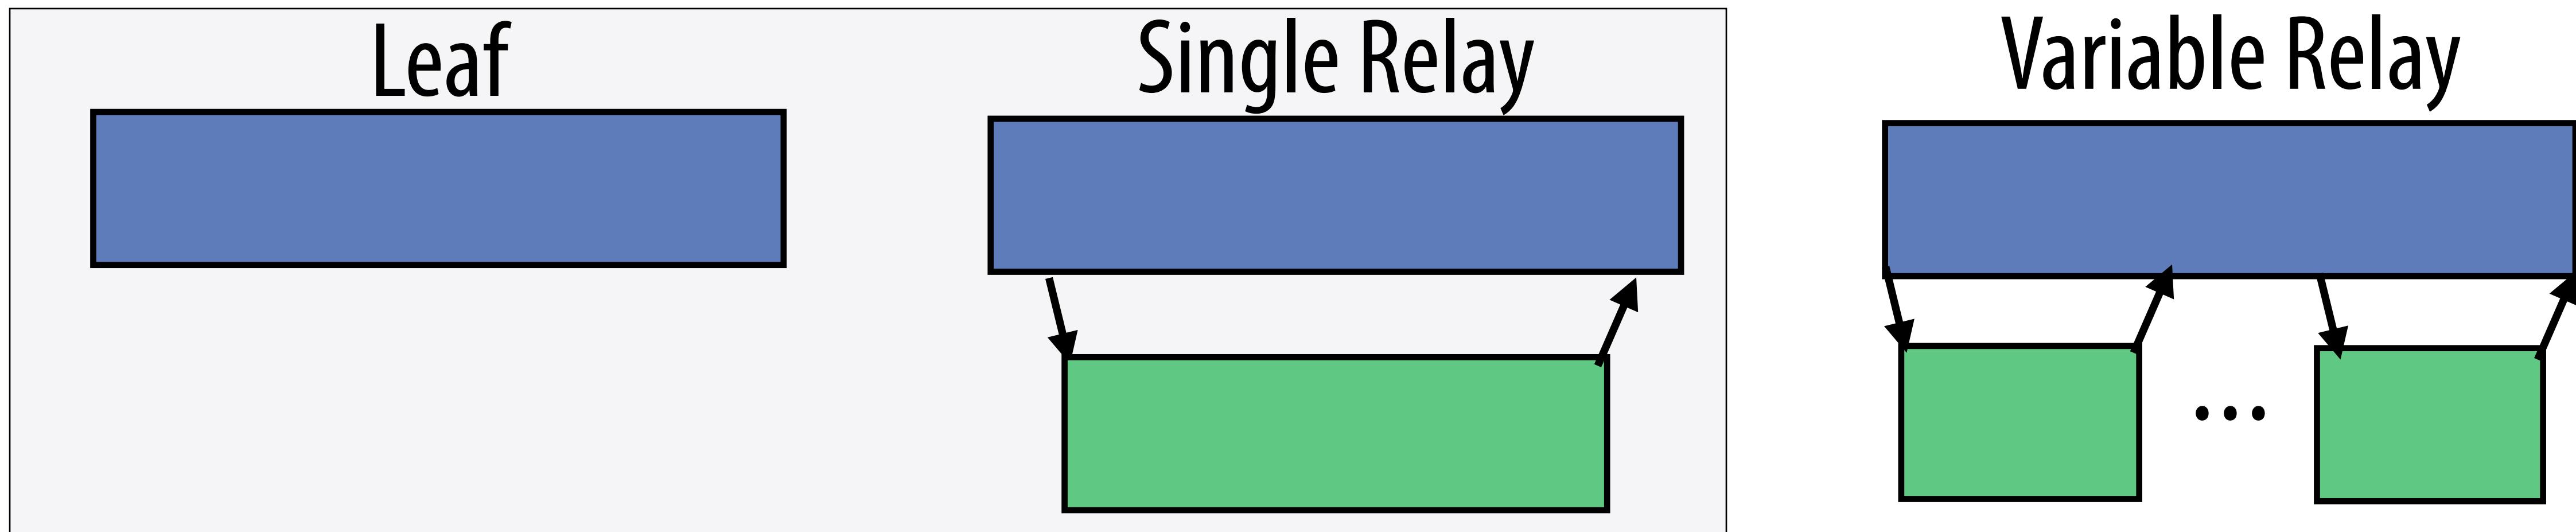


The majority of service + endpoints are leaves or single relays:

- Ads Manager: 54%
- Fetch Notifications: 66%
- RaaS: 72%


Predicting # of children for variable relays

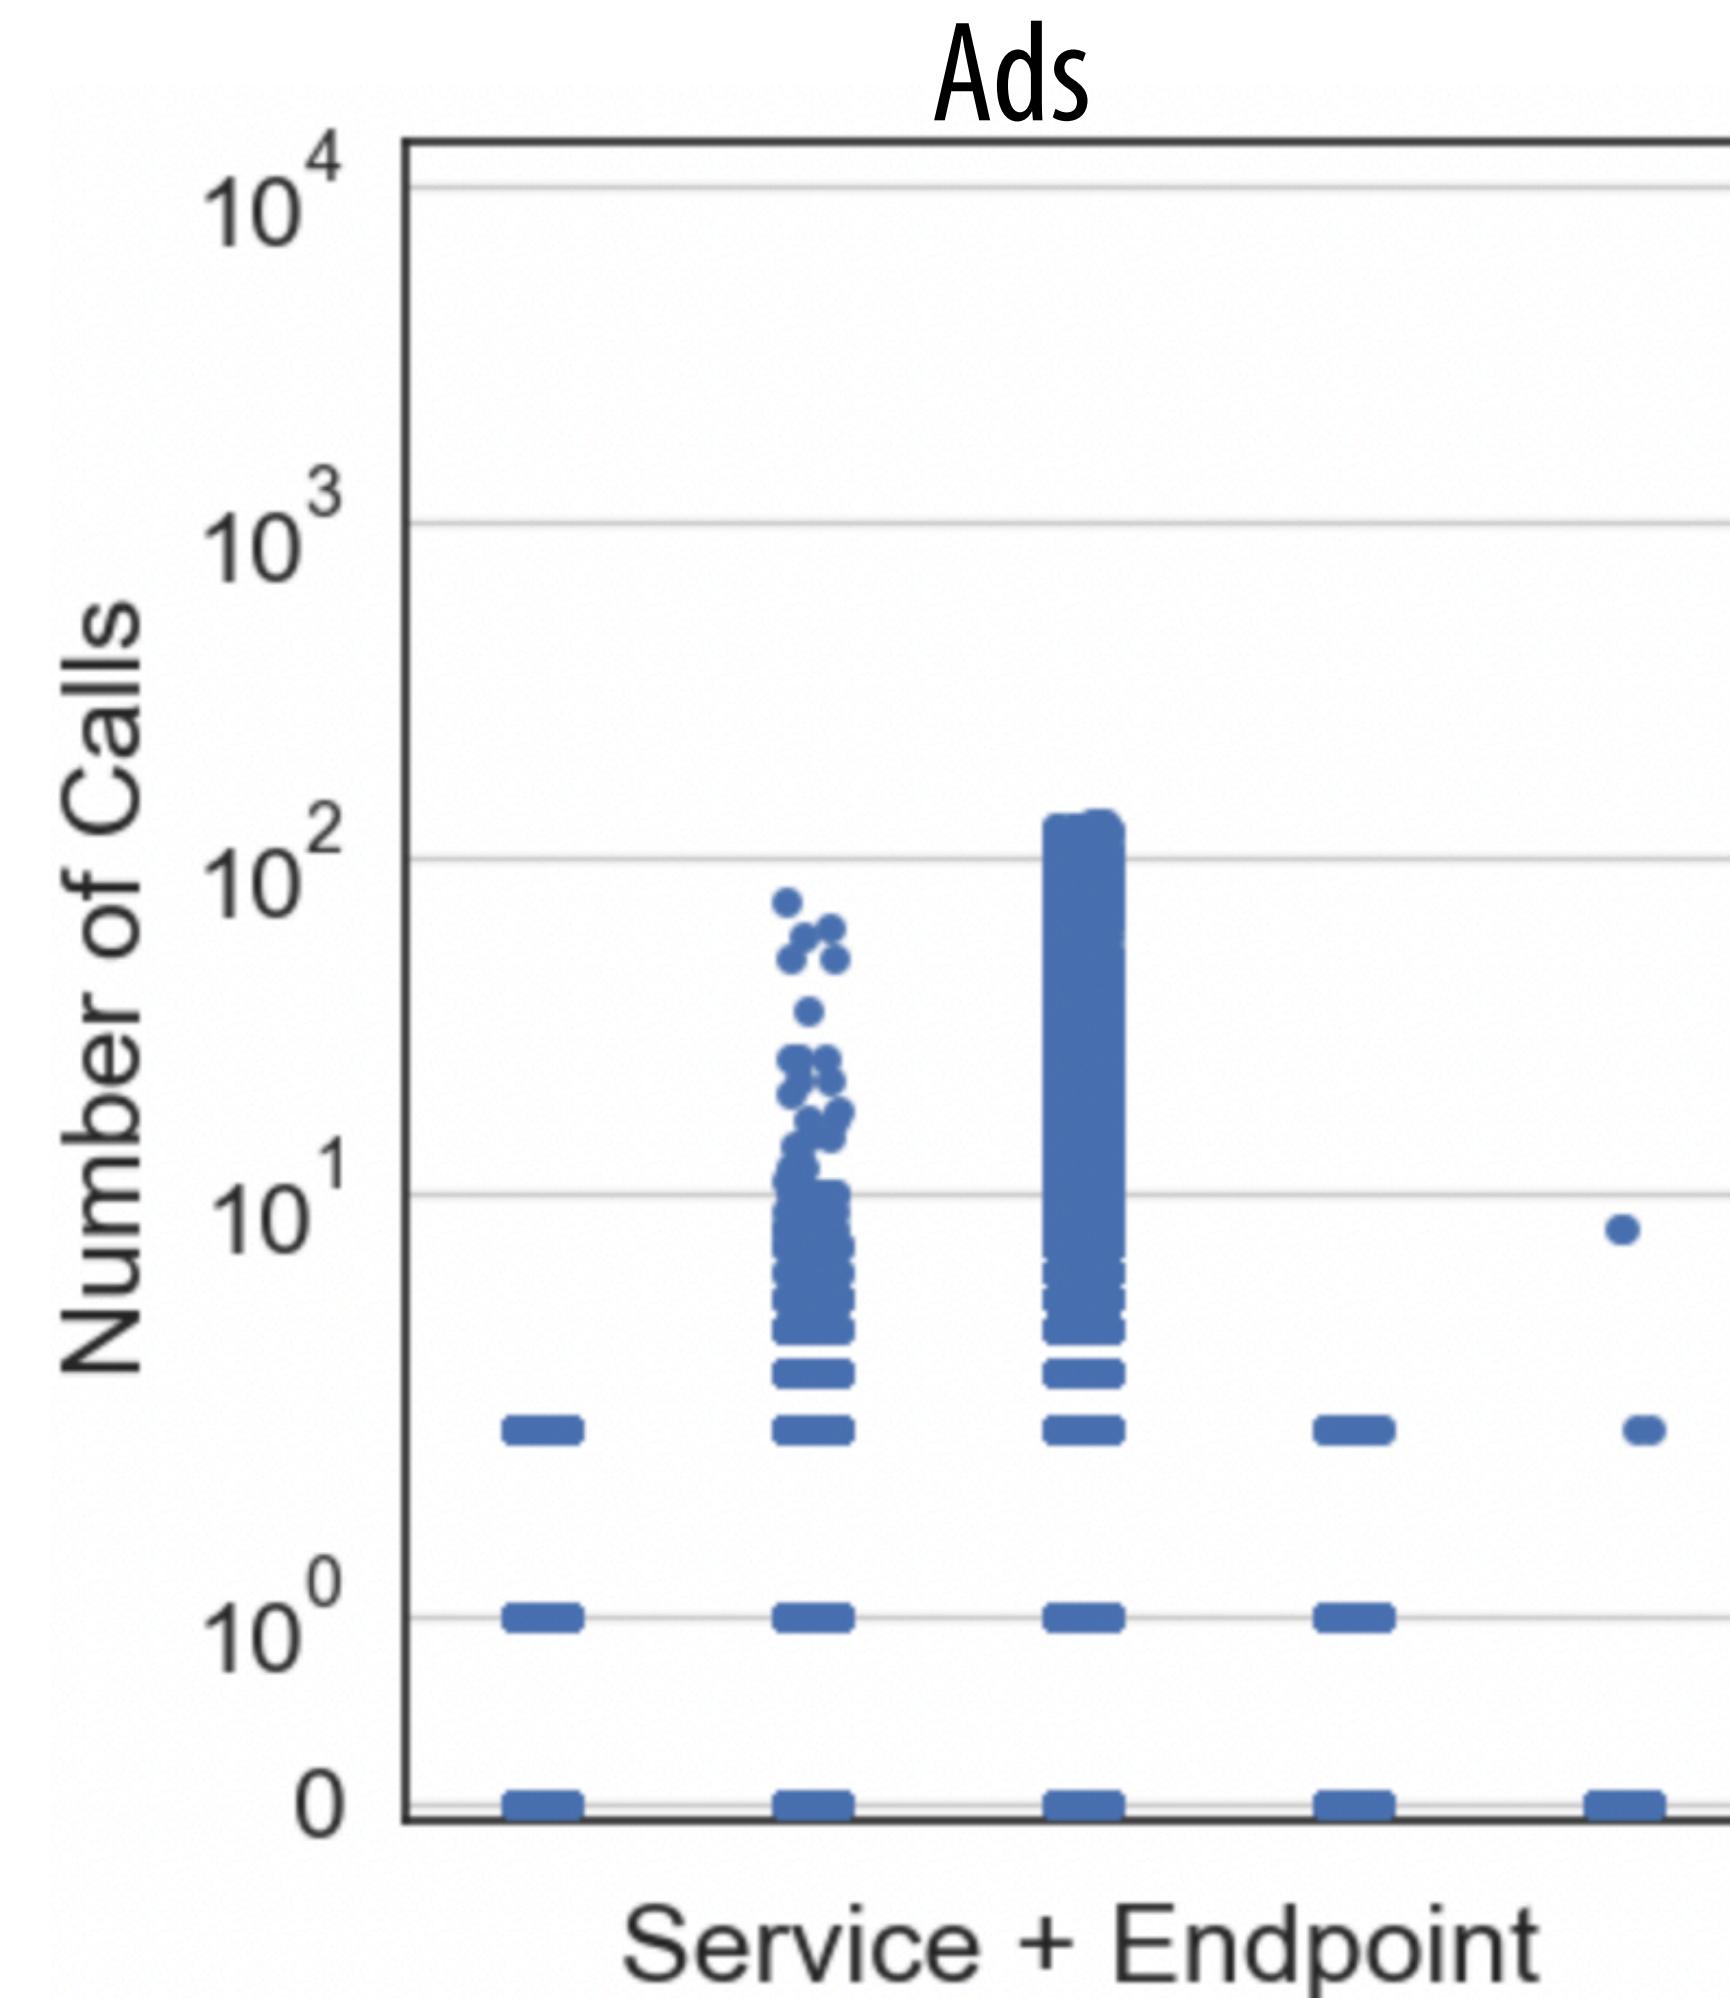


Number of calls issued by a
service + endpoint

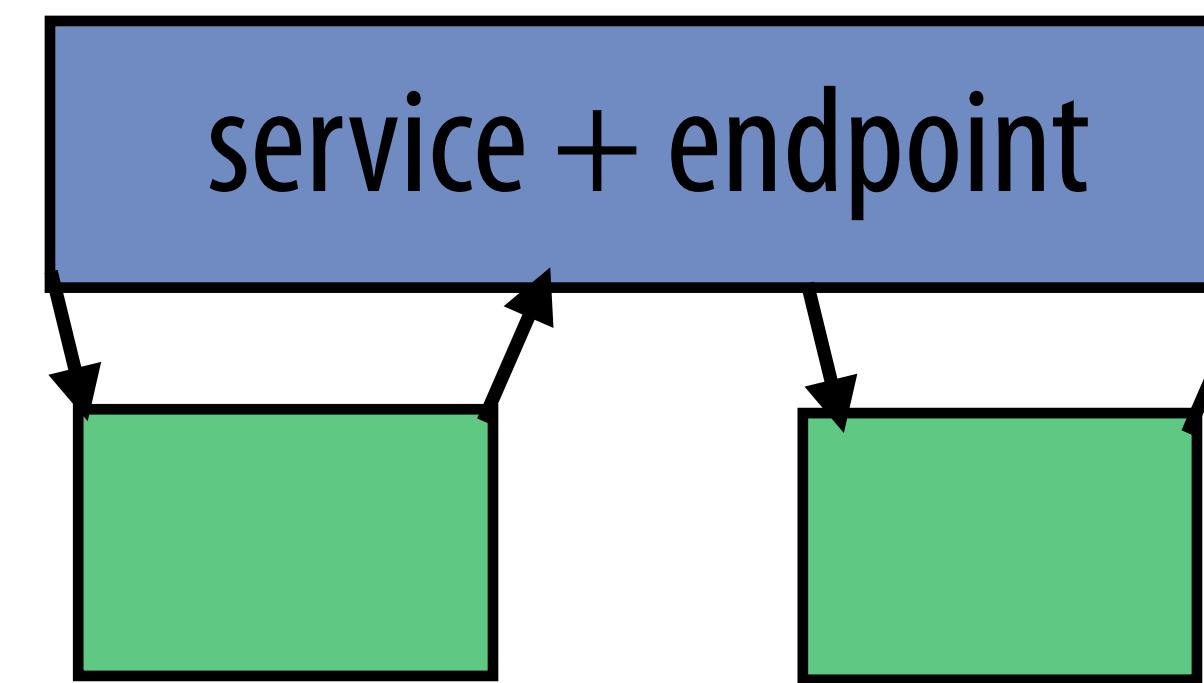

Predicting # of children for variable relays

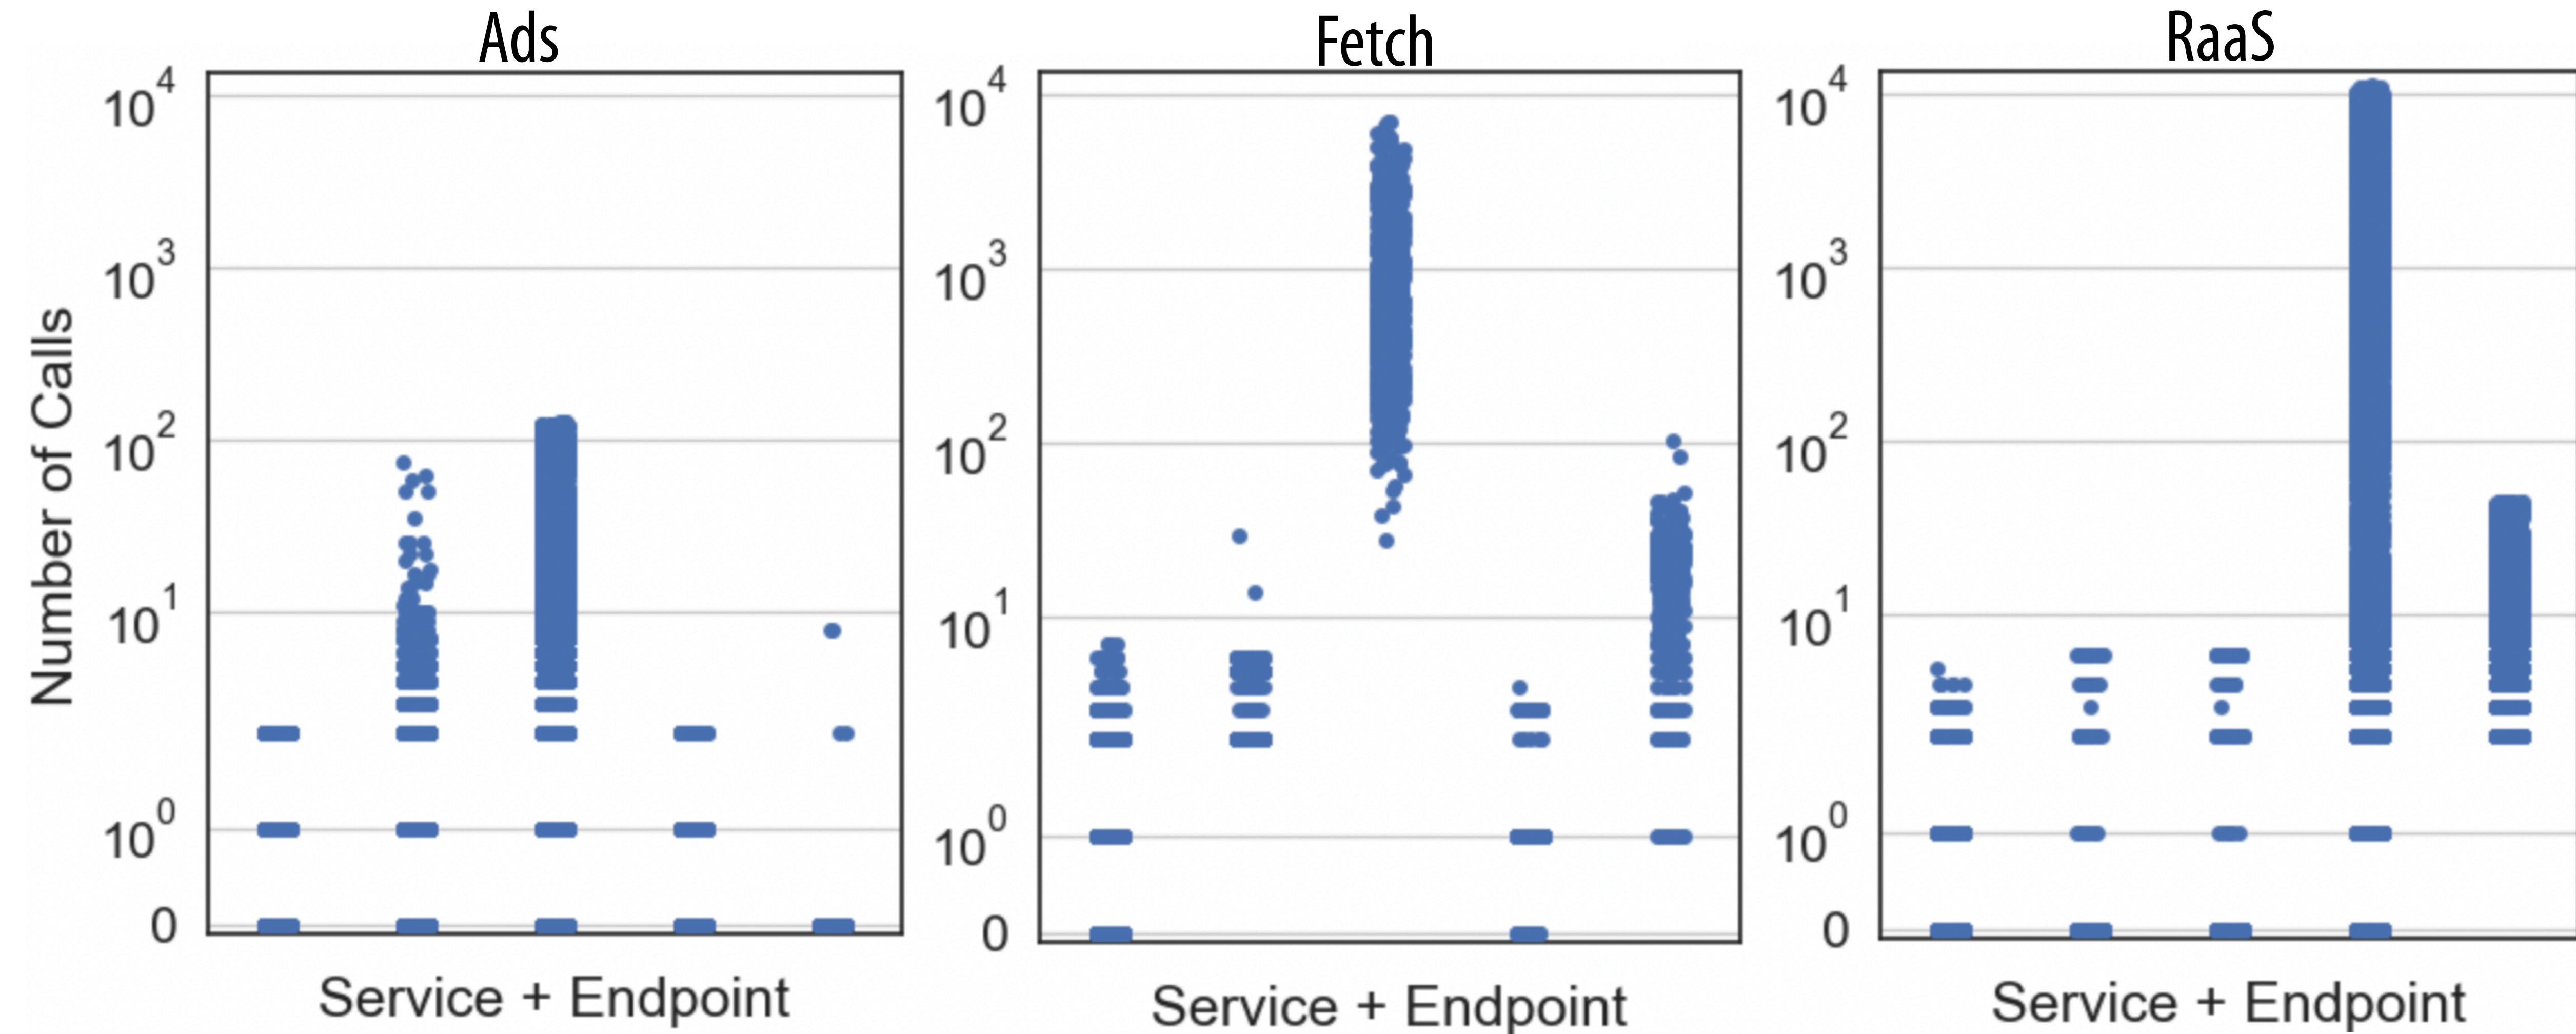


Predicting # of children for variable relays

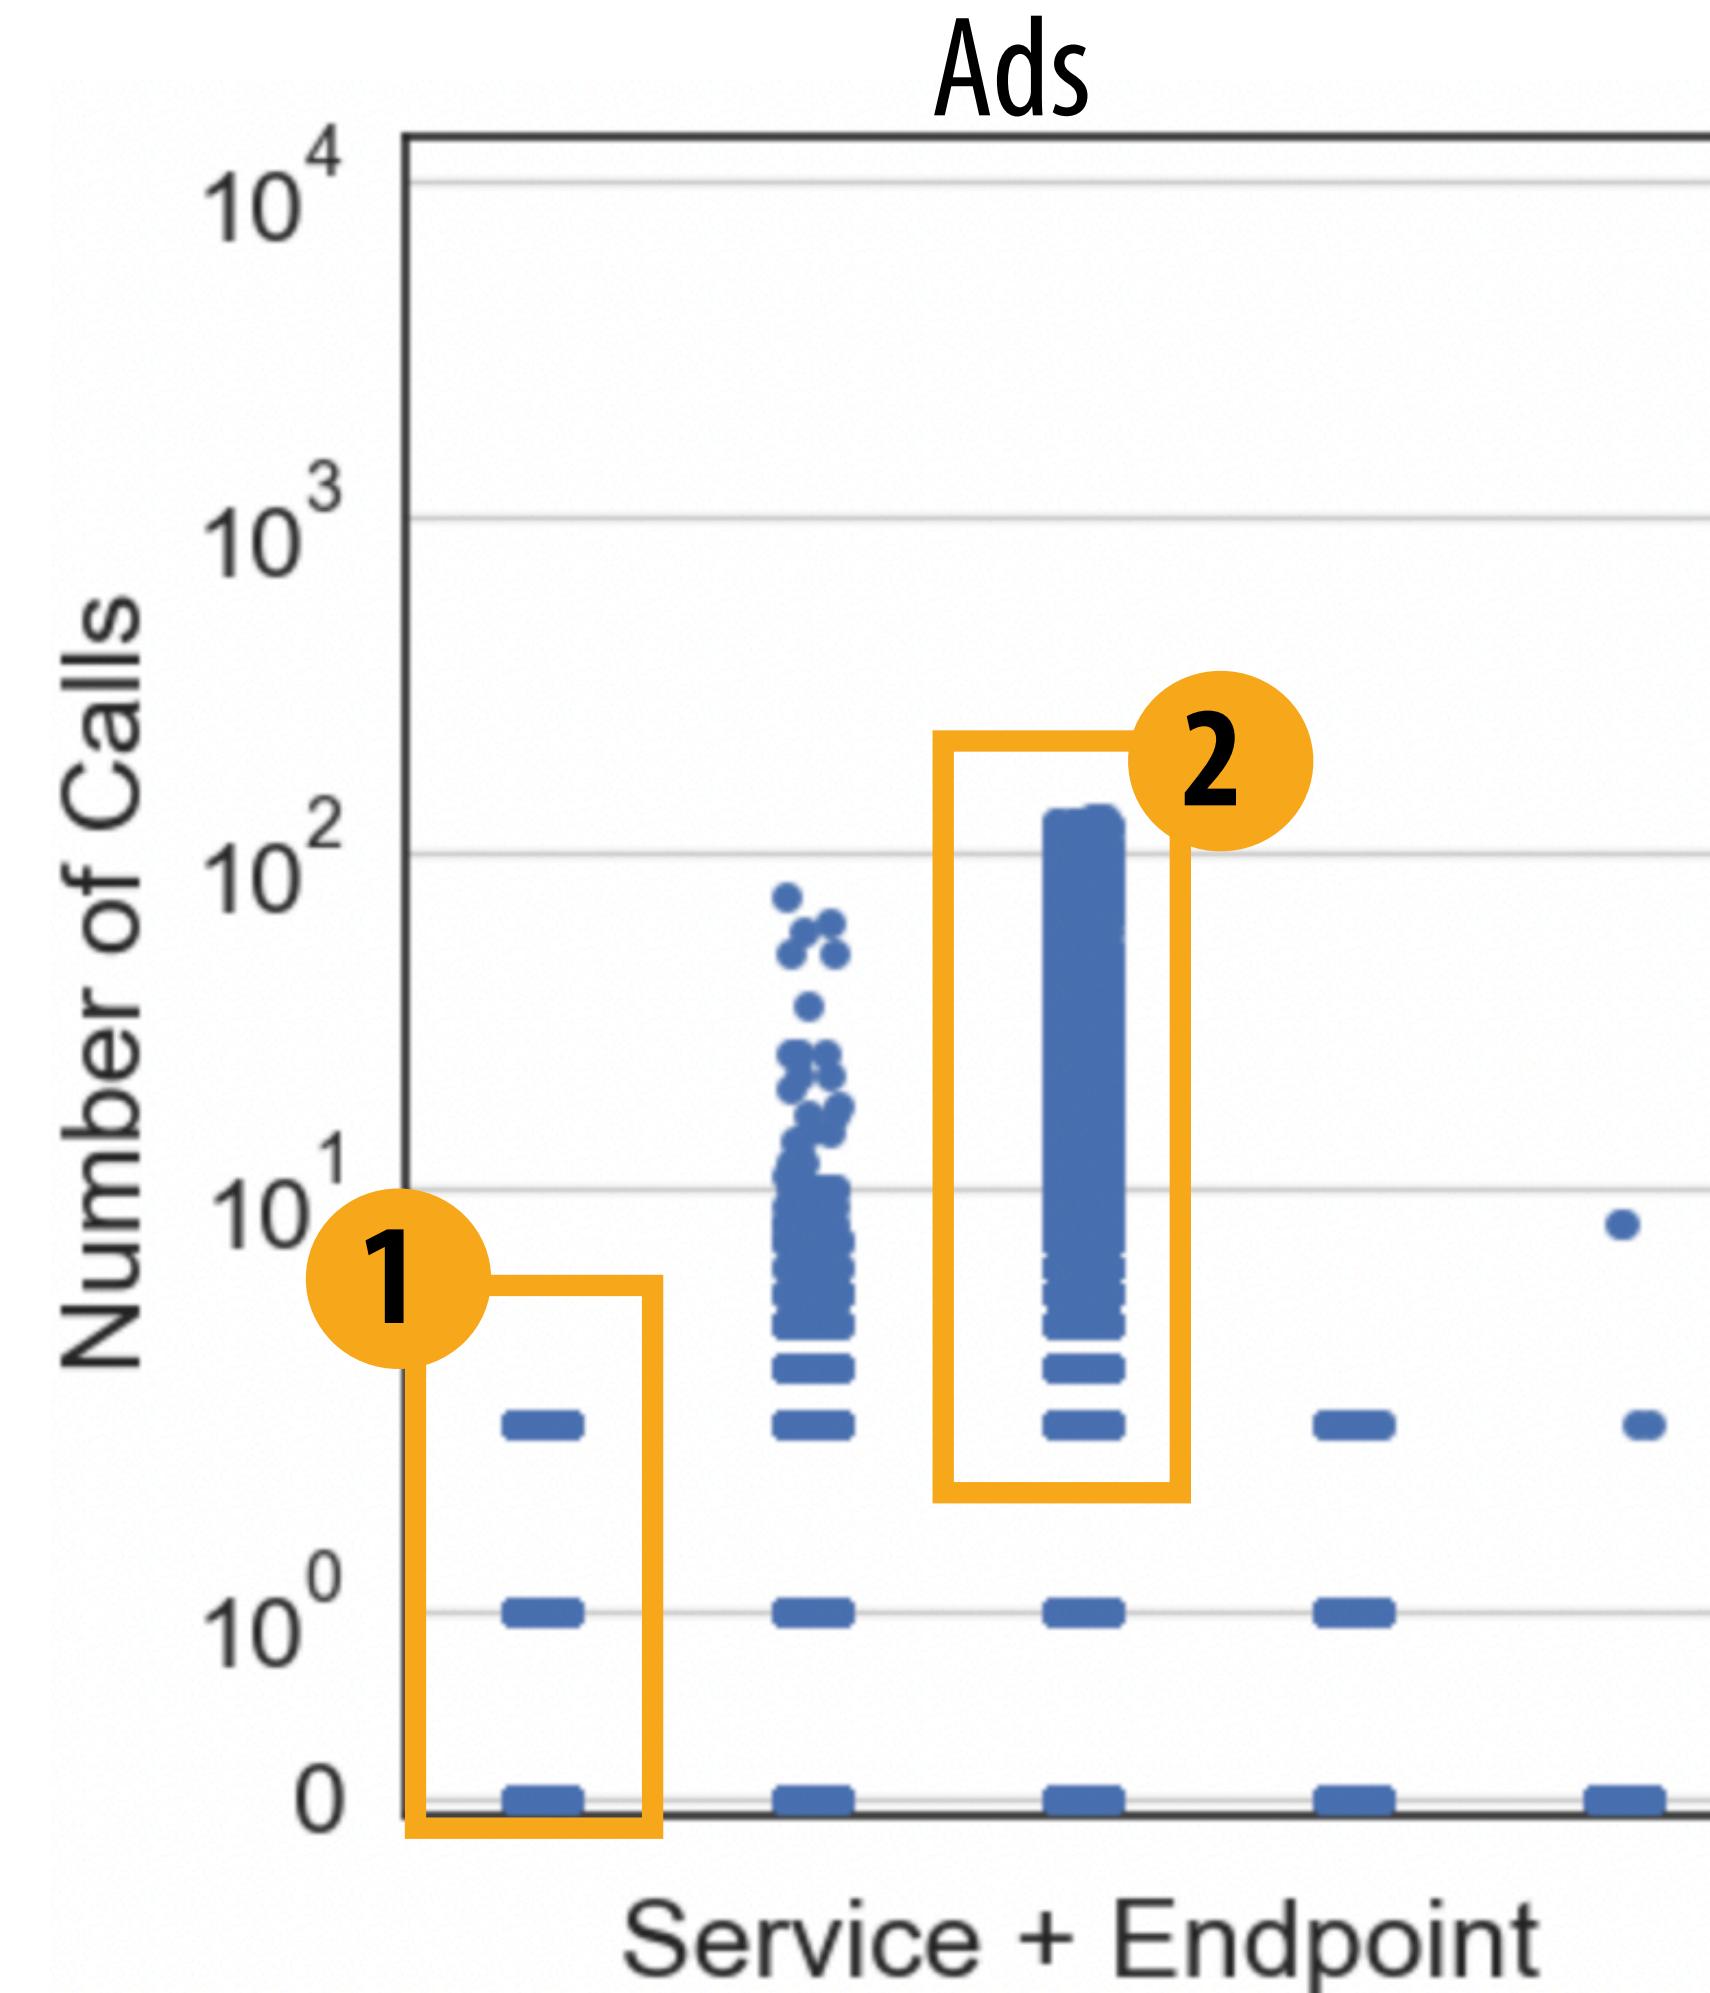


Variation in number of calls is often attributed to:

- 1 Different children sets
- 2 Database accesses


Predicting concurrency rates of variable relays

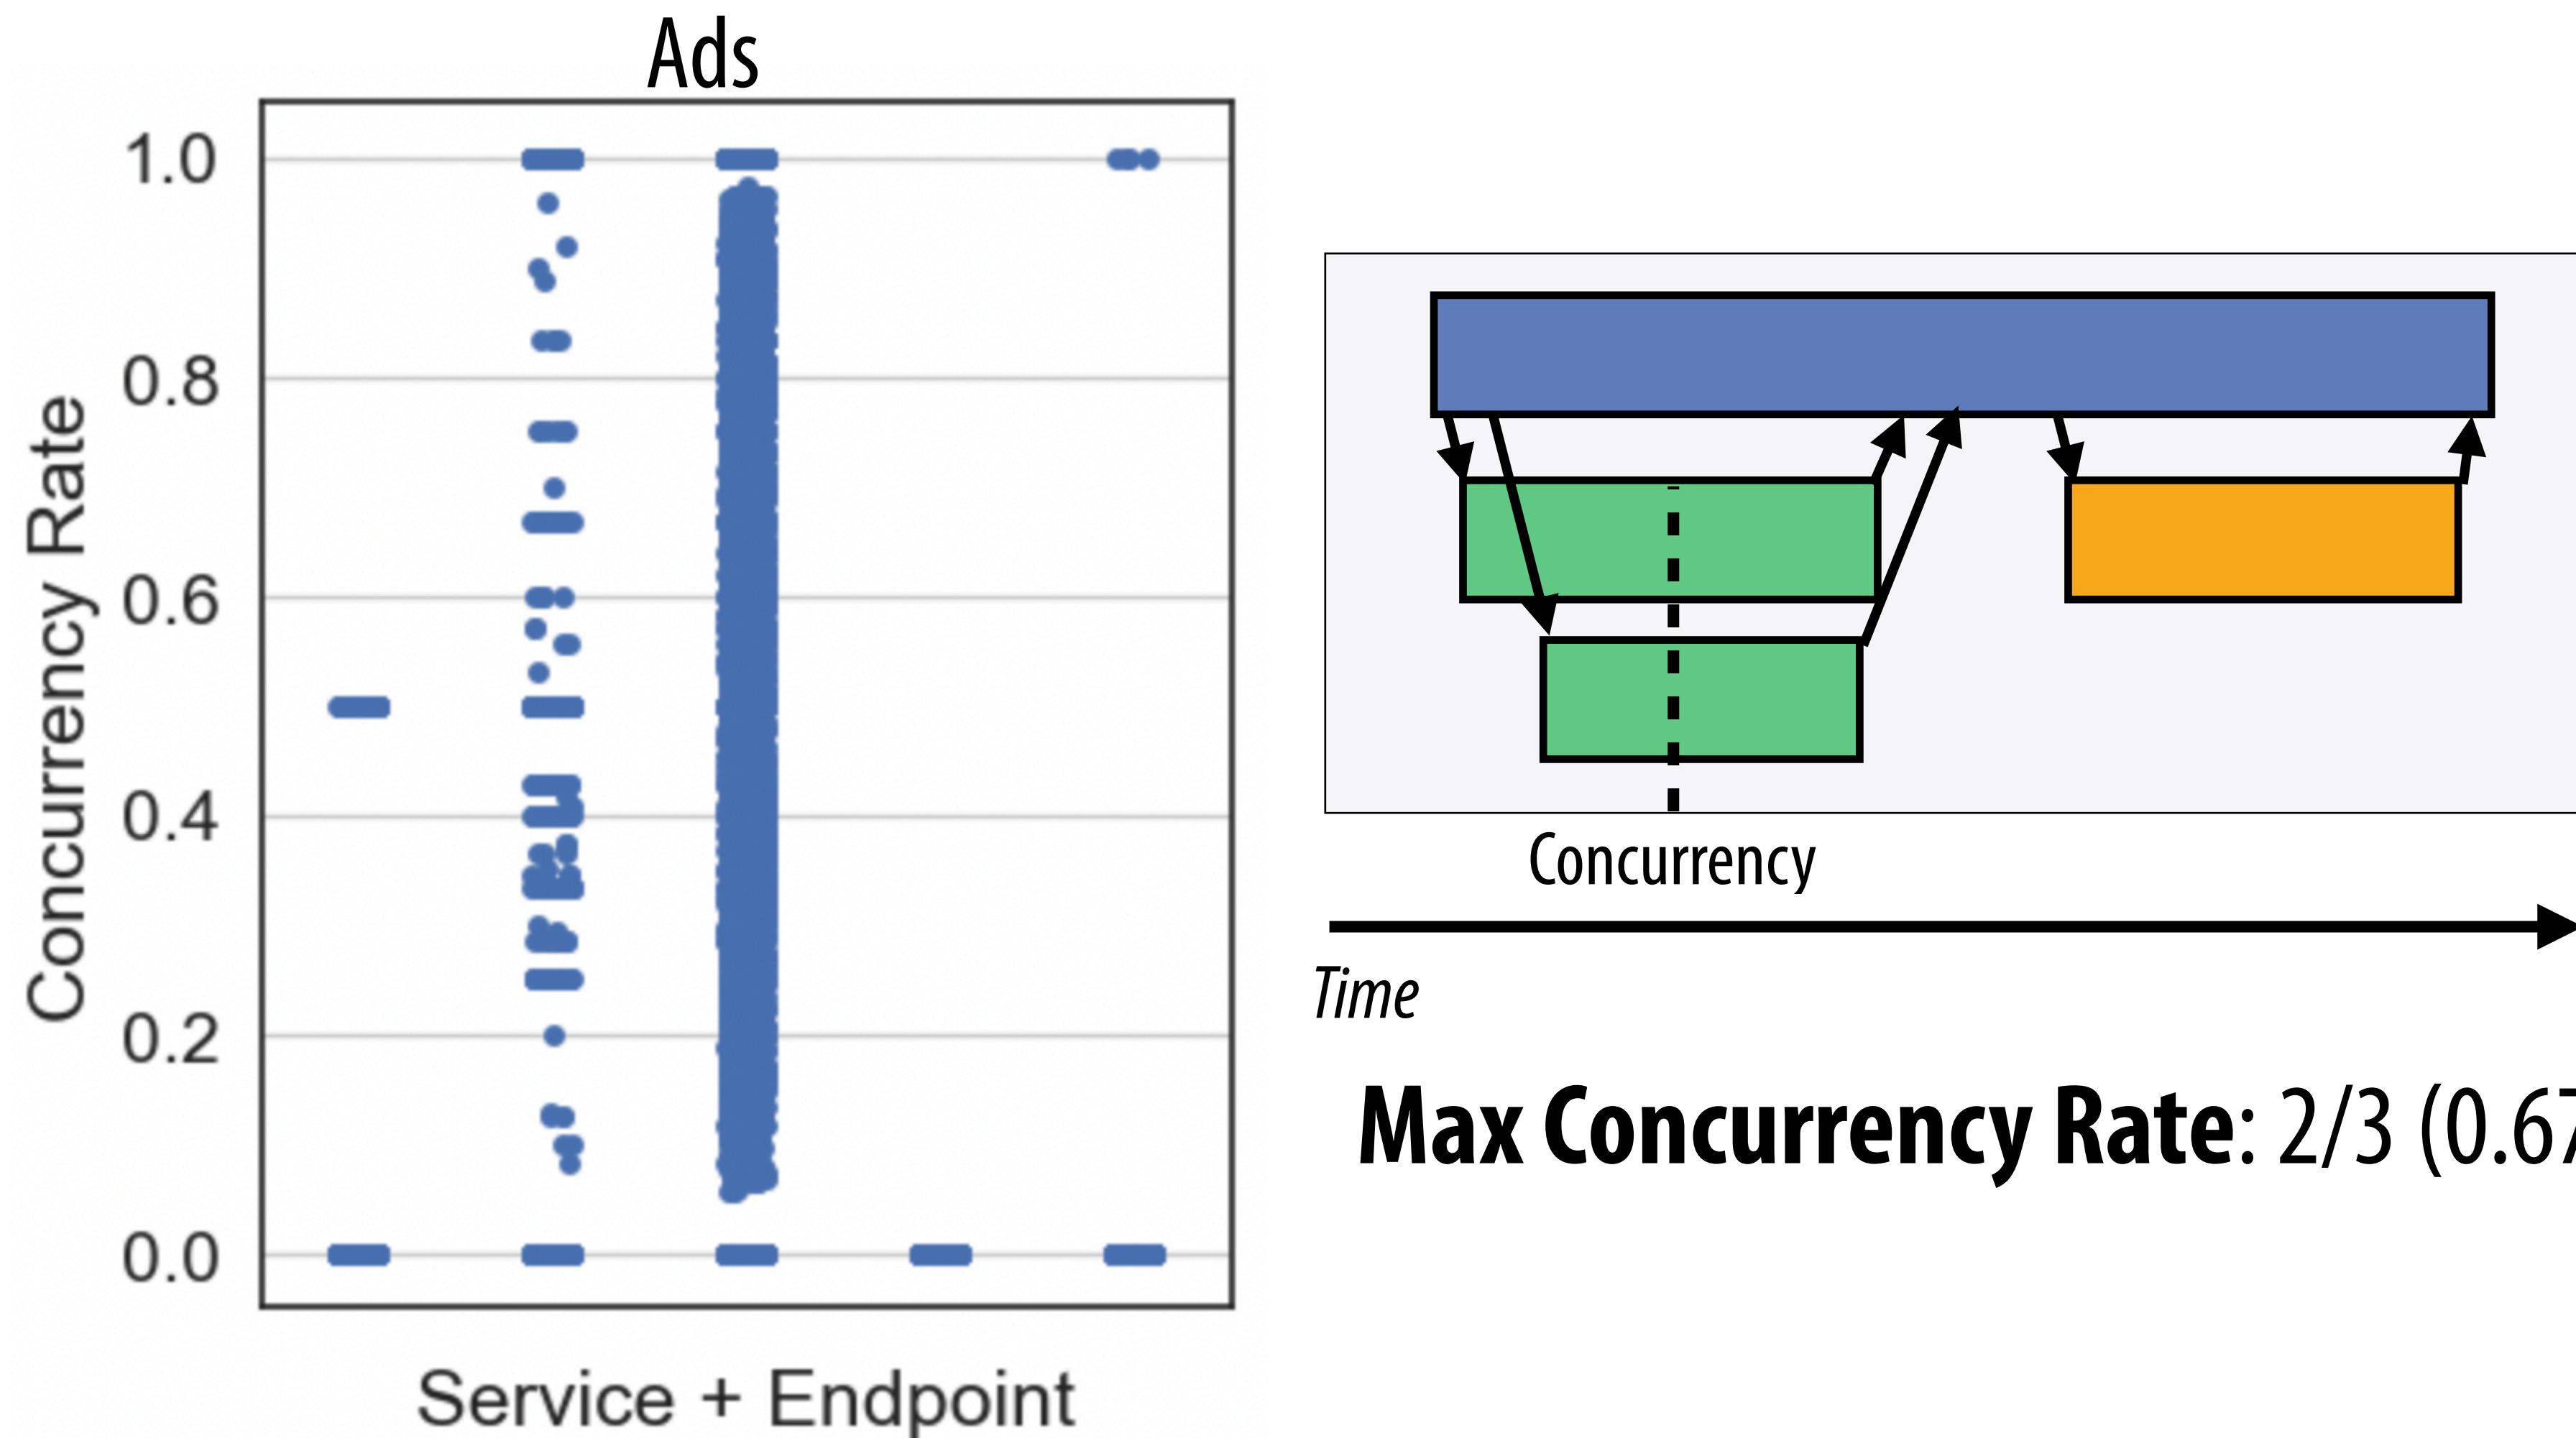

Predicting concurrency rates of variable relays

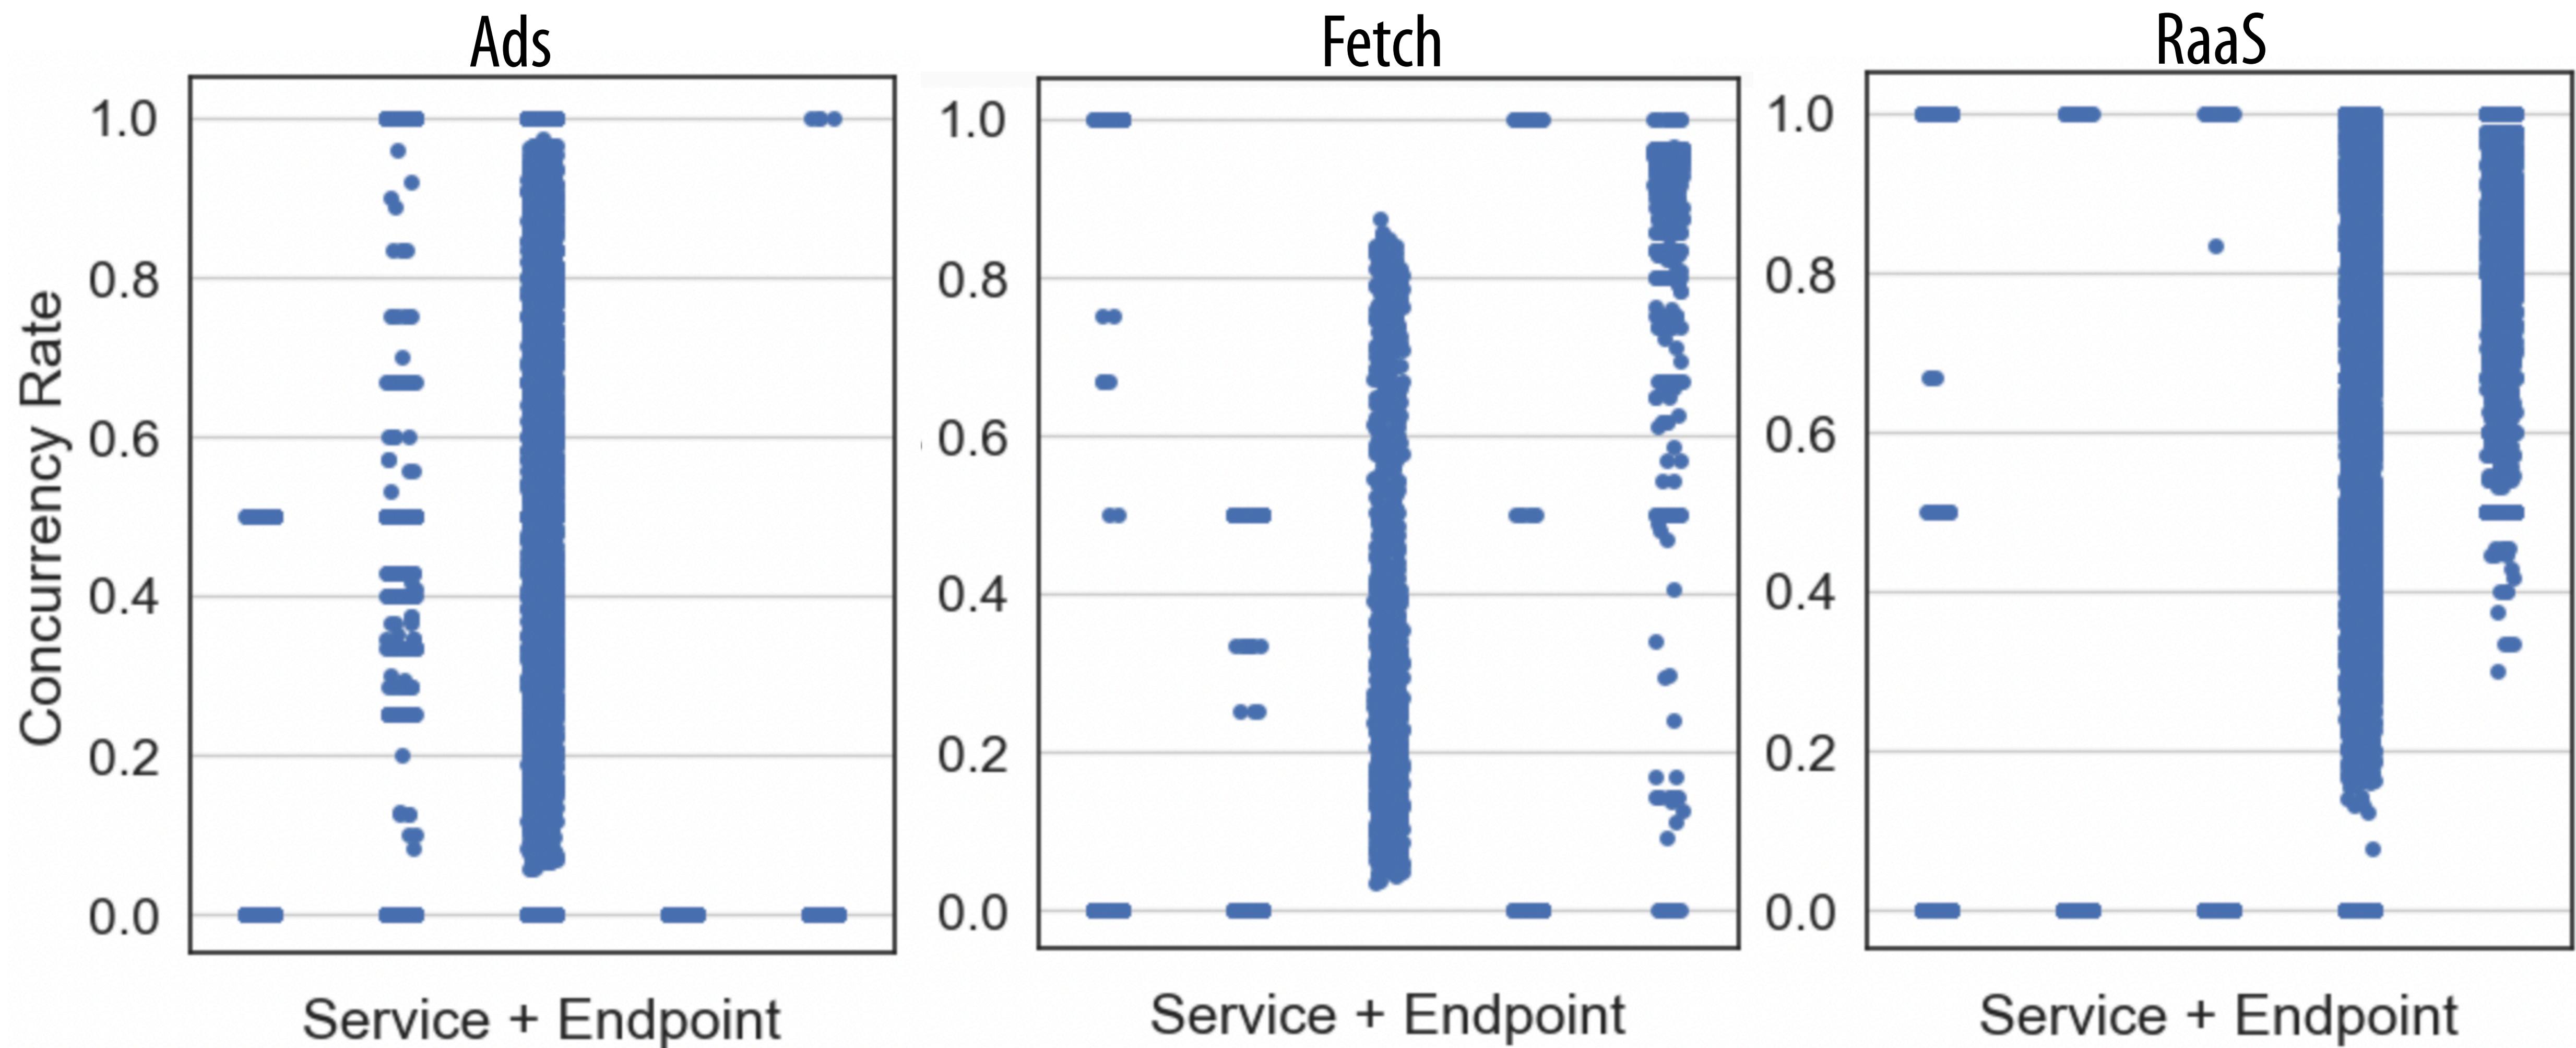

Predicting concurrency rates of variable relays

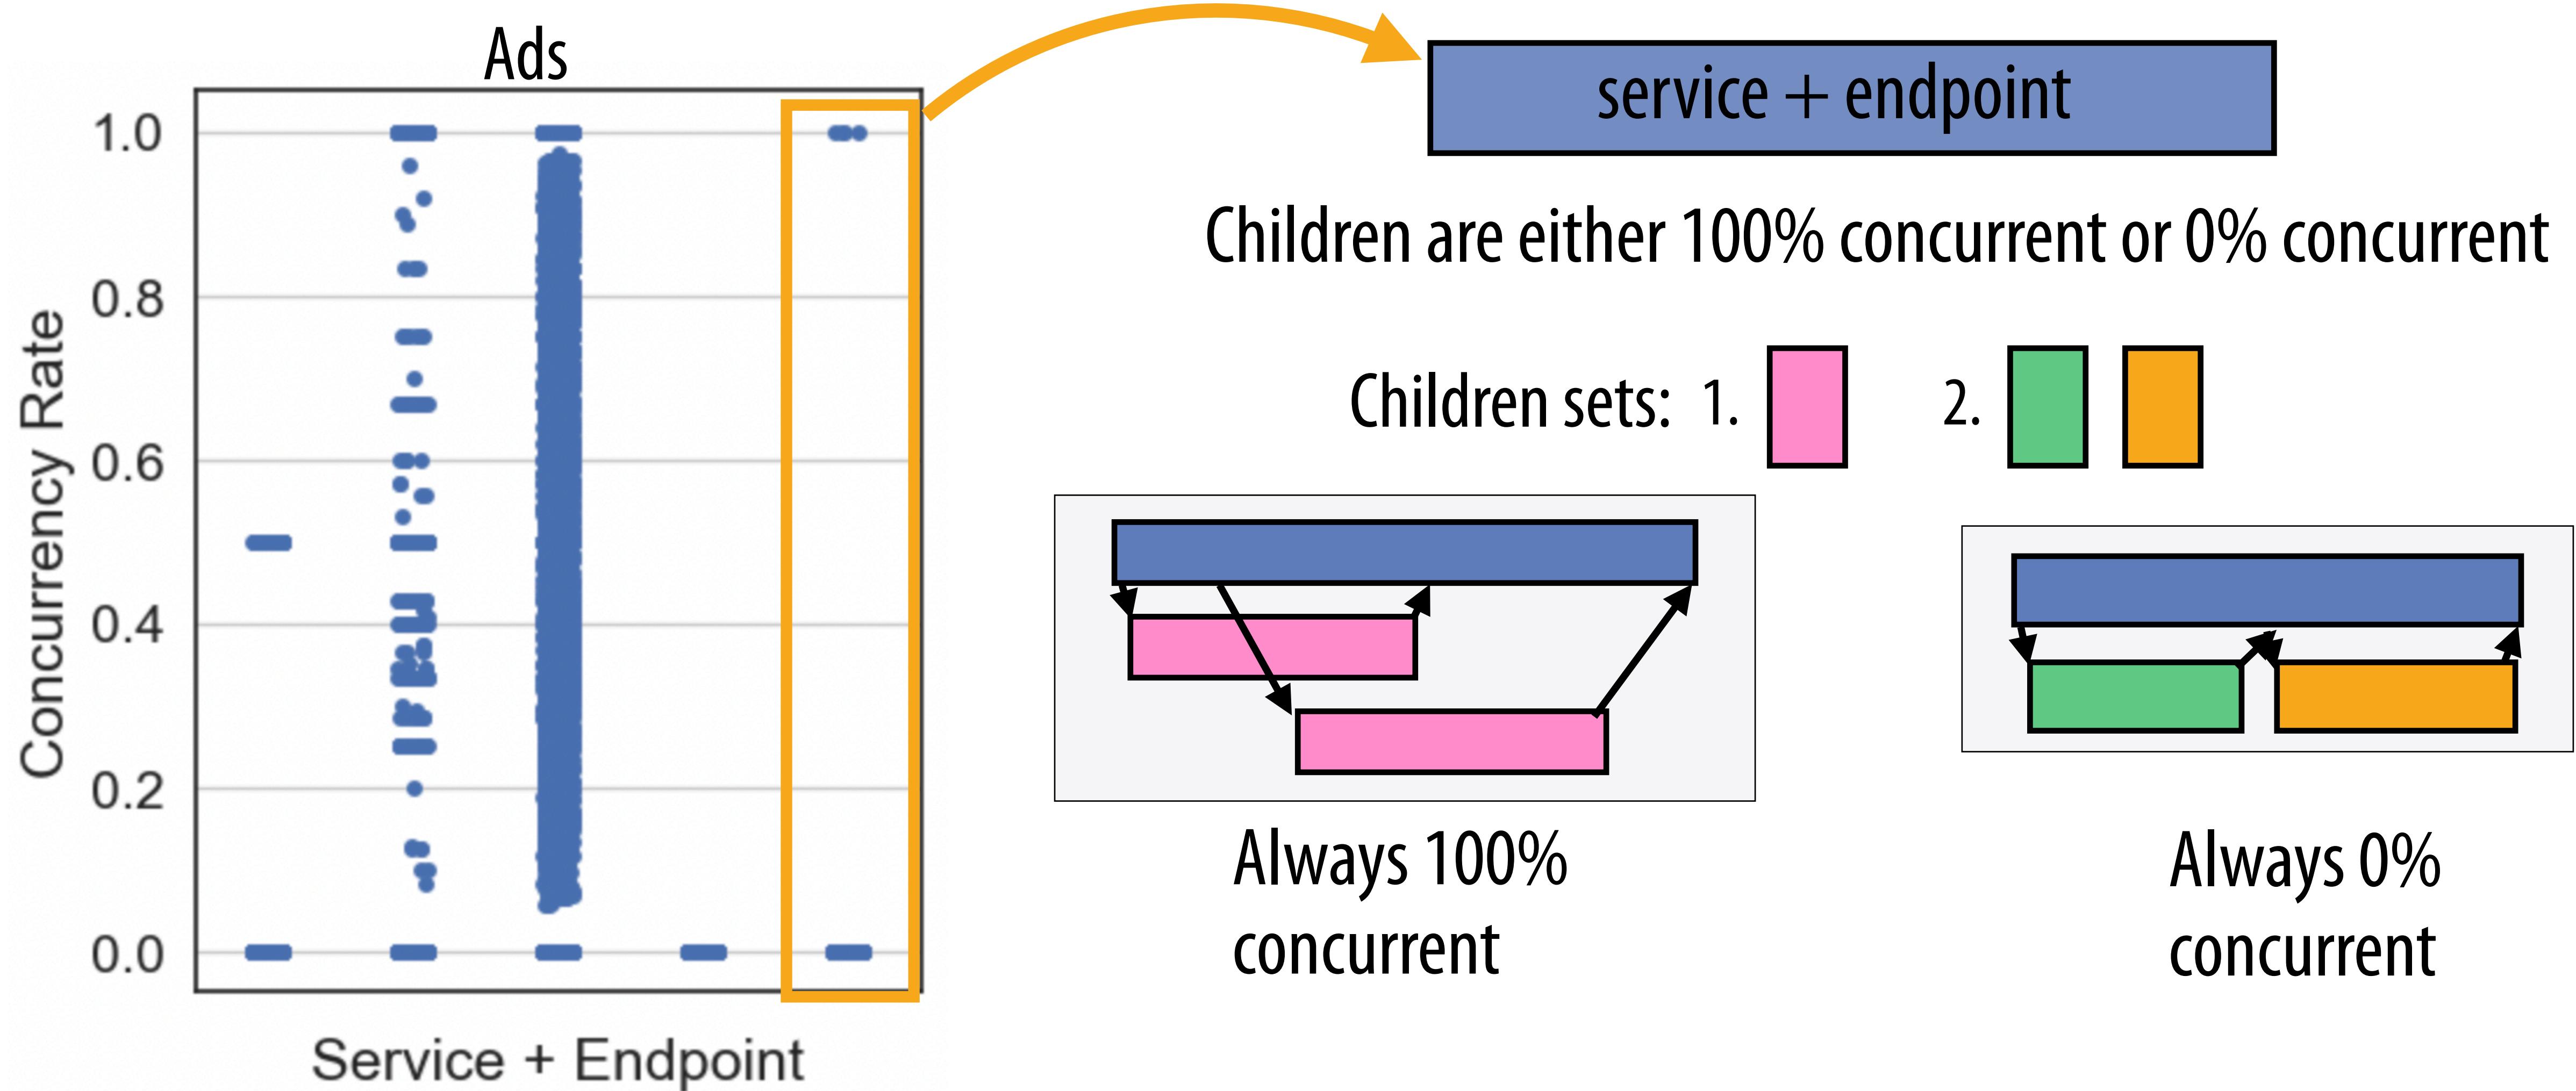

Children set provides visibility into code logic, explaining dependencies

Outline

- Introduction
- Overview of Findings
- Topology
- Workflows
- **Implications**

Implications

Testbeds should be extended to provide support for:

- Heterogeneity of services, churn & growth of deployed instances
- Variable concurrency, number of children, and children sets

Tooling that uses topology for resource management [ASPLOS'21, OSDI'20, SINAN'21]:

- Should be adaptable to dynamic topology

Tooling that uses workflows for performance prediction, diagnosis, capacity planning [Tprof'21, SoCC'19, VAIF'21, ATC '22]:

- Need to assume significant diversity in workflows

Summary

Microservice abstraction should be extended to support different types of archs.

Topology

Service is not one
size fits all

Long-term growth
with daily churn

Long tail of
complex services

Workflows

Wide & shallow

Observability loss
impacts deep traces

Variation in # calls,
even locally

Variation in conc.,
decreased by children set

Data available @
[github.com/
facebookresearch/
distributed_traces](https://github.com/facebookresearch/distributed_traces)

References

- [SOSP'17]: Canopy: An End-to-End Performance Tracing And Analysis System, SOSP'17, Kaldor et al.
- [ATC '22]: CRISP: Critical Path Analysis of Large-Scale Microservice Architectures, ATC'22, Zhang et al.
- [SoCC'21]: Characterizing Microservice Dependency and Performance: Alibaba Trace Analysis, SoCC'21, Lou et al.
- [JSEP'22]: Characterizing and synthesizing the workflow structure of microservices in ByteDance Cloud, JSEP'22, Wen et al.
- [JSys'22]:[SoK] Identifying Mismatches Between Microservice Testbeds and Industrial Perceptions of Microservices, JSYS'22, Huye & Shesagiri et al.
- [ASPLOS'19]: An Open-Source Benchmark Suite for Microservices and Their Hardware-Software Implications for Cloud & Edge Systems, ASPLOS'19, Gan et al.
- [TSE'18]: Fault Analysis and Debugging of Microservice Systems: Industrial Survey, Benchmark System, and Empirical Study, TSE'18, Zhou et al.
- [ASPLOS'21]: Sage: Practical & Scalable ML-Driven Performance Debugging in Microservices, ASPLOS'21, Gan et al.
- [Tprof'21]: tprof: Performance profiling via structural aggregation and automated analysis of distributed systems traces, SoCC'21, Huang et al.

References

- [OSDI'20]: FIRM: An intelligent fine-grained resource management framework for slo-oriented microservices, OSDI'20, Qiu et al.
- [VAIF'21]: Automating instrumentation choices for performance problems in distributed applications with VAIF, SoCC'21, Toslali et al.
- [SINAN'21]: Sinan: ML-based and qos-aware resource management for cloud microservices. ASPLOS'21, Zhang et al.
- [NSDI'11]: Diagnosing performance changes by comparing request flows, NSDI'11, Sambasivan et al.
- [SoCC'19] Sifter: Scalable Sampling for Distributed Traces, without Feature Engineering, SoCC'19, Las-Casas et al.
- [BookInfo] Istio, <https://istio.io/latest/docs/examples/bookinfo/>