

MODA INTERACT

Administrator Training Guide

Support, tenant administration, billing operations and diagnostics

Audience	Moda Interact platform administrators, support staff and operations leads
Version	Draft 0.1
Status	Living draft - current product scope is still evolving
Source review	8 September 2026
Manual locale	en

This guide is based on the implementation present in the reviewed Moda Interact workspace. Where the product flow is incomplete or still evolving, the guide says so explicitly rather than inventing an unsupported workflow.

Contents

Chapter 1

About this training guide

This guide trains internal administrators and support personnel to use the Moda Interact administration console safely and consistently. It is intentionally written as a living operational document because the product scope is still being finalised.

Current implementation note. The reviewed admin console currently covers tenant investigation and administration, merchant support threads, billing-plan mappings, private observability links, and a read-only BullMQ/Redis queue monitor. The console currently loads an English admin catalogue. Documentation localization is deliberately independent from that limitation.

1.1 Training objectives

After completing this guide, an administrator should be able to:

- sign in to the platform administration console using an authorised Google identity;
- find a merchant tenant by brand/domain and review its current state;
- change the tenant's active/suspended state and recovery delay where authorised;
- investigate customer recovery records, conversations, cart contents and lifecycle history;
- triage merchant support messages, take ownership, reply, and request translations;
- understand which merchant-support actions require a **SUPER_ADMIN**;
- review and, where authorised, maintain billing-plan mappings;
- use the private Grafana links for logs, traces, metrics and platform dashboards;
- use the Shopify queue monitor as a read-only diagnostic view;
- collect useful evidence before escalating a product or infrastructure incident.

1.2 Role model

The current admin implementation distinguishes two platform roles.

Role	Current operational meaning
Platform admin	Can authenticate to the protected console and perform normal protected admin reads/mutations, including tenant administration and merchant-support ownership/replies.
SUPER_ADMIN	Includes normal platform-admin capabilities and additionally controls privileged billing-plan mutations, merchant-support reassignment, release overrides, and global failed-translation reconciliation.

A screen being visible does not necessarily mean every action is permitted for every role. In the current billing page, for example, mutations are enforced server-side as SUPER_ADMIN-only.

1.3 Documentation conventions

- **Current implementation note** identifies a behaviour observed in the reviewed codebase that may change as the product evolves.
- **Warning** identifies a step with operational impact or a limitation that support staff should understand before acting.
- Screenshot placeholders are deliberate. A localized image is loaded by screenshot ID and manual locale, for example `admin-tenant-directory.fr.png`.

Chapter 2

Accessing the administration console

2.1 Authentication

The hosted admin console uses Google authentication and restricts access to provisioned, active platform-administrator records. The current authentication session lifetime is eight hours.

1. Open the Moda Interact administration URL for the environment you are supporting.
2. On the login page, select **Continue with Google**.
3. Sign in with the Google account that has been provisioned for platform administration.
4. If the account is not authorised, the console returns to the login screen with an unauthorised message.

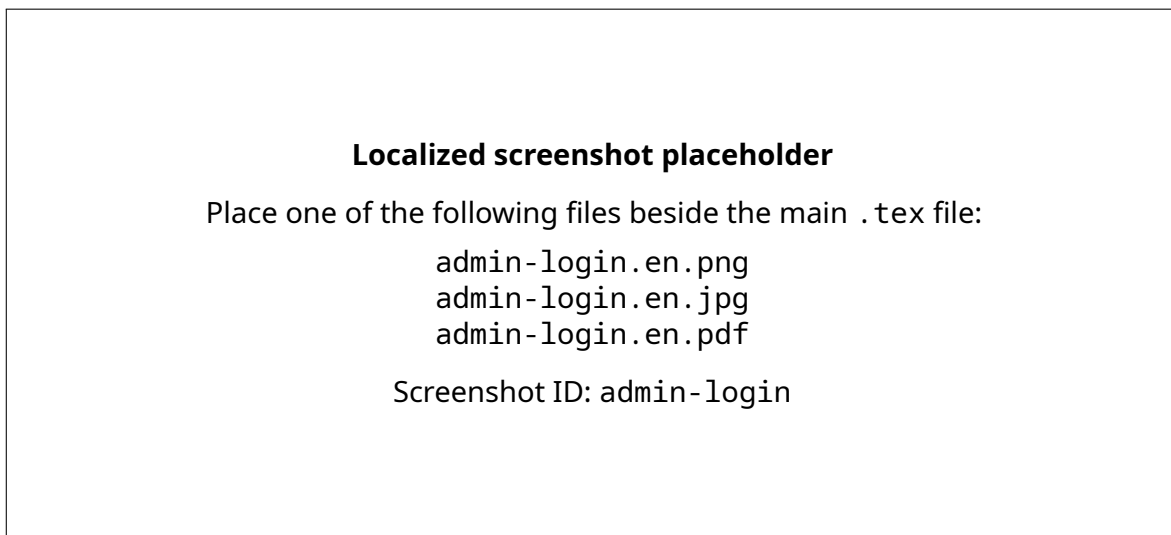


Figure 2.1: Platform administrator login screen.

Do not use development authentication bypass behaviour as a production support procedure. Hosted environments are expected to enforce the provisioned Google administrator identity.

2.2 Main navigation

The current sidebar exposes:

- **Tenant Directory;**
- **Merchant Messages;**
- **Billing Plans;**
- **Observability**, including the Shopify queue view and Grafana destination.

Chapter 3

Tenant Directory

3.1 What the directory shows

The tenant directory is the primary entry point for merchant investigation. Its platform summary includes active tenants, active recoveries, and active job counts for core queues when queue data is available.

The current queue summary includes:

- Checkout Events;
- Order Events;
- Pending Recoveries;
- WhatsApp Events.

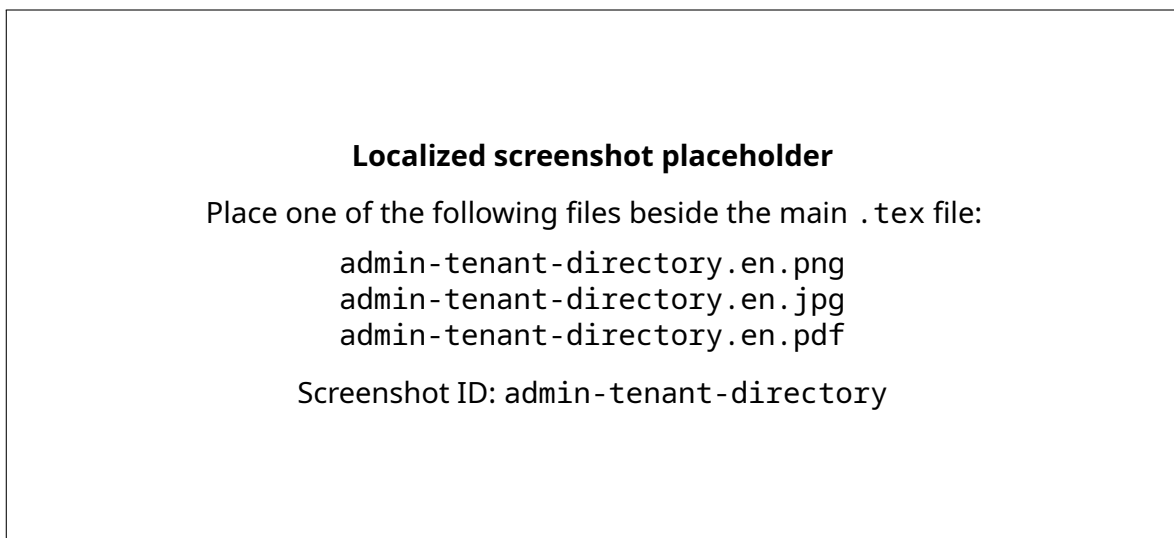


Figure 3.1: Tenant directory and platform summary.

3.2 Finding a merchant

Use the tenant search to match a merchant by brand name or Shopify domain. The tenant directory is paginated.

A good support habit is to confirm the tenant/domain before discussing customer-level recovery information. This prevents an investigation from drifting into the wrong merchant context.

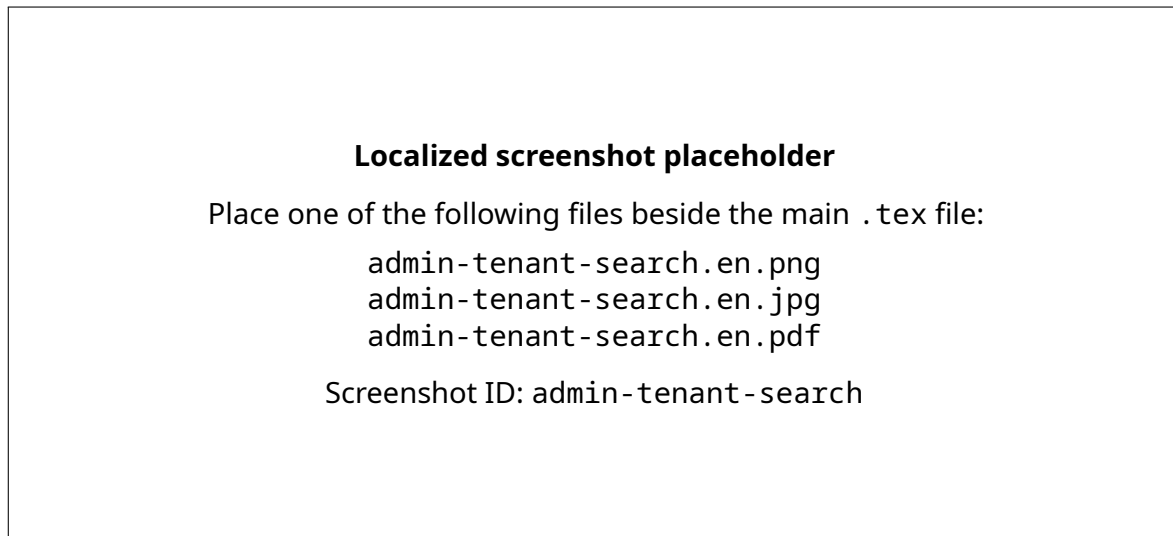


Figure 3.2: Tenant search and tenant selection.

3.3 Tenant detail panel

Selecting a tenant opens tenant details with two main tabs:

- **Administration;**
- **Recovery Logs.**

The Administration tab presents lifecycle/status controls alongside billing and onboarding state.

3.3.1 Editable tenant controls

The current implementation allows the following tenant changes:

- **Shop status:** ACTIVE or SUSPENDED;
- **Recovery delay:** 0 to 10,080 minutes.

The same panel displays, but does not currently edit, installed/uninstalled timestamps, plan, subscription status, billing period dates and onboarding completion state.

Suspending a shop is an operationally significant change. Record the support/incident reason in the external case record used by your organisation. The current tenant form itself does not include a free-text reason field.

3.4 Recovery Logs

The Recovery Logs tab lets support staff move from merchant to customer to individual recovery.

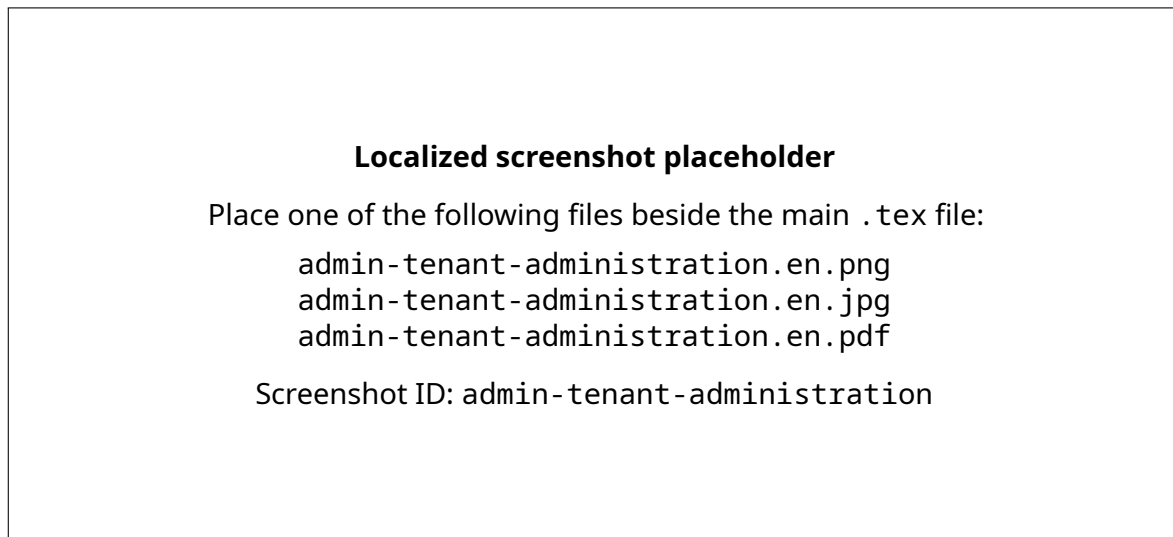


Figure 3.3: Tenant administration controls and billing/onboarding summary.

3.4.1 Customer search

Customers can be searched by name, email or phone. The result view is paginated and shows customer contact information and abandoned-cart counts where available.

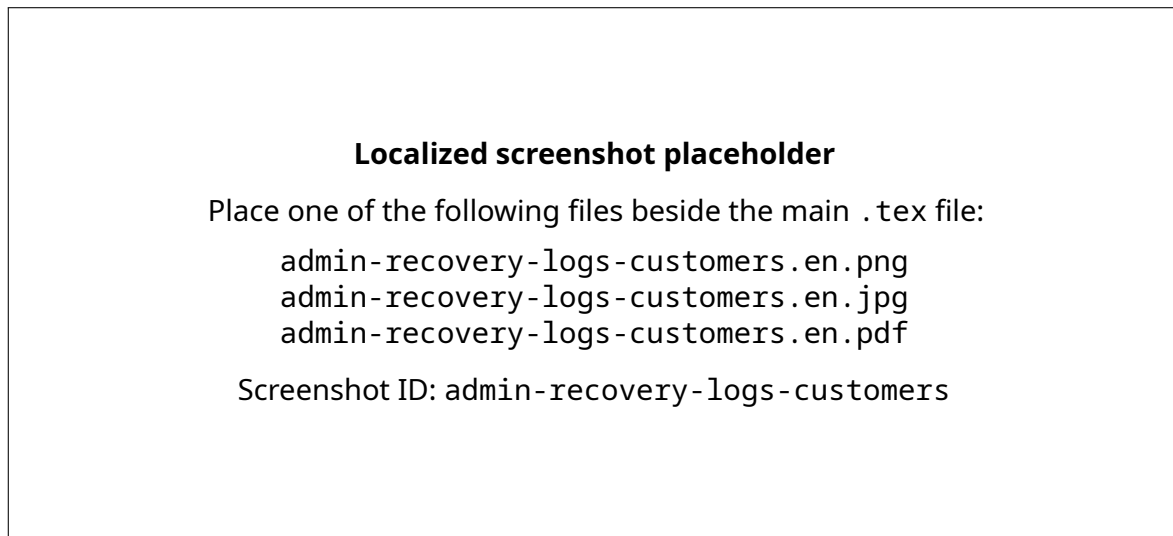


Figure 3.4: Customer list within a tenant's Recovery Logs tab.

3.4.2 Recovery list

Selecting a customer shows the customer's recoveries, including:

- detection time;
- cart value and currency;
- recovery status;
- outcome.

Selecting a recovery opens a right-side detail drawer.

3.5 Recovery detail drawer

The current recovery drawer has three tabs.

3.5.1 Conversation

Use this tab to review WhatsApp/conversation messages associated with the recovery. Message lists are paginated when necessary.

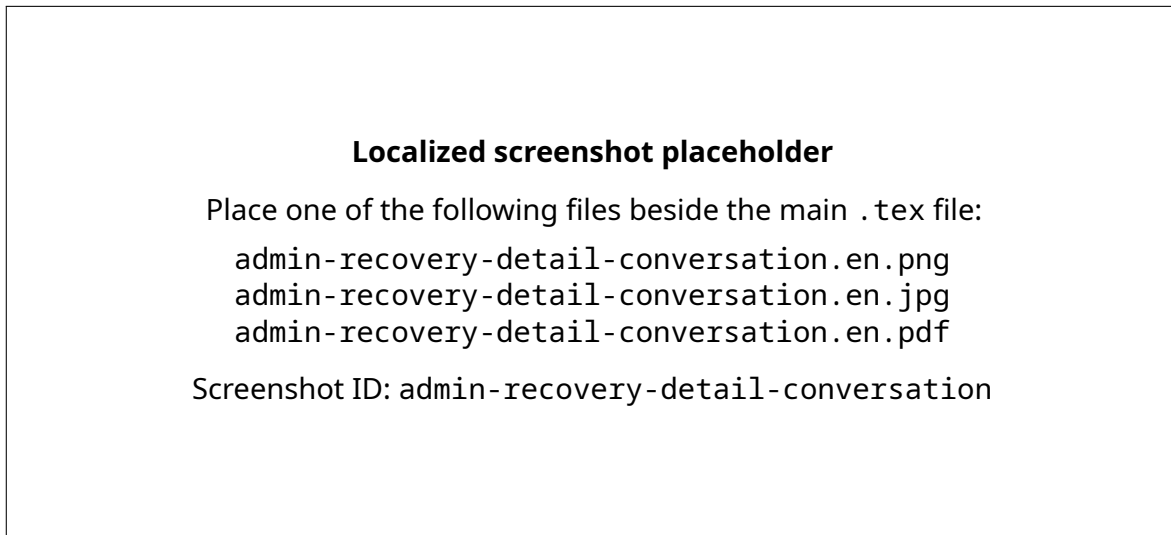


Figure 3.5: Recovery detail - Conversation tab.

3.5.2 Cart Details

Use this tab to inspect line items from the stored checkout payload and, when available, open the checkout link.

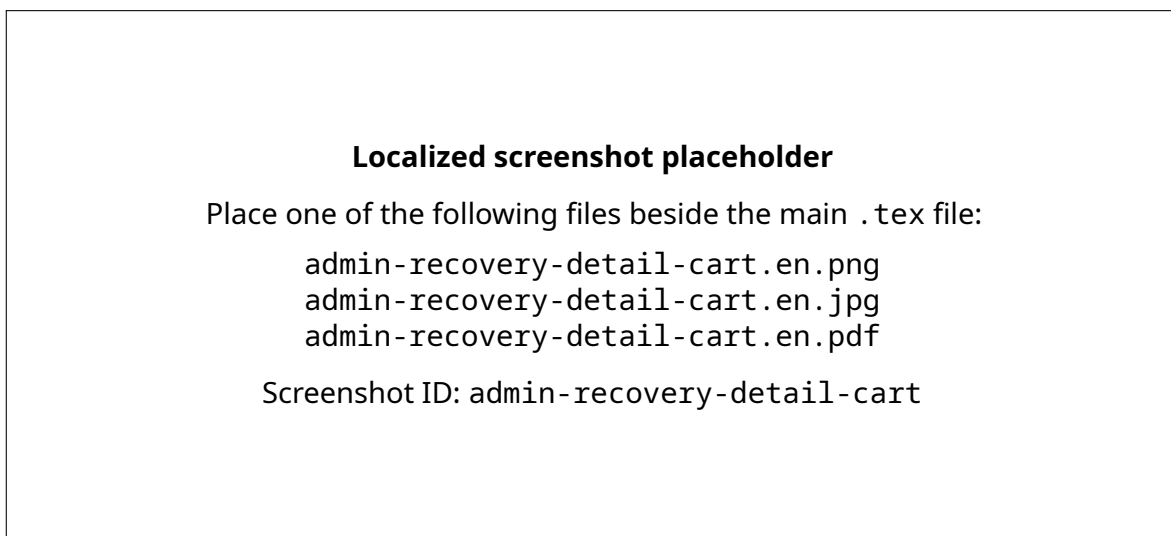


Figure 3.6: Recovery detail - Cart Details tab.

3.5.3 Lifecycle

Use this tab to understand the recovery lifecycle and recorded status transitions/events.

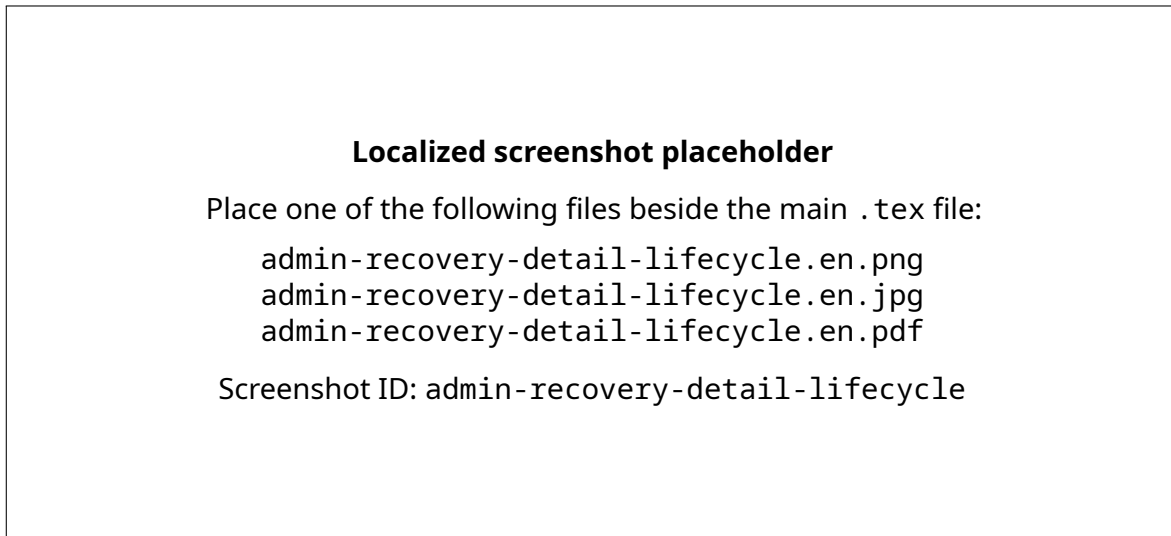


Figure 3.7: Recovery detail - Lifecycle tab.

3.6 Suggested tenant investigation sequence

For a merchant asking “Why did this recovery happen?” or “Why did it not recover?”, use this sequence:

1. Confirm the tenant and Shopify domain.
2. Check shop status and recovery delay.
3. Check subscription/onboarding state displayed in Administration.
4. Open Recovery Logs and locate the customer.
5. Open the relevant recovery and compare Lifecycle, Conversation and Cart Details.
6. If the issue appears asynchronous or infrastructure-related, continue to the Shopify queue view and Grafana evidence described later in this guide.

Chapter 4

Merchant Messages

4.1 Purpose

Merchant Messages is the internal support inbox for durable merchant-support conversations. The page shows support threads that currently require an administrative response.

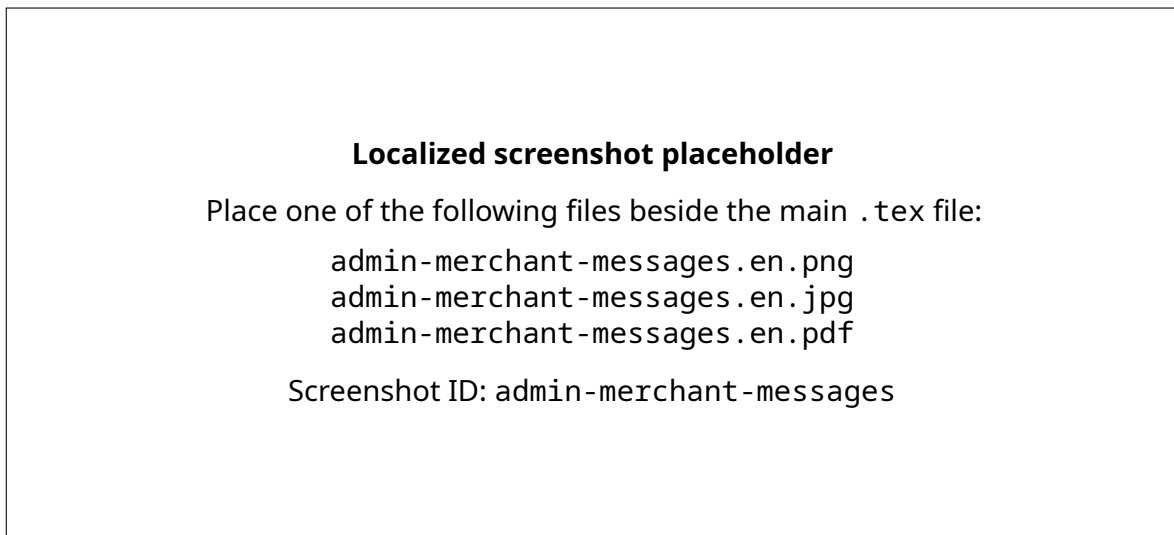


Figure 4.1: Merchant Messages pending-thread view.

4.2 Finding a support thread

The current page supports:

- filters: All pending, Unassigned, Assigned to me, Assigned to others;
- paginated pending threads;
- search/suggestions by shop brand name or domain;
- direct selection of a matching support thread.

Search suggestions begin after two characters, are debounced, and are capped by the UI.

4.3 Ownership workflow

A support thread has a single assigned platform administrator or is unassigned.

1. Open the pending thread.
2. If unassigned, select **Take** before replying.
3. Once you own the thread, compose the administrative response.
4. If responsibility needs to move, release the thread when allowed.
5. A SUPER_ADMIN can reassign a thread to another active administrator ID and can release ownership as an override.

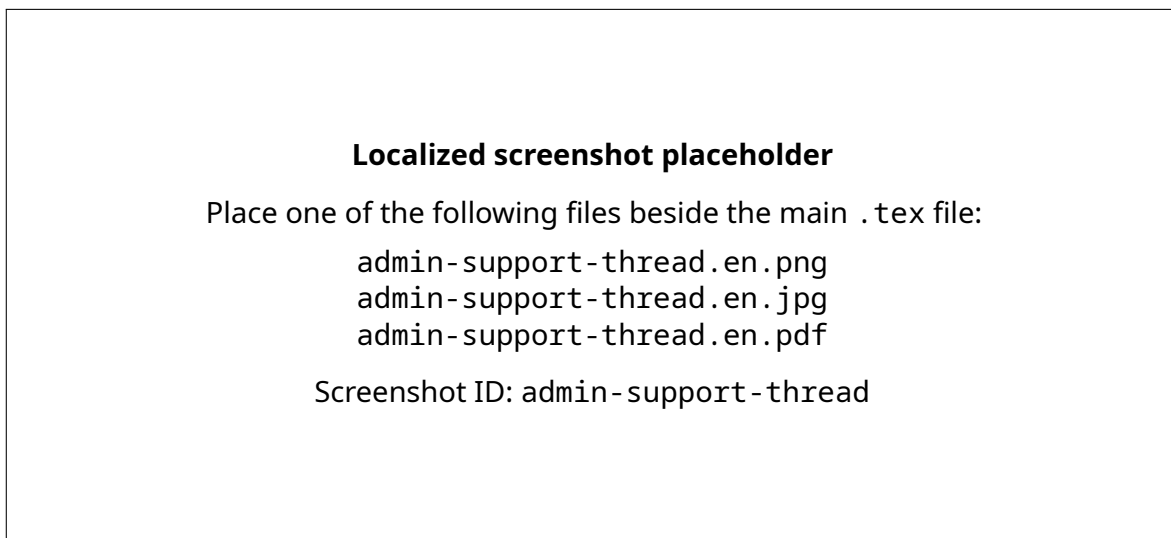


Figure 4.2: Support thread history, ownership controls and reply box.

Current implementation note. Only the current owner may send an administrative reply. The reply body is bounded to 1-500 Unicode graphemes.

4.4 Understanding message states

Messages can be merchant-authored, administrative, or system messages. The UI also shows read state and translation state.

For translation-aware support work:

- the original body remains available;
- available translations can be selected by language tag;
- a failed translation can be retried/reconciled;
- an additional translation can be requested for one of the currently supported translation languages;
- a SUPER_ADMIN can trigger global reconciliation of failed translations.

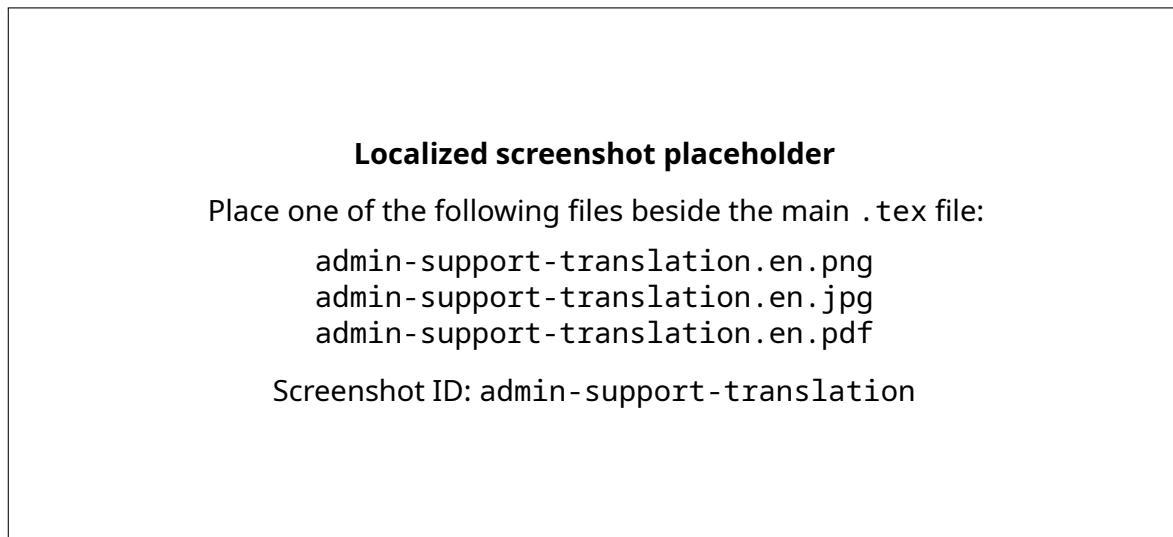


Figure 4.3: Support message translation controls and original/translated text.

4.5 Supported translation languages in the current support UI

Code	Language	Code	Language
cs	Czech	da	Danish
de	German	en	English
es	Spanish	fi	Finnish
fr	French	it	Italian
ja	Japanese	ko	Korean
nb	Norwegian Bokmål	nl	Dutch
pl	Polish	pt-BR	Portuguese (Brazil)
pt-PT	Portuguese (Portugal)	sv	Swedish
th	Thai	tr	Turkish
zh-Hans	Chinese (Simplified)	zh-Hant	Chinese (Traditional)

4.6 Support reply checklist

Before sending a reply:

- confirm you own the thread;
- confirm the tenant/domain;
- read the most recent merchant message and any system messages;
- if using a translation, check whether you are viewing the translation or original text;
- keep the reply within the 500-grapheme limit;
- avoid claiming a recovery, refund, billing adjustment or queue intervention has happened unless the application evidence confirms it.

Chapter 5

Billing Plans

5.1 What this page is for

The Billing Plans page maintains Moda Interact's internal mapping to Shopify-created plan and usage-event handles. Shopify owns the commercial pricing surface; the admin catalog stores the exact handles and Moda entitlement/safety policy.

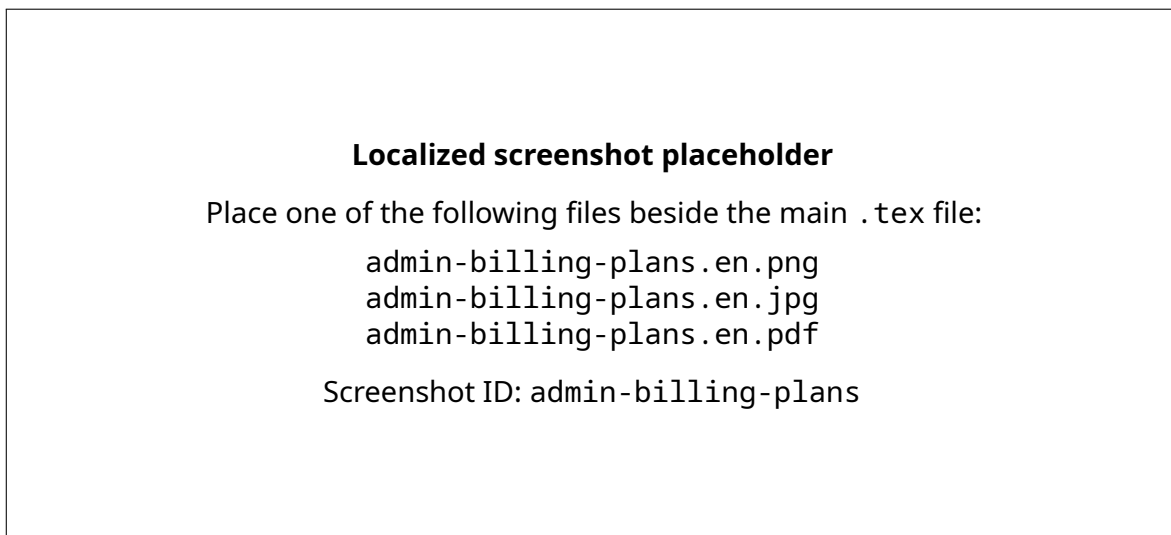


Figure 5.1: Billing plan catalog and plan mapping form.

Billing-plan mutations are SUPER_ADMIN-only in the current implementation. A normal platform administrator should treat this page as informational and escalate required catalog changes.

5.2 Plan mapping fields

The current form includes:

- Shopify plan handle;
- display name;
- plan kind: FREE or PAID_METERED;
- Shopify usage-event handle for paid metered plans;

- Free lifetime conversation allowance for Free plans;
- default outbound soft limit;
- default outbound hard limit;
- reserved terminal response slots;
- feature flags: Checkout recovery, AI conversations, Product search, Order support;
- a required mutation reason.

5.3 Important billing invariants

The server currently enforces the following rules:

- Shopify plan handles are immutable after creation; deactivate the mapping and create a new one if the handle must change.
- FREE plans require a positive lifetime conversation allowance and cannot have a Shopify usage-event handle.
- PAID_METERED plans require an exact Shopify usage-event handle and cannot use a Free lifetime allowance.
- soft and hard limits must be positive integers; the soft limit cannot exceed the hard limit.
- reserved terminal slots must be positive and lower than the hard limit.
- changing an existing usage-event handle requires explicit confirmation because historical usage events retain their previous handle.
- each catalog mutation records an audit event and requires a bounded reason.

5.4 Activation and deactivation

Each plan mapping can be activated or deactivated. Use this deliberately: the state controls whether a plan mapping is active in Moda's billing catalog; it is not the same as editing the merchant's Shopify subscription directly.

Chapter 6

Observability

6.1 Private Grafana access

The Observability page is a navigation surface into Moda Interact’s private Grafana Cloud workspace. Depending on environment configuration, it can provide links for the main platform dashboard, logs, traces and metrics.

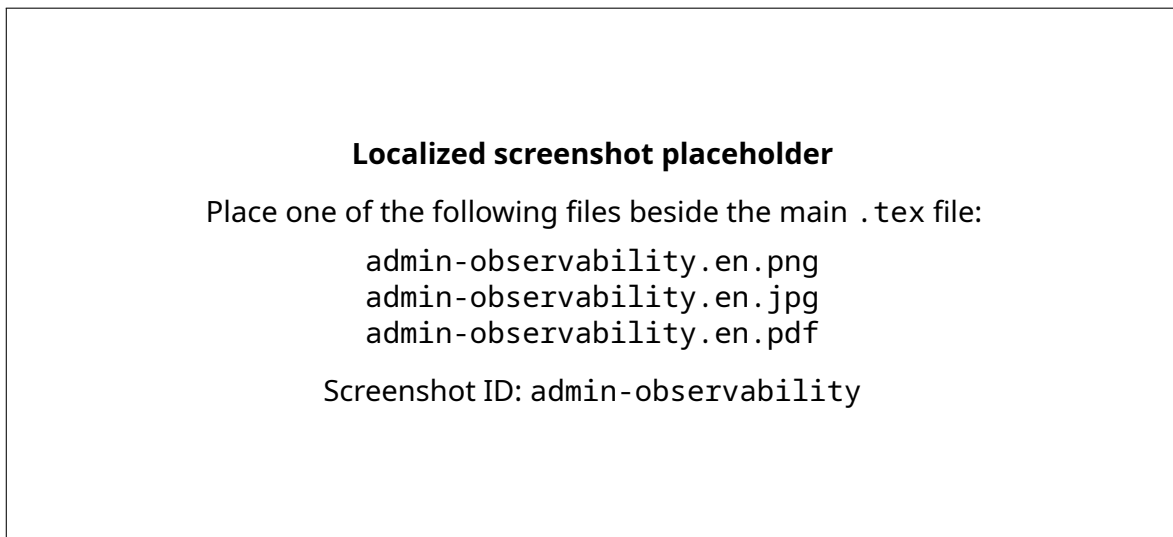


Figure 6.1: Observability page with private Grafana destinations.

Current implementation note. Grafana authentication is handled by Grafana Cloud and is separate from the Moda admin session. If no valid Grafana destination is configured, the admin console continues to provide its other administration features.

6.2 When to use logs, traces and metrics

Evidence type	Use it when
Logs	You need the specific application/infrastructure event, error message, correlation data or provider failure detail.
Traces	You need to follow a request/workflow across service boundaries or understand where latency/failure occurred.

Evidence type	Use it when
Metrics	You need trends, rates, saturation, error-rate changes, queue/worker capacity signals or environment health.

Chapter 7

Shopify Queues

7.1 Purpose and safety boundary

The Shopify Queues page is a read-only operational monitor backed by Redis/BullMQ data. It is designed to help administrators understand current queue state and recent jobs without providing destructive queue controls.

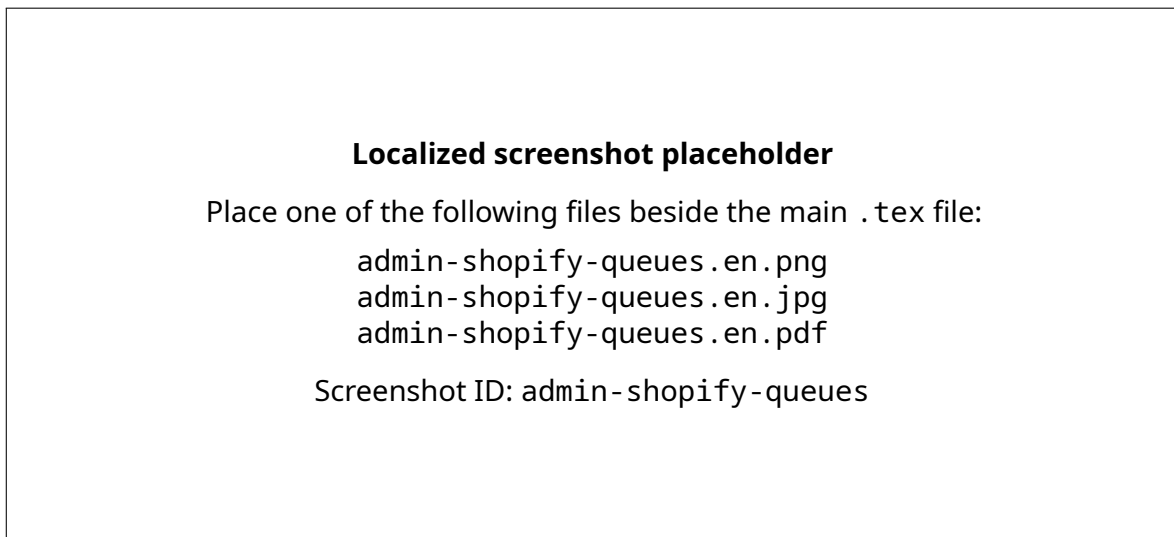


Figure 7.1: Shopify queue operational summary.

The current queue monitor does not provide retry, delete, promote, pause or drain controls. Do not treat the diagnostic UI as a queue-management console.

7.2 Queue summary

The page can show queue/job state, workers and recent Redis activity. Queue snapshots can become temporarily unavailable; the UI attempts to preserve the last successful snapshot where possible.

The refresh control supports manual refresh and configurable polling, including a paused state.

7.3 Opening queue details

Selecting a queue opens a resizable detail panel. Administrators can review recent/all jobs using filters such as:

- job status;
- shop attribution, including unresolved/orphan categories;
- ascending/descending direction;
- page and result count.

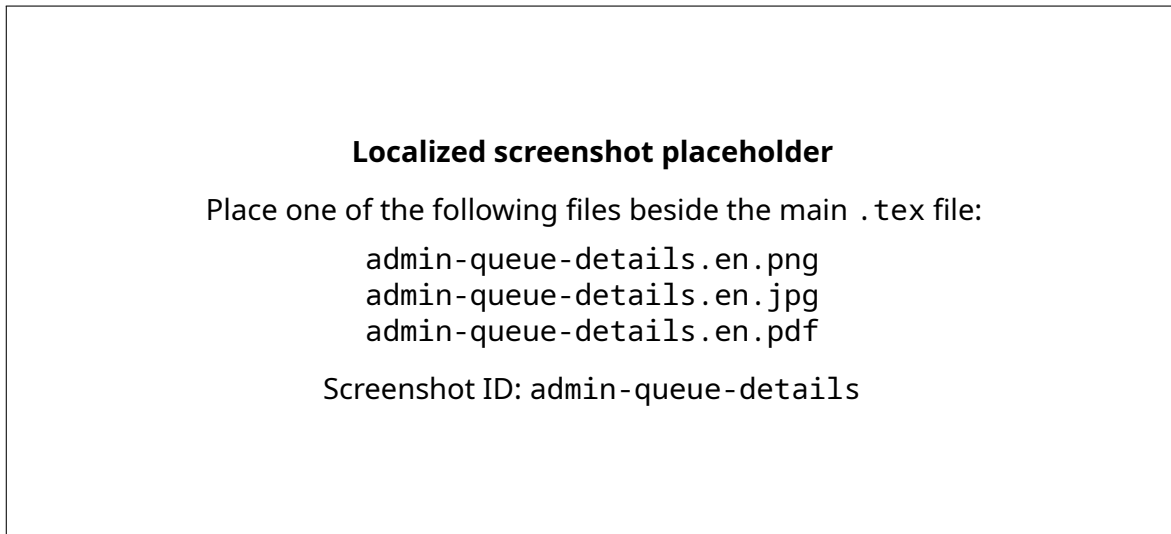


Figure 7.2: Selected queue details and job list.

7.4 Job detail

Selecting a job can expose diagnostic fields including:

- queue name and job name;
- job ID;
- shop attribution;
- attempts made;
- queued/processed/finished timestamps;
- failure reason;
- stack trace;
- payload/job data.

Payload/job data is operational evidence. Treat it as support data: copy only what is necessary into an incident record and avoid forwarding customer or tenant data outside approved support channels.

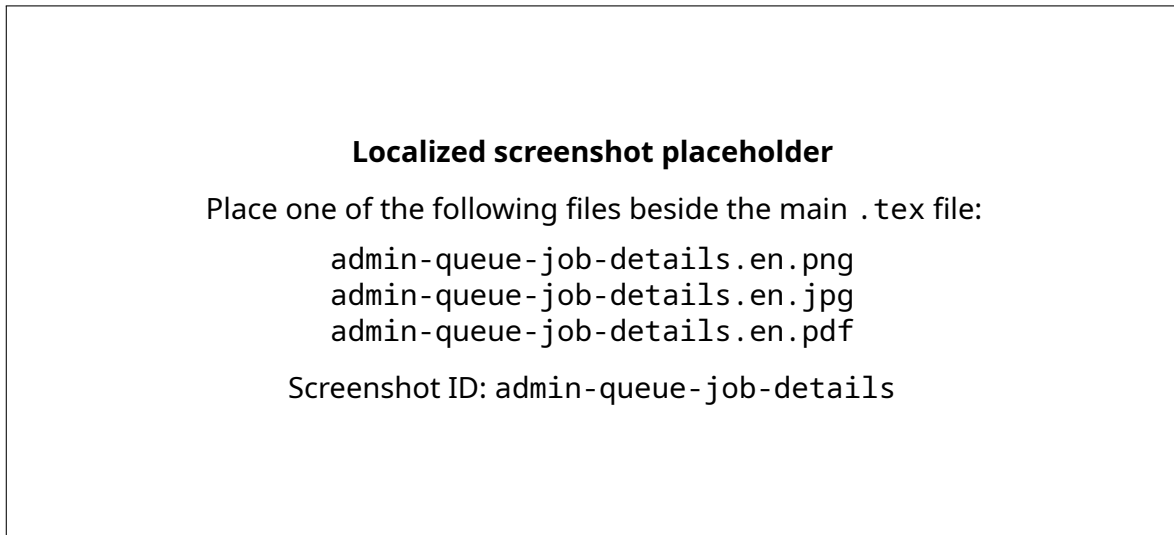


Figure 7.3: Queue job diagnostic detail.

7.5 Interpreting disappearing jobs

Completed jobs may disappear quickly because BullMQ can remove completed jobs according to queue configuration. A missing job after refresh does not, by itself, prove that it never existed.

Chapter 8

Support and incident playbooks

8.1 Merchant reports that a recovery did not start

1. Confirm tenant status is ACTIVE.
2. Confirm the recovery delay currently configured for the tenant.
3. Check onboarding/subscription state displayed in tenant Administration.
4. Search Recovery Logs for the customer/recovery.
5. Check Pending Recoveries and relevant Shopify queues.
6. If jobs are failed or queue data is unavailable, capture queue/job evidence and continue with Grafana logs/traces.

8.2 Merchant reports a message or translation problem

1. Locate the merchant's support thread and recovery/conversation where relevant.
2. Compare original and translated support text.
3. For a failed support translation, use Retry/Reconcile if appropriate.
4. For a missing translation, request an additional supported language.
5. If the translation remains unavailable, capture the message/translation state and escalate with identifiers rather than repeatedly retrying without evidence.

8.3 Merchant reports incorrect billing/usage

1. Review the merchant's displayed subscription/billing state in Tenant Administration.
2. Ask the merchant to identify the billing period and the usage row(s) in question.
3. Use recovery/conversation evidence to correlate the usage event if possible.
4. Do not change billing catalog mappings to fix a single-merchant dispute.
5. Escalate catalog defects to a SUPER_ADMIN with the Shopify plan/usage handles and affected merchant evidence.

8.4 Queue backlog or failures

1. Check the queue summary and worker-online state.
2. Identify whether the problem is isolated to one queue, status or shop.
3. Inspect representative failed jobs and attempts made.
4. Capture timestamps, failure reason and stack trace.
5. Correlate with Grafana logs/traces before escalating to engineering/infrastructure.

Chapter 9

Known product/documentation gaps

This section exists so the training guide does not create fictional operating procedures while the product is still being completed.

- The admin UI currently loads an English catalogue only, although merchant/support translation capabilities cover 20 languages.
- Merchant onboarding completion is represented in durable settings and displayed by admin, but the reviewed merchant code does not contain a complete self-service action that sets onboarding completion to true. The production onboarding flow should be documented again once that lifecycle is finalised.
- The queue monitor is deliberately read-only; operational retry/remediation procedures are not currently implemented in this admin UI.
- Billing catalog mutations require SUPER_ADMIN even though the catalog page itself can be viewed by protected administrators.
- The product scope is still evolving; screenshots and procedures must be reviewed whenever admin routes or support workflows materially change.

Chapter 10

Training exercises

10.1 Exercise 1 - Tenant investigation

Using a non-production test tenant:

1. find the tenant by domain;
2. identify its shop status, recovery delay, plan and onboarding state;
3. open Recovery Logs and identify one customer/recovery;
4. describe the recovery using the Conversation, Cart Details and Lifecycle tabs.

10.2 Exercise 2 - Merchant support ownership

Using a test support thread:

1. filter to Unassigned;
2. take ownership;
3. inspect the original message and any translation;
4. compose a compliant test reply;
5. release ownership when the exercise is complete.

10.3 Exercise 3 - Queue evidence collection

Using a development/test environment:

1. open Shopify Queues;
2. select a queue;
3. filter jobs by status and shop;
4. open one job detail;
5. write an escalation summary containing queue, job ID, time, attempts and failure reason without copying unnecessary payload data.

Appendix A

Administrator screenshot IDs

The following screenshot IDs are referenced by this manual. Place localized files next to `admin-training-guide.tex` using `<id>.<locale>.png`, `.jpg` or `.pdf`.

Screenshot ID	Purpose
admin-login	Platform administrator sign-in
admin-tenant-directory	Tenant directory overview
admin-tenant-search	Tenant search/selection
admin-tenant-administration	Tenant editable controls and billing/onboarding summary
admin-recovery-logs-customers	Customer list within Recovery Logs
admin-recovery-detail-conversation	Recovery conversation tab
admin-recovery-detail-cart	Recovery cart details tab
admin-recovery-detail-lifecycle	Recovery lifecycle tab
admin-merchant-messages	Pending merchant-support threads
admin-support-thread	Thread ownership/history/reply
admin-support-translation	Support translation controls
admin-billing-plans	Billing plan catalog
admin-observability	Grafana navigation
admin-shopify-queues	Queue summary
admin-queue-details	Queue job list/filter panel
admin-queue-job-details	Selected job diagnostics