


The RAPP/1 organism, on one page

Read it top (6) to bottom (0). Left: what comes in. Right: what goes out or across.

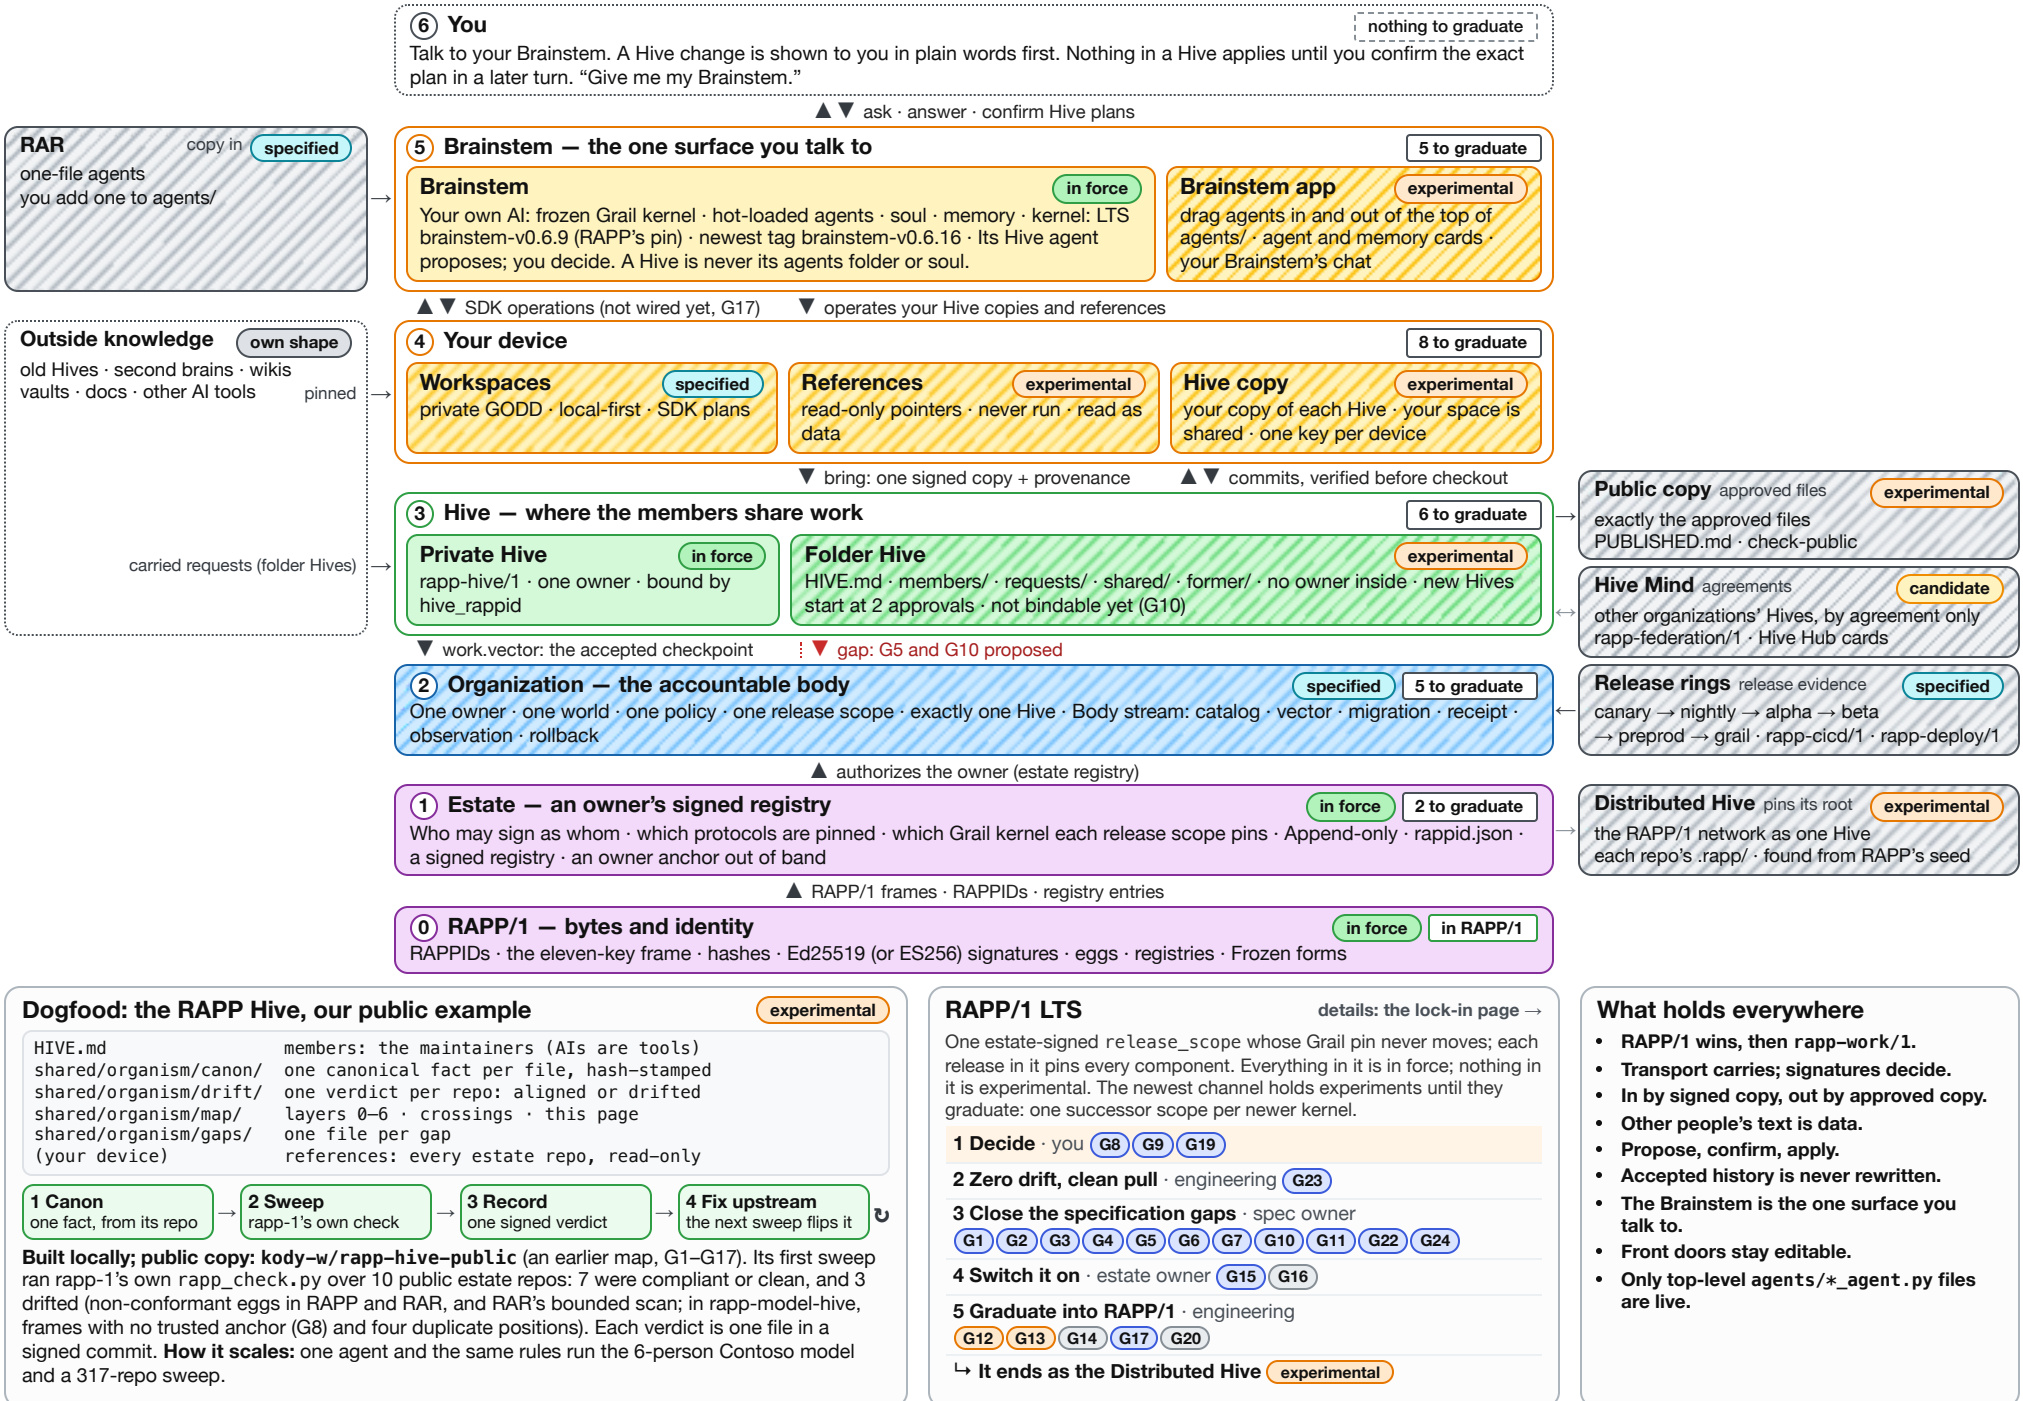

RAPP/1 LTS: what it takes to lock the whole thing

RAPP/1 is the one LTS release people pull. Five phases lock it, in order, with the owner's decisions first; it ends as a distributed Hive.

in force

specified

experimental

candidate

planned

gap

idea

open

proposed

own shape

Your decisions first · phase 1, Decide · you, about an hour

1. accept or refuse RAPP proposal 0002 (G19), Tier 2 loading: a draft on experimental/proposal-0002-tier2-parity

2. ratify the RAPP Work Constitution and its Part V (G8, G9)

3. done: RAPP proposal 0001 and its amendment are merged (kody-w/RAPP#119, kody-w/RAPP#124), so RAPP's Constitution says only top-level agents are live

RAPP/1 LTS is

- One estate-signed release_scope whose Grail pin never moves; each release in it pins every component.

• Everything in it is in force; nothing in it is experimental.

• The newest channel holds experiments until they graduate: one successor scope per newer kernel.

It pins: (the LTS kernel brainstem-v0.6.9 (rapp-hive/1) (rapp-work/1) (RAPP Workspace/1) (rapp-work-sdk/1) (rapp-registry/1.1) (rapp-cicd/1) (rapp-deploy/1) the agents and apps that ship with it)

RAPP/1 §11.1: the pin is “a permanent compatibility anchor”, and “A successor uses a new release_scope”. §13.3: at most one grail-kernel entry per scope, and a protocol entry per adopted protocol. rapp-cicd/1 §2: a release lists every part.

Each layer, top to bottom: in RAPP/1, or what it needs to graduate

6 You	nothing to graduate	
5 Brainstem	5 to graduate	G17 G19 G20 G23 RAR
4 Your device	8 to graduate	G2 G3 G4 G7 G13 G14 G22 G24
3 Hive	6 to graduate	G1 G6 G8 G9 G12 Public copy
2 Organization	5 to graduate	G5 G10 G11 G16 Release rings
1 Estate	2 to graduate	G15 Distributed Hive
0 RAPP/1	in RAPP/1	

2 · Zero drift, clean pull
engineering

- fix RAPP's and RAR's non-conformant eggs and RAR's bounded scan (kody-w/RAPP#121, which only the maintainer merges, and kody-w/RAR#1116; both open)

• give rapp-model-hive's frames a trusted anchor (kody-w/rapp-model-hive#2, open; it needs the owner's registry entries)

• re-sweep until every repo of the RAPP/1 stack is certified (the dogfood)

• keep the default pull clean: default branches and the LTS install carry only in-force parts

• one front door keeps the network unified and tracked; pin the Windows LTS install (G23); only the owner merges its fix)

3 · Close the specification gaps
spec owner

- RAPP/1 core additions land before the estate signs: rev-17, a draft on kody-w/rapp-1 experimental/rapp1-core-*, adds release pins, lifecycle notices and stream signers

• rapp-hive/1 (G1, G6)

• rapp-work-sdk/1 (G2, G3, G4, G7, G11)

• rapp-work/1, by sibling profiles (G5, G10); RAPP's Constitution and RAPP Workspace/1 (G22, G24)

• a gap that cannot close in time waits for a later RAPP, with the owner's sign-off

4 · Switch it on
estate owner

- sign both kernel channels: a grail-kernel entry for the LTS scope, and one for a successor scope (G15)

• sign the remaining protocol pins; that estate-activates the Workspaces and RAR

• activate rapp-work/1 (G16), so the Organization is in force

• authorize the network pulse signer: pulses (experimental) version the map and the network's health

• switch on the Distributed Hive: accept RAPP proposal 0020 (kody-w/RAPP#133), then merge the drafts of beacon 1.1, estate.json and the operator's acceptance in RAPP's seed

5 · Graduate into RAPP/1
engineering, through the rings

- graduate each newest part through the rings: Folder Hive, Hive copy and the Hive agent (G14), References (G13), Hub cards (G12), Public copy, the Brainstem app (G20), the Brainstem's SDK agent (G17), the Distributed Hive

• then Hive Mind, once an estate accepts rapp-federation/1, and the Release rings, once a graduation uses them

• merge what graduated; the rest stays out of what people pull

• tag the lock once the clean-pull check passes again; sweep for drift on a schedule

2 · Keep the default pull clean: files that mention “experimental” (git grep -l -i experimental origin/HEAD, 2026-09-26): (rapp-hive-public 342) (RAR 50) (RAPP 46) (rapp-workspace 26) (rapp-hive-hub 19) (rapp-installer 9) (rapp-model-hive 9) (hive-hub 6) (lisppy 1) (rapp-1 · rapp-work · rapp-drift-lint · hive-hub-join · hive-hub-mcp · rapp-hive-hub-join 0) Mentions, not problems; some are legitimate. Recount at lock time.

One front door: (proposed) the installer's “Start here”, where every header links, leads with the RAPP/1 LTS install (kody-w/rapp-installer#48, open; only the owner merges it) · (experimental) 13 of the stack's 15 default branches show their RAPP/1 status badge (10 certified, 3 not yet) and a “Start here” link; rapp-installer waits on #48, rapp-workspace on G24 · (experimental) the drift sweep sets each status; the portfolio in kody-w/rapp-hive-public, the network's notice board, shows 12 of the stack's 15 certified, and every repo's channel and lifecycle

Gap register: each gap, its phase and who acts

G1	A rapp-hive/1 roster can never change	(proposed)	3 · spec owner	G12	Hive Hub dial records did not describe folder Hives	(experimental)	5 · engineering
G2	SDK plans cannot move a file	(proposed)	3 · spec owner	G13	Outside knowledge had no way in	(experimental)	5 · engineering
G3	SDK discovery misses *_agent.py	(proposed)	3 · spec owner	G14	The Hive agent's path to the production ring	(open)	5 · engineering
G4	SDK migration refuses repository-seeded Hives and long world ids	(proposed)	3 · spec owner	G15	No estate declares the Brainstem's kernel	(proposed)	4 · estate owner
G5	One owner only, so co-equal groups do not fit	(proposed)	3 · spec owner	G16	No estate has activated canonical rapp-work/1	(open)	4 · estate owner
G6	Implementations refuse owner succession	(proposed)	3 · spec owner	G17	The Brainstem does not call the RAPP Work SDK	(proposed)	5 · engineering
G7	SDK verification accepts an edited instruction file	(proposed)	3 · spec owner	G19	The cloud Brainstem loads agents differently	(proposed)	1 · you
G8	Hive members are names bound to keys, not RAPPIDs	(proposed)	1 · you	G20	The Brainstem app's path to the production ring	(open)	5 · engineering
G9	A git commit is not authority in canonical rapp-work/1	(proposed)	1 · you	G22	“Workspace” names two things	(proposed)	3 · spec owner
G10	An organization cannot bind a folder Hive	(proposed)	3 · spec owner	G23	The LTS Windows installer cannot pin the LTS kernel	(proposed)	2 · engineering
G11	“Organization” means two things	(proposed)	3 · spec owner	G24	RAPP Workspace/1's frozen identity pins its READMEs	(proposed)	3 · spec owner

Where it ends: the Distributed Hive (experimental) RAPP/1 LTS resolves as a distributed Hive, so a person pulls full RAPP/1 from static data.

The RAPP/1 network as one Hive, found by raw URL: (RAPP's seed) → (beacon) → (estate.json) → (Hive root) → (a pointer per repository) → (its .rapp/member.md, at its LTS commit)