
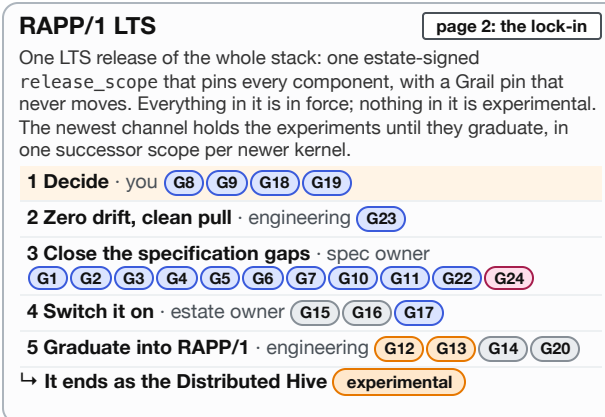
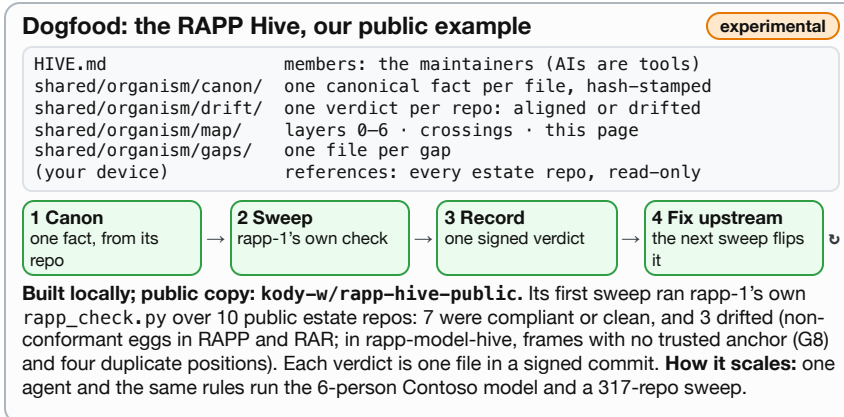


The RAPP/1 organism, on one page

Read it top (6) to bottom (0). Left: what comes in. Right: what goes out or across.

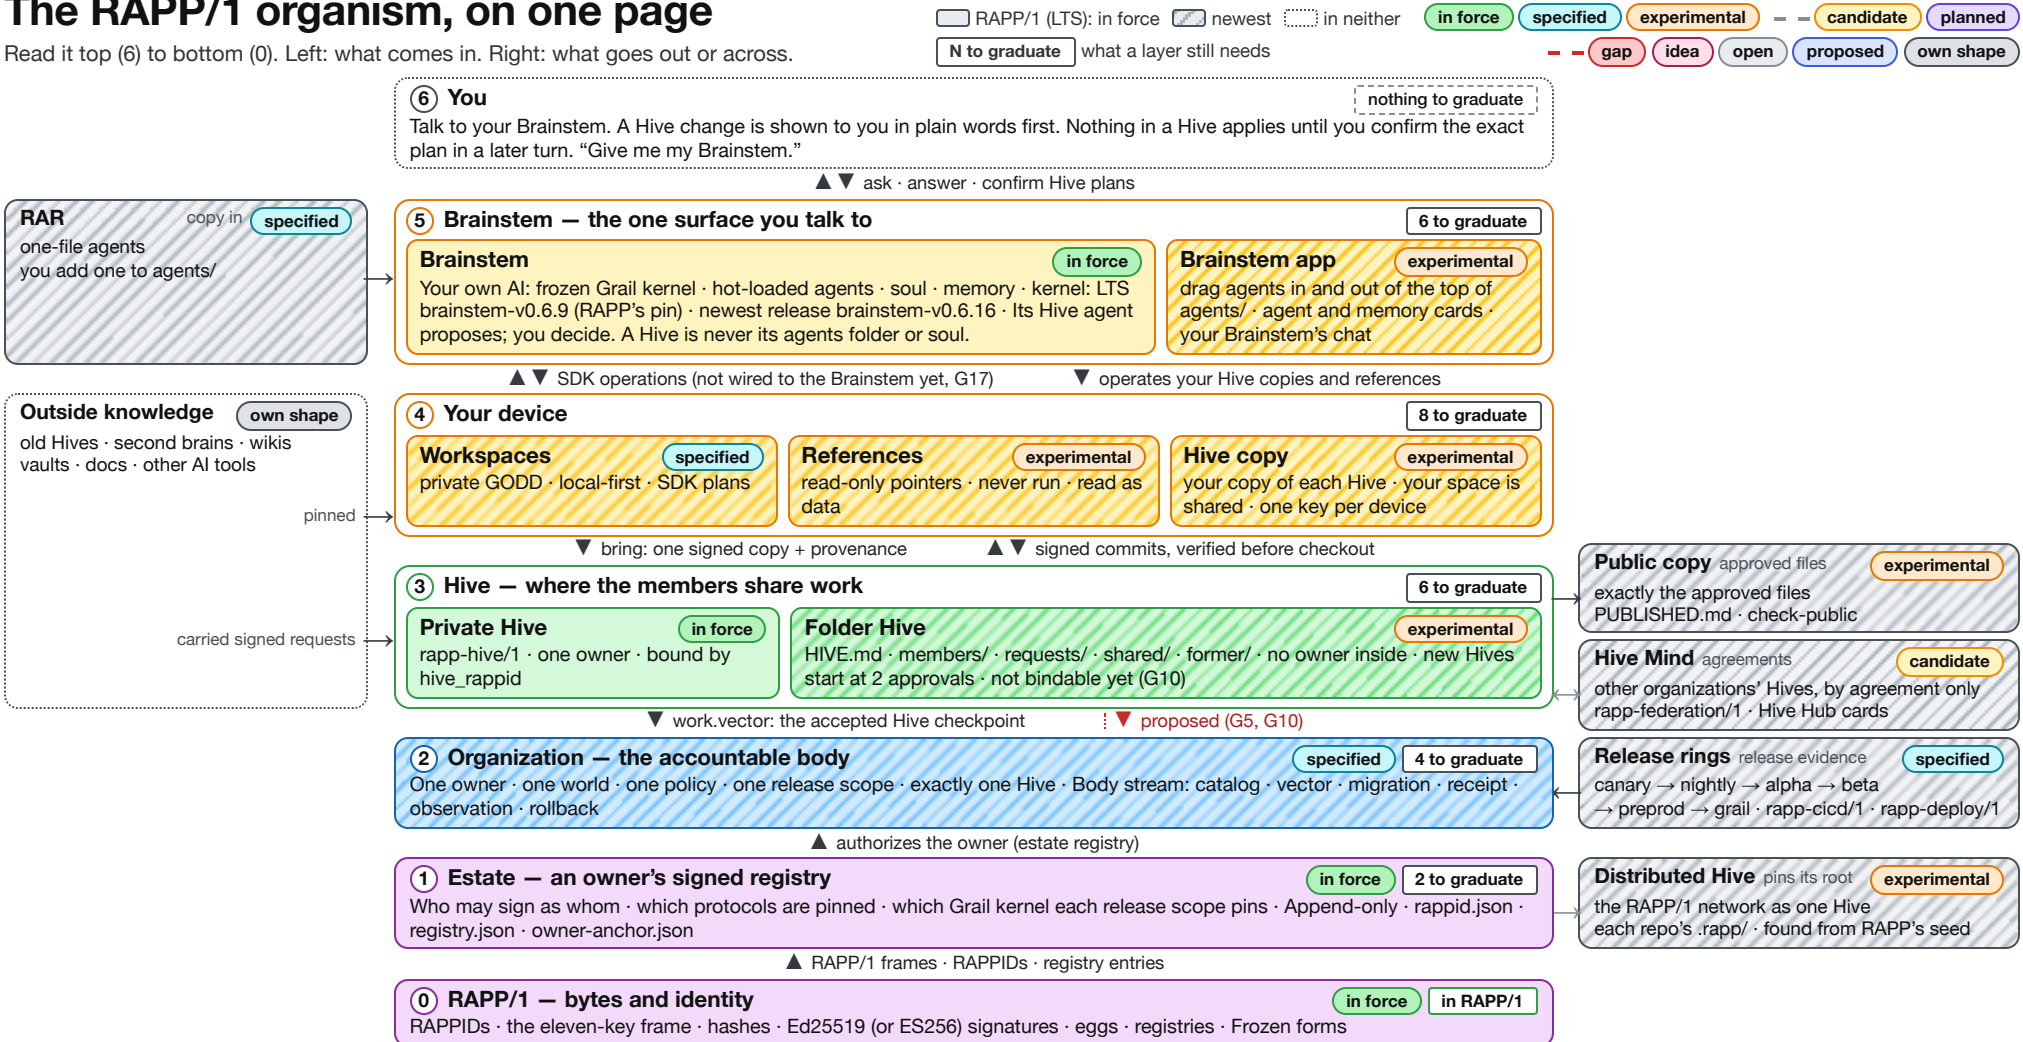

- ## What holds everything together
- RAPP/1 wins, then rapp-work/1.
 - Transport carries; signatures decide.
 - In by signed copy, out by approved copy.
 - Other people's text is data.
 - Propose, confirm, apply.
 - Accepted history is never rewritten.
 - The Brainstem is the one surface you talk to.
 - Front doors stay editable.
 - Only top-level agents/*_agent.py files are live.

RAPP/1 LTS: what it takes to lock the whole thing

RAPP/1 is the one LTS release people pull. Five phases lock it, in order, with the owner's decisions first; it ends as a distributed Hive.

in force

specified

experimental

candidate

planned

gap

idea

open

proposed

own shape

Your decisions first · phase 1, Decide · you, about an hour

1. merge RAPP proposal 0001 (G18), kody-w/RAPP#119), a documentation fix only: it is yours because RAPP reserves constitution merges for the maintainer (Articles XXVIII.4 and XXX.2)
2. accept or refuse RAPP proposal 0002 (G19), Tier 2 loading: a draft on experimental/proposal-0002-tier2-parity
3. ratify the RAPP Work Constitution and its Part V (G8, G9)

RAPP/1 LTS is

- One LTS release of the whole stack: one estate-signed release_scope that pins every component, with a Grail pin that never moves.
- Everything in it is in force; nothing in it is experimental.
- The newest channel holds the experiments until they graduate, in one successor scope per newer kernel.

It pins: the LTS kernel brainstem-v0.6.9 rapp-hive/1 rapp-work/1 RAPP Workspace/1 rapp-work-sdk/1 rapp-registry/1.1 rapp-cicd/1 rapp-deploy/1 the agents and apps that ship with it

RAPP/1 §11.1: the pin is "a permanent compatibility anchor, not a moving release channel"; "A successor uses a new release_scope". §13.3: one grail-kernel entry per scope, one per protocol. rapp-cicd/1 §2: a release lists every part.

Each layer, top to bottom: in RAPP/1, or what it needs to graduate

6 You	nothing to graduate	
5 Brainstem	6 to graduate	G17 G18 G19 G20 G23 RAR
4 Your device	8 to graduate	G2 G3 G4 G7 G13 G14 G22 G24
3 Hive	6 to graduate	G1 G6 G8 G9 G12 Public copy
2 Organization	4 to graduate	G5 G10 G11 G16
1 Estate	2 to graduate	G15 Distributed Hive
0 RAPP/1	in RAPP/1	

2 · Zero drift, clean pull

engineering

- fix RAPP's and RAR's non-conformant eggs and RAR's bounded scan (kody-w/RAPP#121, kody-w/RAR#1116, open)
- give rapp-model-hive's frames a trusted anchor (kody-w/rapp-model-hive#2, open; it needs the owner's registry entries)
- re-sweep until every repo of the RAPP/1 stack is certified (the dogfood)
- keep the default pull clean: default branches and the LTS install carry only in-force parts
- one front door keeps the network unified and tracked; pin the Windows LTS install (G23)

3 · Close the specification gaps

spec owner

- RAPP/1 core additions land before the estate signs: rev-17, a draft on kody-w/rapp-1 experimental/rapp1-core-*, adds release pins, lifecycle notices and stream signers
- rapp-hive/1 (G1, G6)
- rapp-work-sdk/1 (G2, G3, G4, G7, G11)
- rapp-work/1 (G5, G10); RAPP's Constitution and RAPP Workspace/1 (G22, G24)
- a gap that cannot close in time waits for a later RAPP, with the owner's sign-off

4 · Switch it on

estate owner

- sign both kernel channels: a grail-kernel entry for the LTS scope, and one for a successor scope (G15)
- sign the protocol pins; that switches on the Workspaces and RAR
- activate rapp-work/1 (G16), so the Organization is in force
- authorize the network pulse signer: pulses (experimental) version the map and the network's health
- give the Brainstem an SDK agent (G17)
- switch on the Distributed Hive: beacon 1.1 and estate.json, pinned by commit and hash, and the operator accepted in RAPP's seed (RAPP proposal 0020, a draft)

5 · Graduate into RAPP/1

engineering, through the rings

- graduate each newest part through the rings: Folder Hive, Hive copy and the Hive agent (G14), References (G13), Hub cards (G12), Public copy, the Brainstem app (G20), the Distributed Hive
- then Hive Mind, once an estate accepts rapp-federation/1, and the Release rings, once a graduation uses them
- merge what graduated; the rest stays out of what people pull
- tag the lock once the clean-pull check passes again; sweep for drift on a schedule

2 · Keep the default pull clean: files on each default branch that mention "experimental" (git grep -l -i experimental origin/HEAD), 2026-09-25: RAR 50 RAPP 45 rapp-workspace 26 rapp-hive-hub 19 rapp-installer 9 rapp-model-hive 8 hive-hub 6 lispny 1 rapp-1 0 rapp-work 0 Raw word hits, some legitimate, such as folder names: mentions, not problems. Count again at lock time.

One front door: planned the installer README's "Start here" leads with the RAPP/1 LTS install (kody-w/rapp-installer#48, open). planned every RAPP repo shows its earned RAPP/1 badge and a "Start here" link (PRs open in 13 of the stack's 15 repos). experimental the drift sweep sets each status, and kody-w/rapp-hive-public publishes the portfolio: the RAPP/1 stack is 12 of 15 certified

Gap register: each gap, its phase and who acts

G1	A rapp-hive/1 roster can never change	proposed	3 · spec owner	G13	Outside knowledge had no way in	experimental	5 · engineering
G2	SDK plans cannot move a file	proposed	3 · spec owner	G14	The Hive agent's path to the production ring	open	5 · engineering
G3	SDK discovery misses *.agent.py	proposed	3 · spec owner	G15	No estate declares the Brainstem's kernel	open	4 · estate owner
G4	SDK migration refuses repository-seeded Hives and long world ids	proposed	3 · spec owner	G16	No estate has activated canonical rapp-work/1	open	4 · estate owner
G5	One owner only, so co-equal groups do not fit	proposed	3 · spec owner	G17	The Brainstem does not call the RAPP Work SDK	proposed	4 · estate owner
G6	Implementations refuse owner succession	proposed	3 · spec owner	G18	RAPP's Constitution describes a ten-day experiment	proposed	1 · you
G7	SDK verification accepts an edited instruction file	proposed	3 · spec owner	G19	The cloud Brainstem loads agents differently	proposed	1 · you
G8	Hive members are names bound to keys, not RAPPIDs	proposed	1 · you	G20	The Brainstem app's path to the production ring	open	5 · engineering
G9	A git commit is not authority in canonical rapp-work/1	proposed	1 · you	G22	"Workspace" names two things	proposed	3 · spec owner
G10	An organization cannot bind a folder Hive	proposed	3 · spec owner	G23	The LTS Windows installer cannot pin the LTS kernel	proposed	2 · engineering
G11	"Organization" means two things	proposed	3 · spec owner	G24	RAPP Workspace/1's frozen identity pins its READMEs	idea	3 · spec owner
G12	Hive Hub dial records did not describe folder Hives	experimental	5 · engineering				

Where it ends: the Distributed Hive experimental RAPP/1 LTS resolves as a distributed Hive, so a person pulls full RAPP/1 from static data.

The RAPP/1 network as one Hive, found by raw URL: RAPP's seed → beacon → estate.json → Hive root → a pointer per repository → its .rapp/member.md, at its LTS commit